

This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + Refrain from automated querying Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at http://books.google.com/

















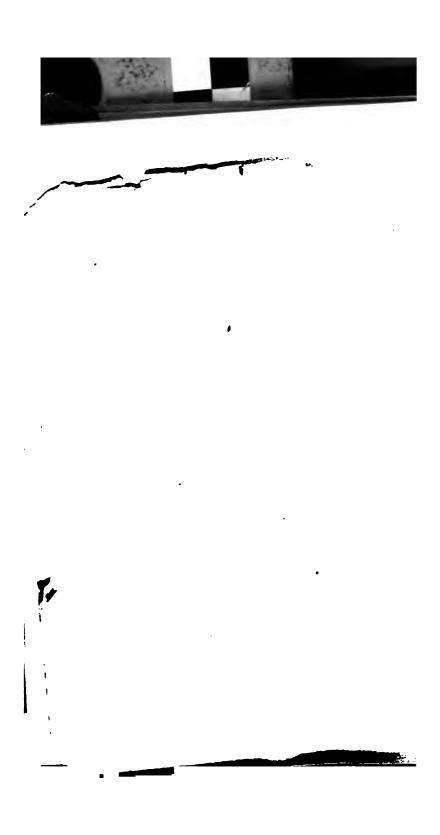

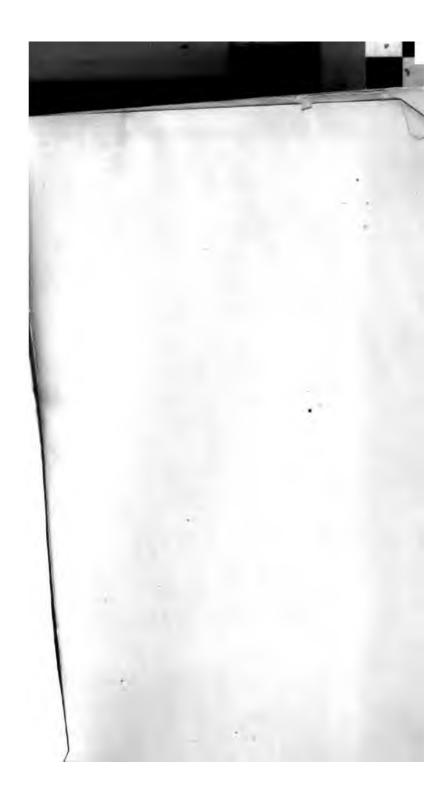

Columbia University inthe City of New York

LIBRARY



THE GIFT OF EDWARD and CLARENCE EPSTEAN

THE WALKER ENGRAVING COMPANY

1932

"Per varios casus, per tot discrimina rerum tendimus in Latium"



PATENTS FOR INVENTIONS.

ABRIDGMENTS

OF

Specifications

RELATING TO

PHOTOGRAPHY.

PRINTED BY ORDER OF THE COMMISSIONERS OF PATENTS.

From 300,13.0.1- 185





LONDON:

PRINTED BY GEORGE E. EYRE AND WILLIAM SPOTTISWOODE, PRINTERS TO THE QUEEN'S MOST EXCELLENT MAJESTY. PUBLISHED AT THE GREAT SEAL PATENT OFFICE, 25, SOUTHAMPTON BUILDINGS, HOLBORN.

1861.



7 1 1.5.5 G75 3,20tran 2017 9-23-41 44.

PREFACE.

THE Indexes to Patents are now so numerous and costly, as to render their purchase inconvenient to a large number of inventors and others, to whom they have become indispensable.

To obviate this difficulty, short abstracts or abridgments of the Specifications of Patents under each head of Invention have been prepared for publication separately, and so arranged as to form at once a Chronological, Subjectmatter, Reference, and Alphabetical Index to the class to which they relate. As these publications do not supersede the necessity for consulting the Specifications, the prices at which the latter are sold have been added.

The Specifications included in this series of inventions relate:—

1st. To the processes of Photography.

2nd. To the chemical, optical, and mechanical apparatus used in the practice of the art, or its applications.

3rd. To the various applications of Photography.

4th. To the camera obscura, so far as its use for photographic purposes is concerned.

5th. To the stereoscope; this instrument depends upon the results of photography for its efficient action; it gives to photographs the nearest possible approach to reality; therefore, all Specifications relating to stereoscopes are included in this series.

All the quotations from the printed Specifications (in-



PREFACE.

cluded between quotation commas throughout the work) are given in the exact punctuation and orthography therein used; however, to draw attention to any passage more immediately connected with this series of abridgments, portions are sometimes italicised that appear in Roman type in the original.

Berzelius' ammonium theory has been adhered to throughout the text of the work, and the best recognised names for chemical and metallic bodies such as ammonium, platinum, have been adopted.

When two words are used as one adjective to qualify a noun, they are connected by a hyphen, thus:—"camel-hair pencil," eye-piece frame," &c.

The definition of "Photography" for the purpose of these abridgments is, "the art of copying designs or "images, however they may be produced, by the chemical "action of light upon surfaces prepared to receive that "action."

It is hoped that the publication of these abridgments will prevent the disappointment consequent on repatenting an old invention, and, by setting forth what has been already done in this department of applied knowledge, enable inventors to exert their talents only upon discoveries and applications that are new.

B. WOODCROFT.

July 1861.

iv

INDEX OF NAMES.

[The names of persons by whom inventions have been communicated from abroad, when known, are printed in *Italies*. The Roman numerals refer to the Introduction.]

Page	Page
Alchemists, The ix	Boyle, C. B
Allen, E. E128	Druggoru, Ll. 11
Alliott, A 12	Brett, J 23
Angamarre, L 59	Brewster, Sir Dxvii
Archerxvii	Brooman, R. A97, 110
, F. S 50	Browning, J 77
Aspray, C143	Bryer, S117
Avery, J 63	Bunsen xix
•	Burleigh, B 104
Baggs, I124	_
Barnes, E. J142	Chappuis, P. E86, 119
Bauerrichter, H 91	Cheetham, J K
Baxter, E. W 90	Chevallier, F. A
——, G120	Clark, W 109, 131
Bayardxv	Claudet, A. J. F., xv, 6, 11, 21,
Beard, R3, 7	42
Beau, A. P. A123	Clive, J. C
Beaud, H 30	Coggan, G. B116
Beauregard, T. de101	Collins, H. G139
Beck, J141	Cooke, G. C 64
Beckers, L 96	Corbin, H. A136
Becquerel, E xv	Cornides, L 51
Benoist, P 65	Cowper, C101, 143
Bérard xi	Crookesxviii
, P. H. G 89	Cundell xvi
Berchtold, A. J 41	Cutting, A109
Bernard, J138	, J. A 34
Berry, M 1	
Beslay, C140	Daguerre, L. J. M., xi, xiii, xv,
Bingham, R. Jxvii	xvi, 1
Blot, Jxviii	Dallas, D. C
Böhm, G 81	Dancer, J. B 67
Bold, J 82	Danchell, F. L104
Bourne, J. C 44	Davy, Sir Hx, xi
Bourquin, J. P 26	Dean, G. A. H114

γi

INDEX.

Derogy, E	
	Herschel, S
Devincenzi, G	Highton, E
Devincenzi, G	Hadreen D
Draper xiv Dreyfus-Werth, S 33	Hodgson, R
Dreyfus-Werth, S 33	Hunt
Dufresne, A. H 60	
Duppa, B. E 24	Jeffery, W.
	Johns, G. E
Earle, W. R142	Johnson, J.
12 17 Q1	
East, F	, J.
Edwardsxviii	Johnston, J
Elliot xiii	Jones, D
Elliott, R 92	T. W
Hingland, J120	Jordan, T.
Euclid ix	Jundzill, A.
Euchu	Junuzini, A.
	,
Ferrier, J. A 93	Kircher
Fischer x	Kircher Kloen, W.
Fisher, R143	}
Fiscauxvii	Langenhein
Fontainemoreau, P. A27, 38	
Bulletine to the state of the s	Langlois, C
Forrest, J. Axviii	Laverdet, M
Fowke, F 61	Le Grey
Fyfexiv	Lewis, E
AL JAC	
4. y.e	, W
	, W
Galen ix	, w. i
Galen ix Garella 97	, W , W. I Licetas
Galen ix Garella 97 Garnier, A. L. 41	Licetas Llewellyn
Galen ix Garella 97 Garnier, A. L. 41	Licetas Llewellyn Lucenay, P
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47	, W , W. I Licetas
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47	Licetas Llewellyn Lucenay, P
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47	Licetas Llewellyn Lucenay, P Luff, H. J.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82	Licetas Llewellyn Lucenay, P Luff, H. J.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv	Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv 'Godet, P. B. 92, 94	Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goöthel C. 24	, W. I. Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goöthel C. 24	, W. I. Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goöthel C. 24	, W. I Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goöthel C. 24	, W. I Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E. Manwaring
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Goëthel, C. 24 Goëthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M. xix	, W. I Licetas Licewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E. Manwaring Marion, C.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goöthel C. 24	, W Licetas Liewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E. Manwaring Marion, C. Martin, A.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goëthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Greer, R. M. xix Grubb, T. 98	, W Licetas Liewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E. Manwaring Marion, C. Martin, A.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goöthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M. xix Grubb, T. 98 Hardie, W. 99	, W Licetas
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goöthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M. xix Grubb, T. 98 Hardie, W. 99	, W. I Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E. Manwaring Marion, C. Martin, A. Massi, C. Mathieu, F.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M. xix Grubb, T. 98 Hardie, W. 99 Harmer, R. 75 Hart, F. W. 132	, W. I Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E. Manwaring Marion, C. Martin, A. Massi, C. Mathieu, F.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M. xix Grubb, T. 98 Hardie, W. 99 Harmer, R. 75 Hart, F. W. 132	, W. I Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E. Manwaring Marion, C. Martin, A. Massi, C. Mathieu, F. Mawson, J.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goëthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M. xix Grubb, T. 98 Hardie, W. 99 Harmer, R. 75 Hart, F. W. 132 Hartnup. xviii	, W. I Licetas Llewellyn Lucenay, P Luff, H. J. Mabley, W McCraw, W Maclehose, Malone, T. Mander, E. Manwaring Marion, C. Martin, A. Massi, C. Mathieu, F. Mawson, J. Mayall, J. I
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A 48 Gedge, J. 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goëthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M xix Grubb, T. 98 Hardie, W. 99 Harmer, R. 75 Hart, F. W 132 Hartnup xii Harup, R. xi	Mabley, W. Maclehose, Malone, T. Mander, E. Manwaring Marion, C. Mathieu, F. Mawa, A. Massi, C. Mawan, J. Mayall, J. Mayer, L. I. Mayer, L. I.
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Gilover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goëthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M. xix Grubb, T. 98 Hardie, W. 99 Harmer, R. 75 Hart, F. W. 132 Hartup, R. xiii Harup, R. xiii Harup, R. xiii Harup, R. xiii Harup, R. xiii	Mabley, W. I. Licetas
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A. 48 Gedge, J. 47 Gill, S. 100 Gilover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goëthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M. xix Grubb, T. 98 Hardie, W. 99 Harmer, R. 75 Hart, F. W. 132 Hartup, R. xiii Harup, R. xiii Harup, R. xiii Harup, R. xiii Harup, R. xiii	Mabley, W. I Licetas
Galen ix Garella 97 Garnier, A. L. 41 Gaudin, P. I. A 48 Gedge, J 47 Gill, S. 100 Glover, J. 82 Goddard, J. xv Godet, P. B. 92, 94 Goëthel, C. 24 Gottgetreu, G. 91 Grant, A. G. 117, 118 Grier, R. M xix Grubb, T. 98 Hardie, W. 99 Harmer, R. 75 Hart, F. W 132 Hartup, R. xii Hay, D. S. 54 —, G. H. 54	Mabley, W. I. Licetas

_	
Herschel, Sir Jxiii, xiv, z Highton, Elo Hodgson, R Huntxv, x	02 7 vi
Jeffery, W	33 72 8 23
lones. I)	76
Jordan, T. W	iv 61
Kircher Kloen, W.	x 76
Langenheim x Langlois, C.	vii 71 25 vii 81 94
Licetas	x
McCraw, W. Maclehose, R. 1 Malone, T. A. 1 Mander, E. 1 Marion, C. M. A. 1 Martin, A. x Massi, C. 1 Mathieu, F. 1	25 13 80 11 26 vii 77 05
Maw, A. Mawson, J. Mayall, J. E	53 52 58 47

Meunier, P 33	Page
Meunier, P	Quin, R
Millot 63	•
Möller, J	Reade, J. B xiii
Monkhoven, Van xix	Ritter, J. W.
Monson, E 36	Rollason, A
Montreuilxviii	Roscoe
Morgan, W 80	Roscoe xix
Moseley, T. B 84	Rostaing, C. S146
Monle I	0.1
Moule, J 82	Sabatier, B 69
Moxham, E135	Saillard, B
	St. Victor, N. dexvii, 109
Nadar123	Samson, L
Nègre, C 86	Sanders, C
Negretti, E. A. L145	Sands, C100
Newton, A. V 95	Sarony, O
F 16 i	Saucrin I F 97 90
——, H	Saugrin, L. F27, 30
W F 99 94 96 100	Scheelex
, W. E. 20, 64, 60, 109,	Schottlander, H 40
137	Schultz, L 57
Niepce, J. I., juniorxiii, 1	Schweitzer xix
Niépce, Nxi, xii	Scott, E. E 72
Noe, H. J 86	Scoutetten, H. J 23
Norris, R. H 67	Seebeck xi
Nunn, W103	Senebier x
,	Serrin, V. L. M
Olley, W. H57, 73	Shedhelt
Orange, A 47	Shadboltxviii
Orange, A 4/	Shaw, C 85
Dolonou II R	Shears, G
Palmer, H. E 74	Sims, T129
Parkes, A	Skaife, T 62
Patrick, H. W134	Small, T. O139
Pein, J. H143	Smith, J 145
Pepper, J. H	Somerville xii
Perry, J 66	Spence, W127
, <i>J. S.</i> 137	Spencer, J. B
Pershouse, H	Spillerxviii
Petitx	
Petitjean, T 44	Stewartxviii
Datas T	Stortz, P. C 121, 122
Pêtre, L	Sutton, E 65
Phillips, W. H 78	, T141
Poitevin, A. L 55	Swan, H125, 138
Ponton, Mxiii	Sweet, H. K 99
Pouncy, J	
Power, J 20	Talbot, W. H. F., xii, xiii, 4, 9,
Pretsch, P37, 48	13, 14, 17, 115
Proal, C. J	Tardieu, J. L
Purnell, J. 83	
I umition, w	Taupenotxviii



viii

INDEX.

Page	Pag
Faylor, T. J	Walcott, A. S
Thistlethwaite, W 59	Wansbrough, J13
Thompson, F 39	Wedgwood, T.
Thomson, W105	Wheatstone xi
Tournachon, G. F	Wollaston x
Towson xv	Woodxv
	Woodward, D. A 95
Urie, J 26	1
	Young x
Vasserot, C. F	1
	Zambra, J. W145
Wagstaff, W 39	Zimmerman, C. M 24

INTRODUCTION.

In order to render the Abridgments of Specifications in which Photography is referred to as complete as possible, the following brief summary of the progress of knowledge in reference to this subject is prefixed. By the chronological arrangement of the matter, the treating of each discovery or invention in a separate paragraph, and the citation of the works consulted, it has been sought to make the heads of the subject easy of reference, and to show readily where more detailed information can be found.

Although the action of light on coloured bodies must have been of every-day occurrence, the philosophers of antiquity did not record the fact, and the chemical action of light upon matter would appear to have entirely escaped their observation. The first definite knowledge of this action appears to have been some observations of the alchemists, that "horn silver" (chloride of silver) was blackened by exposure to light. Although the middle ages thus furnished the discovery of one of the facts upon which the scientific principles of photography depend; the others—viz., the proper application of designs or images to sensitive surfaces and the permanent fixing of the pictures so obtained—are belonging to the present era.

B.C

300. Euclid, about 300 B.C., in his "Treatise on Optics" (26th, 27th, and 28th theorems) proves that he knew that the pictures of bodies seen by both eyes are formed by the union of two dissimilar pictures formed by each eye. (See Brewster on the Stereoscope, p. 6; also Euclid's Optics, Edit. of Pena, pp. 17, 18, Paris, 1577; or Opera, by Gregory, pp. 619, 620, Oxon. 1703.)

A.D

170. GALEN, about A.D. 170, in the twelfth chapter of the tenth book of his work, "De Usu Partium Corporis Humani," described the phenomena attendant upon looking at



- X A.D.
- bodies with both eyes, and alternately with the right and left eye. (See Brewster on the Stereoscope, pp. 6, 7; also De Usu Partium Corporis Humani, edit. Lugduni, 1550, p. 593.)
- 1646. LICETAS and KIRCHER, in 1646, noticed the phosphorescent influences of solar rays. (See Hunt's Manual of Photography, p. 335.)
- 1722. Petit, in 1722, noticed that solutions of nitrate of potash and muriate of ammonia crystallized more readily in the light than they did in darkness. (See Hunt's Manual of Photography, p. 4.)
- 1777. Scheele, in 1777, observed the dissimilar powers of the rays of the spectrum in darkening nitrate of silver; he found the violet ray to have the most blackening effect. (See Hunt's Manual of Photography, p. 4.)
 - 1786. Scheele, in 1786, observed that nitric acid was decomposed by the chemical action of light. (See Hunt's *Manual of Photography*, p. 335.)
 - I791. SENEBIER, in 1791, discovered that yellow wax was bleached by the action of light. (See Hunt's Manual of Photography, p. 335.)
- 1795. FISCHER, in 1795, observed the action of light upon the ferrocyanates of iron. (See Hunt's Manual of Photography, p. 334.)
 - 1801. J. W. RITTER, in 1801, pointed out "the separate exis"tence of chemical rays in the spectrum which extend
 beyond the most refrangible or violet rays." (See
 Encyclopædia Britannica, 8th edit., Dissertation on Optics,
 pp. 921, 922.)
- Mr. Thomas Wedgwood and Sir Humphrey Davy, in
 June 1802, published their method of copying paintings,
 &c., by means of the action of light upon nitrate of
 silver. Paintings on glass were copied by placing white
 paper or white leather, sensitized with this salt, behind
 the painting, and exposing the arrangement to solar
 light. This method was also employed to delineate profiles or shadows of figures, the woody fibres of leaves, the
 wings of insects and the images produced by the solar

- A.D.
- microscope. Muriate of silver was found to be more sensitive than the nitrate, and both were more readily acted upon when moist than when dry. These pictures could not be fixed. (See Nicholson's Journal of Natural Philosophy, &c., 8vo. series, vol. III., p. 167; also Encyclopedia Britansica, 8th edit., art. Photography, p. 544.)
- 1802. Sir Humphrey Davy, in 1802, noticed the effect of light upon the puce-coloured oxide of lead. (See Hunt's Manual of Photography, p. 334.)
- PRO2. Mr. ROBERT HARUP, in 1802, showed that several salts of mercury were reduced by light. (See Hunt's Manual of Photography, p. 5; also Nicholson's Journal for 1802.)
- 1843. Wollaston, in 1803, discovered the action of light upon gum guaiacum. (See Hunt's Manual of Photography, p. 335.)
 - 1803. Dr. Young, about 1803, proved the interference of the obscure chemical rays. (See *Encyclopædia Britannica*, 8th edit., Dissertation on Optics, p. 922.)
- 1810. Seebsok, in 1810, observed the production of colour on chloride of silver by the various rays of the spectrum; the violet rays rendered it brown, the blue produced a shade of blue, the yellow preserved it white, and the red gave the salt a red colour. (See Hunt's Manual of Photography, p. 8.)
 - 1812. Bérard, in 1812, showed that the chemical rays are polarized by reflection. (See *Encyclopædia Britannica*, 8th edit., Dissertation on Optics, p. 922.)
 - 1814. M. NICEPHORUS NIÉPCE, in 1814, "attempted to fix the "pictures produced in the camera obscura, and to copy "engravings by means of light transmitted through "them upon substances made sensible to its action;" he used a tablet of copper coated with silver, and called his process "Heliography." (See Encyclopædia Britannica, 8th edit., art. Photography, p. 545.)
 - HEM. M. DAGUERRE, in 1824, began experiments with the view of fixing the pictures in the camera. (See *Bucyclopædia Britannica*, 8th edit., art. Photography, p. 545.)



A.D.

1827. M. NICEPHORUS NIÉPCE, in December 1827, submitted some pictures taken upon silvered copper plates smeared with the bitumen of Judæa to the Royal Society. The resin is rendered insoluble in certain essential oils by the action of light, on subsequent treatment with the oleaginous solvent, the shadows dissolve away, and the lights are represented by the unaltered resin remaining on the plate. In order to produce a better effect, M. Niépce darkened the silver surface with a film of iodine. (See Encyclopædia Britannica, 8th edit., art. Photography, p. 545; also Hardwich's Manual of Photographic Chemis*try*, pp. 7, 8.)

Mr. WILLIAM HENRY FOX TALBOT'S researches in pho-1833. tography date from October 1833, and were suggested by ٧ an unsatisfactory attempt to use the camera lucida for the purpose of sketching. (See Supplement to the Penny Cyclopædia, art. Photography.)

- 1834. Mr. WILLIAM HENRY FOX TALBOT, in 1834, took pictures in the camera by the action of light upon paper washed with nitrate of silver, and succeeded in fixing them; he called this art "Calotype." (See Encyclopædia Britannica, 8th edit., art. Photography, p. 545.)
- 1835. Mrs. Somerville, in 1835, made some experiments on the permeability of different bodies to the chemical rays. Copper-green glass intercepts, and the emerald transmits them; red glass stops most of them, whilst the garnet transmits them. (See Encyclopædia Britannica, 8th edit., Dissertation on Optics, p. 922.)
- 1838. Mr. WHEATSTONE, on 21st June 1838, read a paper to the Royal Society, in which he described an instrument for uniting two dissimilar pictures of solid bodies, called a " Stereoscope." This instrument is known by the name of "The Reflecting Stereoscope," as the images are made to coincide by means of mirrors. The observer looks into two plane vertical mirrors (one being opposite to each eye) inclined to each other at an angle of 90°; the drawings, taken according to the laws of perspective, are fixed to two upright planes equally inclined to the mirrors.

xii

Ŀ

- D.
- (See Brewster on the Stereoscope; pp. 18 and 58-61; also Phil. Trans. 1838, pp. 371-394.)
- M. DAGUERRE's invention (the "Daguerreotype") was communicated to the Academy of Sciences on the 7th
- 39. January 1839. (See Penny Cyclopædia, art. Photogenic Drawings.)
- Mr. WILLIAM HENRY FOX TALBOT, on the 30th January 1839, communicated his discovery to the Royal Society. The paper was sensitized by means of nitrate of silver, and the image fixed by common salt. (See Encyclopædia Britannica, 8th edit., art. Photography, p. 545.)
- 39. The Rev. J. B. Reade, in April 1839, delineated, by the agency of light, objects of natural history from their images taken by the solar microscope. Nitrate of silver solution sensitized writing paper which was washed with an infusion of nut-galls just prior to use, and was employed wet. Hyposulphite of soda fixed the picture. (See Encyclopedia Britannica, 8th edit., art. Photography, p. 545.)
- 339. Mr. Mungo Ponton, on the 29th May 1839, announced to the Royal Scottish Society of Arts that bichromate of potash might be used in solution to sensitize paper. The dark orange tint of the parts exposed to light remains on the immersion of the picture in water, only the yellow portions being dissolved out. (See Encyclopædia Britannica, 8th edit., art. Photography, p, 545.)
- M. DAGUEBRE in conjunction with M. ISIDORE NIÉPCE, 839. on the 15th June 1839, received a pension from the French Government for their invention of the "Daguerreotype." (See Encyclopædia Britannica, 8th edit., art. Photography, p. 545; also Hunt's Manual of Photography, p. 21.)
- 839. Sir John Herschel, in 1839, used glass plates in conjunction with precipitates of silver to obtain photographs upon. (See Hunt's Manual of Photography, pp. 276-279 and 333.)
- 839. Mr. Elliot, in 1839, constructed an "ocular" stereoscope, consisting of a wooden box, without lenses or mirrors, in which two dissimilar pictures as seen by each eye,







xiv

were placed. The images were united by the e (See Brewster on the Stereoscope, pp. 18-22 and

1839. Mr. T. B. Jordan, in 1839, used photography matic registration. The barometer, thermom magnetometer were thus made self-registering Jordan also devised a "Heliograph" for nu registering the intensity of an incident beam. (S. Manual of Photography, pp. 285-289.)

1839. Dr. Fyfe, in 1839, used the following sensitizing p
The paper is soaked in phosphate of soda soluti
treated with nitrate of silver solution, and "i
"through the salt, by which any excess of silv
"verted to phosphate." (See Hunt's Manual

graphy, pp. 174 and 332.)
1840. Sir John Herschel, in

1840. Sir John Herschel, in 1840, made his imposearches on the chemical properties of the solar He operated upon sensitized paper; the solut were, nitrate of silver, nitrate of silver mixed vide of sodium, and nitrate of silver mixed with bromate of potash. In the first instance the spectrum was 1.57 times the length of the lumin trum, in the second instance 1.81 times, and in instance 2.16 times. (See Sir David Brewste in Lardner's Cabinet Cyclopædia, pp. 104, 105; Trans. for 1840, p. 26.)

1840. Sir John Herschel, in 1840, procured upo graphic paper a coloured image of the solar (See *Encyclopædia Britannica*, 8th edit., art. Pho p. 552.)

1840. Sir J. F. W. HERSCHEL, on 20th February 184 paper to the Royal Society on an "Actinograph registering photometer. (See Phil. Trans., vol. 1.

1840. Sir John Herschel, about 1840, discovered "th
" of the persalts of iron when exposed to st
" contact with organic matter, were reduced to
" of protosalts." (See Hardwich's Manual of
graphic Chemistry, p. 182.)

1840: Dr. Draper, in 1840, published his process in for taking Daguerreotype portraits. (See Hunt

of Photography, pp. 281-284.)

- 1840. Mr. JOHN GODDARD, in 1840, proved that the sensibility of the Daguerreotype plate was greatly promoted by exposing it to the vapours of iodine and bromine in succession. (See Hardwich's Manual of Photographic Chemistry, p. 182.)
- 1840. M. E. BECQUEREL, in 1840, used a combination of bichromate of potash and iodide of starch to sensitize paper with. After exposure to light, the dry photograph is steeped in an alcoholic solution of iodine, then washed and dried. (See Hunt's Manual of Photography, pp. 142, 143, and 335.)



- 1840. Mr. Hunt, in 1840, introduced the use of protosulphate of iron as a photographic agent for developing the image. (See Hunt's Manual of Photography, p. 109.)
- 1840. BAYARD, in 1840, discovered the use of bromide of silver in photographic operations. (See Hunt's Manual of Photography, p. 332.)
- 1841. M. CLAUDET, in 1841, employed chloride of iodine as a means of accelerating the action of sensitive surfaces. M. Claudet also invented a "photographometer," a "dynactonometer," and a "focimeter." (See Hunt's Manual of Photography, pp. 92, 288, and 291.)
- 1842. Mesars. Hunt and Towson, in 1842, made a sensitizing solution containing fulminate of silver; this agent was remarkable for its high degree of sensibility to light. (See Hunt's Manual of Photography, pp. 174, 175, and 332.)
- 1842. Sir J. F. W. HERSCHEL, on the 16th June 1842, read a paper to the Royal Society on the action of the rays of the solar spectrum on vegetable colours and on some new photographic processes; among the processes described were the "Chrysotype" and the "Cyanotype." (See Phil. Trans. vol. 132, 1842.)
- 1843. M. DAGUERRE, in 1843, made certain improvements in polishing and preparing Daguerreotype plates. The chief feature was heating pure water over the plate. (See Hunt's Manual of Photography, pp. 177-179; also Comptes Rendus of 13th March 1843.)



- A.D.
 1843. Mr. Hung, in 1843, used a mixture of bichromate og potash and sulphate of copper as a sensitizing solution. The picture is developed by means of nitrate of silver, and fixed by washing in pure water. This process is called "Chromatype." (See Hunt's Manual of Photograph pp. 143-145, and 334.)
- 1844. M. DAGUERRE, in 1844, published an extremely complex "instantaneous" Daguerreotype process, in which the sensitizing agent was a mixed iodide of gold and platinum. (See Hunt's Manual of Photography, pp. 181-184; also Comptes Rendus for April 1844.)
- 1844. Mr. Cundell, in 1844, invented an important improvement upon Mr. Fox Talbot's "Calotype" process. The chief feature consists in using common salt mixed with the iodide of potassium to "iodize" the paper; the details of the process are also different from Mr. Fox Talbot's method. A negative picture is produced. (See Hunt's Manual of Photography, pp. 56-62; also the Philosophical Magazine for May 1844.)
- 1844. Mr. Hunt, in 1844, published his process called "Energia" type," or "Ferrotype." The paper is sensitized by means of succinic acid, common salt, gum arabic, and nitrate of silver. The picture is developed by a mixture of protosulphate of iron and gum arabic, and fixed by hyposulphite of soda. (See Hunt's Manual of Photography pp. 145-147.)
- 1844. Mr. Hunt, in 1844, published a process which he called the "Fluorotype." The sensitizing solution contains bromide of potassium and fluoride of sodium, a solution of nitrate of silver is then applied. In the developins process protosulphate of iron and weak muriatic acid are used; the image is fixed by means of hyposulphite of soda. (See Hunt's Researches on Light; also Hunt's Manual of Photography, pp. 83 and 257.)
- 1844. Dr. Wood, in 1844, invented a process called "Catalyso"type," from its dependence on catalysis for its action.

 The paper is sensitized by means of weak hydrochloric acid, a mixture of syrup of iodide of iron and tincture of iodine, and a solution of nitrate of silver. When left in

xvi

- L.D.
- the dark, after exposure in the camera, a negative picture becomes gradually developed. The picture may then be fixed by washing it with a solution containing bromide and iodide of potassium. (See Hunt's Manual of Photography, pp. 147-150, and 334.)
- M. Fizeau's method of etching photographic impressions by means of an acid menstruum was presented to the British Association in 1845. (See Supplement to the
- 1845. British Association in 1845. (See Supplement to the Penny Cyclopedia, art. Photography.)
- 1846. Mr. R. J. BINGHAM, in 1846, published his improvements on the Daguerreotype process. These consisted in the substitution of certain compounds of bromine, chlorine, and iodine with lime for the bromine or other accelerating solution. A dry accelerating mixture unaffected by heat is thus secured. (See Philosophical Magazine for October 1846; also Hunt's Manual of Photography, pp. 92-94.)
- 1848. M. Nièrce de St. Victor, in 1848, substituted for the paper used by Mr. Fox Talbot, a film of albumen spread upon glass. (See *Encyclopædia Britannica*, 8th edit., art. Photography, p. 546.)
- 1849. Sir DAVID BREWSTER, in 1849, exhibited his lenticular stereoscope to the British Association. (See Brewster on the Stereoscope, p. 29.)
- 1861. Mr. Archer, in the autumn of 1951, published his collodion process, he at the same time proposed the substitution of pyro-gallic acid for the gallic acid previously employed in developing the image. M. Le Grev originally suggested the use of collodion for photographic purposes. (See Hardwich's Manual of Photographic Chemistry, p. 10.)
- 1851. Mesars Langenheim, in 1851, introduced "Hyalotypes" into England. These were positive pictures, copied on glass from negatives; they were adapted to the slides of magic lanterns. (See Hunt's Manual of Photography, p. 84.)
- 1852. M. ADOLPHE MARTIN, in 1852, used a collodion process in which the sensitizing operation is performed by means of nitrate of silver, iodide of ammonium and nitric acid. No. 20.

- A.D.
- Protosulphate of iron developes the image, which is changed from negative to positive by a bath of double cyanide of silver and potash. (See Hunt's Manual of Photography, pp. 124, 125.)
- 1852. Mr. Stewart, in 1852, employed a negative paper process (wet or dry) in which the following solutions were used:—
 Lodide of potassium, aceto-nitrate of silver, gallic acid (for developing), and hyposulphite of soda. To iodize the paper the air-pump was used. (See Hunt's Manual of Photography, pp. 68-71; also the Atheneum for December 1852.)
- Mr. HARTNUP, Dr. EDWARDS, and Mr. J. A. FORREST, in 1854. 1854, attempted to obtain photographs of the moon. (Se Liverpool Photographic Journal for 1854, p. 14.)
- 1854. Mr. Shadbolt, in March 1854, executed and exhibite microscopic photographs from the 20th to the 40th on an inch diameter. These pictures are made with a structureless collodion. (See Encyclopædia Britannica, 8th edit., art. Photography, p. 552.)
- 1856. M. M. Meline and Montreuil, in 1856, published ary collodion process, the principal feature of which washing the free nitrate of silver away from the sense tized collodion before exciting the plate, and allowing the plate to dry. (See Liverpool and Manchester Photesgraphic Journal for 1857, pp. 7, 8.)
- 1857. M. TAUPENOT, about 1857, used albumen as a varnish preserve sensitive collodion plates. (See Hunt's Manual of Photography, pp. 119 and 336.)
- 1857. M. JULIEN BLOT, in 1857, improved upon M. Taupenot's process, and prevented the blistering of the albuminized collodion film by a process in which dextrine was used. (See Hunt's Manual of Photography, p. 336; also Cosmos of 17th April 1857.)
- 1857. Mesars. Spiller and Crookes, in 1857, used nitrate of magnesia and nitrate of zinc to preserve sensitive collodion plates by their deliquescent properties; the plates thus being kept slightly moist. (See Phil. Mag., May 1857; Photographic Journal, vol. I., p. 223, and vol. II., p. 6;

XIX

A.D. also Encyclopædia Britannica, 8th edit., art. Photography, p. 548.)

1858. Mr. LLEWELLYN, in August 1858, published his oxymel process, in which bromide of potassium, alcohol, oxymel, citric acid, and nitrate of silver are used. (See Encyclopedia Britannica, 8th edit., art. Photography, p. 549.)

- 1858. Mr. R. M. GRIER, in 1858, published the following process:- "A plate coated with asphalt varnish, known in " Prussia by the name of eisenlack, diluted with rectified " bensole or benzine (first product obtained by distilla-" tion of coal tar at a low heat), and when barely dry, and " still slightly sticky, was placed in contact in the pres-" sure frame with a negative on albumen, and exposed to " the direct rays of the sun for half an hour. On re-" moval from the pressure-frame, the plate was breathed " on over its whole surface, until the image became dis-" tinctly visible, the parts changed by the action of light " absorbing moisture, and those covered by the blacks of " the negative remaining unchanged, and repelling it. "In this state, the image being distinctly visible, it was " quickly covered by the bronze powder known as aurum " musivum, which at once changed the almost invisible " image to a direct positive on black and gold, the gold " adhering to the parts that had been protected from the " light, and not adhering to those where the actinic rays " had effected such a change in the molecular structure " of the film as rendered them capable of absorbing " moisture, thus producing a complete picture detailed in " all its parts." (See Journal of the Photographic Society, 22nd Nov. 1858, p. 87; also Encyclopædia Britannica, 8th edit., art. Photography, pp. 546, 547.)
- 359. M. VAN MONKHOVEN, in 1859, presented a memoir to the Académie des Sciences, on a new method of photography by means of the solvents of cellulose; he employed the ammonio-cupric solution of Dr. Schweitzer. (See the *Photographic News*, edited by W. Crookes, for April 15th 1859, pp. 61, 62.)
- 159. Messrs. Bunsen and Roscoe, on the 26th May 1859, read a paper before the Royal Society, respecting their



XX

"photo-chemical researches." The standard flame from their purposes was that of carbonic oxide, and by interpretable their purposes was that of carbonic oxide, and by interpretable their purposes was that of chemical light. A their film of cloud was found to increase the chemical effect, and thick clouds to extinguish the chemical light of diffuse daylight. In the higher latitudes it was found that the chemical action of diffuse daylight greatly exceeded that of direct sunlight. The chemical brightness of the sun, in the latitude of Heidelberg, was ascertained to be 36.6 times as great as that of burning magnesium wire when the sun's zenith distance is 67° 22'. By means of a quartz prism and other appliances the chemical action of the various parts of the solar spectrum was measured. (See Phil. Trans. for 1859, pp. 879—926.)

A.D. 1839, August 14.—Nº 8194.

BERRY, MILES (a communication. Invented by Messrs. Louis Jacques Maude Daguerre and Joseph Isidore Niepce, junior).—This invention is commonly known under the name of "Daguerreo-"type."

"The reproduction of the images received at the focus of the camera obscura, is effected on plates or surfaces of silver, which may be plated on copper." The silver surface of the plate is first polished and cleaned; secondly, a coating sensitive to light is applied to the silver surface; thirdly, the prepared surface is submitted to the action of light in the camera obscura, "so that "it may receive the images;" fourthly, the photographic picture, which is invisible when the plate is taken from the camera, is brought out; fifthly and lastly, the sensitive layer is removed from the plate, thus fixing the picture.

1st process.—Polishing the plate is effected by means of pounce pumice powder, or calcined Venetian tripoli, which is rubbed on the plate by means of finely-carded cotton dipped in olive oil. The plate is then cleaned by dusting the powder over the surface and rubbing it with dry cotton. It is further prepared by rubbing with cotton moistened with dilute nitric acid, cleansed again by means of powder and cotton, and submitted to considerable heat until "the surface of the silver has obtained a whitish tint or "coating." The plate is next cooled rapidly by placing it in contact with a cold substance, cleaned as before, and treated with dilute nitric acid as before, three separate times, the last time being just before use; it is finally entirely cleaned from pounce dust by cotton.

2nd process.—The layer sensitive to light is formed upon the plate, after it has passed through the first or cleansing process, by coating it with iodine by spontaneous evaporation in the dark.



2

The plate is first fixed upon a thin board by means of suitab metallic bands and nails; it is then exposed to the vapour of iodine (being for that purpose enclosed in a suitable box, in the bottom of which is a dish containing iodine,) until it has attaine a golden yellow tint. The board and plate must then be introduced into a frame fitting the camera obscura, and having shutters or doors to exclude light until the plate is exposed in the camera.

3rd process.—The prepared surface should be submitted to the action of light in the camera immediately after being sensitized. This is done by adjusting "the focus of the camera obscura a "that the objects be represented perfectly clear and distinct; a frame containing ground glass is moved forward or backwar for this purpose. The glass is then removed, the frame containing the board and plate is substituted for it, and the shutters opened so that the plate can receive the impression of the image of the objects chosen; the plate remains in this position until the requisite number of minutes have elapsed. The doors are then closed the frame is removed from the camera, and the plate immediatel subjected to the next operation.

4th process.—To bring out the picture the plate is removed from the frame and exposed in the dark to the vapour of mercury.

box is provided with a cup at the bottom, containing mercury the board and plate are introduced into the upper part of the box and shut up. The mercury is then heated, and the plate left i until, by inspection through a glass by means of a candle, the development of the picture is found to be complete. The plate may now be deposited in a suitable dark box, thus being exclude from the light until it is convenient to fix the picture.

5th and last process.—To remove from the plate the coating of iodine, and thus to fix the picture, a solution of "sea salt" made used, but a weak solution of hyposulphite of soda is preferred. The plate is first dipped into distilled water, then moved about if the saline solution until the yellow colour of the iodine is entirely removed, again plunged into water, and finally subjected to the action of a continuous stream of hot water falling on an incline plane carrying the plate, thus cleansing it perfectly; it is the ready for mounting by being placed in a pasteboard case, are covered with glass, thus preserving the silver surface from be touched and from tarnishing.

The Specification describes these processes at great length, and Drawings of the apparatus are given in detail.

[Printed, 11d. See Repertory of Arts, vol. 13 (new series), p. 176; vol. 6, (enlarged series), p. 256; vol. 8, (enlarged series), p. 47; and vol. 14, (enlarged series), p. 293. London Journal (Newton's), vol. 16, (conjoined series), p. 1; vol. 21, (conjoined series), p. 67; vol. 28 (conjoined series), p. 368; vol. 31 (conjoined series), p. 64; and vol. 34 (conjoined series), p. 488. Mechanics' Magazine, vol. 31, p. 464; vol. 32, p. 77; and vol. 47, p. 45. Patent Journal, vol. 3, p. 137; also vol. 7, p. 125. Inventors' Advocate, vol. 2, p. 163. Common Bench Reports, vol. 3, p. 97; also vol. 8, p. 165. Carrington and Kirwan's Reports, vol. 2, p. 667.]

A.D. 1840, June 13.—Nº 8546.

BEARD, RICHARD (a communication). — This invention consists of:—

lst. "A mode of taking likenesses and representations of "nature, and of drawings by reflecting images on to suitably "prepared surfaces," by means of concave reflectors. Instead of the camera obscura a "rectangular" box is used, inside of which and at the end thereof is fixed a concave reflector; the prepared surface is placed opposite the reflector, and is capable of being moved towards or away from it for the adjustment of the focus. The box has its end opposite to the mirror open; this end is placed opposite to the object to be photographed, so that a clear image is reflected on to the prepared surface.

The following points are mentioned as auxiliaries to the use of this apparatus in the case of taking portraits, &c. :—A head-rest attached to the chair of the person sitting; the glazing of the inclined glass roof of the room with blue glass; the use of a large concave reflector, to reflect the light of the sun on to the person sitting, the rectangular box above mentioned being then placed behind the large reflector, which has a hole through it towards the outer edge, also "a surface of tissue paper varnished with "boiled oil" stretched across its front; a screen of ground glass placed behind the person sitting; a frame containing a white surface placed behind the screen, so as to receive the shadow of the person. By the combination of the screen and frame, varying effects of light and shade are produced in the picture. In the case of plaster busts or other white objects, it is sometimes advantageous to use a brown, blue, or black back surface.

2nd. "A mode of preparing silver surfaces by pressing them "face to face between hardened rollers, when they are to receive

"images." Two plates of copper coated with silver are cleaned with cotton and dilute sulphuric acid; their silver surfaces are then placed in contact, and they are passed between a pair of smooth hardened rollers; they are then annealed by heat, permitted to cool, and the whole process repeated until the silver surfaces are highly polished and equal in appearance all over. Tripoli and dilute nitric acid are then lightly rubbed over the silver surface with cotton, and then rubbed off with dry cotton. Lastly, the silver surface is rubbed over with velvet impregnated with charcoal, and is then ready to undergo the iodine process.

3rd. A mode of treating silver surfaces used to receive images, by submitting them to the action of iodine and bromine or bromic acid combined, and, by preference, either nitric acid or sulphuric acid and water is also combined with the iodine and bromine. The silver plate is placed on a glass slide which works in a box, at the bottom of which is a vessel containing the mixture of iodine and acid, or iodine, bromine, and acid, or iodine and bromine; the silver surface is placed downwards, and in a few seconds is ready to receive the image, or to be put into a dark case ready for use.

[Printed, 7d. See Repertory of Arts, vol. 15 (new series), p. 137, and vol. 1 (enlarged series), p. 185; London Journal (Newton's), vol. 18 (conjoined series), p. 112; and Inventors' Advocate, vol. 4, p. 34]

A.D. 1841, February 8.—Nº 8842.

TALBOT, WILLIAM HENRY Fox.—The first part of this invention is generally known as "the calotype process."

The first part of the invention is arranged under the following heads:—

The preparation of "iodized paper."—The best writing paper is washed successively with solutions of nitrate of silver and of iodide of potassium, being dried after each washing; it is kept in a dark place until wanted for use, when the next process is performed.

The preparation of "calotype paper."—A solution of the "gallo"nitrate of silver" is formed, by first adding strong acetic acid to
a solution of nitrate of silver, and to this compound solution
adding a saturated solution of gallic acid or the tincture of galls
diluted with water. The "iodized paper" is washed over with the
"gallo-nitrate of silver" thus prepared, dipped in water and
dried; it is then ready for use in the camera obscura.

To entirely bring out the invisible or faint image.—When the

4

paper is removed from the camera the image is either invisible or very faint; this is brought out by washing the paper with the "gallo-nitrate of silver" solution, and holding it before a gentle fire. When the image is dark enough the picture must be fixed by the next process.

The fixing process.—The picture is dipped into water, partly dried, washed with a solution of bromide of potassium or some other soluble bromide, washed with water, and, finally, dried. The picture thus obtained is a negative photograph; a positive one may be obtained from it on another sheet of sensitive paper by means of the copying frame. This method of obtaining pictures is preferred for portraits.

The second part of the invention consists in a mode of obtaining Positive photographs by a single process. A sheet of sensitive Calotype paper is slightly browned by exposure to daylight, dipped into iodide of potassium solution, then into water, lightly dried, impressed with the image, and washed with gallo-nitrate of silver, warmed and fixed as before directed.

The third part of the invention "is a method of obtaining pho"togenic images upon copper." A plate of polished copper is
sensitized by means of "iodine or bromine, or of these two sub"stances united, or of either of them, in union with chlorine;"
a photogenic image is then formed upon it, and it is exposed
preferably to the vapour of sulphuretted hydrogen; other vapours
or liquid solutions which colour the surface of the copper may be
employed. This image requires no further fixing.

The fourth part of the invention consists in coating any suitable metal with a thin layer of silver, sensitizing the silver face, forming a photogenic image upon it, then producing a coloured film upon it by acting on a solution of lead by means of galvanism.

The fifth part of the invention is a means of obtaining very thin photographic silver plates. A thin layer of copper is electrodeposited upon a polished metal plate; the layer of copper is removed from the metal plate by means of a sheet of paper or card glued to its back, and the copper "is then silvered by dipping it "into any suitable solution of silver."

The sixth and last part of the invention consists of transferring photogenic images from paper to metal. The metallic surface is sensitized, and the paper photograph pressed into firm contact with it by means of a sheet of glass and screws; the whole is then ex-

6

posed to sunshine, and the image on the metal fixed. The positive picture, mentioned in the first part of the invention, is obtained from the negative (preferably on common photographic paper), in a similar way to that just described.

A Disclaimer was enrolled March 8, 1854, by William Henry Fox Talbot, in which the third, fourth, fifth, and sixth portions of the invention are disclaimed.

[Printed, 5d. See Repertory of Arts, vol. 16 (new series), p. 165; London Journal (Newton's), vol. 19 (conjoined series), p. 189, and vol. 44 (conjoined series), p. 457; Mechanics' Magazine, vol. 35, p. 188; Inventors' Advocate, vol. 5, p. 99; and Engineers' and Architects' Journal, vol. 4, p. 429.]

A.D. 1841, December 18.—No 9193.

CLAUDET, Antoine Jean François.—This invention consists of the following improvements in the Daguerreotype process:—

1st. A camera obscura in which various sized lenses can be used, and fitted for either large or small sensitive plates. Each optical arrangement is made to slide in the open front of the camera; it is therefore easy to substitute one for another; the plate frame is fitted with a rack and pinion to adjust the focus, and has a telescope tube slide for vertical adjustment of the plate.

2nd. The vapours of mercury are applied within the camera, at the same moment that the light is producing its effect upon the plate; this enables the development of the picture to be carefully watched, by means of a red or orange coloured light, while the light is acting upon the sensitive medium. There is adapted to the camera a cup containing mercury, which, by means of a spirit lamp applied under it, spreads the vapours of the mercury throughout the camera.

3rd. In taking Daguerreotype portraits a background of painted scenery is applied behind the sitter.

4th. The following artificial lights are employed to take portraits at night, &c.:—lst. "The combustion of coal promoted by a jet "of oxygen gas." 2nd. "The flame of combustible gases and "carburetted liquids burning together with oxygen." 3rd. "A solid refractory body suspended in a jet of inflammable gas, "which is burnt together with oxygen or in a jet of oxygen gas "charged with the vapour of sulphuric ether." A reflecting concave mirror must be adapted behind the light. It is especially necessary to place the light in the optical axis of the mirror.

5th. All the operations upon the Daguerreotype plates which were formerly carried on in the dark, are, by this improvement, now performed in a room lighted through media of such colours as do not affect a sensitive plate; red is preferred.

[Printed, 42. See London Journal (Newton's), vol. 20 (conjoined series), p. 481; Mechanics' Magazine, vol. 27, p. 126; and Engineers' and Architects' Journal, vol. 5, p. 388.]

A.D. 1842, March 10.—No 9292.

BEARD, RICHARD (a communication).—This invention relates to "coloring daguerrectype pictures."

Ist method.—A tracing paper screen, resembling a stencil plate, having the parts cut out that are to receive the colour, is made by means of a subsidiary tracing upon glass or mica. By means of a number of these (one to each colour) used in succession, various colours in impalpable powder are deposited on the different parts of the picture, thus the whole of the picture is coloured.

The dry colours are ground to an impalpable powder in a solution of gum arabic or other adhesive material; they are then dried and sifted; in using them they are allowed to settle from a suitable box on to the screened picture, the screen is withdraws from the picture, the colour removed from the shadows by blowing with bellows, and the remainder fixed on to the plate by breathing.

2nd method.—The surface of the glass which comes next the picture is coloured by using water and gum. A correct tracing is taken on the outer surface of the glass, and the colours are laid on to the under surface in a wet state by a brush.

3rd method.—The dry colours are stippled with a camel-hair pencil on to the different parts of the picture, using the colours required for each part. The colours are successively set by breathing over them.

[Printed, 3d. See Repertory of Arta, vol. 1 (enlarged series), p. 222; London Journal (Neuton's), vol. 21 (conjoined series), p. 358; Mechanics' Magazine, vol. 37, p. 604, and vol. 48, pp. 35 and 94; and Record of Patent Inventions, vol. 1, p. 126.]

A.D. 1842, July 7.-No 9406.

HODGSON, RICHARD.—1st. "Improvements in that class of optical instruments where images are obtained on surfaces by "reflecting mirrors." One improvement "consists in causing

"the images so reflected to pass through a lens or lenses inter"posed between the mirror and the receiving surface;" the
introduction of a "correcting lens or lenses" (either meniscus or
"compound achromatic") is said to correct the aberrations, increase the light, and to enable the mirror to be nearer the front of
the camera. Another improvement "consists of passing the
"image from a mirror through a tube or trunk interposed
between the mirror and the receiving surface;" the tube is
much preferred to "the diaphragms now in use." Both or either
of these improvements are applicable to photographic purposes.

2nd. Improvements in refracting cameras by applying a lens in combination with a prism of curved surfaces; a "correcting "lens" is added to increase "the concentration of the rays." In the instance described a double convex lens of crown glass is combined with a prism of flint glass; the correcting lens used consists of a "concave convex" flint glass with its convex side towards the object, combined with a double convex crown glass whose lesser radius is towards the image; the prism combination (or "object glass") is connected with the correcting lens by means of a sliding tube. This combination gives an erect image, and is adjustable to objects at different distances; it is applicable to photography, particularly to portraiture.

[Printed, 8d. See Mechanics' Magazine, vol. 38, p. 800; and Record of Patent Inventions, vol. 1, p. 455.]

A.D. 1843, March 18.-Nº 9672.

WALCOTT, ALEXANDER SIMON, and JOHNSON, JOHN.—1st. An improvement in Daguerreotype pictures. The light is allowed to act a longer time than usual on the plate. The plate is then removed from further luminous action, and is exposed to the vapour of iodine or to any vapour that lessens the deposit of mercury when the plate is afterwards exposed to it. By this treatment the gradation of light and shade is more true to nature than by the usual process, and the picture is not so much injured by an error in the time of its exposure to light as it otherwise would be.

2nd. "A camera, in which photographic pictures on polished "plates may be copied by the scattered light from the surface of "the plate." The camera has a slanting aperture at the top to admit light to the picture to be copied, whose polished surface reflects

the light thus received. The reflected rays pass through an adjustable tube containing two sets of lenses on to the surface on which the copy is to be made; by adjusting the relative distances of the tube and the reflecting and receiving surfaces, various sizes of copies may be produced. By inclining the reflecting and receiving surfaces to each other, distorted pictures may be copied in true perspective.

3rd. Apparatus for exhibiting photographic pictures on a screen in a dark room. A lime light illuminates a photographic picture made on the surface of a concave metallic mirror; the light from all parts of this picture passes through "a set of achroce matic glasses," and the image is received on to a suitably placed screen. To enable the dark parts of the picture on the mirror to become the least polished and the lightest the most so, with the intermediate gradations," some sulphuric acid is placed in the mirror and heated until the desired change takes place; the mirror is then washed, cleaned, and dried.

4th. Copying photographic pictures on metallic plates by means of the light reflected from their polished surfaces. The light is converged, by means of a lens or lenses, on to the surface of the plate (previously prepared by means of sulphuric acid as in the 3rd improvement), passed through a tube containing a double set of lenses and received on the sensitive surface, which is placed parallel to the original surface in order that it may receive a true image; a small likeness may thus be copied on to paper so as to be the size of life. The apparatus described in the 3rd improvement may be used by placing the prepared surface to receive the copy in the place of the screen.

[Printed, 8d. See Repertory of Arts, vol. 2, (enlarged series), p. 275; and London Journal (Newton's), vol. 25 (conjoined series), p. 330.]

A.D. 1843, June 1.—Nº 9753.

TALBOT, WILLIAM HENRY Fox.—This invention relates to the following improvements:—

1st. "To give increased whiteness to calotype and other pho"tographic pictures, and at the same time make them more
"permanent," they are plunged into a hot solution of "hyposul"phite of soda (or any other soluble hyposulphite)," then
removed, washed, and dried. After this process the picture
may be waxed "by causing melted wax to penetrate into the

" perces of the paper, the object of which is to give increased transparency."

2nd. To make calotype or other photographic paper more sensitive, it is exposed to the action of a warm plate of iron during the formation of the picture.

3rd. The preparation and use of "io-gallic paper." "Iodized "paper" is washed with a saturated aqueous solution of gallic acid. When wanted for use in the camera, it is washed with a solution of nitrate of silver, which renders it sensitive to light.

4th. The preparation of dry "calotype paper." "Iodised." paper" is washed with the "gallo-nitrate of silver," containing only a small proportion of the nitrate instead of equal parts used in making moist "calotype paper." This paper is sensitive to light and can be used in a copying frame, but it "can" easily be dried at a gentle fire without being spoiled thereby."

5th. A photographic copy is taken in the usual way, except that the light is allowed to act upon it twice the usual time. It comes out too dark, is washed, and then plunged into an iodide of potassium solution, which brightens the picture and causes the lights to assume a pale yellow tint; by exposing the picture to the light this effect may be increased. "The picture is then "washed, and then plunged into hot hyposulphite of soda" (as in the 1st improvement) until the lights are of a white colour.

6th. To obtain pleasing effects, a paper photograph is waxed, which makes it more transparent; a sheet of white or coloured paper is then fastened behind it.

7th. Obtaining enlarged photographs. An enlarged negative calotype picture is obtained by throwing a magnified image of a small photograph upon "calotype paper," by means of lenses; positive copies are obtained in the usual manner. Large portraits can thus be taken without the sitter being obliged to sit an inconveniently long time.

8th. "The application of photography to printing by arranging "moveable letters or figures so as to form pages, and making "photographic images thereof." Letters (cut out from some pages of letter-press) are composed and fixed in proper order upon a sheet of white paper; a photographic negative is taken from this, and the requisite number of positive copies taken from it. Another method coasists in using a camera obscura to throw upon sensitive

Paper the reduced image of a tablet, on which large letters have been suitably arranged in grooves.

9th. "Photographic publication," or the multiplication of positive photographs by a certain combination of processes. To form the negative copy, writing paper is dipped into salt water, riped, and dried; it is then washed with a solution made by Precipitating nitrate of silver by means of ammonia and re-dissolving the precipitate, and dried; this prepared paper (called "copying paper") is then used in the copying frame. A negative Of distant objects may be obtained with a camera upon "calotype paper." The negative copy upon "copying paper" is fixed by being washed with warm water, placed in a solution of hyposul-Dhite of soda, and all removed that is soluble in water by plunging it into two or three baths of warm water consecutively; it is then dried, and, if necessary, waxed. The "calotype" negative may be fixed as set forth in the 1st improvement. From either of these negatives, the requisite number of positives is obtained upon copying paper by means of the copying frame, and fixed in the same way as the negative copy was.

The terms "calotype paper" and "iodized paper" are used in the same sense as that employed in No 8842. "A general re-"ference is had to what has been explained and made known" in No 8842.

[Printed, 4d. See Repertory of Arts, vol. 3 (enlarged series), p. 47; London Journal (Newton's), vol. 23 (conjoined series), p. 430; and Artizan, vol. 2, p. 23.]

A.D. 1843, November 21.—No 9957.

CLAUDET, Antoine François Jean (a communication).— This invention "consists in rendering the daguerrectype picture "susceptible of producing by printing a great number of proofs "or copies, thereby transforming it into a complete engraved "plate."

The plate is first delicately engraved, the "biting in" is then completed, and, lastly, the plate is protected "from the effects of "wear produced by the operation of printing."

The preparatory engraving.—The plate is first cleaned by immersion in a weak solution of nitric acid, washed, inamersed in "alcoholized potash," then in the biting acid (called "normal acid"), washed, and then treated with "ammoniacal chloride of

" silver," again washed, heated in caustic potash and left to cool. By repeating these operations a second biting is produced, and by again repeating them (stopping, however, before the ammoniacal chloride of silver is used), a third biting is produced. The plate is then dried, polished with pumice stone, and the chloride of silver filling the black parts removed by means of the normal acid and the ammoniacal chloride of silver solution. The "normal " acid" is composed of nitric acid, "nitrate" [nitrite?] " of " potassa," and common salt, the whole much diluted with water; other solutions used intermediately to the principal ones above mentioned are, a weak solution of caustic potash, a weak solution of ammonia, and distilled water.

The completion of the "biting in."—The plate is inked as copperplate printers do, but with a siccative ink, dried, and polished on the white parts; it is then electro-gilt, cleansed by means of boiling caustic potash, and the lamp black (if any) removed by rubbing the plate with a crumb of bread. The plate is then bitten in by aquafortis (which does not attack the face covering of gold) "according to the ordinary process used by engravers."

The protection of the plate.—The surface of the plate is electro-coated with a very thin pellicle of copper; it may then be used to print from. When this thin coating begins to show signs of wear it must be removed and a fresh electro-coat applied in its place. To remove the pellicle, a dilute solution of nitric and nitrous acid, or a caustic solution of ammonia, may be used.

[Printed, 4d. See London Journal (Newton's), vol. 25 (conjoined series), p. 111.]

A.D. 1849, April 17.-Nº 12,575.

ALLIOTT, ALEXANDER.—This invention relates to improvements in various kinds of registering apparatus.

The Specification and Drawings describe and show "apparatus" for ascertaining and for marking or registering the force or "pressure of wind, of water, and of steam, the weight of goods "or substances, and the velocity of carriages; also an apparatus "for ascertaining, under certain circumstances, the length of time elapsed after carriages have passed any given place, and for enabling the place or direction of floating bodies to be "ascertained."

The "improvements in apparatus for enabling the place or "direction of floating bodies to be ascertained, consist in the "employment for that purpose of the mariner's compass, in " combination with chemically prepared paper, moved by suitable "clockwork." The following is an apparatus by which the direction in which a vessel is sailing may at every moment be registered:—The registering paper is "prepared by some suitable " photographic process," and ruled with five lines by which eight divisions of the compass are shown; it is caused to travel uniformly in a line parallel with the sides of the vessel, immediately below the compass card, by means of rollers actuated by clockwork. The light passing through two small holes in the compass card marks the sensitive paper according to the course of the vessel. "A separate scale divided into parts of equal length, correspond-" ing to the rate of motion given to the paper, must be employed " to measure the length of time the vessel sails in any particular " course." "During the night some artificial light must be " nsed."

[Printed, 2s. 6d. See Mechanics' Magazine, vol. 51, p. 381; and vol. 52 p. 361; also Patent Journal, vol. 8, p. 55.]

A.D. 1849, December 19.—No 12,906.

TALBOT, WILLIAM HENRY FOX, and MALONE, THOMAS AUGUSTINE.—1st. "The use of plates of unglazed porcelain to re-" ceive the photographic images." The porcelain plate is prepared For use by giving it a coating of white of egg, and gently drying it at a fire; the plate being thus prepared, the remainder of the process and manipulation does not differ from that ordinarily employed in making photographic pictures upon paper. The process described is nearly the same as that set forth in No 8842.

2nd. " A method of converting or changing negative photo-" graphic images into positive ones." To produce the negative picture, a clean plate of glass is covered with a film of albumen by pouring a solution of albumen over the glass, and drying it; the film is then iodized by exposure to the vapour of iodine, dipped into nitrate of silver solution, placed in the camera, and treated with an aqueous solution of gallic acid, which developes the latent picture. To convert this picture into a positive picture, a solution of nitrate of silver is allowed to stand some time on the plate; the resulting picture is still negative if viewed by transmitted light, No. 20.

but, if viewed by reflected light, is positive. To view the positive image well, the glass should be placed upon a dark surface. The positive picture thus obtained must be fixed in the usual way. Other surfaces are stated as being advantageous for this process, such as talc, varnished or oiled paper, dark coloured porcelain, and other dark surfaces. Instead of albumen, gelatine or other substances of animal or vegetable origin may be used.

3rd. The use of varnished or other transparent paper "to "support a film of albumen for photographic purposes." The varnished paper is coated with albumen on one side, and rendered sensitive to light by exposure to the vapour of iodine, as in the 2nd improvement. This paper is useful for "photographic pictures giving panoramic views of scenery, which are "produced upon a curved surface by a movement of the object glass of the camera."

4th. "A method of obtaining more complete fixation of pho"tographic pictures upon paper." In addition to the usual
fixing process, the picture is dipped into a boiling solution of
caustic potash. To give an agreeable tint to the picture it may
then be exposed to the vapour of sulphuretted hydrogen.

5th. Forming photographic pictures upon steel plates. A mixture of solution of iodide of potassium and albumen is uniformly spread over the plate, and dried. The plate is then washed over with an alcoholic solution of "gallo-nitrate of silver," and is ready to receive the photographic image, which is to be fixed by hyposulphite of soda.

A Disclaimer was enrolled May 1, 1855, by William Henry Fox Talbot, in which the 1st, 3rd, 4th, and 5th portions of the invention are disclaimed; also that part of the 2nd improvement which refers to other surfaces besides glass, is disclaimed.

[Printed, 5d. See Repertory of Arts, vol. 16 (enlarged series), p. 37; Mechanics' Magazine, vol. 52, p. 518; and Patent Journal, vol. 9, p. 148.]

A.D. 1851, June 12.—Nº 13,664.

TALBOT, WILLIAM HENRY Fox.—1st. A method of producing photographic images upon glass plates. Pictures thus obtained are called "amphitypes," in consequence of their appearing either positive or negative, according to the light in which they are held. A clean plate of glass is covered with a film of albumen, which is dried, dipped into a nitrate of silver solution, and dried again, washed, coated a second time with an albuminous.

film, treated with proto-iodide of iron, containing excess of iodiae, acetic acid, and alcohol, and dried. When required for use, the plate is dipped into a solution of nitrate of silver, containing acetic acid; the photographic image is then impressed. To develope the latent image the plate is dipped into a solution of sulphate of iron. To fix the picture, it is dipped into hyposulphite of seds solution, washed, cleaned with cotton and water, and dried. The surface may then be coated with a protective covering of varnish or albumen.

An arrangement for using this invention when the operator is on a journey is fully set forth. A plate prepared for use in the camera is dropped into a glass cell in the camera, which is supplied from the outside with nitrate of silver solution; the image is then taken, and the cell containing the plate is consecutively supplied with the proper quantities of sulphate of iron solution, distilled water, and hyposulphite of soda solution, and is then removed from the camera, having been in the camera (and therefore not exposed to extraneous light) from the time of sensitizing the picture to its fixation. Instead of pouring the contents of the bottles into the glass cell, stop-cocks and supply pipes may be used. The glass cell has an exit pipe.

2nd. Taking "photographic pictures of objects which are in "rapid motion." The glass plate being prepared as set forth in the 1st improvement, and properly arranged in the camera, the moving object is illuminated by the discharge from a large electrical battery. The instantaneous image thus impressed is treated as in the 1st improvement, and the result is a distinct positive image of the moving body upon the glass, "the rapidity of the "motion not affecting the accuracy of the delineation."

A Disclaimer was enrolled March 8, 1854, by William Henry Fox Talbot, in which the arrangement for using the 1st part of this invention when the operator is on a journey is disclaimed; also the whole of the 2nd part of the invention is disclaimed.

[Printed, 5d. See Repertory of Arts, vol. 19 (mlarged series), p. 41; and Mechanics' Magazine, vol. 55, p. 497.]

A.D. 1852, September 23.—No 14,302.

TARDIEU, Jacques Léon.—"Certain improvements in the colouring of photographical images."

The paper photograph, after being varnished, is mounted either

on a frame, or on a sheet of glass. Oil colours are preferred to be used; they are laid on at the back of the photograph thus rendered transparent, "the transparency of the paper permitting "the colours to appear in all their brightness on the paper side of "the photographical image."

"The final operation for the preservation of the images" consists in glueing (or otherwise sticking) "on the colour," one or several sheets of paper, tissue, suitable fabric, pasteboard, wood, or other suitable substance of slight thickness. Cloth or canvas, covered with paint in the same manner as canvas for paintings, may be used to glue the photograph on, pressure being used to attach the surfaces, and a proper varnish afterwards applied to the surface of the image.

[Printed, 34d. See Mechanics' Magazine, vol. 58, p. 296.]

PATENT LAW AMENDMENT ACT, 1852.

1852.

A.D. 1852, October 2.—Nº 179.

NEWTON, FREDERIC.—"Improvements in the apparatus to be "employed for producing photographic pictures."

This invention consists in "an improved arrangement of appa"ratus for taking photographic pictures without the use of a dark
"room;" the sensitizing, developing, washing, and fixing
operations being either performed in the camera itself, or in a
box attached to it, without handling the plate or introducing the
hands into the camera.

One method consists in introducing the glass plate covered with collodion "into a glass vessel placed in the camera, and supplied " in turn with the proper solutions for rendering the plate, first,

16

" sensitive, then to develope and finish and fix the picture." This method is set forth only in the Provisional Specification.

A second method consists in suspending the glass or other plate over an aperture at the bottom of the camera, so that the vessels containing the chemical solutions may be successively introduced from below, and the plate thereby submitted consecutively to their action.

A third method consists in making the vessels slide in grooves under the camera, so as to come successively under the plate, which is consecutively dipped down into them, the plate being for that Purpose attached to a rod working in a stuffing box at the top of the camera; or the stuffing box may move in grooves, the troughs being fixed.

A fourth method consists in placing the troughs inside the Camera, and having a top chamber, into which the plate can be drawn out of the respective solutions by means of a rod and stuffing box.

A fifth method consists in placing the sensitized plate in a dark chamber with a moveable shutter in the camera, impressing the image, and then transferring the dark chamber to the top of a box which contains troughs of the several solutions; these troughs are successively brought under the plate, which is consecutively dipped into them, and is thereby acted upon so as ultimately to produce the finished picture. The cover of this box is so made (with hinges) that, when it is shut, sheets of vulcanized India-rubber come down upon the troughs, and preserve the solutions in them perfectly air-tight.

[Printed, 71d.]

A.D. 1852, October 29.-No 565.

TALBOT, WILLIAM HENRY Fox.—This invention refers to engraving pictures, obtained by photographic processes on steel plates; the engraved plates can be used for printing from.

A steel plate (prepared for the use of engravers) is dipped into a solution containing vinegar and sulphuric acid, coated with a mixture of gelatine and bichromate of potash, impressed with the photographic image by means of the copying frame, and washed. The film of gelatine is originally yellow; a yellow image on a brown ground is produced by the action of light, and the washing

removes all the bichromate of potash and the greater part of the gelatine from the parts of the plate upon which the sun's rays have not acted; the consequence of this is that the image is whitened. The photographic part of the process is completed by dipping the plate into alcohol, and placing it to dry in a vertical position.

The plate is then etched by means of a solution composed of a certain proportion of "bichloride of platina," containing a little free acid and water. The plate is placed horizontal, and has some of this solution poured upon it, "and quickly diffused and spread " over the whole plate with a camel's hair brush;" the etching is finished, when a very distinct and regular black image of the object is obtained.

"Photographic veils."—To produce the effect of engraved lines or of uniform shading, the image of a piece of folded gauze, or other suitable material, is impressed upon the gelatine prior to the image of the object required being formed.

Plates of zinc or lithographic stones are also readily engraved by this process.

[Printed, 41d.]

A.D. 1852, October 30.-No 575.

LUCENAY, PIERRE BERNARDET DE.—"The production of photographic images by means of artificial light."

To obtain an image of a "stereotype" [stereoscopic or photographic?] plate on unpolished glass. The artificial light is reflected by a mirror, so as to pass through lenses, through the "stereotype" [?] "plate, which is to be copied," then through "an ordinary daguerreotype objective" on to the glass plate where the required representation is produced.

Instead of receiving the image on a sheet of unpolished glass, it may be received on photographic paper, or on a glass plate coated with collodion, and sensitized so as to fix the image thus produced.

"The light is produced either by the galvanic battery" or by
"refractory bodies heated by lighted oxigen, or by the combustion
"of pyrotechnic compositions, or by any other suitable means."
When parallel rays of light are required, a parabolic reflector is used, the light being placed in its focus.

"The light is rendered diffuse for portraits. In this case the "interposition of blue cobalt glasses will be required, and the "reflectors will be a simple screen of a dull ground placed behind "the luminary." This application of the invention is not mentioned in the Complete Specification.

[Printed, 54d.]

1 77

.

L.

ú

A.D. 1852, November 9.-Nº 693.

MABLEY, WILLIAM TUDOR.—"Ornamenting glass and other "transparent or partially transparent substances for windows "and for other purposes," by means of photographic designs formed thereon.

A design for a window or lamp may be produced by copying the object required upon glass by the collodion or other process, fixing the image, and applying a transparent varnish to protect it from injury; this, however, will be a negative representation, and not suitable for many designs.

To produce a positive design, a negative photograph (prepared by superposition or by the camera) is used as the original to form a positive picture on the glass by means of the collodion process. One negative will serve to produce a number of positives.

Positives may also be produced on a different scale from their negatives by means of the camera, which also affords the means of combining various negatives into one design. The effect is heightened by placing ground glass or enamelled glass behind the positive picture. The boldness of the picture may be increased by the usual means, and is sometimes essential, in the application of photography to this invention.

To facilitate ornamentation, the sensitive film, with the image on it, may be transferred from one surface to another; parts of surfaces only may be ornamented in this manner; also curved surfaces may be thus made receptive of photographic images. By this means designs may be made up of several photographs, and thus large designs produced that it would not be possible to photograph at one operation.

The designs may be protected from injury by varnish or by a lacet of plain glass.

[Printed Std.]

A.D. 1852, Décember 29.-Nº 1196.

POWER, JAMES.—This invention consists of "silvering all "sorts of metals and of glass," "by a solution of silver, with "the aid of electricity, and of covering the said coating of silver "with a coating of copper, in the usual way, and in certain cases" of detaching "the silver and copper plate from the glass, to serve "for daguerrectype, photograph, and other similar purposes."

The solution of silver consists of nitrate of silver, nitrate of ammonium, and "nitrate of silver of alcohol (spirits of wine gun"powder proof)" [the Provisional Specification says, "nitrate of
"alcool (spirits of wine gunpowder proof)"]; to this is added a
certain quantity of "resinous spirit," consisting, by preference, of
gum galbanum and spirits of wine.

For laying a very thin coating of silver upon glass to give it conducting surface, the above solution has a few drops of spirits of cloves mixed with it; the glass plate is then transferred to another silvering bath (formed as described above), connected with a galvanic battery, then a coating of copper given by the usual galvanic means.

These silvered plates may be said to be electro-cast upon glass "chrystal, porcelaine," and other non-metallic substances susceptible of receiving a perfect polish, may be used. The metallic plate, when detached from the glass, is of the most perfect polish, "requiring neither flattening nor polishing, and is most beautifully adapted to the use of daguerreotype and photographic portraits, views, &c."

[Printed, 4]d.]

1853.

A.D. 1853, January 25.-No 193.

MAYALL, JOHN EDWIN.—This invention "relates to the pro"duction of imitation crayon drawings or portraits in or by the
"photographic process by the aid of a mechanical contrivance
"interposed between the object and the camera."

This contrivance consists of a disc, with a central aperture in it of the form of a large star, which disc is slowly revolved by means

k. "The central or free open portion of this star is y large to admit the rays from that part of the object to be shewn in strong light, or as a firm sharp image, e rays from those exterior parts which are to be shaded or deepened off to a dark or light background lly intercepted by the converging points of the star. s apparatus the intensity of the light is gradually d, and the pictures taken in conjunction with it he required softened off crayon effect. The apparatus able to every kind of camera, and by placing it at distances from the camera different portions of the y be softened off."

re stellar shape of aperture is not essentially necessary id in view, inasmuch as other shapes would answer for z the graduation of the rays."

5\d.]

A.D. 1853, March 23.—Nº 711.

. Antoine François Jean.—" Improvements in pes." This invention consists:—

the producing of pleasing and novel optical illusions of a peculiar construction and arrangement of some of , which are made moveable so as to impart to the ne appearance of moving figures."

the picture to "be seen in a natural position, and not as is usually the case," a mirror is placed in the at an angle of 45° to the plane of the picture, and the are placed at the back of the stereoscope, so that the t is parallel with the plane of the picture.

ner improvement, a slide, adapted to the eye pieces, cwards and forwards, and thus opens and closes each lternately. The pictures are made differently, so that are not similarly placed (but differently viewed) in the case of ordinary stereoscopic views. One view roon with his hat on, for instance; the other the same at off; by the action of the slide it appears that the aking off his hat. "An increased effect and great rill be produced by combining a number of pictures in the form of a cross, so arranged as to exhibit alter-

"nately under each eye from different positions, so that the observer may, in succession, see eight different pictures, all in different attitudes." Two crosses are used; they are mounted on horizontal axles in the body of the stereoscope, and are rotated by a coiled spring, free to act by the movement of the slide.

2nd. "In so constructing and combining the several parts of "which the stereoscope is composed that the instrument may be collapsed and brought into a small compass, so as to be renued dered more conveniently portable than ordinary rigid stereoscopes."

The mirror stereoscope mentioned in the first part of the invention is rendered portable by making the bottom of the stereoscope correspond to the bottom of the case formed by the instrument when folded; the ends of the instrument form the lids, the mirror with its "lids" fold up against the back of the instrument, which back is hinged to the bottom, and the eye pieces are made collapsible by means of helical springs.

In another construction, "immediately the fastening which "holds the instrument in a closed state is undone, all the parts "will be at once made to assume their proper position for viewing "a picture." The bottom of the closed instrument corresponds to the bottom of the instrument when in use, and the lid to the back; the said back supports the eye-piece flap, as well as another flap which forms the partially open front of the stereoscope. The eye pieces are as in the folding mirror stereoscope. The instrument is ready for use when the cover is opened, the flaps being made to open by an elastic strap. A modification of this construction consists in supporting the eye-piece flap by a central partition, which springs into its proper position by an elastic spring. Another modification consists in altering the external form of the instrument so that the eye pieces need not be collapsible.

"Another form of making the instrument consists in attaching "the eye pieces to two flaps, which have holes to look through "made therein, and are hinged to a central vertical partition, "which is made moveable in a vertical guide, so that it may be "moved up or down for the purpose of altering the focus when "required." This instrument will open without assistance from the observer. The top and bottom (together) of the case form the bottom of the instrument when in use. In a modification of

this form the vertical guide forms the back of the instrument and also the top of the closed box; the eye-piece flap is in one piece, and has an overhanging flap for a shade.

[Printed, 6]d.]

A.D. 1853, May 21.-No 1260.

SCOUTETTEN, HENRI JOSEPH.—This invention is entitled "An improved plastic compound applicable to various ornamental "and useful purposes," and (amongst other things) it relates to rendering paper impermeable, which impermeable paper "is "suitable for photography." This application of the invention is not mentioned in the Provisional Specification.

"When it is desired to render paper or stuffs impermeable, the caoutchoue and the gutta percha must be separately dissolved in sulphuret of carbon, in the proportion of eight of gutta percha for one hundred of sulphuret of carbon, well purified; the solution is left to rest during eight days, and the white of eggs is added to it; when the impure matters are deposited it is poured forth to obtain an almost colorless liquid. Paper or stuff may be then steeped in this liquid, and drawn from it by passing them between cleansing rollers, which equalize the layer of the matter."

[Printed, 2kd.]

A.D. 1853, July 8.—Nº 1629.

PRETT, JACOB (a communication).—(Provisional Protection Only.) "This invention consists in combining together into one apparatus two photographic cameras in such a manner that two stereoscopic pictures may be taken at the same time and on the same plane. The instrument is arranged in such manner that the angle at which the two pictures are taken may be varied at pleasure, but at the same time retaining the distance between the pictures on the plane always constant."

"The invention also consists in obtaining from a negative photographic picture a positive picture of either a larger or smaller size than the original negative, by so arranging the apparatus that the light which passes through the negative picture (which is preferred to be on glass) is caused to pass through a series of theses which bring the light to a focus at the other end of the

" apparatus, where a prepared surface is placed to receive th " positive image, the size of which will vary according to th

" distance at which the negative picture is placed from th

" lenses."

[Printed, 2\d.]

A.D. 1853, October 31.—Nº 2510.

GOËTHEL, CHRISTIAN, and ZIMMERMAN, CHARLES MC RITZ.—(Provisional Protection only.) "Improvements in stered " scopes."

"The improved portable stereoscope" "consists principally (" three parts hinged together so as to allow of the whole bein " folded up."

The Drawing shows an instrument with a moulded base, whic constitutes the "centre piece" or back of the stereoscope whe in use. Two vertical planes are hinged to this base; one carrithe lenses, the other the picture to be viewed. These planes ma be held in a vertical position by ties, and are also capable of bein folded down (one over the other) on to the base.

" The distance of the verticals is regulated according to th

" focal distance of the lenzes. This arrangement allows of a mon " minute examination of the details of the object, and the whole

" when folded up occupies no more room than a small sketching

" block."

[Printed, 4]d.]

A.D. 1853, November 3.—No 2552.

DUPPA, BRYAN EDWARD.—"Improvements in coloring pho

" tographic pictures." These improvements "consist of rendering the front surface

" transparent with suitable varnish, and applying colors to th " back surfaces, by which means the laying on of the color

" will not require that artistic skill heretofore necessary, an

" results are obtained which cannot be obtained by the colorin

" on the front surface."

A coating of wax, mastic, or other varnish is given to the fron surface of a paper photograph; this process renders the pape transparent. Oil colours are then suitably applied to the back of the picture by means of a brush; the colour being applied un

24

formly (in most cases), the lights and shadows are entirely produced by those of the photographic picture itself. The back of the picture is then cemented on to a surface of white lead spread over cardboard, and, finally, the front of the picture is again varnished.

The image shown by the photographic picture may be reversed by colouring the "face" or front of the photograph, the paper being rendered transparent as explained above; "the photograph image will then be seen through the paper, and the "colours through both."

[Printed, 2]d.]

A.D. 1853, December 8.—No 2856.

LAVERDET, MARCEL GUSTAVE.—(Provisional Protection only.)
"This invention relates to a mode of coloring photographic
"pictures, so as to give them a life-like or natural appearance,
"without impairing the exactitude of the photographic image, as
" is the case with the ordinary method of coloring, and without
"requiring the manipulation of a skilful artist."

The photograph is rendered transparent "by coating the back "with varnish, and causing it to penetrate the pores of the fabric containing the picture." When the varnish is dry, oil colours are laid on the back of the picture, "so as to imitate as closely as possible the natural tint of the object represented.

"These colors may be diluted with rectified essence of tur"pentine so as to obtain the requisite tints, care being taken to
"saturate the paper, so that the color may penetrate through to
"the other side.

"The picture is then allowed to dry, and is afterwards varnished on the front side. If the tones are not correct they may be removed by means of essence of turpentine, and others laid on without injuring either the picture or the paper.

"It is only now necessary to place the photographic picture upon a white ground and the operation is complete."

[Printed, 2]d.]



1854.

A.D. 1854, January 18.—Nº 125.

BOURQUIN, JEAN PIERRE. — (Provisional Protection only.) This invention relates:—

lst. To a method of making troughs "for holding the various "chemical solutions required in photographic processes." The troughs are made "of a square, rectangular, or other conveniently "shaped framework of wood, in which a glass bottom is cemented in any suitable manner by means of a cement which is not "liable to be acted upon by the chemical solutions to be employed."

2nd. "To a method of levelling the troughs or vessels, so that "the same depth of liquid may be maintained in every part of "the trough." Three or more levelling screws are adapted to the framework of the trough; these screws "pass through screwed" shoulders or brackets, fixed on the tray, trough, or vessel, and "form the feet whereon the vessel rests."

[Printed, 3d.]

A.D. 1854, February 20.—No 407.

URIE, JOHN.—"Improvements in photographic pictures."

To give photographs on glass or other transparent plates, "the "effect of standing out in high relief from the apparent image "surface," "the back of the glass or the surface opposite to that "on which the image is taken" is "coated with a black varnish "or other pigment; care being taken to confine this reverse "coating to the exact area opposite to or covered by the picture, "or that portion of the picture to which the appearance of relief "is to be given." Paper or other dark material may be used to give the effect of relief, "and two or more kinds of reverse "coatings may be used." In some cases the background may be coloured and shaded, "or the part uncovered by the actual image "may be treated with fluoric acid." Different degrees of relief may be given by using two or more thicknesses of glass or other transparent material, "and by putting the dark reverse coating

" for one part of the picture at a greater or less distance from the picture surface than that for another part."

By another process, plaster of Paris or other plastic substance is poured or deposited upon the surface of a positive image on glass, and, when solidified, the substance is detached from the glass, "taking with it the positive image film."

[Printed, 4d.]

A.D. 1854, April 7.—N° 808.

FONTAINEMOREAU, PETER ARMAND LE COMTE DE (a communication).—(Provisional Protection only.) "Certain improvements in the preparation of photographic paper."

"The invention consists in the construction of an apparatus
by which photographic paper is instantaneously obtained, and
which shews visibly the progress in coloration of the proofs,
producing at the same time the degree of heat favorable to the
operation.

"It is composed of pans with edges perfectly flush, resting on a plate of glass, to allow the liquid chemical solution spread on the surface of the paper to combine with it, by absence of any intervening atmosphere, light, dust, &c.

"Secondly, of a frame with sliding door, which perfectly encloses the moistened paper, so as to preserve it from the effects of light, though the operation takes place in open day."

[Printed, \$d.]

A.D. 1854, April 7.-Nº 809.

SAUGRIN, Louis François.—(Provisional Protection only.) "Improvements in the construction of stereoscopes."

This invention "consists in constructing stereoscopes with "moveable lenses and collapsable springs, and rendering them "more portable than heretofore."

This instrument is made so as to be entirely compressible into the stereoscope case; for that purpose the piece carrying the lenses is connected to the bottom of the case by means of a "rectangue" lar spiral spring." The bottom of the case forms the bottom of the instrument, and has an aperture "to show the object by trans" parency." The lenses are "set in a sliding piece, to facilitate the change of glasses." "Black stuff is stretched" around the

"nose piece," "so as to prevent the reflection of the face on the "object."

A spring "which can be entirely compressed," and applicable to a stereoscope, is shown in the Drawing, and consists of two flat semicircular springs in the case, and one abutting on them to support the eye piece. Another form of spiral spring is also shown.

[Printed, 5d.]

A.D. 1854, April 7.-Nº 822.

NEWTON, WILLIAM EDWARD (a communication). — "Im" provements in producing stereoscopic pictures, and in the appa" ratus for exhibiting such or similar pictures."

lst. The method of producing stereoscopic pictures "consists in taking the two pictures from the extreme ends of the hypothe—" nuse of a right angle triangle, one of the sides of which is hori—" zontal and the other vertical, each of the sides being two and a "half inches, or thereabouts, in length." One method of practically accomplishing this object, is to take the first picture with the camera risen up two and a half inches from its table, by means of studs or pins, and to take the second picture with the camera placed flat on its table, the pins passing through apertures distant horizontally from its former position two and a half inches. Other methods can be used "which shall allow the camera to be put into the two positions required."

2nd. The method of exhibiting stereoscopic pictures consists in giving them "a panoramic motion into and out of the field of "vision by means of machinery." In a reflecting stereoscope the pictures are brought in succession into the field of view by means of screw and screw-wheel machinery. The pictures are arranged in sets, one set on each side of the instrument; each picture has a rack attached to its under side, by means of which spur wheels on the screw-wheel shafts give the desired "panoramic" motion; by means of pins on vertical shafts (worked by the screw-wheel shafts) the pictures have also a lateral motion, to enable them to place themselves in the case in proper order. The machinery is worked_by a crank handle in front of the instrument.

[Printed, 1s.]

A.D. 1854, April 13.—Nº 868.

→ DEVINCENZI, Guiseppe.—"A method or methods of produc-"ing engraved, figured, and typographic surfaces for printing "and embossing from, and for ornaments, also certain machinery "employed therein."

The following processes treated of in this Specification have relation to photography:—

Impressions are produced on metallic surfaces "with some "greasy matters," by means of a photographic process, either direct "or on a lithographic stone, to transfer from afterwards an "impression of any bituminous or resinous substance." Other means of producing these "impressions" are set forth at length.

To engrave these "impressions" they are varnished on the surface by a process similar to that of inking, and engraved by chemical or electro-chemical action; or the "impressions" may be simply warmed and dusted over with bituminous or vitreous matter, which is melted, and figured surfaces are thus obtained.

Another process consists in producing the "impressions" upon electro-deposited layer, and subjecting the resulting surface to the solvent action of the electric current in a suitable liquid. Inother method is to electro-coat all such portions of the "impressions" "as have no impressions with a layer of a different metal," then to "remove the material in which the impressions are taken," and either to use the resulting surface as a deep engraving by electro-etching it in a liquid which does not act upon the layer, or to use it as an ornamental surface.

Engravings on non-metallic bodies may be produced by means of the above-named "impressions" in combination with the chemical action of acids.

The "impressions" obtained as above may also be used "to produce electro-plate reproductions or stereotype plates."

Besides the above-mentioned processes to which the method of producing "impressions" by means of photography are applicable, other modes of producing ornamental surfaces are set forth at great length in the Specification; also many applications of this invention are explicitly stated. An electro-magnetic "printing "machine," to work with a limited number of types is described in the Specification and shown in the Drawings.

[Printed, 1s. 6d.] No. 20.

A.D. 1854, April 27.-No 956.

JOHNSON, JOHN HENRY (a communication from Henry Beaud).—" Improvements in polishing and flattening metal

plates," more especially Daguerreotype plates.

The plates are first polished on a flat table, which is provided with a ledge and moveable side. The plate is retained firmly on the table by being nipped between the ledge and the moveable side, the moveable side being provided with guide plates and a screw for that purpose. In this position the plate is well polished by the aid of polishing pads and a suitable mixture of impalpable powder and liquid. A pair of the plates are then laid back to back, and a block or "squeezing plate" is placed against the polished surface of each plate, the plates being thus placed between two blocks. The blocks and plates are then fastened together, so as to form one solid piece, by means of a hinged frame carrying a clamp screw, and are subjected to the pressing action of a pair of rollers, "through which the plates are passed two or three times." "When perfectly flattened, the finishing polish is effected by rub-"bing with the hand, or by suitable polishing mechanism."

It is important that the pressing surfaces of the blocks should be as well and as carefully polished as the surfaces of the plates, before being used.

[Printed, 6d.]

A.D. 1854, May 15.-No 1080.

SAUGRIN, Louis François.—"Improvements in apparatus " for the production of stereoscopic and photographic pictures."

The Specification and Drawings describe and show a camera having three object lenses, and which is capable of taking three stereoscopic views at one set of operations, when used in connection with a second camera, in which the arrangement of lenses and plates is reversed. The three lenses are placed over one another in a vertical line, and have hinged fronts, so that they may have such an inclination as to enable a true picture to be taken by each. The lenses are not placed in the centre line of the camera, but are nearer to one side than the other.

In taking a picture, "the sides of the apparatus, where the "lenses are nearest to the edge, are placed towards each other." To obtain "the angle of two objects upon the same plate." the

operator shuts "the right slide of one of the apparatus and the "left slide of the other apparatus;" then "the frame containing the plate of the left apparatus" is withdrawn, and placed "in "that of the right one, and vice versa." Three pictures, vertically over one another, are first made in one camera, and their stereoscopic copies are made in the other camera. To obtain "the six proofs double by one operation," three additional lenses are added to each camera.

A similar camera to that described above, but with two lenses instead of three, is described and shown; also another camera, with two lenses placed side by side.

[Printed, 10d.]

A.D: 1854, May 15.-No 1086.

EAST, FREDERICK.—"Taking photographic views and portraits in the open air, by means of vertible machinery attached to a cubical box, by which the changes are seen, and the light and the time of exposure regulated."

A camera is described in the Specification, and shown in the Drawings, called "the camara chora," and consisting of the following parts:—A removable chest, which fits into the camera: this contains two water baths, a rack, a bottle case, and a drawer. The camera stand, which consists of a number of thin pieces of wood, jointed at the centres and ends; these "form three legs " when drawn out, and three thin squares when closed up;" they fold under each other "into a frame fixed round the bottom of the " camera, and are thus out of sight." A "diverting bath" to excite the plate, at one end of which is a cylinder, from which the exciting solution runs into the bath, when the bath is turned on the axis of the cylinder downwards; this and the following apparatus are interior fittings of the camera. The developing apparatus, consisting of a flexible case, from which the developing fluid is forced (by the compression of a screw) into a "meter;" when its knob is turned the fluid runs over the plate, and developes the picture. The fixing apparatus is on the other side of the camera to the developing, and consists of a similar arrangement; a thin plate of metal ("the developing tray") in connection with a wire is used to spread the fluid over the plate, in the developing and fixing processes. The focussing apparatus, con-

sisting of a rack and pinion arrangement attached to a plate holder; a socket containing a half zone, in which the lens is so mounted that it can be turned upon its axis; a set of "light " regulators," admitting different colours and qualities of light; a set of diaphragms; and a "paraphon" or shutter; the light regulators, diaphragms, and shutter, are placed within the mounting of the lens, and turned by keys fixed round the head of the mounting; the focussing is observed with a tube at the back of the camera, provided with a "valve" or shutter. A "monitor," (or time-beater), consisting of wheel-work, actuated by a main spring, and regulated by a fly; a wheel "with elastic points" strikes the time, when required, upon "vibrating wires of different "tones:" a dial outside the camera marks the time for exciting the plate; and the exact time of exposure is ascertained by means of a connection from the fly to "the paraphon valve," in the mounting of the lens. Certain outer fittings consist of a "lunette," or "peep-hole," to look into the camera, having a shutter; a "diaphane" or window (with a shutter) to admit such rays of light as will not injure the solution; a handle to carry the instrument, a tap, a waste bag, and "locks and keys " with various other fastenings."

To work the instrument.—The camera is prepared by fixing the legs, taking out the chest, putting the waste bag on the tap and opening the tap. The prepared plate is then placed in the lip of the plate holder, the focus taken by the above described focussing apparatus, and the plate excited by immersion in the "diverting" bath. The picture is then taken, using such diaphragms and "light regulators" as may be necessary, and closing the "paraphon." In developing the picture, light of the requisite colour is admitted through the "diaphane," the plate dropped into the developing tray, and the developing fluid allowed to run over the plate. To fix the picture, the fixing fluid is allowed to run over the plate in a similar way to the process for developing; the operator, during developing and fixing, watches the process through the "lunette." The picture is then taken out of the camera, and washed, rinsed. and dried in the chest. Finally, the waste bag is unhooked, the tap closed, the chest put into the camera, and the legs folded under the camera, preparatory to leaving the field.

[Printed, 1s. 8d.]

A.D. 1854, May 22.-No 1139.

SPENCER, JOSEPH BLAKEY, and MELHUISH, AETHUR JAMES.—(Provisional Protection only.) "Improvements in pho"tographic apparatus."

By means of this invention a series of photographic pictures may be obtained, in succession, upon a long sheet of sensitive paper, "the parts of the paper or sensitive surface not for the "time being in use being rolled up within the frame of the "camera." "The frame in which the prepared surfaces are em-" ployed is fitted up with two rollers;" "in using the apparatus, "after one picture has been taken, that part of the prepared "sensitive surface is wound up on to one of the rollers, and a "fresh quantity of the prepared surface, suitable for receiving "another picture, is unwound off the other roller, and so on, " till all the prepared paper or surface on the roller has been used. "Two rods or tubes of yellow glass are employed to retain the " part of the sensitive surface, which for the time being is brought " into position in the correct plane or position." It is preferred into position in the correct plane or position." It is preferred to focus directly on to the prepared surface when using waxed paper (instead of focussing on to a plate of ground glass), a Plate of yellow glass having previously been placed in front of the Lens to prevent the light from injuriously affecting the surface, and lso having placed another plate of yellow glass behind the paper with a similar object.

[Printed, 3d.]

A.D. 1854, June 23.—Nº 1384.

DREYFUS-WERTH, SALOMON, and MEUNIER, PIERRE.—(Provisional Protection only.) "A new or improved system of applying designs to all kinds of fabrics, and of surfaces of wood, marble, and stone."

This invention "consists in a new or improved system for ap"plying designs to or ornamenting the surfaces set forth in the
"title." For this purpose "the chemical action of light upon
"colours" is applied "directly to the surfaces above mentioned.

"The surface to be acted upon is first rendered sensitive by
"subjecting it to one or more baths of any suitable substance,
"such as solutions of chloride of sodium, nitrate of silver, hypo"sulphite of soda, chromate of potash, and sulphuric acid.

:

The fabrics or other surface, after being subjected to one or more of these baths, is well washed and dried; the designs to be reproduced on the surface are then laid or put on it in a suitable manner, and the whole or part of the surface thus treated exposed to the action of solar light during a few moments. The surface having thus received the image or outline of the design, may have any required tint given to it by the usual processes."

[Printed, 3d.]

A.D. 1854, July 26.-Nº 1638.

CUTTING, JAMES A.—This invention refers "to the art of taking pictures photographically on a film of collodion upon the surface of a sheet of glass;" the process is called "ambrotype."

The invention is divided into the following parts:-

1st.—Preparing the collodion.—Gun cotton "is plunged in to strong alcohol, which effectually deprives it of the water which it "contains, without exposing it to the atmosphere for the periodic plus it is an essential part of the invention. From the alcohol the gun cotton is taken immediately to a mixture of said plus cether and alcohol which dissolves it, thus forming the collodion.

2nd.—Beautifying the picture and sensitizing the plate.—The collodion, made as described above, is allowed to settle, and decanted. Iodide of potassium dissolved in alcohol is then added to the collodion. "After being well shaken" the mixture has gum camphor added to it; this is the second essential feature of the invention, and greatly increases the distinctness and beauty of the picture to be produced. This mixture is poured over the glass so as to form "a colorless transparent film," and, when it has only partially set, it is placed in a solution of nitrate of silver until the ether has escaped from the collodion; the plate is then ready to be placed in the camera.

3rd.—The completion of the process.—After being exposed in the camera the plate has its latent picture developed "by the "application of a solution of protosulphite of iron, acetic acid "and nitric acid;" it is then washed and its picture fixed b means of hyposulphite of soda solution. The plate is then washe and dried, thus completing the chemical portion of the process. The third important point in this invention, however, consists in applying "a coating of balsam of fir to the surface of the glass" upon which the picture is made, the balsam being confined to "the picture plate by a secondary plate of glass;" for this purpose the balsam is "applied in a line along one edge of the glass," and one edge of the other plate is applied to the edge of the first, the two plates are then pressed gradually together and the superabundant balsam thus removed; this process greatly enhances the beauty and distinctness of the picture, and "secures the whole" from the action of air, moisture, and dust."

[Printed, 4d.]

A.D. 1854, August 1.-Nº 1696.

MERRITT, THOMAS EDWARD.—"Improvements in apparatus "for taking photographic pictures in the open air."

1st. A dark chamber or box "capable of containing any re-" quired number of prepared papers or glasses" is fitted at the hinder part of the camera. "A screw of quick pitch," passing through the back of the box, brings "the prepared papers or " glasses forward in succession into the focus of the camera." A second chamber is fitted beneath the camera and the box, in which is placed "a tray deep enough to hold the prepared papers " or glasses edgewise, and divided into as many compartments " as the box is capable of holding papers or glasses;" or the tray may have ears that slide in grooves at the bottom of the camera, thus dispensing with the second chamber. A slit is formed through the bottom of the dark chamber; this can be closed by means of a slide, and is employed to allow each paper or glass to fall into the tray after having been used. The tray is shifted "as " it is required to receive a paper or glass, so as to bring forward " a fresh compartment for it to fall into." A number of pictures can thus be taken without being exposed to light, and they may remain in the tray "until a convenient time for developing " them."

2nd. A small frame of tin, or other suitable material, to hold collodionized glass by means of a spring or springs; this arrangement may also be employed to hold the papers prepared for use in the camera mentioned in the 1st improvement. The paper is

prepared by being placed between two pieces of glass, "which are "held together by a strip of paper pasted at their edges."

3rd. "A close box for containing one or more prepared papers" or glasses for taking photographic pictures in the open air with " a camera of the common description."

Besides the above particulars, the Specification and Drawing describe and show "an improved bath for developing collodio" pictures taken in the camera" described in the 1st improvement. The bath is adapted to the camera by means of ears, a consists of two cells communicating with one another by means of a perforated partition. The solution is poured into one and the partition admits it to the photograph in the other. There is a lid to keep light out of the bath and a corked spout for drawing off the used liquids.

[Printed, 1s. 4d.]

36

A.D. 1854, August 11.-Nº 1752.

MONSON, EDWARD.—This invention "consists of a machine or "apparatus" "for manufacturing or getting up, cleaning, polishing and buffing daguerreotype plates."

The plate or plates are fixed upon a horizontal platform by means of a holder. This platform rests upon a second platform, and each platform is capable of a rectilinear sliding motion, "the " two sliding motions being at right angles to one another." By means of a rapid alternating motion given to the upper platform. and a slow direct motion given to the under platform, the whole of the surface of the plates is brought under the action of the tools for hammering, burnishing, or polishing them. The hammer is made to have a suitable vertical and alternating motion by means of a cam arrangement in combination with a helical spring; the cam raising the vertical shaft that carries the hammer. and the spring (in combination with the weight of the hammer and shaft) forcing the hammer on to the plates. The burnisher or buff is pressed on to the surface of the moving plate by means of a weight at the end of a lever, and besides can have a rotary motion on its axis given to it when required. It is preferred to hammer a number of plates first and then to buff them, but the hammering and buffing may be done at the same time. The buff

1

as to prevent its rotation, for finally polishing the plate. nt the plates from being spoiled, by dust being hamerein," a blowing apparatus is used.

6d.]

A.D. 1854, November 9.-No 2373.

I, PAUL.—This invention "consists in adapting the phic process to the purpose of obtaining either a raised k design on glass or other suitable material or materials, with glutinous substances mixed with photographic, which aforesaid design can then be copied by the pe process, or by other means, for producing plates for printing purposes, or can be applied for producing applicable for obtaining plates."

n a raised design, the following process is employed:—containing glue, nitrate of silver, iodide of potassium, mate of potash is poured over the plate on which the equired. When the coating thus formed is completely bject to be copied is laid on the prepared surface, and transferred to the photographic copying frame and light. After a sufficient exposure the plate is removed hed either with cold water or a solution of borax or of ze of soda, as may be necessary." The picture thus a relief is treated with spirits of wine, dilute copal id a weak solution of tannin; when sufficiently raised and dried. The picture may now be copied by the , stereotype, or other like process.

n a sunk design:—The previous process is employed, g gelatine for glue and drying the plate after washing its of wine; the picture is then ready to be copied.

ink may be applied to the design developed as above, zincographic or lithographic impressions obtained.

tures have flat surfaces when taken from the copying y using more sensitive compounds as the iodide or f ammonium instead of iodide of potassium, designs ained by the camera.

, 3d.]



A.D. 1854, November 18.—No 2447.

LUFF, HENRY JAMES.—(Provisional Protection only.) "Im "provements in the mode of attacking hostile bodies, also appli "cable to the obtainment of plans of forts." Photography i mentioned as a means of obtaining the plans of forts.

These improvements "consist in the mode of attacking hostil " forts and towns, or bodies of troops when stationed near to the " sea, by having, in connexion with a vessel at sea or in a harbour " a balloon having a telegraphic communication with such vesse." " such balloon being freighted with explosive compounds of are " description most suitable with the purpose. The balloon having " ascended from the vessel, and being then in connexion there " with, can readily direct the movements of such vessel, whil " such movements by suitable connexions can again operate "the position of the balloon, so as to bring the same readily in "the most favorable position with regard to the fort, army, " other object to be acted upon, when the explosive compound " may be easily let down in the exact position where the greates " injury can be inflicted. It is also to be observed, that by " similar means, plans of fortifications, &c., may readily be " acquired by the photographic process. It is obvious, that " where inland forts or armies are to be attacked, the balloon " may be in connection with any apparatus upon land, so as te " effect the same results."

[Printed, 3d.]

A.D. 1854, December 13.—No 2620.

FONTAINEMOREAU, PETER ARMAND LE COMTE DE (communication).—This invention "consists in fixing, vitrifying "and coloring photographic images taken by the collodion pro "cess upon enamel, metal, stone, porcelain, glass, china, and al "kinds of earthenware."

"Upon a plate of glass is poured a composition consisting c rectified sulphuric ether, rectified alcohol, gun cotton, an hydrate of ammonia; after leaving this layer to dry for a fer seconds, the plate is plunged in a solution composed of dir tilled water, crystallized nitrate of silver, and rectified alcoho with or without a solvent. The plate is then ready to receiv the photographic image in the usual manner; after which it i

38

" introduced into a bath composed of filtered water, sulphate of " iron, acetic and sulphuric acid. After having washed the proof " several times with fresh water, it is plunged into a bath com-" posed of cyanide of potassium and distilled water, and then " submitted to the action of a solution of bi-chloride of mercury, "hydrochloric acid and distilled water. This operation being "terminated, a very sharp permanent proof is obtained, which " may be separated from the glass upon which it has been made, " by plunging it during a few seconds into water and taking it " off with blotting paper. This image may be applied to a sur-"face of metal or glass, &c., of any form by means of a thin " solution of gum or other adhesive matter." It is then baked in a porcelain furnace. The images may be coloured by applying vitrifiable colours either in a state of powder "or mixed with "spirits of turpentine, lavender, &c.;" these colours are also baked in.

[Printed, 3d.]

A.D. 1854, December 29.—No 2745.

THOMPSON, FREDERICK, and WAGSTAFF, WILLIAM .-(Provisional Protection only.) "Improvements in photography." "The invention consists in marking on the back of a glass " plate on which a picture or photograph has been taken, or upon one or more seperate glass, metal or other plates placed behind the same, the outline or form of the object or objects in the Picture or photograph, with any sort of varnish, cement, or Other material that can mark or define a line, or with paper, Cloth, velvet, silk, gutta percha, wood, or other suitable material. and filling the space or part thereof within such outline with one or more coats of the above, or other suitable material, thereby producing an appearance of relief or rotundity. And the same effect may be produced by eating away with any acid or other suitable material the whole or part of the said outline, or any part of the back of the glass or picture, or upon any seperate plate of glass, metal, or other suitable material, and coloring or coating the part affected by the said acid or other suitable material, or with varnish or other material before described.

"The invention farther consists in producing a colored background for photographic pictures, by placing behind the plate

"on which the picture is produced, or upon or behind one or more seperate plates of glass or other suitable material, tinted paper, cloth, velvet, silk, gutta percha, wood, stained glass, or other suitable material, and which background will add to or assist the appearance of relief or rotundity before described."

[Printed, 3d.]

1855.

A.D. 1855, February 20.—No 371.

SCHOTTLANDER, HENRY.—The title of this invention is, — =

Various methods of painting, transferring, or printing ornamental designs "upon the back of a looking glass not yet silvered," and afterwards silvering the same in the ordinary way, are set forth. "Through this process the drawing, design, "&c. appears between the silver and the glass either in black or "colours, as the case may be, and becomes closed in hermetically." The parts not covered with colour become thereby ordinary "looking glasses, and form the basis or ground of the design, "&c."

The patentee further states:—" I further deposit photographics direct upon glass, colour the same if required, and silver them afterwards, thereby transforming them partly into looking glasses, the photography appearing between the glass and the silver, in manner as heretofore described, by which process the same are protected against any effects of the atmospheric air and consequently retain their freshness permanently. In order to detach the outlines of a photography upon glass from the chemical substances which surround them, I apply the described process of scraping, provided that the design does not contain too many minute parts; otherwise I cover the photography itself with varnish, and wash the surpassing chemical substances off with water or other dissolving liquids."

The process of "scraping" above alluded to is thus described =

"The drawing or design themselves are formed into looking"

"glasses in imitation of inlaid silver by covering the whole "surface of a glass on one side with paint, and scraping the "colours off those parts where I desire to have looking glass."

[Printed, 3d.]

A.D. 1855, February 27.-No 426.

BERCHTOLD, ALFRED JEAN.—(Provisional Protection only.) The title of this invention is, "Certain improvements in apply-" ing the photographic engraving on metals or other materials."

The patentee states:—"I take a negative or positive photograph either on paper, or on collodion, or albumen, or other suitable material, and I produce a grain upon this photograph by printing the grain in black or any other colour upon it from a plate or block or other printing surface, or by perforating or making strokes, lines, or dots upon it by a roller or other instrument, worked by the hand or by machinery.

"The design is then transferred by the action of light to a varnished surface of metal or stone or other suitable material by the process already known, and the varnish is afterwards treated by solvents, and the surface etched by acid, as already known. By this means the strokes, lines, or dots, or grain, are produced upon the metal, stone, or other suitable material by the action of the light, and not by the mechanical application of powdered resin, as heretofore."

"The printing, or marks, or perforations may be made on a separate sheet of paper or other suitable material, instead of being made on the photograph itself. The perforations may pass completely through the paper, or only partially through it."


[Printed, 3d.]

A.D. 1855, March 5.-No 488.

GARNIER, ARSÈNE LOUIS.—The title of this invention is, "An "improved process for producing photographic pictures, which I "intend to denominate 'Système Garnier de Photochérographie "coloriée.'"

The invention consists in:-

lst. "Employing a textile or woven fabric instead of paper as "the surface on which the picture is to be produced."



2nd. A certain process "for neutralizing any alkaline salts, and "for removing any impurities or injurious matters contained in the fabric or paper employed." For this purpose the fabric is immersed consecutively in boiling water, alcohol, and potash.

Having cleansed the fabric according to the 2nd part of the invention, it is cut into pieces of suitable sizes coated with a paste of rice flour, allowed to dry, and immersed in a mixture of virgin wax, Venice turpentine, and linseed oil; the fabric has thus a body and a finely polished surface, upon which a positive photograph may be obtained in the usual manner, and fixed in a bath "of ammoniacal hyposulphites." "To remove any alkaline salts "which may remain after the ordinary washings," the picture is immersed in pure alcohol and hot water. The picture is then ready for the reception of oil colour (which is applied at the back), and can be attached to a suitable flat and even surface and vasnished on the face.

The 2nd part of the invention can also be applied to paper photographs after they have been obtained and fixed in the usual manner. The picture is then treated with starch, waxed, coloured on the back, mounted, and varnished.

[Printed, 4d.]

A.D. 1855, March 8.-Nº 515.

CLAUDET, Antoine François Jean.—"Improvements in stereoscopes."

1st. "Giving to the interior of the casing or box of the stereo"scope such a form that no part of it can be reflected from the
"pictures or the frame upon which they are to the eye of the
"observer." "A perpendicular from the tangent at any point
"which could otherwise be reflected of the curve of the interior
"of the casing must make with the slide such an angle as will
"not reflect it to the eye of the observer." The casing of the
stereoscope shown in the Drawings has its vertical sections towards
the end that receives the pictures composed of curves of contrary
flexure.

2nd. Placing within the outside casing two "chambers," each chamber being larger than, but in continuation with, and concentric with each eye tube. These chambers are suitably blackened and have openings corresponding to the form of the picture; they

42

thus "allow the pictures to be seen freely, and wholly hide the "frame."

3rd. An "adaptation of the lenses so as to obviate the necessity of any adjustment to suit observers whose eyes are at different distances apart." Each eye piece is made out of a half lens, the only transparent part of the Ienses through which the observer can view the pictures" being a thin central strip in the longitudinal direction of the instrument; "the other portions of the lenses are blackened and rendered opaque." If the meniscus form of lens be used, "the concave side should be towards the eye, in order to the prevention so far as possible of reflection from the lens."

4th. A "mode of adjusting the foci of the lenses to the focal length usually required by the varieties of long, common, and short sight." The sliding parts of the eye tubes are connected a cross piece which carries "a small arm, upon which is mounted an index." A graduated scale, fixed on the outside of the casing, enables the index to be suitably placed for correct ision.

5th. Modes of "mounting several slides on a revolving frame, and exhibiting them to view in succession." According to one method a frame revolving on an axis has as many sides to it as it is required to carry slides. To give rotation to the frame a button or " serew" on the axis is turned by hand, and a ratchet wheel and pall prevents the frame revolving while the picture is being viewed. According to another method machinery is used; by pulling out a bar that carries a rack working into a wheel on the frame, a shutter is made to cover the interior of the eye pieces during the motion of the frame by the rack. On the release of the bar, a " spiral" [helical?] spring in combination with a weighted cord, brings it (the bar, but not the frame) back to its original position, thus opening the shutter and exposing a new slide to view. By fixing the slides on an endless band more slides than four can be arranged in the instrument, and when an apparatus is required to show pictures to several persons at once several sets of apparatus may be mounted in a polygonal box.

6th. "The use for each eye piece of the central part of a whole lens, instead of a half lens, so that the pictures are seen through the lenses at or very near to their centres." In this case "the axes of the eyes of the observer must converge in order to pro-

PHOTOGRAPHY.

"duce coalescence." To adapt this part of the invention to the 3rd improvement, the excentric parts of the longitudinal strips must be rendered opaque.

[Printed, 1s. 5d.]

44

A.D. 1855, March 17.-No 598.

PETITJEAN, Tony, and PETRE, Louis (a communication).— (Provisional Protection only.) "Certain improvements in the " manufacture of daguerreotype plates and of electro-plated sheets " of metal, part of which improvements may be applied to the " production of polished surfaces on metallic articles."

This invention "consists of the following method for giving a " perfectly smooth and polished surface to the plates or sheets of " electro-plated copper."

A piece of glass is taken, of the size and shape of the plate to be produced, and prepared "to receive the action of the galvanic " battery;" it is then electro-silvered and electro-coppered. Instead of being electro-coppered, the plate may be electro-coated with iron or other metal or with "as many layers of different " metals as we please. This method of giving several layers of " metal we think especially useful for daguerreotype plates, as such " plates would form a kind of voltaic pile, and render them more " sensible to the chemical action to which they are afterwards ex-" posed. As to the electro-plated sheets of metal used for reflec-" tore and other purposes, we think it sufficient, after giving a coat " of silver as before described, to give a single coat of iron or " other metal, but we will not limit ourselves in that respect. "By using proper moulds, metallic articles may receive a high " polish by the above-described process."

[Printed, 3d.]

A.D. 1855, March 27.-Nº 674.

BOURNE, JOHN COOKE.—This invention relates to portable photographic apparatus, and consists in :-

1st. Constructing photographic apparatus "in such a manner " that the box or case in which the camera is contained may serve " as a foundation on which the camera may be supported when in " use, and when out of use the front part of the camera may be " folded into the back part, and be placed in a compartment within " the box."

2nd. "Constructing the box or case so that when opened it may
"form the base for a tent, which is constituted by means of a lath
"fixed on a centre or pivot at each angle of the inside of the box,
"the several laths being raised and united at the top in pairs, so as
"to form, as it were, two gable ends, in order to support a covering
of suitable fabric, within which the operations of preparing
"the sensitive surface, developing the photographic picture, &c.
"may be performed, the camera remaining suspended from the lid
of the box during such operations. The said fabric or covering
"is confined to the box or foundation by means of an elastic cord,
and it has suitable openings in it to admit of the head and hands
"of the operator being introduced as required."

3rd. "Arranging and constructing the means of adjusting the position of the lens of the camera, so as to ensure its movement and ultimate position in a direction always in that of a curve, the radius of which is the focal length of the lens, the rays of light passing through the centre of the lens at right angles to the surface thereof will fall upon the centre of the picture."

A camera is described and shown, consisting of a "slide case" connected to the lens end of the instrument by means of a dark chamber formed of cloth or other suitable material that will enable the lens end of the instrument to be collapsed against the slide case, so that the camera may be packed in a box. The box contains the camera, a triangular table to which the legs are fixed, and on which the box is fastened by a central bolt and nut, a "triangular developing stand, constructed on the principle of a "book hinge," chemicals, plates, washing trough, also laths and waterproof covering for forming the tent. Besides the above there are the legs of the instrument, which are retained on the pegs of the triangular table by means of elastic bands.

In using the apparatus the triangle and legs are set up, then the box is fixed on to "the table so formed," and the camera is fixed and adjusted to the lid of the box. A "swivel foot" and "hinged "tail board" allow of the fixing, adjustment, and inclination of the slide case as required; the lens end of the instrument is adjusted horizontally along curved slots, and vertically upon a standard that is bolted to the box lid. When the objects to be taken are at unequal distances from the camera, they may all be nearly focussed for vertical lines by means of a slot in the lens standard in combination with an inclination of the slide case upon the ver-

No. 20.

tical axis of the swivel foot; for horizontal lines this adjustment is made by raising or depressing the lens on the standard, and suitably inclining the slide case by means of the "hinged tail-" board." The plate is then prepared under the tent (the camera during this operation being suspended downwards, from the lid of the open box), the tent removed, the box closed, the slide substituted for the focussing glass, the picture taken by exposure of the plate, the tent re-formed, and the picture developed in the usual manner.

[Printed, 1s. 8d.]

A.D. 1855, April 7.—N° 770.

ROLLASON, ALEXANDER.—This invention "consists of im"provements in transferring to paper, linen, cardboard, bone,
"ivory, wood, metal, or stone, the film of collodion or albumen
"used in collodiotype or albumenized plates." By this invention
a photograph may either be removed "from the glass or plate on
"which it may have been produced; or, by transferring the plain
"film on to certain of the substances above named," a new base
or medium on which photographic pictures may be taken may
be produced.

After having produced the picture in the ordinary way, it is immersed in dilute nitric acid and allowed to dry, coloured (if requisite), and varnished with "asphaltum or Brunswick black" dissolved in mineral naptha to about the consistency of cream."

The film is then transferred from the glass to the substance-destined to receive it, by means of a mucilage composed of gumarabic and honey; during the separation of the film, "water—" spirits of wine, or other limpid fluid" is introduced between the film and the glass.

"The irridescence" that appears after the transfer may be removed by rubbing the film over with cotton wool and oil, thus. "leaving a slight stickiness, to which the dry colours known as "mansions' and many other dry colours will adhere." In some instances this last operation may be omitted, and the picture completed by means of water, oil, or varnish colours.

In producing the new medium above referred to, the film is transferred "before the picture is taken instead of after."

[Printed, 4d.



A.D. 1855, June 7.-Nº 1303.

ORANGE, André.—(Provisional Protection only.) "Improve-"ments in obtaining representations for commercial purposes of "articles for sale."

"This invention relates to the obtainment of the representations of articles intended for sale, such representations being used in lieu of samples in negotiating with purchasers: such representations are produced by any of the well-known photographic processes, either on paper, glass, or other material, when the articles to be represented are in their finished condition, varnished, polished, burnished, or otherwise treated, so as to reflect the light. It is preferred to take the representations of them before the final finishing stage, or when they present a dull appearance, or such as is suitable for producing a well-defined outline in the camera; or the finished articles may be washed over or prepared in some suitable manner, so as to present the required dull appearance."

[Printed, 3d.]

A.D. 1855, July 7.—No 1523.

GEDGE, JOHN (a communication from Louis Samson).—(Provisional Protection only.) "Improvements in photographic glasses."

"The 'panes' or 'plates' to be made are of two kinds, one vitrified and the other not; the latter are composed of two transparent or translucid glasses, colored or not. The proof is obtained on one of these glasses by means of a very delicate preparation of albumine and collodien, permitting it to retain great transparence, so as to enable it to support with facility the subsequent operations. To obtain 'positive' proofs on the above" the "types" are arranged "in a framing so as to form a group; this frame is placed behind a second, furnished with drawings or designs corresponding to the types aforesaid forming a whole, the parts of which may be varied at pleasure. The transfer apparatus is furnished with powerful lenzes, and being placed in position, receives the glass prepared as aforesaid with albumine and collodien, on which the light will act in a direct manner, traversing the designs and types aforesaid. The

" production is now 'positive;' it may be taken of any size " merely advancing or withdrawing the apparatus."

"To vitrify these panes, they may be submitted to a his " temperature, so as to volatilize the albumine or collodien; t " silver (reduced) will penetrate into the glass (liquified on " surface), leaving thereon a scarcely visible design or image of " dirty yellow color. To turn this into 'bistre,' it is necessary " combine therewith that which is obtained by the vitrification " colcothar or oxide of iron, and for this purpose the employme " of protosulphate of iron will be found most serviceable as " means of developing the image or design, as the oxide of ir " and silver and a small quantity of sulphur of silver, which a " formed during the vitrification, gives to the proof a sufficie " strength of color."

[Printed, 3d.]

A.D. 1855, July 13.-No 1581.

GAUDIN, PIERRE IGNACE ALEXIS .- (Provisional Protecti only.) The title of the invention is, "Improvements in bat " used for photographic purposes."

The inventor further states:—"My improvements in bat " used for photographic purposes relates to baths of nitrate " silver or collodion, into which the paper or glass is immer " previous to receiving the photographic impression, and consi " in maintaining and the means of maintaining the bath as " proper temperature for the purpose. To effect this I surrou " the bath with a double casing of metal or other suita " material, into which I place a freezing mixture or other cooli " material, in order to cool and reduce the bath to the proj " temperature when it is naturally too warm for the purpo " and on the other hand, when too cold by reason of the natu " coldness of the surrounding atmosphere, I place warm wa " within the double external casing of the bath, in order to ra " the temperature to the required degree." [Printed, 3d.]

A.D. 1855, August 11.-No 1824.

PRETSCH, PAUL.—This invention relates to "obtaining cyl " drical and other engraved and ornamented surfaces" "

"photographic and other agency," and refers to further improvements in the application of the processes set forth in N° 2373, A.D. 1854, (which see).

Copper or other suitable plates are engraved by the processes set forth in N° 2373 (A.D. 1854), and are employed "for the forma-"tion of cylinders to be employed in calico and similar printing, "embossing, or other purposes; or cylinders may be formed directly by the electrotype process by means of suitable tubular "or other arrangements" of the engraved plates, "to serve "as moulds, and the cylinders produced therefrom may be "strengthened by the insertion of metal rollers, cast metal, and "similar methods."

"When it is desired to ornament manufactured articles with engraving," according to this improved process, "the same can be variously applied to flat, curved, and other surfaces, and when required the engraved surfaces may be covered with gold, silver, or other metals or materials, or may be inlaid with metals or other materials."

[Printed, 3d.]

A.D. 1855, August 14.—Nº 1842.

SHEARS, GEORGE.—"An improved construction of stereo"scope."

This invention "has for its object to construct these instruments " in such a manner as will admit of their being folded up and packed away in a shallow box when not in use." Each side is in two pieces, connected together "by a butt hinge" and "a " vulcanized india-rubber spring," "in such a manner, that when " the stereoscope is opened these springs will retain the parts in osition, but will yield to pressure, and allow the parts to fold the one over the other when it is required to close the instru-" ment. The cross piece at top which carries the lenses is jointed "by hinges to the folding sides, and these sides are hinged to the side or bottom of the stereoscope box." All unnecessary light may be shaded from the picture under inspection by connecting the side pieces by cloth or other flexible material. "For the " purpose of exhibiting transparent pictures, the bottom of the estereoscope box may be formed of glass, or this bottom may be 44 made to consist merely of a hollow frame and covered with an

X

"opaque door, which may be removed or folded back when the light is required to be introduced to the back of the picture." The lid of the box will assist in forming with the flexible "material before mentioned a dark chamber for the reception of "the transparent picture." The "shallow box" itself forms the bottom of the instrument, and is attached to the lid by a leathern joint or hinge; when not in use, the instrument is compressed within the box, and the lid is closed by hooks and eyes.

[Printed, 7d.]

A.D. 1855, August 24.—Nº 1914.

ARCHER, FREDERICK SCOTT.—This invention relates to "the "manufacture or production of transparent or semi-transparent "tough and flexible photographic pictures, capable of being "used for the production of other or positive pictures by coating, or covering, or combining a collodion film with a film of gutta percha, and removing the combined films from the glass or other surface which supports the collodion during the operation of taking the picture."

"The negative picture is produced in the ordinary manner." upon the collodion film on a sheet of glass, and it is fixed and dried in the ordinary manner." The picture is then treated with a solution of gutta percha in benzole, either by pouring the solution over the plate or dipping it (the plate) into the solution after draining off the excess of the solution," the plate "is dried" by a gentle heat, and leaves a nearly transparent film of gutta percha upon the collodion. If the film is not sufficiently thick, this operation is repeated one or more times, until a sufficiently thick film of gutta percha is formed." The whole is then immersed in water, "which causes the collodion to separate from the glass," and "the film or sheet of gutta percha with the collodion film firmly adhering or combined with it," is removed.

The glass plate may be first coated with a film of gutta percha, then with a collodion film, and when the picture is produced and fixed, with another film of gutta-percha; on removing these films from the glass plate, a collodion film coated on both sides with gutta percha, is obtained. Instead of using the second film of gutta percha, the picture may be simply varnished with any suitable varnish.

[Printed, 3d.]

A.D. 1855, September 19.—N° 2112.

CORNIDES, Louis.—This invention is entitled "Certain im"provements in obtaining impressions of prints or drawings, and
"in transferring printing, and colouring or ornamenting the
"same on glass or other surfaces;" one of these improvements
relates to an application of photographic processes. The improvements are:—

1st. A method of transferring "lithographic or other impres-"sions" on to a surface of glass, coated with "gelatine or "animal glue." After the impression is transferred, it is "fixed" by means of "a solution of any of the known salts of alumina."

2nd.—"Coloring the gelatined surface of glass with or without printing or transferring impressions thereon after the same has been steeped in the before-mentioned fixing bath." "Negative impressions" are transferred to the coated glass surface, and coloured so as to produce a positive picture by transmitted light.

3rd.—The use of finely pulverized coloured glass applied to the conted surface of glass by means of stencil plates.

4th.—"The use of the gelatined glass surface for the purpose of making photographic impressions." Positive impressions are obtained from photographic negatives on the gelatine surface, which is sensitized for the purpose. The positive picture thus produced is subjected to the action of the fixing bath mentioned in the 1st improvement; it may also be subjected to the "color-" ing or coating processes mentioned in this Patent."

5th.—Colouring the transferred impression by means of a coat of fine metallic powder, and transferring the same to the gelatined surface.

6th.—Protecting the printed or coloured surface of gelatine by means of a "solution of explosive cotton in pyroxylic spirit, combined with gums or resins."

Nos. 2066 (A.D. 1854), and 745 (A.D. 1855), are referred to in the description of this invention.

[Printed, 4d.]

٠<u>٠</u>

-

A.D. 1855, September 25.—No 2139.

CLIVE, JOSEPH CHARLES.—(Provisional Protection only.) This invention "relates principally to such photographic pictures as " are taken upon glass, and are called collodion positives;" its

52

PHOTOGRAPHY.

object is "the production of 'backgrounds' to portraits and "groups, which said 'backgrounds' shall be well defined."

The inventor further states:—"My invention consists in taking "the portrait or group on one side of a sheet of glass, and after having removed from the glass the whole of the background, take upon the other side of the sheet of glass any scene which wish to be the background, or I take the said background on second sheet of glass, and place the same at the back of the first. The pictures are thus superposed, the portrait or ground being uppermost, and the picture constituting the background undermost."

"By the method described, figures or objects taken at different times and at different places can be brought into one picture." [Printed, 3d.]

A.D. 1855, October 24,-N° 2381.

MAYALL, JOHN EDWIN.—This invention relates to the application and use of artificial ivory, "for receiving the photographic pictures, as a substitute for the metal or glass plates, or pho"tographic paper ordinarily employed for that purpose," such material "having all the properties and beautiful finish of ivory."

The methods of making artificial ivory for photographic purposes are as follows:—

lst method.—Tablets or slabs composed of gelatine or glue in its natural state "are immersed in a bath of alumina, which is "held in solution by sulphuric or acetic acid;" "a complete "combination takes place between the alumina and the gelatine "or glue." The tablets remain in the bath until they are sufficiently thick; they are then removed, allowed to dry or harden, and dressed and polished by any known process. The material thus produced is "known in France as Pinson's artificial ivory."

2nd method.—Alumina may be mixed directly with gelatine or glue, and sheets manufactured therefrom.

3rd method.—Equal portions of bone or ivory dust and albumen or gelatine are worked into a paste, and afterwards rolled out into sheets. The sheets are then allowed to harden, "and " are cut into slabs or tablets of the required size."

4th method.—Finely powdered baryta and albumen are "well



PHOTOGRAPHY.

53

"worked together, and rolled out into slabs." Preference is given to this method.

The slabs produced by either of the above means are "carefully "acraped, to give them a perfectly even surface," washed with alcohol, and prepared in the ordinary way to receive positive pictures. "The pictures having been printed, the entire slab" is immersed in weak nitro-sulphuric or nitro-hydrochloric acid, fixed, and dried under pressure on a marble slab.

[Printed, 3d.]

A.D. 1855, November 13.-No 2555.

MAWSON, JOHN.—(Provisional Protection only.) "Improve-"ments in cameras for taking photographic pictures."

The inventor states:—" My improvements in cameras consist " in forming them in such a manner that they are capable of " being closed up so as to occupy less space than ordinary, and " also in so arranging the front of the camera, or bracket carrying "the lens, that a readier method is afforded for focussing or " setting the instrument. I also place at the back of the camera " a shutter or screen, which serves as a permanent focussing cloth, " which, when not in use, folds down and fits into the body of " the camera. I form the body part of my improved camera of " cloth, the ordinary grooves for the reception of the focussing " glass and dark chamber being made in the framework of the " camera. In front of the body of the camera I place a conical "tube of pliant or flexible cloth. This tube is connected to the " back of the bracket carrying the lens by means of an elastic " neck, which fits into a deep groove in the bracket. The bracket " carrying the lens is fixed to a slide, which fits into a groove or " sheath in the framework of the camera, and is pushed out or " drawn in by a regulating screw. The sheath or base of the " camera is fitted with a slotted plate, by means of which the " main frame of the camera may be turned square upon the " base, or otherwise adjusted without detachment therefrom. " Where it is desired to render the camera more portable I dis-" pense with the ordinary tubing or casing of the lens, and fix "the lens permanently in the bracket before mentioned, and " attach in the front thereof a flexible tube, fitted with a coiled

54

" spring, which can be drawn out to any required exter when not in use fits flat against the bracket, thereby al

" ing as a covering or protection to the lens."

[Printed, 3d.]

A.D. 1855, November 14.—No 2573.

MÖLLER, JOHANNES.—(Provisional Protection only.) I of this invention is, "Producing a transparent photograp "ture on ivory without injuring the nature of the ivory, "be able to finish the picture with colours like other mining. This invention "consists in producing a transparent photographic picture, and bringing or transferring th upon ivory by means of a gelatine or glass medium leaves the ivory free from all injury, and will enable the thus to finish the picture so brought or transferred (with colours like other miniatures prepared on ivory."

[Printed, 3d.]

A.D. 1855, December 12.—No 2808.

HAY, GEORGE HERON, and HAY, DAVID SYME.—I vention relates to colouring photographic pictures; it con applying amber or other clear varnish to the collodion fil when this first coating is dry, applying a secondary coat of oil and varnish on which the colours are laid whilst the varnish is still moist. "The colours may be applied eithe form of ordinary oil paint, or in the dry condition."

According to another process "the colours may be applia" out the previous application of the medium or se "coating, in which case of course oil or other moist color are to be used.

"The backgrounds and other portions of the picture finished up in any desired style, and the colouring m then coated with a varnish or protective cover. This sy treatment is obviously applicable to collodion and othe graphs of various kinds, and it renders such pictures ex durable and unliable to injury or decay."

[Printed, 3d.]



A.D. 1855, December 13.-No 2815.

POITEVIN, ALPHONSE Louis.—The title of this invention is, " Improved photographic printing."

A mixture is made, consisting of "a concentrated solution of " albumen, fibrine, gum arabic, gelatine, or similar organic sub-" stance, and a concentrated solution of a chromate or bichromate " of potash, or of any base which does not precipitate the organic " matter of the first solution." This mixture is applied "upon " the surface which is to receive the design," so as to form a layer or film; the layer is used dry when the picture is impressed by contact, and moist when used in the camera. When the picture is impressed, if the surface is not moist enough, it must be moistened and a "greasy ink" applied to it; the ink "will be found " to adhere to those parts only which have been affected by the " light," and the print thus obtained "may be retained on the sur-" face on which it is first produced," or impressions may be taken from it in the manner of lithographic printing. Lithographic stone, metal, glass, wood, or other suitable material may be used to receive the photographic image.

A design is produced in colour by mixing a suitable colour with the above-mentioned organic mixture, and, when the photograph is impressed, washing away those portions of the mixture which have not been acted upon by the light. A design in various colours may be produced by suitably applying different colours to

different parts of the surface.

[Printed, 3d.]

A.D. 1855, December 13.-No 2816.

POITEVIN, ALPHONSE LOUIS.—The title of this invention is, " Improved photographic engraving."

A glass or other surface is covered with a layer of "chromatized " gelatine," either by pouring on a uniform layer of gelatine and plunging the whole into a concentrated solution of bichromate of potash, or by using the gelatine and bichromate mixed to pour on to the class plate. The plate being thus sensitized the image is impressed and the plate plunged into water; "the parts which 46 have not been acted upon by the light absorb the water and swell or expand, while the parts which have been acted upon

" by the light only become slightly moistened, and thus form " hollows."

A plaster cast of the plate whose hollows thus correspond to the lights is taken by pouring a solution of protosulphate of iron upon it, then washing it, and pouring the plaster upon it, a suitable frame having been fitted to it; when the plaster has set it is carefully removed. The protosulphate of iron gives consistence and strength to the plaster, so that it may be successfully removed from the film of gelatine.

The surface of gelatine is metallized for yielding an electrotype mould by the following process:—Immediately after exposure to light it is immersed in a solution of iodide of potassium, then in a solution of nitrate of silver. The whole surface is then exposed to light, and, ultimately, the silver is completely reduced by a solution of protosulphate of iron.

The engraved plates that may be produced from these moulds are adapted for printing and embossing, also for moulds for earthenware, &c.

[Printed, 4d.]

1856.

A.D. 1856, March 18.—Nº 646.

MAW, ARTHUR.—(Provisional Protection refused.) "Improved means of ornamenting the surfaces of woven, knitted, or felted fabrics, such as cloths, stuffs, ribbons, and other fabrics; or of parchment, vellum, leather, or other animal tissues, and rendering such fabrics or tissues applicable to various purposes."

This invention "consists in the employment of certain processes, closely allied to the process of photography, and whereby the surfaces of these materials may be rendered sensitive to light, so that, having obtained a negative picture on glass or paper, or some other transparent or translucent material, a positive impression or image may be transferred to the prepared surface of the fabric or tissue. By these means any variety of design or pattern may be transferred to these materials; but the particular nature of the design or pattern must depend not only upon

" the taste of the operator, but also upon the purpose for which "the ornamented materials are to be employed.

"It will be clearly understood, from the foregoing, that the invention admits of an infinite variety of applications; for instance, it may be successfully applied to ornamenting various articles of dress, and also for ornamenting books, both externally and internally, as well as various articles of furniture, and to other purposes too numerous to mention."

[Printed, Sd.]

A.D. 1856, April 12.—Nº 875.

SCHULTZ, LUDWIG.—(Provisional Protection only.) The title of this invention is, "Improvements in obtaining photographic pictures upon paper, glass, metal plates, and other fibrous "substances."

The inventor states:—"The invention consists in preparing "my paper or other fibrous substances which I intend to use for obtaining photographic pictures upon, by first coating them over with a suitable varnish, preferably of a dark color, so as to give them a smooth surface, and at the same time to prevent them from being injuriously acted upon when immersed in the liquids for subsequent preparation. I apply in like manner the same varnish to glass or other metal plates, for the purpose of giving them a proper smooth surface to receive the picture upon."

[Printed, 3d.]

A.D. 1856, April 15.—No 896.

LLEY, WILLIAM HENRY.—(Provisional Protection only.) The relie of this invention is, "Taking photographic impressions or pictures of microscopic objects by reflection, such reflection being effected by the combined aid of the microscope and camera obscura and camera lucida, or other reflectors that may be employed in place of the latter."

"The four-sided reflecting glass prism, commonly known as the camera lucida," is fitted "on the eye piece of the microscope, the cap by which it (the eye piece) is usually surmounted being previously removed, and the body or tube of the instrument brought into a horizontal position;" an inverted camera obscura

.....

" or darkened box" is then placed over the said prism camera fits closely to the tube of the microscope, and has a box open at the lower end sliding within it that carries t frame; the image of an object properly placed at the object the microscope formed by reflection from the camera can thus be correctly focussed on to a ground glass plate, rarily substituted in the usual manner for the sensitiv. The picture is then taken, developed, and fixed in the away.

"The invention is applicable to the obtaining microsco "pressions, by reflection, by the use of iodized silver plat "every modification of the daguerreotype process, album photographic glass plates, calotype paper, and all other or surfaces impressionable by light."

Plate glass or other reflectors may be used instead camera lucida.

[Printed, 3d.]

A.D. 1856, May 8.—No 1078.

MAYER, Louis Fréderic.—(Provisional Protection This invention "consists in substituting linen and other fabrics for the ordinary materials, on the surface of whi "tographic images are deposited or printed.

"tographic images are deposited or printed.

"The surface of the said woven fabrics is prepared ordinary manner in which the surface of paper and materials have been hitherto prepared, so as to render eptible of receiving an image by means of the photo process; and the process is carried on in the usual is except that the chemical ingredients in ordinary use purpose are varied in their proportions, so as to adapt the to the particular nature or character of the fabric."

[Printed, 3d.]

A.D. 1856, May 13.—No 1123.

PARKES, ALEXANDER.—(Provisional Protection only. title of this invention is, "Improvements in the use of co "in photography."

The inventor states:—"Heretofore in taking photo procures by what is known as the collodion process, a :

"glass has been used to support the film of prepared collodion.

"Now this invention consists in substituting for this sheet of

"glass a sheet of collodion, of sufficient thickness to support

"the prepared film; or a thick layer of collodion may be first

"formed on the glass, and on this layer the film of prepared

"collodion may be produced, and the picture taken thereon and

"suitably varnished or protected, afterwards the whole may be

stripped from the glass together. And when making positive

pictures by either of these processes, I coat the back of the

"collodion plate which supports the picture with a black flexible

"varnish, or the plate of collodion which supports the picture

Tray be of a black color."

[Printed, 3d.]

A.D. 1856, May 16.-No 1159.

T HISTLETHWAITE, WILLIAM (a communication from Louis **gamarre).—"This invention consists in producing and fixing photographic pictures upon all kinds of fabrics and materials." A very thick preparation of collodion is made, "consisting of sulphuric ether, alcohol, gun cotton, and iodide of ammoniac;" to make the collodion more sensible," certain proportions of cohol, "iodide of ammoniac, bromide of ammoniac, and chloride of ammoniac," are mixed with it (the "chloride of ammoniac" not mentioned in the Complete Specification). This composition termed "the pedicle," and is poured upon glass and then Plunged into a solution of nitrate of silver. When the photo-Saphic image is impressed, the negative picture is obtained by Introducing the plate "into a bath composed of distilled water, "protosulphate of iron, acetic acid crystallized, and sulphuric " acid;" the positive picture is fixed by plunging the plate into a solution of cyanide of potassium. "The proof is then dried, " and the pedicle may be seperated from the glass with a piece of " blotting paper and placed upon the necessary material, and " passed under a roller or rollers so as to well fix it upon the " material; and after the blotting paper is removed, spirits of " wine (of 60 degrees centigrade) is poured upon the likeness or " image to give it the required tone and brilliancy."

The following is a mode of separating the "pedicle" that does not invert the picture:—The "pedicle" is made to float upon the

top of the glass, by plunging it (the glass) into a weak of hydrochloric acid; the "pedicle" is then transfer finished by laying the glass down on a flat surface, plu material upon it, taking up the whole, so that the glass most, pressing "the fabric underneath it with the fingers," out all air bubbles," removing the fabric and "pedicithe glass, pouring water over it and drying the pictu surface is then moistened and cleansed from all imperfect rubbing. The picture may then be coloured in the usual "This last mode of removing the pedicle from the is preferred.

[Printed, 8d.]

A.D. 1856, May 21.-Nº 1201.

DUFRESNE, ALEXANDRE HENRI.—"An improved p "gilding and ornamenting steel and other metals," is photography is used to produce "reserves."

This invention consists in:-

1st. "The employment of one or several intermediate deposited either by chemical, electro-chemical, or me processes, on the metal to be gilded, silvered, or ornamical." The manual or mechanical application of a pi matter, such as varnish, bitumen of Judea, printers' i upon the intermediate metals to form the reserves to be silvered, or ornamented, such reserves being produced be graphic means, or by a general coating sensible to lig as bitumen of Judea." The ordinary processes of phot may be employed "either directly or by transfer on the si be gilded, silvered, or ornamented."

3rd. "The destruction of the intermediate unreserved by baths of different kinds," "for the production of relievo designs."

4th. "The removal of the protecting matters which hav" to preserve the surfaces operated on."

5th. "Gilding or silvering the surfaces by means of n according to the ordinary processes of gilding and silve amalgamation, and finally the volatilization of the : "by heat."

Methods of operating on iron, steel, "platina," and silver, according to the processes comprised in this invention are silven at length.

[Printed, 3d.]

A.D. 1856, May 24.—No 1245.

JUNDZILL, ADAM DUNIN.—(Provisional Protection only.)

The title of this invention is, "An instrument for animating "stereoscopic figures."

The inventor states:—"This invention, for which I request a "patent, is an application of the stereoscope to the apparatus well known under the name of phanakisticope" [phenakistoscope?] or sobroscope, invented by Plateau; the last shews the figures in motion. My apparatus makes the figures which stand out by the stereoscope to be seen in motion; this is its description:—

"Two round cartoons, with figures of phanakisticope set in the same manner and symetrically, are put in motion by means of a crank which gives them a speed perfectly identical. A small pasteboard wheel, bored on the edge, is put in motion by the same crank in such a manner that its speed be the same as that of the aforesaid two cartoons with figures. Two stereoscope glasses are set into their frames forward the bored wheel, and are placed in such a manner that both eyes may see the two figures reflected in a looking glass which is set before the apparatus. Therefore, when any one intends to use the appara ratus, he will begin by setting it at such a distance from the looking glass that the figures motionless be confounded, and stand out as in the stereoscope. Then the crank will be put in motion. The two cartoons with figures being identical, and their speed being the same, it is obvious that their effect will be the same as in the phanakisticope, and therefore the figures " will be seen in natural motion."

This apparatus is called the "kinimoscope."

Any of the ordinary means can be used to put "the cartoons" in motion.

[Printed, 8d.]

A.D. 1856, May 31.-No 1295.

FOWKE, FRANCIS.—(Provisional Protection only.) "An im-

No. 20.

62

This "improvement consists in certain mechanical arrang" ments, by means of which the frame of the photograph" camera can be brought to lie close together, and packed in the least possible space.

"The bottom which has usually been employed, is pardispensed with, by constructing the front part of the carne
in the form of a four sided cone, made of wood, each ai
hinged, and differing sufficiently in length to fold down to
one over the other, so as to be enclosed in a shallow frame
This peculiar arrangement of the front part has the advantage
of giving it sufficient rigidity to sustain itself."

[Printed, 3d.]

A.D. 1856, June 5.-Nº 1344.

Y DALLAS, DUNCAN CAMPBELL.—(Provisional Protection only.)
The title of this invention is, "Improvements in chemical pre"parations applicable to the photographic and photo-galvano"graphic processes."

The inventor states:—"The peculiarity of my said invention consists in the employment of chromic acid, either alone or in combination with photographic or other materials, as hereafter mentioned.

"I put a solution of chromic acid to a solution of gelatine; or with the solution of chromic acid I mix a solution of iodide of potassium, & add them to one of gelatine; or the solution of chromic acid may be mixed with one of nitrate of silver, and be added to one of gelatine; or, if required, all the four solutions may be combined."

[Printed, 3d.]

A.D. 1856, June 10.—No 1373.

SKAIFE, THOMAS.—This invention is entitled "Spring-folding "camera shutters, for the more speedy and convenient mode of taking photographic pictures than has been hitherto adopted."

The invention consists:—

lst. In substituting for the ordinary dark slide of the camera, a pair of folding shutters. These shutters are fixed on vertical spindles attached to the plate frame; each spindle carries at its upper end a drum, and an india-rubber elastic band and cord are

ro arranged round the drums that, upon a ring being drawn smallel to the optical axis of the camera, the band stretches and rotates the drums, thence opening the shutters. Upon the ring being let loose the reaction of the India-rubber spring closes the shutters. When the shutters are large, other springs are applied, so as to prevent them opening when out of the camera.

2nd. In adapting a similar arrangement to that of the 1st part of the invention, to the camera itself, immediately behind the lens. The cord from this second pair of shutters may be attached by a hook to the ring of the larger shutters above mentioned, and thus both pair of shutters opened at once, or they may act independently of the frame shutters. "The object of this second pair of "shutters is to keep the lens covered until the first pair is at "least three quarters opened."

When an instantaneous picture is required, a steel plate with a circular aperture is used instead of the second pair of shutters. To allow the aperture to be suddenly and momentarily projected behind the lens, a thread attached to the steel slide is acted on by an India-rubber tube. A bolt of steel or "trigger" retains the opaque part of the slide behind the lens until the picture is required to be taken. When the "trigger" is pressed, the slide is immediately projected behind the lens, thus instantly admitting and shutting off the light in consequence of the India-rubber tube being free to act. A magnet may be placed so as to accelerate the movement of the slide.

[Printed, 7d.]

A.D. 1856, July 12.—Nº 1651.

AVERY, JOHN (a communication from Madame Millot).—"An "improved 'plate-holder' for photographic and other purposes."

The Specification and Drawings describe and show an apparatus Possessing the general appearance and many of the characteristics of an ordinary pistol. The part corresponding to the barrel is a "rod of wood or other suitable material" fixed to the stock or handle, over which "rod" a moveable tube or "hollow rod" fits. "Both rods are provided with jaws or clamps" "cut aslant or hollowed on the parts opposite to each other." By sliding the "hollow rod" upon the other, the jaws can be set at any distance apart to suit plates of various sizes. The jaw upon the "move-

64

PHOTOGRAPHY.

" able rod" is fixed; that upon the stock slides in a groove s is provided with a suitable spring and trigger.

The trigger being fixed to the jaw on the stock, by pressing trigger, the action of the spring is neutralized, and the plate either be fixed in the apparatus or removed therefrom. Whe plate is required to be coated with a thin layer of collodion solution, this apparatus enables the operation to be perform easily and readily, owing to the freedom of motion permitted the position of the handle.

When large plates are to be operated upon, a metal point the end of the "moveable rod," "stuck either in the wall or "door," gives the necessary support to the plate.

The spring attached to the moveable jaw may be of caoutchor or a magnet may be used instead of a spring.

[Printed, 10d.]

A.D. 1856, July 26.—No 1782.

COOKE, GEORGE COLLETON. — "Improvements in ster " scopes."

This invention consists:—

1st. In "the application to stereoscopes of conical, "or py midal, or trumpet-mouth tubes for the eye pieces, in place "the ordinary cylindrical tubes usually employed for this p "pose."

2nd. In "the adaptation to the eye pieces of stereoscopes "additional moveable lenses of various kinds." "These ler "may be colored or plain," and "are moved into and out "use by means of small levers projecting through the side "the box;" "colored glasses may be adapted to the instrum "in a somewhat similar manner." When it is desired to mage the picture, the additional lenses should be placed about I way between the picture and the eye pieces. If magnify lenses of short focal distance are placed immediately under ordinary lenses, the picture is placed on a shelf about midw between the bottom of the box and the eye pieces.

3rd. In "the adaptation to stereoscopes, immediately above "space occupied by the picture, of a double 'passe-partout,' frame, for the purpose of preserving uniformity of size in

" pictures, as well as to prevent any light from being reflected " from their margin and confusing the eye."

[Printed, 10d.]

A.D. 1856, August 19.—No 1935.

SUTTON, EDWIN.—(Provisional Protection only.) The inventor states:—"My invention of an improved 'construction of stereo"'scope,' has for its object, firstly, the constructing and so combining the various parts of which the stereoscope is commonly
"composed, that it may be easily compressed into a small case,
"& thereby rendered more conveniently portable than the usual
"rigid form stereoscope.

"Secondly, it is made to possess all the advantages of the most improved rigid stereoscope by the construction & application of entirely newly formed hinges & spring. These hinges I fix to the bottom of the folding ends that support the top that carries the lenses or eye pieces. The centre pivots or axles of the hinges I make so as to work in holes in the sides of the case, into which the instrument is compressed; upon these axles I fix a piece of metal with angular hinges. I also attach to the inside of the case a flat steel spring, made in such amanner as to be always kept in tension by the angular edges of one hinge at each end, and as the flat edge of the spring presses against the hinges, it will always have a tendency to find a flat baring, & consequently will firmly keep the parts of the instrument in position when in use & at rest."

[Printed, 3d.]

A.D. 1856, August 23.—No 1965.

BENOIST, PHILIPPE.—(Provisional Protection only.) "An im"provement in the construction of sterioscopes."
"This invention is to combine the effects of the 'fenakisticope'"

[phenakistoscope?] "and the sterioscope; the former gives movement to the figures, but no relief; the latter relief, but no movement. The animated sterioscope unites the two results in one
instrument. The 'animated sterioscope' is contained in a box
scarcely larger than the ordinary sterioscope, but in doubling the
pictures of the sterioscope it preserves the relief of that instrument, and adds the movements of the 'fenakisticope.' The

" figures in the animated sterioscope are, as in the two instruments " above mentioned, obtained in the desired position, and they are " seen alternately without visible displacement in the substitution. " To obtain this effect they are placed one upon the other, " so that they may be seen alternately, the one without the other, " by the following means:-The two sterioscopic pictures are " placed at right angles, the plain of the one being perpendicular " to the plain of the other. A grooved glass cuts the angle in two, " and consequently places an angle of forty-five degrees between " the glass and each figure. The motion which is given to the " glass by a spring at the side of the instrument displaces it " without altering its inclination, so as not to change the angles " which it makes with each picture. As the glass is only trans-" parent in those parts necessary to obtain the desired effect, " it shews alternately the two figures, the one by reflection, the " other by refraction."

[Printed, 3d.]

A.D. 1856, August 26.—No 1983.

PERRY, JOHN.—This invention relates to the obtainment photographic positive pictures from negatives previously obtained on glass or other suitable material, the said positive pictures being absolutely permanent and insensible to the action of solar light.

The paper to be used is floated on a solution of chromate ammonium or bi-chromate of potash, dried, impressed with a positive picture, washed, dipped in a solution of protosulphate of iron, washed again, and treated with a solution of gallic or pyrogallic acid or of tannin.

In this process other combinations of chromium may be employed, and if chromate of iron is used, the picture is ready for the application of the gallic acid, without the use of any other salt of chromic acid or of iron, thus simplifying the process.

Soluble salts of silver, tin, lead, zinc, cadmium, antimony, nickel, or bismuth, with or without ammonia, may be used, "previous to the application of the chromium," to produce depth of colour.

Instead of using protosulphate of iron to develope the picture, other salts of iron may be used for that purpose, and the salts of silver, copper, tin, lead, zinc, cadmium, antimony, nickel, or

bismuth may be employed at the same stage of the process. The salt of iron may be employed, combined with ammonia, without the chromium, but in conjunction with the subsequent use of gallie acid.

To produce colour and improve the general effect, cyanogen and other analogous articles may be applied in the same manner as the gallic acid.

If paper is used for this invention, its surface may be prepared with gelatine prior to other treatment.

[Printed, 4d.]

A.D. 1856, September 1.-No 2029.

NORRIS, RICHARD HILL.—" Certain improvements in photo"graphy by the use of collodion in a dry condition, and for
"a means of transferring photographic films."

Under ordinary circumstances, the sensitiveness and porosity of collodion films are destroyed by dessication, but by the following Process pictures may be produced "on perfectly dry and hard collodion films:—Having produced in the film the sensitive iodide of silver," the film is immersed "in a solution of gum arabic, or of dextrine, starch, gelatine, albumen, gum tragacanth, vegetable mucilages, caseine, gluten, or other such like substances," that will by "occupying the pores of the collodion film, prevent its condensation on drying, and retain it in a sensitive and pervious state;" "the films are then dried and are ready for exposure to light, or may be kept for any convenient "length of time and used as desired."

To transfer photographic films from glass plates to elastic plates gelatine, the following process is used:—"A strong solution of gelatine is poured over the film and permitted to dry; when dry it is coated with plain collodion, and may be readily stripped from the glass, and then possesses the advantages of elasticity, compactness, lightness, and freedom from breakage. This mode of transfer is applicable to photographic films in general."

[Printed, 3d.]

A.D. 1856, September 5.—N° 2064.

DANCER, JOHN BENJAMIN.—" Improvements in photographic "cameras, and in the apparatus connected therewith."

1st. To adjust the focus of binocular stereoscopic cameras, a rack or chain movement is used; one extremity of the rack or chain is fixed to the camera box, the other to the aliding piece carrying the lenses. When a chain is used, a fluted spindle terminated by an exterior milled head, produces the necessary motion; and if a rack is employed, it is worked by means of a pinion.

2nd. The application of a fixed or permanent level "to camera" in general." The Drawings show an ordinary spirit level mounted on the top of the camera box.

3rd. "The use of revolving or sliding diaphragms or plates "pierced with apertures of various areas, which may at pleasure "be brought into use." The lenses are attached to the front of the camera by flanges, and project into the camera; the flanges carry the perforated discs by means of centre pins. The discs are turned upon the centre pins until the required apertures are opposite those of the flanges, and are held in the required position by means of springs fixed to the camera box, which take into indentations on the discs. To shut off the light from the lenses of binocular cameras, a plate is mounted upon a centre pin situated between the two lenses; by the turning of the plate the two apertures are closed at the same time.

4th. "A method of altering the level of the lenses of binocular "cameras." The lenses are mounted upon a piece capable of sliding in vertical guides; to this piece is attached a central nut, within which is a vertical screw; by turning the milled head of the screw the lenses may be raised or lowered as required.

5th. Apparatus whereby "a number of prepared plates or other "sensitive surfaces" may be successively exposed to light, without the aid of a dark room or other similar contrivance. According to one method, the camera box is supported on the top of a box, within which slides another box containing the sensitive plates, separated by suitable compartments. The plates are mounted in frames, which are (by rack and pinion motion) successively brought under an aperture in the camera box; a rod, situated in or near the focal plane of the lenses, is movemble vertically, so as to raise the plates through the said aperture into the proper position in the camera for receiving the image. When a plate has had the image impressed upon it, it is restored to the dark box by depressing the rod; the rod is then detached

from the plate, the box moved so that the next compartment is mider the aperture, and another plate impressed and restored to the box in like manner. The lid of the plate box is kept away from the aperture in the camera box by a screw, which is undone, to allow the lid to be closed, when the box of impressed plates is removed from the camera.

The box may be on either side or at the top of the camera, instead of underneath. According to another modification, the box may be stationary, and the vertical rod moveable to the places of the respective plates. The plate box may be detached from the camera, and the dark frame may be adjustable to it, so as to take out or restore a plate without exposing the said plate to light; for this purpose the lid of the box is made more than double the length of the box, with an aperture in the middle, and a hinged shutter prevents the light from entering the dark frame.

[Printed, 11d.]

A.D. 1856, September 5.—No 2072.

JOHNSTON, JOHN.—" Improvements in photographic plates."

This invention "consists in substituting in lieu of plates of glass, as commonly employed for taking photographic portraits upon, thin plates of metal, for example, sheet iron, one side or surface of which is coated with black japan, such said japanned surface being intended to receive the collodion coating, in the manner usually practised of coating plates of glass; the said japanned metal plates possessing this advantage, that whereas for positive pictures on glass the back of the picture requires to be covered with black varnish to throw up the shadows, by this invention, when the image or picture is developed the japan background is at once exposed to view; moreover, the aforesaid metal plates may be afterwards easily cut to any desired shape."

[Printed, 3d.]

A.D. 1856, September 8.—No 2092.

SABATIER, BONIFACE.—This invention relates to the instrunents used in photographic manipulations.

This invention consists in making the plates used for photographic purposes with "tenons," for holding them in the various perations they undergo. The Drawings show a glass plate to which

these "tenons" are adapted, either by being cut originally in that shape by means of a diamond, by casting, or by affixing by means of marine glue; the "tenon" is represented as a square projection in the middle of each of the shortest sides of the rectangular plate. This tenoned plate is fitted for application to the various instruments by a strip of glass, (the width of the tenons, and rather longer than the total width of the plate and tenons,) which is affixed to the back of the plate (by means of silver wedges) so not to touch any part of the plate itself.

To clean the glass plates.—For the rough cleaning a Baron Gros' instrument is used, to the ends of the plate of which are attached "metal tenons" and clamp screws. When manipulating, the plate of this instrument is attached to a table by a clamp and screw. For giving the finishing polish to the glass, an instrument is employed consisting of two cheeks, one of which slides in a dovetailed groove attached to the other, and is made to clamp the piece of glass at the back of the plate by means of a screw. The tops of the cheeks are flat, to serve "as a table for the tenoned" glass plate to rest upon."

A plate frame fitting into an ordinary camera is described and shown, having recesses for the reception of the tenons of the glass plate. The back of this frame has a recess for the reception of the strip of glass at the back of the plate, and is fastened to the frame by means of hooks and eyes.

An instrument for holding the strip of glass whilst the plate is being detached therefrom, consists of a stand having fork-shaped pieces projecting upwards that carry recesses and wires for that purpose.

An instrument for holding the glass plate whilst developing the image, consists of a slide provided with a handle underneath and carrying a fixed and moveable cheek. By suitably placing and fixing the moveable cheek the glass can be securely held.

A glass bath for containing the sensitizing solution is adapted for use in connection with the tenoned plates, by having two projections from the bottom of the bath on which the tenons rest. The solution should not be higher than the top of these projections.

In a pressure frame adapted to the tenoned plates, a frame with recesses for the tenons and an India-rubber strip placed round the edge for the plate to rest on, is placed in the pressure frame and obviates the necessity for using very thick glass.

In an instrument employed in the albumen and chloride of gold processes, a plate is connected with a stand by means of rods proceeding from its opposite sides to a common stem; a spirit lamp can thus be placed under the plate, and the photographic plate is secured to the plate by means of cramps.

In an iodizing frame the tenoned plate is surrounded with suitably shaped pieces of glass, to prevent evaporation by making an air-tight joint.

[Printed, 7d.]

A.D. 1856, September 16.—No 2254.

LANGLOIS, CLAUDE.—"This invention consists in a method " of arranging photographic cameras so that the operator can " adjust the focus from the front, or that side next the person or "object to be taken, and also so that the moveable frame for " containing the prepared glass or other material for receiving the "image may also be used for ascertaining the correct focus." On one side of the camera folding doors are hinged to the front and back, and close together in the middle. The door hinged to the front of the camera is inclined to the front 45° when closed: it also has an aperture which serves for focussing and for opening the front door of the slide. The plate frame "has a hinged door " at the front and at the back, one for introducing the plate and " the other to be opened for exposing it;" it is mounted on a centre round which it can be turned half round; upon the frame being placed in the camera, the image is focussed upon the door at the back of the slide—made white for that purpose; the slide then being turned half round, the plate is exposed by the opening of the front door, the operator's hand being introduced through a sleeve for that purpose. "Screw feet" enable the camera to be adjusted to any required inclination.

"This invention also consists in backing photographic pictures "with plaster of Paris." A positive collodion picture (printed by the light of a lamp) is backed with plaster of Paris in the following manner:—The plaster is poured on the collodion surface and a piece of muslin is applied over the plaster, this operation being repeated until the required thickness is obtained. If it be required

to remove the glass from the picture, the glass plate is first coated with gum, and when the picture has been printed and backed, the gum is dissolved by warm water, thus leaving the picture on the plaster; the resulting shining appearance of the picture is removed by ether. The plaster may be saturated with wax, when coloring is to be applied, and it may be cemented to metal, &c., to strengthen it.

[Printed, 4d.]

٠,

A.D. 1856, October 23.-Nº 2486.

JOHNS, GEORGE EDWARD.—The title of this invention is,
"The application and adaptation of an optical or stereoscopic
"arrangement in the manufacture of boxes;" it consists in combining an optical or stereoscopic apparatus with ornamental and other boxes, "capable of such an arrangement, whether such "boxes be manufactured of paper, wood, or any other material or materials."

The stereoscopic tubes and glasses are fixed to the front of thbox; "the object or photographic views" are placed against "th-"inner back of the box," the box being empty when used fcstereoscopic or optical purposes.

"It will be seen, that all that is necessary to turn any box wish this arrangement into a complete stereoscope, will be to ada; the focuses of the sterescopic lenses to the proper viewal; distances from the views to be placed against" "the innec, back of the box, and the thbes to the necessary width apart, so that both eyes of a spectator may, at the same time, through the tubes, see the object in the box."

"The stereoscopic lenses may be applied to any part of the box to which it may be necessary or desirable to affix the same."

[Printed, 3d.]

A.D. 1856, November 3.—No 2581.

SCOTT, EBENEZER ERSKINE. — "Improvements in stereo- "scopes."

This invention consists in "the use of eye pieces composed of "two magnifying lenses, either entire or modified," "placed so "that their centres are at a greater distance apart than the eyes "of the observer, the said distance being either fixed or capable

" of adjustment, so as to produce the maximum of pleasant effect " in the use of the instrument."

The double eye piece is so arranged "that the rays from the "two pictures come to the eye as if they radiated from a point of "medium distance, such as that at which we are in the habit of "looking at natural objects, the effect being" "that the eyes of the observer instantly form the combined picture without the alightest pain to the eyes, and the reality of the view is consequently much more strongly impressed on the mind, and the pleasing illusion much increased."

The lenses may be made achromatic with the plain surface next be eye, and in all cases the chromatic and spherical aberrations regreatly reduced.

An instrument is shown in the Drawings in which a diaphragm mables each eye to view only one picture; the picture is adjustable by means of a screw, to the centre of the field of vision, and suitably placed diaphragms shut off all extraneous light, thus permitting only the view to be seen. The box is mounted on a stand, and is capable of adjustment by a sliding rod and pinching one.

[Printed, 7d.]

A.D. 1856, November 6.—No 2614,

OLLEY, WILLIAM HENRY.—" Improvements in obtaining photographic impressions or pictures of microscopic objects."

This invention consists in obtaining the above-mentioned impressions "by the combined use of the microscope, the camera lucida, or other suitable reflector or reflectors, and the camera obscura."

"The metallic cap by which the eye piece of the microscope is usually surmounted" is removed, and "the four-sided reflecting glass prism known as the camera lucida, or any other suitable and analogous reflector or reflectors," is or are placed upon or near the eye piece so as to produce an image of the object of which an impression is to be obtained. "The tube or body of the instrument having been brought into a horizontal position, an inverted camera obscura, or darkened box, is placed over the said prism," it (the camera) being so connected with the microscope tube as to exclude light. Upon the object being

properly placed before the object glass of the microscope, an image of the said object will be formed by reflection from the prism or other reflector upon a prepared plate or surface previously introduced into the camera. After the prepared surface has thus been exposed to the action of light, it is removed from the camera, and subjected to the usual processes of developing and fixing.

[Printed, 3d.]

A.D. 1856, November 26.-No 2806.

PALMER, HENRY EASTMAN.—"This invention consists in a "method of arranging photographic cameras and apparatus so "that the plate may be rendered sensitive and the picture de "veloped and fixed within the chamber of the camera."

The camera chamber contains the following appearatus:--" bag or well, of flexible waterproof material, for holding a vessel " containing the solution of nitrate of silver," fixed underneath the plate frame. A tank, also under the camera, and nearer to the lens end, containing water heated by a lamp; the lamp is used to heat the chamber in cold weather. The waste pan, under the camera near to the plate end. A cold water reservoir, of flexible waterproof material, at the back and upper part of the camera, with a flexible tube and stopcock; this reservoir supplies water to the interior of the chamber, to the hot-water tank, and to a condenser that is close by the hot-water tank and in which the steam produced in the hot-water tank is condensed. Manipulating sleeves, attached either to the back or sides of the camera. Two eye pieces, and a small window glazed with yellow glass, to enable the photographer to see his operations. The plate frame; this can be slid to and from the lens by means of a rack, and can also be placed in an inclined position. The frame, containing the lens, attached to the camera by means of a flexible tube capable of adjustment by means of a set screw. Vessels containing the developing and fixing solutions, suspended from the rods that support the top of the camera and the cold water reservoir.

The sides of the chamber are made of waterproof fabric, supported by rods set upon the ordinary tripod.

The cap of the lens is a disc with a hinge.

[Printed, 7d.]

A.D. 1856, November 29.-No 2832.

HARMER, RICHARD.—" Improvements in stereoscopic pictures." The inventor states: - "My invention relates to colouring "stereoscopic pictures, that is, pictures to be viewed in the " stereoscope produced by the camera or any other means, the " same being printed on paper chemically prepared by the " agency of light or otherwise, as usual. " In pictures viewed in the stereoscope two similar pictures " are introduced to produce one view, which two pictures hereto-" fore have been exactly similar in every particular in colour and " outline, or as nearly so as may be, whereas according to my " invention, I produce and use two pictures in the ordinary way, "similar in outline but different in colour. For example, one " picture may be coloured emerald green and carmine, and the cor-"responding picture used therewith may be coloured blue and " violet, which colours when viewed in the stereoscope blend with " each other, and greatly enhance the effect produced. Any other " colours may be used, and if selected and used with judgment " produce beautiful effects in such pictures." The colours are applied by hand.

Printed, 5d.]

A.D. 1856, December 3.—N° 2871.

CHEETHAM, JAMES KINDER.—"Improvements in the appli"cation of photographic pictures to metal and other surfaces,
"and in rendering the same applicable as printing surfaces."

lst. Obtaining designs upon copper which may be used for crnamental purposes, "or upon which the engraver may work by "any of the usual methods." A varnish composed of shellac dissolved in a solution of borax is applied to a collodion photograph; "when this is dry, a piece of paper painted with the same "materials is applied wet, and the whole allowed to dry, after "which the plate is placed in cold water, and the film will then "separate from the glass." This film is placed upon a sheet of copper that has been coated with mercury, the reduced silver of the photograph transferred to the mercury by rubbing or pressure, and the film separated from the metallic surface by heat. A variation of this process consists in removing the film with its picture from the glass by means of a solution of gutta percha in

benzole, applying it (the film with its picture) "to the mercu"rialized metallic surface," and removing the film only from the
metallic surface by dissolving it in methylated chloroform; "the
"mercury may then be driven off by heat if desired." It is important to observe that "the picture is not caused to adhere to the
"metallic surface by any glutinous substance," "but is connected
"thereto by the mercury, after the ordinary manner of gilding."

2nd. Printing surfaces are obtained from photographs by etching the silver picture, obtained according to the method set forth in the 1st improvement, so as to leave one portion of the surface in relief. The etching fluid may be nitric acid.

3rd. Producing lithographs by transferring the aforesaid silver picture on to a surface of copper electro-deposited upon a stone.

The "bare copper" is then dissolved away, the stone run overwith an inking roller, and the metal picture removed, "leaving can be clear surface of stone for the light portions." "This operations may be reversed."

[Printed, 3d.]

A.D. 1856, December 5.—No 2887.

KLOEN, WILLIAM, and JONES, DANIEL.—(Provisional Protesion only.) "An improvement or improvements in photography This invention "consists in substituting the materials, here is after enumerated, in place of glass, for taking the photographic pictures upon, called positive collodion pictures. When glass is used for the said pictures, the said glass requires to be blackered at the back if colorless, and when, to avoid this trouble, black glass is employed, the brittleness, which is one of the greatest objections to the use of glass is unremedied."

"objections to the use of glass is unremedied."

This invention "consists in the use of materials which present a black surface, which are not brittle, and which have such chemical composition as not to act prejudicially on the material employed in taking the picture." The material preferred "impapier maché, and the various compositions and materials which are or may be used as substitutes for papier maché, such plates of metal, wood, or other substance covered with the varnish or japan with which papier maché is usually covered The plates on which the pictures have been taken may be applied to trays and such other articles as are or may be made of papier maché."

[Printed, 3d.]

A.D. 1856, December 9.—No 2914.

BROWNING, JOHN.—(Provisional Protection only.) "Improvements in stereoscopes."

This invention "consists in wholly or partially coating the exterior of the instrument with glass, either silvered, painted, etched, stained, engraved, or otherwise ornamented, and in the employment of colored screens of glass to intercept the light transmitted directly through glass or other transparent slides, or reflected upon paper or other opaque slides, thereby producting effects upon the pictures, when viewed with the improved stereoscope, resembling those produced by what are known as Claude Lorrain glasses." When the improved stereoscope is used with transparent slides, pieces of coloured glass, of any required tint, are placed "in a groove at the bottom of the instrument underneath the slide containing the picture or other object. When opaque slides are used, the colored glass screens are slid into a groove in front of the instrument, over the usual aperture made for that purpose."

"The bottom portion of the front of the instrument being composed of glass," the door and reflector at present in use may be dispensed with, or coloured reflectors of metal or glass may be employed as may be required. When transparent slides are examined, an opaque glass closes "the aperture in front of the instrument;" this opaque glass "can be concealed within the instrument when opaque objects are viewed."

[Printed, 3d.]

A.D. 1856, December 19.—No 3009.

MASSI, CHARLES.—(Provisional Protection only.) "This inven"tion has for its object improvements in apparatus for mounting
"cameras. For these purposes, when two cameras are used to
"take two pictures at the same time and at an angle to each other
"for stereoscopic purposes, the two cameras are placed on a suit"able surface or stand, through which are two parallel slits or
"openings for the passage of two pairs of studs or upright pro"jections, which are fixed to two bars, one pair to each bar. The
"two studs or uprights of each bar are at a distance apart from
"each other, so as to pass through the two parallel slits in the
No. 20.

" surface above. The two cameras are each placed on to the " two stems or uprights of one of the bars, by which means, so " long as the two bars are parallel to each other, the cameras will " be parallel, but when the bars are made to incline to each other. " a similar inclination is given to the two cameras. The two " bars are actuated by means of two screw shafts or axes, each " having a right handed screw at one end, and a left handed screw at " the other end. The two bars have each two screw nuts attached "thereto, through which the two screw shafts or axes pass, and " they actuate the two cameras in such manner, that if both the " screw shafts or axes are simultaneously turned, the cameras " approach to or recede from each other according to the direc-" tions in which the screw shafts or axes are turned. And when " only one of the screw shafts or axes is turned, or when one is " turned in excess of the other, the cameras are made to incline to " each other to the extent desired. By these means two pictures " may be more conveniently and more correctly taken at the " same time than heretofore." [Printed, 3d.]

1857.

A.D. 1857, January 1.-Nº 11.

PHILLIPS, WILLIAM HENRY. — "Improvements on stereo—" scopes."

"The frame or case of a stereoscope is made in two parts, hinged or connected together at or near the base of each in such manner that the eye pieces may be brought to or moved from each other with greater facility than heretofore to accommodate for different sights. The movement of the two parts may be accomplished by hand when holding a stereoscope to the eyes, or by a screw, or other convenient means. The lenses and eyempieces, in place of being mounted in sliding tubes, as heretofore, are each mounted on a tube, produced by winding a plate or strip of sheet metal or other suitable material spirally, and the elongating or contracting of such tube may be by a screw or other convenient means. In order to give a better finish to the picture, it is arranged to be seen through openings of another

"photographic picture, representing a frame or curtain, or other suitable device, according to taste, and such second pictures "may be either fixed or moveable in respect to the stereoscope, and also in respect to the pictures used therewith. When "separate from the pictures different pictures may be viewed "through the openings of the same second picture."

The Drawings show a stereoscope in which the two parts above mentioned that earry the eye pieces are connected to the two ends of the base by a flexible material; a hinge joint connects the two parts together. The distance between the eye pieces is regulated by a right and left handed screw. The elongation or contraction of the eye-piece tubes is accomplished by means of a right and left handed screw. In another form of stereoscope the spiral tube is the body of the instrument, and carries both eye pieces.

[Printed, 8d.]

A.D. 1857, January 20.-Nº 168.

QUIN, RICHARD.—(Provisional Protection only.) "This invention consists of improved methods of arranging stereoscopes." For this purpose the front and back of the instrument, which are rigid, are hinged or jointed to the top or portion containing the eye pieces, and they are connected together at the sides by flexible gussets, so that they may be folded down parallel to each other when the instrument is out of use. To the back of the instrument a stiff partition is hinged, which turns up so as to keep the front and back at a suitable distance apart when the instrument is set up for use; or in place of a central partition the instrument may have two stiff sides turning up in a similar manner, in place of having flexible side gussets, as previously mentioned.

"In the front of the instrument is a reflector of the ordinary description, which, when the instrument is folded, is fastened in its place by the same clasp as that which holds the front and back together. This clasp is made in three portions; one fixed to the back of the instrument, another folding over the edge, and the last turning down on the front, and eatching over a pin fixed on the outside of the reflector." The instrument, when arranged in this manner, forms a box capable of containing a number of stereoscopic pictures.

Another arrangement consists in using a stiff bottom, to which the front and back of the instrument are connected by a flexible joint; the top of the instrument being connected in a similar way to the front and back, "the parts of the front and of the back "double in and fold one over the other when the instrument is "out of use. A central partition is used to make this instrument "rigid when set up."

Folding stereoscopes may be made with a stiff front, to which the top and bottom are jointed; the back and sides are flexible.

[Printed, 3d.]

A.D. 1857, January 22.-No 191.

MANDER, ELISHA, and MORGAN, WILLIAM.—(Provisional Protection only.) "Improvements in the manufacture of photo"graphic, jewellers', and other cases having wood or papier maché
"foundations, and where raised, regular, or irregular forms are
"required in such cases, and the machinery for carrying out such __
"improvements, parts of which are applicable to other purposesses"
where sawing or shaping is required."

The improvements relate to various modes of "mitring" the angles; holding the material together; preventing warping; combining papier maché, millboard, and wood; forming the tops and bottoms; and "the employment of composition or glue, or marin employment glue with sawdust, in hot moulds to form cases."

The saw of the sawing machine is placed at an angle of 45° to the table, and traverses "by suitable contrivances, the material being held stationary in guides, or the saw may be stationary "and the material moving against it.

"The shaping of the various portions of cases is performed by a machine, having two lathe heads geared together and arranged either side by side or facing each other, one having an arrangement for holding the material to be cut, and the other a maundril corresponding with or the reverse of the form required, the cutter running in a rocking shaft or spring slide placed on a slide passing before or between such heads; or a single head may be used, the maundril being placed on the spindle of the said head; or the action may be reversed, the head may be made to rock instead of the cutter."

[Printed, 3d.]

A.D. 1857, February 4.—No 321.

LEWIS, EDWARD, and BÖHM, GIDEON.—(Provisional Protection only.) The title of this invention is, "Improvements in printing in colours, called an improved photo-galvanographic chromographic process."

The inventors state:—"The object of this invention is to use plates or impressions from plates prepared by a process called the photo-galvanographic process, in the art of colour printing or chromography. The first named process, which forms the subject of Letters Patent granted to M. Pretsch, consists in the peculiar adaptation of the photographic process to the production of printing plates in copper and other metals. Now, our invention consists of the use of these plates or impressions as a basis, outline, or groundwork for pictures printed in colours on wood, stone, metal, or other substance."

[Printed, 8d.]

A.D. 1857, February 9.—No 374.

TAYLOR, THOMAS JOHN.—(Provisional Protection only.) The citle of this invention is, "An improved construction of stereo-scope."

The inventor states:—"This invention relates to the application to stereoscopes of a reflecting surface, which will enable opaque photographic pictures to be viewed with greater ease, and seen with greater clearness than where the ordinary construction of stereoscope is employed. For this purpose, I apply to the under surface of the hinged door of the stereoscope a plane or concave mirror, (preferring the use of silvered glass,) and the door thus provided I set at any required angle with respect to the plane of the photographic pictures, by means of a quadrant, arc, or other suitable contrivance, in order that the reflecting surface may receive the light and transmit it to the surface of the double picture. Or, I apply to the stereoscope a fixed surface or screen, instead of a movable one, provided with a plane or concave reflector.

"By this arrangement not only will the picture be more clearly seen than heretofore, but the spectator when using the stereo-

" scope will not require to stoop in order to permit the rays of light to strike directly upon the picture."

[Printed, 3d.]

A.D. 1857, February 18.—Nº 478.

MOULE, John.—This invention consists of "improved appa"ratus to be used for burning pyrotechnic compositions or pre"parations," and "relates to a means of burning any of the
"chemical compounds that are usually employed for producing
"various colored lights, such as are required for theatrical per"formances; some of which chemical compounds will, however,
"produce lights of such a quality as will admit of their being
"used for photographic purposes."

In one apparatus, a wide shallow vessel containing sand, is provided for the reception of the pyrotechnic composition; this vessel is placed within a glass cylinder or other suitably shaped case with openings at the bottom "to admit air in vertical columns" all round the burning composition," and a moveable cap connected with a flue or chimney. A hinged door enables access to be obtained to the interior of the glass case.

In another apparatus, the pyrotechnic composition is contained in a tube "up which it is pressed or forced by means of a coiled "spring," "somewhat in the same manner in which candles are "pressed up in candle lamps." The charged tube is fixed in a case similar to that of the apparatus first described; it has a knife attached to a lever for the purpose of dividing the charge into several parts.

The effect of either of these apparatus is to carry off the noxious vapours or gases from the burning composition, and thus prevent annoyance to bystanders.

The glass surrounding the burning composition may be coloured so as to render the light "useful for photographic purposes."

[Printed, 9d.]

A.D. 1857, February 20.—No 501.

GLOVER, JOSEPH, and BOLD, JOHN, the younger.—The title of this invention is, "Improvements consisting of extended uses " of photography as applied to dials, tablets, and pictures."

83

Enamelled glass, metals, or other suitable mineral substances are operated upon in the following manner:—The surface of the material is first washed with fluoric acid to destroy the gloss, and then with water. The material thus prepared is ready to receive the collodion or other sensitive substance, and to be subjected to the ordinary photographic operations of receiving the image, and developing and fixing the same. "Translucent or transparent tablets and dials may be taken on glass or other transparent, semi-transparent, or opaque substances by the above process." By thus preparing the enamelled or other surface, pictures or subjects printed thereon are rendered capable of receiving water colors, oil colors, dry colors, and varnish colors."

[Printed, 3d.]

A.D. 1857, April 9.-Nº 1005.

PURNELL, JOSEPH. — (Provisional Protection only.) "Im-"provements in apparatus for taking photographic pictures."

An apparatus is described in which "the photographic surface " is rendered sensitive within the camera." A clamp, suspended by a rod passing through the top of the camera, presses against the two edges of the plate by means of two jaws. The prepared plate having been placed in the clamp, is lowered by means of the rod into an exciting bath "let into the bottom of the camera." When it has remained in the exciting bath a sufficient time, "it is " in the same way raised out of it, and the picture is taken while " it is still held by the clamp; afterwards the hand of the operator " is introduced through a sleeve into the interior of the camera, " and the plate is removed from the clamp and placed in a drawer " at the bottom of the camera, which is then closed by a slide, " and the drawer is removed for the developing operation to be " effected." To develope the picture a cover fits on the top of the drawer; "this cover is furnished with eye-pieces, glazed with yellow glass," "the bottom of the drawer is also made of yellow " glass;" the picture is developed by pouring the requisite solution over the plate, then water is poured over the plate "through " a trapped hole in the side of the cover, and it is allowed to " run out by a valve at the bottom of the drawer. The picture " is fixed in the ordinary manner."

For taking stereoscopic pictures the lens of the camera is

mounted on a slide, and in taking the two pictures is pushed first to one side and then to the other of the camera. A moveable partition prevents the light falling on one side of the plate while the picture is being taken on the other side. To move the camera suitably in order to take the second picture, it has a rectilinear motion along a board, and an angular motion by turning the board on its centre.

[Printed, 3d.]

A.D. 1857, May 4.—No 1253.

MOSELEY, THOMAS BEEBY. - (Provisional Protection only.) The inventor states:-"This invention relates to a particular " description of instrument called a pneumatic holder, used very " generally in photographic manipulations, and the improvement " which constitutes this invention consists in constructing the " same in the following manner, that is to say:-Instead of " simply affixing a bell-shaped piece of india-rubber to an up-" right handle and exerting pressure direct thereon, I affix an " annular piece of wood or other light substance to one end of " a piece of wood or other material which serves as a handle. " Into the aforesaid annular piece of wood I place a bell-shaped " piece of india-rubber, and connect it by a wire to one end of a " horizontal lever, the fulcrum of which is a pin passing through " the handle of the instrument, so that in using this instrument " the operator has simply to place the india-rubber surface upon " the article to be held thereby, and by forcing down the aforesaid " lever, I raise the bell-shaped piece of india-rubber within the " before-mentioned annular piece of wood, thereby producing a " partial vacuum therein and causing the india-rubber to adhere " closely to the surface, which it is desired to hold. The aforesaid " lever may be securely held in this position by a sliding link or " other suitable contrivance."

[Printed, 3d.]

A.D. 1857, May 27.-Nº 1511.

NEWTON, WILLIAM EDWARD (a communication).—"An im"proved method of applying photography to the use of engravers."
This invention has for its object "to produce a photographic

" picture upon a surface of wood that shall entirely answer the requirements of the engraver;" and it "consists in producing "a surface upon the block by rubbing into it a volatile varnish made so limpid as easily to soak into and fill the pores of the wood, and produce a smooth and polished surface without leaving a pellicle thereon of appreciable thickness to obstruct the operations of the engraver."

"The surface of an ordinary engraver's block is smoothed in "the customary manner to prepare it for the engraver's use; a " mixture is then made of alsohaltum varnish, ether, and lamp-" black. This mixture is rubbed into the surface of the block " with a piece of buckskin or cloth, two or three thin coatings " being applied so that the pores may be thoroughly filled, but " no pellicle of varnish of appreciable thickness left upon the " surface. An even, smooth, and polished surface is thus obtained, " upon which to take the photographic picture; upon this surface " the collodion is poured in the ordinary manner of taking pho-" tographic pictures; the silver bath is then applied. The block " is then exposed in the camera a sufficient length of time to take "the picture," and it is then subjected to a developing solution compounded of sulphate of iron, acetic acid, water, and alcohol. The picture is then fixed by means of a solution of "cyanuret " of potassium," " and the block is to be washed in clear water " and dried, when it is fit for the engraver."

[Printed, 3d.]

A.D. 1857, June 2.—N° 1550.

SHAW, CHARLES.—(Provisional Protection only.) This invention is entitled, "A new or improved manufacture of matts for "photographic and other pictures."

The inventor states:—"My said invention consists in manufac"turing the said matts of card or paper, plain or coloured, and
"gilded or partially gilded, or covered with a metallic coating.

"The said matts may be cut out and embossed at a press, or
"manufactured by rolling, or by pressure otherwise applied.

"Any desired ornamental form may be given to the said matts
"by suitably engraving the dies or tools by which the said matts
"are made. Matts made of gilded or plated paper or card
"according to my invention cannot be distinguished when con-

"nected with a photographic or other miniature from matts made of metal. Matts made according to my invention are less costly "than the ordinary metallic matts. Although I prefer to use paper or card in carrying my invention into effect, yet papier maché, or other composition or mixture consisting mainly of vegetable fibre, may be employed with the same or nearly the same effect."

[Printed, 3d.]

A.D. 1857, June 3.—Nº 1558.

CHAPPUIS, PAUL EMILE.—(Provisional Protection only.) "Improvements in stereoscopes."

"This invention consists of the use of metallic or other reflectors in or on stereoscopes, for the purpose of increasing the intensity of light brought to bear on the objects viewed through that apparatus."

[Printed, 3d.]

A.D. 1857, June 6.-Nº 1595.

NOÉ, HENRI JOSEPH.—(Provisional Protection only.) The title of this invention is, "Improvements in portable stereoscopes."

The inventor states:—" In constructing portable stereoscopes, I form each end piece in two parts, connected by a folding joint, and over the eye glasses in the upper piece I place a folding piece or jointed lid. The bottom of the instrument, or the piece which supports the pictures to be viewed, is connected to the upper portion of the instrument by an expanding connecting piece, or bellows joint, so that the distance between the pictures and the eye glasses may be varied by means of adjusting screws, or otherwise, to suit the vision of the person using the instrument wariously, to produce different effects, as may be desirable. I sometimes affix the bottom of the instrument to a case or portfolio, which, when the stereoscope is not in use, may be folded over it, and fastened by an elastic strap, or otherwise."

[Printed, 3d.]

A.D. 1857, July 1.—Nº 1835.

NEWTON, WILLIAM EDWARD (a communication from Charles Nègre).—The object of this invention "is to reproduce copies of

"photographic images, drawings, and prints, by obtaining from them by the action of light in conjunction with the employment of chemical and galvanic operations engraved plates, wither in intaglio or in relief, upon iron, steel, copper and its alloys, zinc, silver, tin, aluminium, gold, and other metals; also produce damaskened designs formed by metals of various colors; also designs formed of different colors, by means of several engraved plates, registering one with the other; also designs of different colors, gold and platinum upon porcelain, earthenware, stoneware, &c.; also enamel or 'nielle' work and inlaid work upon metals, marble, stone, &c."

The photographs employed are "negative reversed proofs, and ordinary positive and negative proofs."

A layer of organic matter is spread upon a plate of polished etal. It is essential that this layer is sensitive to light, and can the same time act as a varnish, to protect the metallic surface Inderneath from the action of acids. The sensitive layer is then cted upon by light, in a manner suitable to the effect ultimately to be produced, and the parts of the layer that have not been exposed to light are removed by a suitable solvent. All parts of the metal that have been laid bare by the solvent are then coated with a less oxidizable metal than that of the underneath plate, by means of electric force; the protecting layer is removed; the . result is a "heliographic incrustation" of a different metal to that forming the ground of the picture. The plate may now either be oxidized or sulphurized, to obtain a colored damaskene, or it may be engraved by immersion in acids, or in electro-etching solutions; after the first biting in, the parts in relief are inked, and the biting in finished. To obtain an inlaid design from an etched plate, the parts in relief are protected by varnish, and the sunken parts are filled up by electro-deposited metal.

"'Nielle' work is obtained by filling up the hollow parts with a substance which will melt into an enamel by means of fire."

Instead of etching the design upon the plate, an electro-cast may be taken from it.

If a layer of gelatine, added to bichromate of potash, has had a design impressed upon it by means of a "reversed negative," and has been acted upon by a solvent, "the polished metal will be laid bare at those parts which correspond to the light parts of the design;" these polished metal portions having been covered

with printing ink, and the gelatine (and metal under it) having been acted upon by acid, an engraving in intaglio or in relief is obtained.

Engraved plates in intaglio and in relief may also be obtained from photographs, &c., by reducing the metal "in the parts of the "sensitive layer acted upon by the light, when this layer consists of "a salt of silver or any other metallic salt sensitive to light," and depositing copper upon the metallized design. "When the "deposit is considered sufficient it may be detached."

[Printed, 5d.]

A.D. 1857, July 2.—Nº 1843.

McCRAW, William.—(Provisional Protection only.) "This "invention relates to certain improved processes of producing positive photographic images or pictures on white or light-"tinted substances, either vitreous, animal, or vegetable."

According to one process, a slab of unglazed porcelain is coated with collodion, excited and exposed in the camera in the usual way; it is then developed by a weak developing solution, and "immediately washed before any visible or appreciable effect is "produced." After a momentary exposure to light, it is again treated with a developing fluid; the result is a positive photograph, "with the right and left reversed."

According to another process, a glass negative photograph is "placed in front of the camera at a suitable distance off, with a "mirror or reflector placed behind the image at an angle of about "45 degrees, to act upon the principle of the microscopic re- "flector." The prepared porcelain slab is exposed in the camera, and the image developed, fixed, and washed in the usual manner. A clear and well-defined positive and direct photograph is the result; this may be treated with chloride of gold solution to heighten the effect, dried, and varnished, also coloured, if required.

By either of these processes positive photographs may be produced "on porcelain, china, ivory, bone, mother-o'-pearl, white "enamel, white or opal glass, and other surfaces, which, by "reason of the inequalities of their surfaces, or the rigid nature "of the materials, are rendered unfit for receiving photographic images from negative photographs in the ordinary way."

Stereoscopic slides on white or opal glass can be produced by either of the above-mentioned processes.

[Printed, 8d.]

A.D. 1857, July 7.—No 1883.

BÉRARD, PETER HIPPOLYTE GUSTAVE.—"Improvements in manufacturing azotic cotton or pyroxile for photographic and "other purposes."

The cotton used for this process "is that obtained from the " shearing of swan skins (tontisse de molleton)." Two glass bottles are taken; a certain proportion of concentrated sulphuric acid and "powdered azotate of potash" is placed in one bottle, the bottle closed at once with its stopper, and shaken; the liquid is then poured into the other bottle containing the shearings of cotton, and the bottle closed directly. "The mixture forms a "thick paste, which is shaken several times," and the operation is completed in from six to ten minutes. The product is then washed by pouring filtered water into the bottle, pouring the whole into a large glazed earthen vessel containing filtered water, draining off the superincumbent liquid by means of a stopcock, and pouring in fresh water and so on until the liquid no longer acts on litmus paper. The cotton is then dried "by means of an " apparatus rotating quickly (une essorense); " "the drying is " then completed in a chamber heated by steam pipes."

"In order to obtain a greater solubility, ensure its preservation, and avoid the causes of spontaneous alteration and the danger attending removals, the azotic cotton is dissolved either in ether or in the usual mixture of ether and alcohol; it is then left to settle, and the solution being drawn off is evaporated by means of a still so as to collect the ether which distils over."

The collodion thus obtained "is dry, diaphanous, entirely soluble in ether and in alcoholic mixtures, and is ready for use either for surgical or for photographic and other operations."

[Printed, 3d.]

A.D. 1857, July 7.—Nº 1884.

BÉRARD, PETER HIPPOLYTE GUSTAVE.—"Improvements in "manufacturing and applying concentrated collodion," applicable to the collodion used for photographic purposes.

"Concentrated collodion" is economically prepared, "either b "dissolving the azotic cotton in a warm state, or by concentratin "the solution, in which case sixty per cent. at least of the ethe "used can be recovered. The modus operandi consists in dir solving the azotic cotton with the assistance of heat in "common distilling apparatus, composed either of a metallic, glass or earthen vessel, heated by means of a water bath, and pre vided with a worm as usual, which worm is cooled by col "water." The distillation is continued "until the collodion concentrated to the required degree for the preparation to which it is intended to be applied." The quantity of ether direction of the amount of concentration.

The collodion, thus manufactured, can be made to yield sheet as thin as the thinnest paper, as well as plates as thick as stor leather. In this process, instead of the cotton remaining sever days in cold ether, to effect its solution, the solution of the cotto is almost instantaneous.

To prepare a coloured collodion, the colouring material (grown with castor oil) is added to the distilling vessel, and the distillative carried on as far as necessary.

[Printed, 3d.]

A.D. 1857, July 28.—Nº 2058.

BAXTER, EDWARD WILLIAM.—"An improved mode of pr paring glass labels, advertizing tablets, and ornamental devio "upon glass," in which photographic processes are used.

To copy the device in gold or silver.—That part of the surface of the glass which is to receive the device is coated with were isinglass size, and overlaid with gold or silver leaf. The met leaf is then backed with a varnish composed of "asphaltum dissolved in turpentine, which will become insoluble when expose to the action of light. A negative design, made upon a transparent medium, either by the aid of photography or by painting or printing, is then applied to the sensitive surface and exposed the action of light, thus fixing the parts left uncovered by the negative. The negative is then removed, the unfixed portions the varnish dissolved off by means of turpentine, and the superfluous gold or silver wiped away by means of a damp piece.



PHOTOGRAPHY.

cotton wool; "there will remain on the glass a perfect counter-" part of the device contained on the negative plate."

"When using a pigment in place of metal leaf, it is to be mixed with resinous varnish or gold size, and laid thinly upon the glass surface, and when dry it is to be subjected to the above"named treatment."

To produce devices in frosted silver.—A positive design is painted or printed upon a sheet of transparent paper. The glass is coated with a sensitive varnish as above described; the sensitive surface is then overlaid with the positive and exposed to light. The soluble parts of the varnish are then removed; the exposed portion of the glass is acted upon by fluoric acid, and the ornamented surface of the glass is silvered in the usual way.

[Printed, 4d.]

A.D. 1857, July 30.-No 2078.

BAUERRICHTER, HENRY, and GOTTGETREU, GUSTAVUS.—(Provisional Protection only.) "The improvements relate to "adapting stereoscopic apparatus so as to obtain simplicity of parts, and in combining therewith a box or case, which, whilst it is suitable to hold such stereoscopic apparatus, is at the same time adapted as a receptacle for handkerchiefs, gloves, stereo-"scopic slides, or other articles.

"The stereoscopic lenses are supported from one end of a platform or frame, the other end of which is provided with a rest
for the pictures, and the apparatus thus formed fits into a box
or case in such manner as not to interfere (or only slightly so)
with the internal form of the box, which is also of form to
receive the stereoscope without interfering with its other uses;
the front or other side of the box or case being cut to admit of
the lenses projecting or being seen even when the box is
closed."

The stereoscope and box is also formed "so that the one fits "into and for the time when not in use forms or appears to form part of the other without the lenses appearing externally. For this purpose the part of the stereoscope carrying the lenses and that forming the support for the picture (either or both, of them) fold to form part of the hollow of such box or case

"without otherwise interfering with the internal form of the box or case, and its adaptation as a receptacle for handkerchiefs, gloves, stereoscopic slides, or other articles."

[Printed, 3d.]

A.D. 1857, September 1.-Nº 2295.

ELLIOTT, ROBINSON.—"Improvements in photography, by "which the lensular defects of the present processes of taking photographic prints are avoided, and impressions are obtained of any size." "The lensular defects alluded to are the different ways in which the camera represents certain colours; blue, for instance, however powerful or deep, is represented as white, and "red as black."

To attain the above-mentioned objects the following method of copying a picture is pursued:—The surface of a piece of good glass is brushed over with gum water, and the glass is fixed in a frame. The picture is placed underneath the glass, and its outline traced on the coated surface of the glass by means of "a fine colored point of chalk." The picture is then removed, a black cloth placed in lieu thereof, and the outline on the glass is painted in the requisite gradations of light and shade by means of white lead, the dark background forming the shades, and the white lead the lights of the picture or painting. The painting has a piece of sensitive paper placed on the unpainted side, and the whole is submitted to the action of light in the ordinary photographic printing frame. The photographic copy thus obtained is fixed in the ordinary manner.

If the copy is required of a different size to the original, the glass painting is taken from an outline on paper of the desired size. The picture may be an original one on the glass itself.

In taking impressions from lace, &c., it may be fixed on to the glass by means of gelatine; the sensitive paper is placed next the lace or other fabric.

[Printed, 4d.]

A.D. 1857, September 4.—Nº 2312.

GODET, PROSPER BERNARD. — (Provisional Protection only.) The title of this invention is, "Improvements in stereoscopes."

The inventor states:—" Hitherto the stereoscope and the pic" tures to be inserted therein for view formed separate parts. My

"invention consists in collecting the pictures in the manner as
"the folios of an album or keepsake, the cover of which latter
"may be folded up so as to form a box open at both ends. In
"one part of this cover are fixed the lenses, so that each picture
"may be placed at its turn in the visual axis of the lenses, in order
"to be seen in the proper stereoscopic view."
[Printed, 3d.]

A.D. 1857, September 4.-Nº 2315.

FERRIER, JACQUES ALEXANDER. — (Provisional Protection only.) This invention relates:—

1st. "To a new means of reproducing transparent photographic representations or pictures on other substances than glass."

2nd. "To the application of such pictures or representations to stereoscopes."

The substances alluded to in the 1st portion of the invention are selatine, gutta percha dissolved in chloroform, in benzine or its solvents, pharmaceutical collodion and india-rubber dissolved, siccative oils, mucilagenous substances, starch, or other amy-laceous substances, such as arrow root, tapioca, &c., soluble or fusible resins, galipot, pounce, white or yellow wax, either in solution or in fusion."

The process is as follows:—"A light coating of neuter collodion" is spread over "a smooth and transparent surface," Thowed to dry, and coated with albumen. The surface is sensitized by means of "aceto-nitrate of silver," washed, dried, and applied on to a glass negative. Exposure to light then takes place, the picture is developed by means of gallic acid and the mitrate of silver, fixed with hyposulphite of soda, and coloured. A solution of gelatine is then poured over the picture, allowed to dry, and the whole detached from the smooth surface on which it has been placed. The picture is thus protected on one side by a coat of collodion, and on the other by a coat of gelatine, which may be coloured. Any of the above-mentioned materials, either singly or in combination, may be employed instead of gelatine.

A stereoscopic picture may be made by detaching from glass a Picture on photographic collodion by means of gelatine or gutta Perroha.

[Printed, 3d.] No. 20.

PHOTOGRAPHY.

A.D. 1857, September 7.—N° 2332.

LEWIS, WILLIAM, and LEWIS, WILLIAM HENRY.—The title of this invention is, "Improvements in plateholders or frames for "photographic cameras."

These improvements "relate to the frames that receive the glass " or other plate on which photographic and similar pictures are " taken in cameras," and consist:—

lst. In a glass receptacle inserted in the bottom of the frame, so as to retain "any chemicals that may drip from the plate." This receptacle is in the form of a horizontal bottle, with a neck and cork or stopper at one end, "and a dishing or concave upper " surface, catching drippings, and passing the same into the " receptacle through the mouth or opening;" small projections may be provided on this receptacle, against which the slide shuts down.

2nd. In forming the corners or supports, that hold the photographic plate, of solid glass; these fit into the frame by means of ribs that project into corresponding grooves formed on the inside of the frame; they are fixed by means of putty.

3rd. In a "cut off," made of a bar of black glass. This arrangement prevents the entry of the light into the frame during the withdrawal of the slide. When the slide is withdrawn, the "cut off" is forced by a spring into a slight groove, "so as "perfectly to exclude the light."

[Printed, 6d.]

A.D. 1857, September 16.-Nº 2396.

GODET, PROSPER BERNARD.—(Provisional Protection only.) The title of this invention is, "A new mode of illustrating literary "productions."

The inventor states:—"The invention consists in illustrating "literary productions by means of photographic stereoscopic pictures taken from groups or scenes formed by living figures or laymen, dressed arranged and combined with the required accessories according to the narratives described in the book or other literary production to be illustrated, and from which narratives or sceneries the said photographic stereoscopic pictures may thus offer a perfect natural illustration, corresponding with the ideas of the author of the book or other literary production;

"thus for instance, I intend to give illustrations of the most conspicuous scenes of living or bygone authors, such as Shakspeare, Dickins, Lamartine, historical or other works, and even of sacred books, such as the Holy Bible, prayer books, or any other suitable literary productions in general."

[Printed, 3d.]

A.D. 1857, September 22.—N° 2459.

NEWTON, ALFRED VINCENT (a communication from David A. Woodward).—" Improvements in obtaining photographic pictures."

These improvements consist in "adapting to the photographing "eamers a lens and reflector in rear of the object glass, in such "manner that the instrument may be mode to answer the twofold purpose of a camera obscura and a camera lucida."

By means of this apparatus a negative is taken in the usual way. For this purpose the ordinary photographic lenses have a rack and pinion movement for focussing the object on to the place afterwards occupied by the sensitive plate. The negative thus produced is then fixed in an open "sheath" or frame, "and placed "in the instrument in the same position as before so that the light may pass through it." The reflector is made to pass through an aperture in the shutter of a darkened room, and by means of this reflector and a lens at the back of the camera "the sun's rays" are reflected with great power through the negative, which is focussed on the sensitized paper or canvas;" the open frame containing the negative is mounted in a box which slides by means of rack and pinion movement, the front lenses have a similar mode of adjustment, and by these motions combined the image is focussed of the required size.

"To reflect a positive picture for tracing, &c.," a positive picture is placed in the open "sheath" or frame, and its image is thrown on to the canvas, in a similar way to that used in throwing the image of the negative picture on to the sensitive surface, as described above.

[Printed, 6d.]

A.D. 1857, September 28.—No 2494.

QUIN, RICHARD.—(Provisional Protection only.) "Improvements in the construction of cases suitable for containing photographic and other pictures."

PHOTOGRAPHY.

96

These cases satisfy the three following requirements:—The picture may be enclosed for protection; the picture may, when placed on a table, be supported by the case in an inclined position; the picture may be hung so as to exhibit the picture in an ordinary picture frame. The picture is mounted in an inner frame, which is backed with leather and serves as the back of the complete case; an exterior frame, capable of turning on pins attached to the inner frame, has a lid of the ordinary description hinged to it.

By turning the picture half round on its axes within the exterior frame, and using the lid as a strut, the picture may be placed on a table at the desired inclination.

To hang the picture, the inner frame is turned half round and the lid is closed down on the outer frame.

Another way of constructing cases consists of mounting the picture in a frame enclosed at the back and placing this within a similar frame. "There is a strut or foot hinged to the outer case " to support it in an inclined position."

If the lid of the case be hinged by a double hinge to the centre of the top of the case, it will serve either to enclose the picture or to form a strut. To hang the picture the lid is turned over against the back of the case.

If the picture is mounted in a frame hinged to the front of the ordinary case, a spring may throw it up into an inclined position on the opening of the case.

[Printed, 8d.]

A.D. 1857, October 5.—Nº 2551.

BECKERS, Louis (a communication).—(Provisional Protection only.) The title of this invention is, "Improvements in appara" tuses for exhibiting daguerreotype, photographic, and other
" stereoscopic views and pictures."

The inventor states:—"My improvements consist in arranging inside a box, case, or chamber an endless belt or apron having a series of frames or slides to receive views and pictures attached to it, in such manner as to stand perpendicular to its face; by moving the belt through a handle outside the box, the pictures are presented successively in a vertical or other suitable position opposite to magnifying glasses or other transparent media, to suitable openings. By arranging the pictures at right angle to the face of the endless belt or chain, a larger number of

"tures may be contained and exhibited in a box or case of a given is size than by the arrangement of the same parallel with the face of the belt, as is usual in moving panoramas. I secure the pictures in the slides by means of elastic bands and notches formed in the ends of the grooved portions of the slides."

A.D. 1857, October 6.--Nº 2560.

BROOMAN, RICHARD ARCHIBALD (a communication from M. Garella).—" Improvements in apparatuses for taking photographic "pictures."

"This invention consists in a method of taking photographic views or pictures subtending any angle up to 360° on a plane surface."

"To effect this, the object glass, together with the whole appa-" ratus, is made to turn on an axis, so as to present the glass, " paper, plate, or other sensitive surface, as the case may be, to "the object to be taken. The vertical slide or sash slides hori-" zontally into the dark chamber through the side of the camera, " and the object glass, instead of being opposite to the centre of " the dark chamber, is fitted at the side of the same. The camera " is fixed to a board which rests on a bed, and this bed is caused " to turn, and with it the rest of the apparatus, by means of " suitable gearing at the will of the operator. The moveable sash " which receives the sensitive surface is composed of two distinct " parts, and is provided with a grooved shutter hinged at one end, " so that the shutter can be raised when the sash is fixed in the " frame, and returned when the sensitive surface has received the " image. The whole is caused to move along the bed by means " of grooves and rollers suitably arranged. In the dark chamber, " between the sash frame and the object glass, there is a partition " extending the whole length of the dark chamber, provided with " an opening, which is covered by a diaphragm or card. "A guide curve is used for the purpose of imparting to the sen-

"sitized glass, paper, or plate such a motion that every point of the picture shall remain on the same point of the sensitized surface as near as may be during the exposure of the surface; this guide curve is formed of hard wood or other suitable material to ensure accuracy. In some cases a mirror or prism is used before the object glass;" positive pictures are thus produced.



PHOTOGRAPHY.

When negative proofs are required, and when the object glass alone is used, the axis of rotation is placed under the object glass; when positive pictures are required and a mirror is therefore used, the axis is placed at a distance behind the plate equal to the focal distance. The relative motion of the plate, in the former case, is therefore in the same direction as that of the rotation of the instrument, but in the latter case is in the opposite direction.

The Drawings show an apparatus for "obtaining pictures sub"tending an angle of 100°." The modification of the apparatus
necessary to produce positive pictures by the aid of a mirror is
also shown.

As the panoramic views produced upon a plane surface are all distorted, the following apparatus is devised in order to view them free from distortion or deformity:—The picture is placed in a case so as "to assume a position resembling that in which it was "taken." The case is semi-cylindrical, and "formed with two horizontal semicircular ends connected by a curved vertical side, its radius being equal to the focal distance of the object glass "with which the picture to be examined was produced." The picture is viewed by means of a moveable lens fitted to a vertical pivot in the axis of the semi-cylindrical case. The images are thus seen "as they appeared when transferred to the sensitized "surface, and with a certain increase of size and a relation be- tween their parts somewhat analagous to the illusion produced by the stereoscope."

[Printed, 1s. 4d.]

98

A.D. 1857, October 8.-Nº 2574.

GRUBB, THOMAS.—" An improved photographic lens."

This lens may be either used alone and as a "view lens," or in combination with other lenses of similar or ordinary construction. The distinctive characteristics of the construction of this lens are:—"That the two kinds of glass of which it is formed "occupy inverted places in the compound, and that the internal "or separating curve is also inverted," and much deeper in the improved lens than in the ordinary or existing photographic lenses.

To construct the improved photographic lens:-

Firstly, a crown lens of suitable focus is first formed; this lens is " of a form approximating to that known as plano-convex; one

* surface is generally, by preference, made slightly concave, and the lense is in such case a 'meniscus.'"

Secondly, a flint lens is formed; one side or surface of this lens is concave and of the same radius of curvature as the deeper side of the crown lens; the other side of this lens is formed "of "that curvature which will cause the lens to form with the crown lens previously described a nearly achromatized compound, or more strictly speaking a compound corrected for actinic dispersion, and which second surface of the flint lens will necessarily be a convex surface."

Lastly, the two lenses are placed together "with or without a "cement or fluid interposed, so that the surfaces of similar radii "shall be adjacent." The "crown lens is next the object."

A.D. 1857, November 3.—No 2792.

SWEET, HENRY KINSMAN (a communication).—(Provisional Protection only.). "Improvements in photographic portraits and "pictures."

This invention "consists in taking such portraits or pictures on concave or convex plates of glass or other material in place of taking them on flat plates as heretofore, by which means effects in some respects superior to those hitherto obtained may be produced."

[Printed, 8d.]

[Printed, 5-1.]

A.D. 1857, November 9.—No 2827.

HARDIE, WALTER.—(Provisional Protection only.) "An im-"proved stereoscope."

"The optical part of the instrument consists of two plane mirrors," "placed side by side, with their reflecting surfaces at "right angles to a vertical plane midway between them, but in"clined to each other at an angle." "The pictures are viewed by reflection from these mirrors, the eyes being placed so that "the line joining them is perpendicular to and bisected by the above-mentioned vertical plane."

"The pictures must be placed one above the other, head to foot, inverted with respect to the observer, and with a lateral separation of the corresponding vanishing points amounting to

" about two inches and a half (the distance between the eyes); "those points in the picture for the right eye being to the right " of the corresponding points in the other picture." Both pictures are not in the same plane, but are inclined to each other; the angle of inclination depends upon their distance from the mirrors and the angle of the mirrors.

"There is no necessary limit to the breadth of the pictures: " panoramic views and pictures broader than the field of view " may be exhibited by being drawn across the field of view." If necessary, prisms and lenses may be used with this stereoscope in conjunction with the above-mentioned mirrors.

A stereoscope is shown in the Drawings to exhibit pictures up to ten inches in height. Hinges enable the instrument to be compactly folded up.

" When not in use the pictures may be folded together face to " face;" they may be bound together as the leaves of a book, and exhibited in succession by turning over the leaves without removing them from the stereoscope."

[Printed, 9d.]

A.D. 1857, November 19.-No 2903.

GILL, SETH, and NEWTON, HENRY .- (Provisional Protection only.) "Improvements in obtaining stereoscopic pictures."

" This invention consists in obtaining the double image to " form the stereoscopic picture by a double reflector, and then " taking the pictures by a camera from the reflectors, which may

" consist of two silvered plates placed at a convenient angle

" to each other.'

[Printed, 3d.]

A.D. 1857, November 24.—N° 2940.

SANDS, CHARLES.—" Improvements in stereoscopes."

This invention relates "to the actuating, adjusting, and sus-" taining of the flap or door of stereoscopes, by which the light " is admitted to the picture, such door having a reflector on the

" inside which reflects and concentrates the light upon the pic-

The door is placed upon a stiff hinge, " so that it will remain in " any position in which it is placed," and "the joint pin or rod " (which is affixed to the door)" is extended beyond the sides of the instrument and has thumb knobs applied at either end. "By " taking hold of the thumb knob the position of the door and " reflector can be readily adjusted and regulated while viewing the " picture, and it will remain of itself in the position adjusted.

"Instead of extending the joint pin to carry the thumb knobs, a separate rod or axis may be applied for the purpose just above the joint, and a short arm extended therefrom with which the door and reflector is connected. This additional rod with thumb knobs is fitted in its bearings to rotate therein with sufficient friction to sustain the door and reflector as explained, or the door may move with sufficient friction on its hinges for the purpose required."

[Printed, 9d.]

A.D. 1857, December 8.—No 3034.

PERSHOUSE, HENRY.—(Provisional Protection only.) The title of the invention is, "An improvement or improvements in stereoscopes."

The inventor states:—"In stereoscopes as ordinarily constructed the lenses are removed for cleaning their inner surfaces by either pulling the end of the instrument from out the body, or by lifting up the said end upon the hinge, by which it is jointed to the body. My invention consists in making the end of the instrument in which the lenses are inserted engage with the body of the instrument by a lateral sliding motion, the said end being drawn from off the body by a motion similar to that of the sliding lid of a colour box. I prefer to insert a spring in one of the grooves in which the lid slides for the purpose of producing such an amount of friction as will prevent the end from sliding out by its own weight."

[Printed, 3d.]

A.D. 1857, December 12.—No 3066.

COWPER, CHARLES (a communication from Testud de Beauregard).—This invention consists in "producing photographic "proofs or pictures by means of carbon or other colouring matter," applied by superposition to a coating sensitive to the action of light.

Paper is immersed in or floated on a warm solution of "bichro" mate of potash or ammonia," mixed with gelatine; it "is
" then dried, and its surface covered with the pigment." The
pigment may be rubbed over the dry surface with a pad of leather
or other suitable material; or it may be "ground up very fine
" with nut oil or other oil, and rubbed over the surface, which is
" subsequently immersed in a bath of ether to which a little col" lodion may be added; or the paper may be immersed in a bath
" of indian ink or other pigment ground up very fine with
" water and mixed with gelatine and a little gum or dextrine, and
" used hot; or rollers or presses or other apparatus may be em" ployed to apply the pigment or assist the operation."

The paper, having been prepared in the dark, is exposed to the action of light and washed in hot water. This "dissolves the "gelatine which has not been acted upon by the light, but does "not dissolve that which has been rendered insoluble by the "action of the light, and which insoluble gelatine retains the "pigment and thus produces the image."

Glass or other substances may be substituted for paper.

By employing carbon, pigments, or finely divided gold or silver "photographs or pictures of the greatest permanence and durability may be obtained."

[Printed, 4d.]

A.D. 1857, December 17.—No 3101.

HIGHTON, EDWARD.—" Improvements in electric telegraphs." lst. The substitution of an electro-magnet for a permanent magnet in "the gold leaf telegraph."

2nd. "Recording signs or indications made by telegraphic "instruments by means of photography." A strip of paper, rendered as sensitive as possible to the action of light, is moved "uniformly forward by suitable apparatus, as is well understood, "& in front of this travelling strip of sensitive paper a mag"netic needle or bar is mounted, and this is caused by a suitable "arrangement of coils to move in one or other direction, when a "current is passing in the line wire. In the magnetic needle or bar a hole is formed, and by suitable optical apparatus light is "concentrated at and around this hole, and a portion of it passes "through on to the paper, and marks it, so that the position of

"the needle is constantly registered on the paper. In place of perforating the needle or bar itself, it may, if preferred, be

" caused to actuate a perforated screen."

3rd. "A method of protecting telegraphic wires when buried in the ground."

4th. "A peculiar form of code table."
[Printed, 5d.]

A.D. 1857, December 23.—No 3148.

NUNN, WILLIAM.—" Improvements in stereoscopic apparatus."
The improvements relate:—

Ist. "To the application of glass or other reflectors to stereo"scopes, in such manner that more than one person may be
"capable of looking through suitable glasses or eye-pieces at the
"same picture or the reflection of it at the same time." "The
"reflecting surface employed is placed in such position that,
"whilst the direct view of the picture is obtained as heretofore
"through one pair of glasses, the reflection thereof may be seen
"at the same time through other glasses." In the Drawings, one
instrument is shown with a reflector, complete in itself, and
another consisting of duplicate apparatus, each of which is capable
of being used as an ordinary stereoscope; prismatic glasses are
also shown near the eye pieces, "to counteract the reversing effect
"produced by the reflector."

2nd. "To the application of glass or other reflectors to the "sides of stereoscopes, in such manner as to facilitate the introduction of reflected light on to the picture or pictures sideways." The Drawings show reflectors on hinges, capable of folding down to the side of the stereoscope.

3rd. To the table or other support to receive the above-mentioned stereoscope. The stereoscope is mounted in a stem sliding freely in a hollow pillar, and provided with a spring stop. The pillar, stem, and stereoscope, when out of use, may be lowered within the central table leg and enclosed by a flap, so that the table may be used for other purposes.

4th. To "the application of india rubber or other elastic means as connections between the eye-pieces and the bodies of stereo"scopes, so as to admit of elasticity, and thereby prevent injury
"to the eyes whilst viewing objects."

[Printed, 9d.]

PHOTOGRAPHY.

A.D. 1857, December 24.-Nº 3164.

BURLEIGH, BENJAMIN, and DANCHELL, FREDERICK LUDwig.—This invention has for its object the formation of "recep-"tacles and other articles for photographists" from carbonaceous matters solidified by percussive force, "and afterwards submitted "to the action of heat in closed vessels."

The carbonaceous substances, in a pulverized form, are mixed with "either moist, bituminous, resinous, gummy, oleaginous, "saccharine or glutinous matters," and forced "into moulds, suitable for the objects to be constructed, by stamping or beating with suitable tools by means of machine or other power to the required degree of consistency or solidity, after which the objects are baked or burned in closed vessels."

"To render crucibles and other objects made of solidified carbon proof against the action of oxygen when exposed to fire, the said articles" are "coated outside with silicious glaze or other substance not liable to be acted upon by oxygen or atmospheric air."

"To render vessels and other objects impermeable to fluids and gases," they are glazed or coated "either on the outside or "inside, or on both sides when required, with a varnish or lacquer insoluble in the particular fluid or gas intended to be contained in the vessel."

Many other applications of this invention are set forth.
[Printed, 4d.]

1858.

A.D. 1858, January 21.-Nº 115.

HERMAGIS, HYACINTHE. — (Provisional Protection only.) "Improvements in stereoscopes."

This invention "relates to improvements in the optical parts of stereoscopes, which improvements produce four important "results,—

" 1st, perfect rectitude of the lines of photographic pictures.

" 2ndly, more zones or fringes of prismatic colours.

"3rdly, greater increase of the size of the pictures than can be obtained with the prismatic lenticular system heretofore mployed.

"4thly, less fatigue to the eyes as regards their position in

" the axes of parallel spherical lenses.

"These improvements consist in adapting to the stereoscope, without the aid of any prism, spherical lenses, either simple or achromatic, having parallel spherical surfaces compelling the eyes to be placed at a reasonable distance from the optical lenses, perpendicular to the axes of the said lenses, which allows of the view being more easily taken in by reason of its position towards the converging point of the luminous zones proper to produce the effect of relief in pictures placed in the stereoscope."

[Printed, 3d.]

A.D. 1858, February 8.-N° 228.

MATHIEU, FRANÇOIS.—" Improvements in stereoscopes."

"The lenses are fixed in a short box with an opening or openings at the back. A piece of wood or other suitable material is hinged to the back, and another piece of wood is hinged to the first piece and carries the picture holder. These pieces fold up on the box, and are secured by a catch when the instrument is not in use. The picture holder is either permanently fixed, or jointed, or otherwise attached to its base, with or without means of adjustment in either direction, and it lies in a suitable space or recess when the instrument is shut up. The picture holder may be a simple upright piece or pieces, with a spring or springs to secure the picture, or grooved upright pieces or other similar means may be employed to support the picture at the proper distance from the lenses, which may be of any of the known forms. A large amount of light can thus be allowed to fall on the picture, and the instrument is very portable."

"The materials of which the apparatus is constructed may be "varied."

[Printed, 6d.]

A.D. 1858, February 9.—N° 329.

THOMSON, WILLIAM.—The title of this invention is, "Im"provements in testing and working electric telegraphs;

some of the improvements relate to the application of photography to the above-named purposes.

The description of the invention is divided into the following parts:—

lst. Testing the insulation of a telegraphic conductor by means of certain electro-static instruments.

2nd. Testing "the insulation of a telegraphic wire by com-"paring its resistance to the flow of electricity from a constant

" source with the resistance of a standard wire to the flow of " electricity from the same, or another constant source."

3rd. Testing "a submarine telegraph wire during the operation

" of laying it by measuring from time to time the strength of currents produced in it by the electro-motive force of a constant battery or batteries." Certain galvanometers adapted for use

at sea are employed for this purpose.

4th. The use of "a double bifilar suspension" for the "indi-" cator" of electric telegraph instruments.

5th. The use of a conducting suspension wire for the abovenamed indicators; also the use of a conductor connected with the said indicator and dipping into a conducting liquid, in order to maintain electric communication.

6th. The use of "electro-motive forces, of several different "positive and negative strengths, to give different signals in "telegraphing." Certain arrangements of electro-dynamic coils and magnets are used to determine the direction and amount of the electro-motive forces.

7th. A "galvanometric relay or receiving instrument."

8th. The use of the electrometers, described in the 1st part of the invention as receiving instruments for telegraphic signals made by electricity other than frictional.

9th. The use of the thermal or thermo-electric effects of rays—reflected from the indicator of a receiving instrument for the—purpose of recording its indications.

10th. The use of photography "for recording electric signals as indicated, by motions of an indicator or indicators, either by light reflected from a mirror attached to the indicator, or trans-

" mitted by an aperture or transparent part in the indicator, or by

" influences of a shadow or image of the indicator, or of the

" shadow or image of any part of it." "A band or piece of



PHOTOGRAPHY.

107

" photographic paper or other substance sensitive to photographie action" is, "by any ordinary mechanism," caused "to travel at a steady rate across the line of motion of the indicating beam whose movements are recorded by the marks made on the paper or other sensitive substance."

11th. A method of "transmitting telegraph messages between "one or more conductors and a different number of conductors." Also a method "by which two or more messages can be sent at "the same time from the same station along one telegraph wire."

12th. The use of electric sparks in connection with photographic action for receiving or recording telegraphic signals. "Electric " sparks excited by a Ruhmkorff coil or any other convenient instru-" ment," are passed "between any part of the indicator and a sheet " of matter fixed or carried along by a regular motion near it;" these sparks record the motions of the indicator by photographic action, by impressions, by chemical changes, or by perforations. 46 In using electric sparks to record the indications of a moveable " body in a galvanometer or galvanometric relay employed for " telegraph purposes," a regular succession of sparks is employed; these sparks follow one another at very short intervals of time, and each make a mark "on the paper or other sheet receiving the " impression or perforation." In using this part of the invention it is preferred "to cause a strip of paper sensitive to photographic " action, or otherwise, to travel with a steady motion across the " path of the end of the indicator over a metal plate, above " which plate the end of a conductor projecting from, or forming " part of the indicator, moves to and fro in consequence of the "action of the current transmitting signals. The series of " sparks excited by the Ruhmkorff coil or other instrument takes " place between the before-mentioned end of a conductor and the " metal plate, and makes a series of marks on the paper either by 46 photographic action or perforation, or both. The result is an " undulating curve of dots, the character and succession of the " undulations of which give the different signals desired to be " sent."

13th. "An apparatus by means of which electric signals may "be read off" by observing the amount of motion of an indicator. The greater or less amount of motion of the indicator is produced by currents of greater or less strength. It is preferred to use a light mirror attached to the indicator; a beam of light is thus

produced, which beam produces a luminous spot on a graduated screen.

14th Various apparatus "for rapidly producing and for main" taining electric currents of stated strengths in telegraphic wires,
" and for discharging currents from such wires."

15th. Certain "arrangements for throwing the receiving instru"ment at the transmitting end out of circuit during part of the
"time during which a signal is being transmitted from that end."

16th. Means and apparatus for "compensating the effects pro-

"duced on the receiving instrument at the transmitting end by operations performed at that station."

17th. A method and apparatus for transmitting signals in opposite directions at the same time.

18th. "The use, for receiving and recording signals, of two or "more instruments at or near the same station, thrown into "operation during regulated intervals of time."

19th. A means of checking the motion of any moveable indicator in a receiving instrument after its indication has been read off. This portion of the invention is mentioned in the Provisional Specification, but is not proceeded with.

20th. A method and apparatus for increasing, diminishing, or regulating the stability of the indicator of a telegraphic instrument.

21st. Certain means of compensating the effect of previous signals on the telegraph wire. This portion of the invention is mentioned in the Provisional Specification, but it is not proceeded with, except so far as is comprehended under the 16th part of the invention.

22nd. A method and apparatus "for producing at a receiving "station, lines, figures, letters, or symbols of given shapes." Two mirrors are attached "to the indicators of two galvanometers, at "the receiving end of, and receiving currents from one transmit-"ting station by two separate telegraph lines;" a ray of light is caused "to be reflected from these two mirrors in succession, "and to be thrown on a screen, so as to give a visible effect, or by "photographic or thermal influence, a recorded effect, by which any lines, figures, letters or symbols, drawn or written at the transmitting station upon an instrument adapted to give different degrees of electro-motive force to the two lines, according to the two independent variables thus dealt with may be written,

"drawn, or made visible at the receiving station." "For transmitting a line, drawing, or writing of any kind by telegraph," a third telegraphic wire is added, "which is so connected and arranged, that when the tracing point at the transmitting station is lifted from the surface on which the curve is drawn, the indicating or marking beam of light is cut off at the receiving station."

[Printed, 1s. 6d.]

A.D. 1858, February 23.-No 357.

NEWTON, WILLIAM EDWARD (a communication from A. Cutting and Lodowick H. Bradford).—"An improved process for producing photographic pictures or designs on the surface of stone or metals so that impressions may be taken therefrom by the process of lithographic printing."

"The surface of the stone after being prepared either by polishing or graining," is covered with a solution containing water, gum arabic, sugar, and bichromate of potash, exposed to the action of light, washed with a solution of soap, thoroughly washed with water and dried; it is then ready to be inked by means of a roller.

The action of this process upon the stone is as follows:—The sugar deprives the gum arabic solution of its power to adhere firmly to the surface of the stone until it has been subjected to the subsequent processes. The exposure to light, by its action upon the bichromate of potash, causes the gum to adhere to the stone upon those parts of the picture where lights appear. The application of the solution of soap removes the gum from those parts which have been protected from light, and leaves an insoluble soap in place of the coating removed; the gum still adheres to those parts which have been fixed by the access of light. The gum is entirely removed by the thorough washing with water, and the insoluble soap forms "the groundwork from which the "picture is printed, as in the ordinary lithographic process."

[Printed, 4d.]

A.D. 1858, February 27.—N° 396.

CLARK, WILLIAM (a communication from M. Niepce de St. Victor).—(Provisional Protection only.) "Improvements in pre-No. 20. " paring paper for and in obtaining photographic proofs or " impressions."

The method of preparing the paper "is based on the property "that all bodies have of absorbing a greater or less quantity of " light." This new photographic process is called "photography " by absorption of light." To produce a positive picture, a sheet of paper is kept in the dark for a certain time, insurersed in a solution of "azotate of oxide of uranium" (or other salt of oxide of uranium), dried, and impressed with the photographic image. The picture is then developed by means of a solution of " azotate of silver," and fixed by immersion in pure water, " which dissolves all that part of a salt of oxyd of uranium " which by reason of the dark parts of the negative proof have " not received the action of light."

When it is desired to give a black tint to a photograph of the above description, either chloride of gold solution may be applied to it after the process just described, or bichloride of mercury solution may be applied between the exposure to light and immersion in nitrate of silver solution. Chloride of gold may be used to develope the image instead of nitrate of silver; in this case the proof has a very dark blue tint.

Negative impressions are produced by placing "a sheet of " paper impregnated with salt of uranium" in the dark.

This process is adapted for use on glass by means of a gelatinous or gummy solution of "azotate of uranium," which is insoluble when exposed to light.

This process is simple and rapid, and gives more stable photographs than the ordinary process.

[Printed, 3d.]

A.D. 1858, March 22,-Nº 590.

BROOMAN, RICHARD ARCHIBALD (a communication).—(Provisional Protection only.) The title of this invention is, "Improv-" ments in apparatuses for exhibiting daguerreotype, photographic " and other stereoscopic views and pictures."

"These improvements consist in arranging inside a box, car-" or chamber an endless belt or apron having a series of frame. " or slides to receive views and pictures attached to it, in standard

" manner as to stand perpendicular to its face. By moving

"belt through a handle outside the box the pictures are pre"sented successively in a vertical or other suitable position opposize to magnifying glasses, or other transparent media, or to
"suitable openings. By arranging the pictures at right angles
"to the face of the endless belt or chain, a larger number of
"pictures may be contained and exhibited in a box or case of a
"given size than by the arrangement of the same parallel with
"the face of the belt, as is usual in moving paneramas." The
pictures are secured "in the slides by means of elastic bands and
"notches formed in the ends of the grooved portions of the
"alides."

[Printed, 3d.]

A.D. 1858, March 22.—No 591.

MANWARING, EDWARD JOHN.—" Improvements applicable to stereoscopic apparatus."

This invention "consists in the application to or combination "with the stereoscope, or apparatus for exhibiting stereoscopic," photographic, or other similar views, of a system of rollers, "whereby views produced or placed upon flexible material may be "wound, unwound, and rewound upon or from such rollers, so as to be brought up to and taken away from sight by acting upon the said rollers, without the trouble of taking away each separate view and putting another in its place, as heretofore practised."

The Drawings show a box or case containing the apparatus to be attached to the bottom of a stereoscope. Two rollers, worked by a pulley and driving band, receive the band of views; two other collers keep the views flat for observation. The driving pulley is actuated by a knob or handle outside the case, and the rollers are suffered to turn one way only in consequence of a catch and spring on each roller. Each roller can be unshipped by means of "a screw, which forms the axis of one end of roller, working in a socket in that end of said roller."

Transparent views may be exhibited by this apparatus, transparent textile material being used.

[Printed, &d.]

A.D. 1858, March 25.—Nº 636.

CHEVALLIER, FRANÇOIS AUGUSTE. — "Improvements in "photographic apparatus."

The apparatus which is the subject of this invention enables the exact reproduction to be made of the entire horizon surrounding it. For this purpose it is made to revolve slowly upon a vertical axis placed under the sensitive plate, whilst the sensitive plate has a corresponding motion, so as to expose a certain portion of its surface to a corresponding point of the horizon. The sensitive plate is circular, and revolves in a vertical plane by means of toothed gearing connected with the vertical axis carrying the camera. By means of "eccentric" or radial shutters and a divided arc, a sector of any number of degrees can be photographed at once, and then another similar sector until the whole horizon is completed, or such portion of it as may be required; when, however, the whole horizon has to be taken, it is preferred " to operate with sectors of 2 or 3 degrees, imparting to the " apparatus a continuous rotary motion slow enough for the " image to be reproduced." Auxiliary fittings contribute to the perfect working of the instrument; a divided circle upon the vertical axis enables the camera to be moved exactly through a given arc; "a magnetic or compass table" fixes the geographical position of the various parts of the photographs; and a special stereoscope, having a transparent band of silk (tinted to represent various atmospheric effects and mounted on moveable rollers) and also having internal mirrors, enables the views to be seen under various apparent circumstances.

The rollers and silk band may be adapted to ordinary stereosses.

The pictures obtained by means of this apparatus may applied to fans, as they are circular and radiate towards there centre.

[Printed, 10d.]

A.D. 1858, April 5.-Nº 725.

SARONY, OLIVER.—" Improvements in producing photograp— in portraits."

This invention consists in producing a positive portrait by means of two or more negatives. A negative portrait is some

PHOTOGRAPHY.

taken, "in which every portion of the figure, excepting one, is "sacrificed in order to obtain an accurate representation of that "one portion;" a second negative is taken, in which another portion of the figure is accurately taken, all the rest being sacrificed; and so on, until accurate portraits of the whole figure are taken. The accurate portions are then printed in their proper relative positions upon a positive plate, those portions sacrificed being stopped off by masks; a positive portrait is thus produced, consisting of all the accurate portions of the negatives. To prevent the stunted appearance that photographic portraits usually have, in the positive picture the head is placed "somewhat further "from the waist than it appears in either of the negatives."

These improvements "may also be effected by taking up the different portions of the collodion film from the glass of one or more negatives and laying them down on a glass or in the printing frame in the positions above described, and then mining from them without masks."

When all the portions of the portrait have been thus printed in, "the portion of the figure between them is drawn in by an artist."

[Printed, 3d.]

A.D. 1858, April 10.-No 780.

POUNCY, JOHN.—(Provisional Protection only.) The title of this invention is, "Improvements in the production of photographic pictures."

The inventor states:—"According to my invention I prepare the paper or other surface for having the picture produced on it, by applying over its whole surface the coloring matter which is to form the picture, and together with this coloring matter is applied a substance which is acted on by the light. The following is the manner in which I proceed when printing positive pictures on paper from negative pictures:—I coat the paper or surface which is to receive the picture with a composition of vegetable carbon, gum arabic, and bichromate of potash, and on to this prepared surface I place the negative picture, and expose it to the light in the usual way, afterwards the surface is washed with water, which dissolves the composition at the parts on which the light has not acted, but fails to affect those

" parts of the surface on which the light has acted; consequently, on those parts of the surface the coloring matter remains in the state in which it was applied, having experienced no chemical change. Sometimes for the vegetable carbon I substitute bitumen, or other coloring matter may be employed. By this process pictures are obtained which are not liable to fade like ordinary photographs."

[Printed, 3d.]

A.D. 1858, April 13.-Nº 794.

DEAN, GEORGE ALFRED HENRY.—(Provisional Protection only.) "An improvement in stereoscope's slides," "whereby the figures on the slide may have movement and motion imparted to them. This is managed by first taking your stereoscopic background, and then taking your figures or groupings. The figures required to move are cut out and affixed in their position on the slide by a shaft running at the back of slide with shafts or arms passing through passages cut through the cardboard of slide, to which arms or shafts the figures required to move are affixed by either wire, thread, gum. paste, or any other adhesive or sticking substance; a mechanical motion is thus obtained and given to the figures or groups of figures by the shaft being pulled at will up or down, backwards or forwards.

[Printed, 3d.]

A.D. 1858, April 20.—No 860.

DEROGY, EUGENE.—" Improvements in instruments and paratus applicable to photographic purposes."

This invention consists of a new system and combination lenses and diaphragms in the usual lens holders or mountings photographic cameras.

By means of certain adjustments, arrangements, and arrangements of the lenses and diaphragms the same results are obtained "which now require the powers and use of at least 3" separate instruments or sets of apparatus." Also representations may be taken "on a larger or smaller scale by lengthering "or shortening the focus;" they may also be taken instantaneously.

The peculiarities of the instrument may be set forth as follows :--

The tube forming the body of the instrument is made so that the usual cell and diaphragm holder is removeable therefrom so as to be placed at either end of the said tube; certain lenses and diaphragms are thus placed in the centre of the tube from either end of the said tube. The cap covers the exterior end of the tube when the above-mentioned cell and diaphragm holder with the sun shade is placed in the end of the tube that is inserted in the camera. To fix the cell and diaphragm holder, as well as a lens cell used for portraits, a bayonet joint is used. Two extra lens cells may be placed in the usual cell and diaphragm holder; one when the representations are required smaller, the other when they are required larger than the above-mentioned combinations can give. The combination of ten foci in one apparatus.

[Printed, 7d.]

A.D. 1858, April 21.—Nº 875.

TALBOT, WILLIAM HENRY FOX.—"Improvements in the art "of engraving," in which photographic processes are used.

In the first place a mixture of gelatine with bichromate of potash is poured upon a metal plate prepared for engraving; this is left to dry, placed in the photographic copying frame in contact with the object to be copied, and exposed to the action of light so as to produce a photographic impression on the gelatine; thus far the process is identical to that described in N° 565 (A.D. 1852).

The novelty of the present invention consists in the mode of etching the image obtained as above; this is done as follows:—
The picture is not washed, but as soon as it is removed from the copying frame it is covered with pulverised copal or other resin.
This powder is melted by heating it strongly over a lamp. When the plate has cooled it is etched by means of a nearly saturated solution of perchloride of iron in water; the etching being accomplished in consequence of the perchloride solution penetrating the gelatine wherever the light has not acted upon it, but refusing the penetrate those parts upon which the light has sufficiently etching is effected the etching liquid is washed off with a rapid current of cold water " and the plate is cleaned.

Another mode of etching the image consists in washing the image (when taken out of the copying frame) with a mixture of water and spirits of wine, and then with spirits of wine alone.

The plate is dried, dipped into warm water, and dried again; the

powdered resin is then put on and the rest of the process conducted as described above, but with etching liquid more diluted with water. This mode of etching the image is only mentioned in the Provisional Specification.

The perchloride of iron may be employed for ordinary etching.

Another part of this invention, only detailed in the Provisional Specification, is as follows:—A metal plate is engraved or etched all over, so that it will print a dark and uniform shade upon paper; it is then covered with a mixture of gelatine and bichromate of potash, impressed with a photographic image, and washed as above described, so as to expose the etched surface of the metal at those parts on which the light has not acted. An impression of the plate is then take on a slab of warm gutta percha, this impression is made conductive of electricity, and an electrotype etching is obtained therefrom. "By a nearly similar process a "photographic etching may be made upon the surface of the stones usually employed for lithography."

The processes here described are named "photoglyphic en-"graving."

[Printed, 5d.]

[Printed, 3d.]

A.D. 1858, May 7.-No 1027.

COGGAN, GEORGE BARTLETT.—(Provisional Protection only.) The title of this invention is, "A new portable apparatus to be "called a 'Stereoscopia,' for exhibiting stereoscopic pictures."

The inventor states:—"This invention consists of a square platform mounted on wheels for transit from one place to another, having a box or case about two and a half feet square and about seven feet high securely fixed thereto, the aforesaid box or case having a glass top either ground or otherwise. At the front and back of said box or case I propose inserting two or more sets of lenses, and in the interior I place a cylinder of wood or other suitable material extending from side to side, having an axis at each end, upon one of which I place a winch handle for the purpose of changing the subjects. The lower portion of this apparatus I propose using to contain and for conveying photographic apparatus."

A.D. 1858, May 21.-Nº 1136.

BRYER, STEPHEN.—" Improved instruments to be used in the sensitizing and developing of photographic plates."

"For lifting the plate off the dipper (by which the plate is im"mersed in the bath) and transferring it to the plate frame," two
pairs of forceps are used; these have two curved limbs jointed
together and provided with elastic cushions at their ends, the
plate is thus held firmly "by simply gripping its edges." "In
"order to take up the plate after it has been removed from the
"camera and hold it firmly while the developing and washing
"operations are proceeding," "the developing forceps" is used.
The limbs of this forceps have attached to their ends, by loose
joints, clips of L shaped metal coated inside with gutta percha.
A screw and nut "after the manner of compasses" are also fitted
to the forceps for retaining the instrument in a closed position.
The construction of these forceps enables them to accommodate
themselves to various sizes of plates and to firmly grip them.

The transferring forceps above described may also have jointed ends or clips, the said clips being discs of metal covered on their inner face with India-rubber.

"When operating upon plates of a size that could not be con"veniently spanned by forceps," an instrument is used consisting of the common elastic suction holder attached to the face of a blade of wood; the said blade forms a handle for the operator to grasp at one end, and at the other end its continuation facilitates the manipulation of the plates.


[Printed, 7d.]

A.D. 1858, June 1.—Nº 1230,

GRANT, ALONZO GAYLORD. — (Provisional Protection only.) The title of this invention is, "A method of preparing paper, in "order to render it waterproof and adapted for the reception of "photographic pictures."

"Paper with or without size, giving preference, however, to "that in which little or no size has been used," is dipped in or impregnated with a "composition of the following materials:— "Asphalte, oil, turpentine, Canada balsam, caoutchouc, gum lac, "and white wax, with or without the addition of chloroform."

4



PHOTOGRAPHY.

"The paper, coated or impregnated, may or may not be passed through rolls, and whether passed through rolls or not it is next placed in an oven or drying chamber, wherein the heat is raised to a point just below that at which the material will ignite, where it remains until it is perfectly dry; after drying, the paper or material prepared as above described is fit for use. When to be employed for photographic purposes, it receives any of the usual preparations employed in the art to render it sensitive."

[Printed, 3d.]

118

A.D. 1858, June 1.-Nº 1231.

GRANT, ALONZO GAYLORD. — (Provisional Protection only.)
"An improved stand or rest for" [photographic?] "cameras,
"theodolites, guns, and other articles."

"This stand consists of three or more legs which, when brought together, unite in the form of a cylinder. The upper ends of these legs are hinged or jointed to a metal boss, with a hole through the centre thereof. In the hollow of the boss there is a collar in the shape of a split ring, and through this collar passes a shaft carrying at top a table or other holder, according to the nature of the article to be held or supported. To the inside of each of the legs one end of a rod is connected, while the other end of each rod is connected to a collar through which the central shaft passes. When folded up, the rods lie in a groove made for their reception inside the legs. In order to fix the table or other holder at any required height, the split ring is made to grasp and nip the central rod by a screw passing through the side of and worked from the outside of the boss."

[Printed, 3d.]

A.D. 1858, July 3.—Nº 1501.

SARONY, OLIVER.—"Improvements in treating and coloring "photographic pictures."

The object of the process which is the subject of this invention is to imitate paintings upon ivory by means of paper photographs, to which a medium is applied, "which penetrates the paper, "destroys its opacity, and allows the artist's work to appear

" floating within the substance of the paper. This appearance is " obtained by the following method: - The paper on which the photograph has been taken is stretched on a frame having a " moveable panel, so that the back of the photograph picture " may be uncovered when required without unstretching. The photograph is then colored in the ordinary way with water colors on the front side until the picture is worked up to the required finish; the panel at the back is removed, the photograph picture is then placed face downwards upon a hot metal plate, the back is then, by a brush, covered all over with melted bees'-wax until the paper is perfectly saturated and the wax appears at the other side."

"The photograph picture may now be mounted like any piece of ivory upon a light or cream-coloured ground of paper.

enamel, or other substance."

A similar effect may be produced "by using oil, varnish, or gum, to give a semi-transparency to the paper."

[Printed, 3d.]

A.D. 1858, August 16.—No 1866.

CHAPPUIS, PAUL EMILE.—" Improvements in stereoscopes and stereoscopic apparatus."

lst. " Making a folding stereoscope in the form of a book." The back of the instrument is made with a double hinge in the centre, so as to form, when shut up, the back and sides of the book. "The lenses and divider or partition fold inwards," and the frame supporting the picture is made to slide in a groove in the back of the instrument so as to lengthen or shorten the focus. To open the stereoscope a spring in front of the book is pressed, the sides are expanded, the lenses raised to a vertical position, and the partition raised until the top corner fits into a slit in the upper part of the lens frame; the inverse operations close the instrument.

2nd. "Another form of portable folding stereoscopes consists " of an oblong box resembling a color box with a sliding lid. "When the lid is removed it is turned over and slid into grooves " made in the sides of the box, and the divider which is laid flat " is raised up; the focus may be adjusted by shifting the lid on " which the picture rests."

3rd. The "improvements in stereoscopic apparatus consist of a "box or case for presenting the slides or pictures for exhibition "through the lenses." The slides are retained in slips of wood glued to an endless band; the band is stretched over rollers which are caused to revolve by means of a thumb screw. "When the "slides have been presented to the glasses they fall into a bag or other suitable receptacle, and are to be replaced in the slips. "This apparatus may be used with any ordinary stereoscope, or "with the folding sort herein-before described."

[Printed, 7d.]

A.D. 1858, October 11.-No 2262.

ENGLAND, JOHN.—(Provisional Protection only.) "Improve" ments in apparatus for cleaning the plates used in photography."

This apparatus "is for the purpose of providing great—
"facilities for holding the glass plates used by photographers.
The glass plate is fixed on the ordinary pneumatic sucker. The apparatus consists of a frame supported on a suitable table, whisalso carries a pair of clips worked by a right and left handscrew. The frame carries and supports the glass at the same time that the clips hold the pneumatic sucker firmly. The tesurface of the frame "is provided with india-rubber," "on white the glass rests in a horizontal position, and is favorably place" for being operated upon."

The parts forming the table are provided with hinges, so as to be capable of being folded up.

[Printed, 6d.]

A.D. 1858, October 14.-No 2295.

BAXTER, George.—"Improvements in coloring photographic "pictures."

This invention "consists in combining with photographic pictures the processes of intaglio, plate, and surface printing," and also the processes of lithographic and zincographic printing as a means of coloring such photographic pictures."

"To color photographic pictures by means of wood blocks."— As many positives as it is desired to use blocks in coloring are taken from a negative on to transfer paper, the said negative having two dots for each block. The surfaces of the wood blocks are coated with flake white and gold size, then with transfer varnish. A positive, marked with a composition of vermilion, mastic, varnish, and turpentine on the parts to be coloured by one of the blocks, is laid on one of the prepared blocks, and the marking transferred to the surface of the block by pressure. When the transfer varnish has hardened, the paper is washed off by means of dilute acid, "the marking or drawing remaining on "the block." "The marked blocks obtained in this manner are engraved by hand in the usual manner." Register is obtained by puncturing the sheets to be printed with holes exactly corresponding with the dots on the negative, the said holes being placed over two register points on the tympan of the press. Stereotype plates may be used instead of wood blocks.

"To color photographic pictures by means of intaglio engraved "plates."—Tracings, one for each colour, are transferred to a series of copper plates, and each plate is engraved in accordance with the tracing. Register is obtained in a similar manner to that above detailed, the dots being traced on to the copper plate and points let in where the dots are; the sheets to be printed have corresponding holes, which are placed over the points.

"To color photographic pictures by means of lithographic "stones or zinc plates."—The parts to be coloured with each tint are drawn in transfer ink on a series of photographs printed on lithographic transfer paper. The pictures are printed in succession, until they are completely colored, with the stones or plates to which the pictures are transferred. The register is obtained in the usual manner or by means of dots. Another method of operating consists in transferring tracings to the stones or plates, and making the drawing for the different tints on the stones or plates themselves.

[Printed, 4d.]

A.D. 1858, October 20.-No 2342.

STORTZ, PHILIP CHRISTIAN.—(Provisional Protection only. "Improvements in the materials of photographic plates."

This invention "consists in substituting prepared copper or other metal plates, pannels of wood, millboard, canvass, or other materials having oiled or varnished surfaces, such as

" usually used for painting upon in oil, for the ordinary materials
upon which photographic images are deposited or printed, and
for producing photographic images or pictures direct from the
object, with or without printing from a negative.

"The prepared surface of the said plates, pannels, millboard, canvass or other materials is first cleared of all oil or varnish glaze. The edges of the said plates, pannels, millboard, canwass, or other materials are then hermetically sealed, and the surface prepared in the ordinary manner so as to render it susceptible of receiving photographic images by means of the photographic process, and the process is carried on in the usual manner, except that the chemical ingredients in ordinary use for the purpose are varied in their proportions so as to adapt the process to the particular nature or character of the said plates, pannels, millboard, canvass or other materials."

[Printed, 3d.]

A.D. 1858, October 23.-No 2367.

STORTZ, PHILIP CHRISTIAN. — (Provisional Protection only.)
"An improvement for taking life-size pictures from smaller
"pictures, either with or without the aid of photography."

This invention "consists in taking and tracing life-size pictures" from smaller negative or positive pictures in the most simple "manner.

"Place a double or single lens with camera so that the lens is turned in a dark room; place a transparent positive or negative image against the daylight. In the dark room is placed on an easel a cardboard, canvas, glass, or paper, on which will be seen the image on a large scale. If the image is negative take Indian ink or any color, pencil, or chalk, and fill up all white lines and designs, which, when seen in daylight, will produce an exact image of the smaller one. If it appear positive on the canvas, take the same ink or color, but do only the outlines, which will produce the same effect; or in rendering the surface of the said cardboard, canvas, glass, or paper sensitive to light, an image by photographic means may be produced."

[Printed, 3d.]

A.D. 1858, October 27.-Nº 2391.

BRAU, ADOLPHE PAUL AUGUSTE.—"A pocket stereoscope."

The lens frame is attached to two covers or flaps, "so as to "resemble a small pocket book or note book." The flaps have pockets on the inside to carry small articles, or "even the "stereoscopic views." When the instrument is in use, it is held by means of the flaps or covers, which are, for this purpose, thrown backwards; a moveable diaphragm is also then let into a groove in the lens frame, so as to project at right angles from it, and thus separate the field of view of each lens. The eye pieces may be formed of a "spiral" [helical?] spring, covered with leather, so as to shut off the external light from the eyes. The diaphragm may slide within a sheath, by which means it may be lengthened or shortened. "The stereoscopic views may be held "at the end of the diaphragm by any suitable arrangement."

Instead of the above-described arrangement, the lens frame may simply slide within a sheath, "which serves for a handle when the "latter is pulled out and the instrument in use, or a handle may "be attached to the frame itself."

[Printed, 6d.]

A.D. 1858, October 29.—N° 2425.

JOHNSON, JOHN 'HENRY (a communication from Gasperd Felix Tournachon, called Nadar).—(Provisional Protection only.)

"Improvements in photography, and in the apparatus connected therewith."

"This invention relates to an entirely new system of photography, whereby photographic bird's-eye views of portions of
the earth's surface may be taken, and consists in fitting a
photographic camera in a vertical position, with the lens downwards, into the bottom or side of the car of a balloon, such car
being formed, when requisite, into a 'dark chamber,' by
surrounding or enclosing it at the upper part with black silk or
other fabric, and covering or closing the space or chamber so
formed by a moveable roof or ceiling of yellow silk, or other
fabric for the purpose of obtaining the required yellow or
negative light. The lens is covered or uncovered in a ready

"manner by means either of a lever acatthed" [attached?] "to the car, and worked by a cord, so as to bring or remove a cap or cover over or from the lens, or if preferred, a horizontal disc turning on a vertical axis, may be employed for that purpose.

"Photographic views may thus be readily taken of the sub-"jacent plane either during the passage of the balloon, or when anchored and maintained stationary at an elevation in the air, for which latter purpose three ropes are employed, extending from the balloon to suitable windlasses below."

[Printed, 3d.]

A.D. 1858, November 4.-No 2468.

BAGGS, ISHAM.—(Provisional Protection only.) "Improvements "in telegraphing by electricity;" in one of these improvements photography is employed.

This invention "consists in the employment of a fixed micro"scope, telescope, or other optical power or instrument in combi"nation with an instrument or apparatus for indicating currents
"or effects produced in telegraphing by electricity, whether
"needle instrument, or an instrument in which movements or
"signs are capable of being produced or exerted by electricity,
"howsoever obtained or applied, and whether the electricity be
"frictional, voltaic, or otherwise."

In carrying out this invention, "the chemical agency of electri"city" is preferred to be used, "as acting upon particles of
"matter, and not upon masses, and being thereby practically
"independent of the opposing forces of inertia and friction."
Various illustrations of this mode of operating are given.

Another part of this invention relates to the generation of gas by electricity for telegraph purposes, "under a vacuum, or partial "vacuum."

Another part of this invention "consists in the application of "photography conducted by any suitable means whatever, to "impress upon paper, glass, or other material the required tele- graphic communications."

[Printed, 3d.]

A.D. 1858, November 20.—No 2644.

SWAN, HENRY.—(Provisional Protection only.) "Improvements in stereoscopes and other optical instruments, and in stands or supports for stereoscopes."

The "standard" connecting the "stage" of the stereoscope with the lens frame "is for the purpose of adjustment divided transversely into two parts, and in one of these parts two pro-' jecting wires or prongs are fixed, and these enter corresponding " holes in the other part. The holes are lined interiorly with " cloth, so that sufficient friction may be offered to the sliding of " the prongs in the holes, to retain them in any position in which 'they may be placed. When the instrument is in use it is held " by a button attached to the lower part of the standard, and the " adjustment of the distance between the picture and the glasses " is effected by placing the end of the thumb in a recess formed in the upper portion of the standard, and moving it up or down till the proper distance is found." To render the instrument ore portable, the "standard" may be attached to the "stage" and to the frame of the glasses "by hinges furnished with springs similar to the springs of a pocket knife."

A method of arranging opera glasses is set forth.

In arranging stereoscopes, the partition is formed of ribbed Rass or other transparent or translucent material.

In the ordinary stereoscope, instead of the single reflector usually employed, a series of narrow reflectors like a Venetian blind is used.

"In arranging stands or supports for stereoscopes two (or other number of) series of levers, parallel the one to the other, and arranged on what is known as the 'lazy-tongs principle,' are employed." "The height of the stand or support is adjusted by altering the angle, which the levers of each pair make with one another."

[Printed, 3d.]

A.D. 1858, December 20.—No 2909.

MACLEHOSE, ROBERT.—(Provisional Protection only.) "Improvements in stereoscopes."

The stereoscope described "is in the form of a deep rectangular No. 20.

" box, fitted at one end, near the top, with the usual stereoscopic " glasses."

An open drum or roller is placed "in the line of sight, and " between the glasses and the extreme back of the box or case." This drum works "upon a horizontal spindle, to which is attached " a projecting handle for turning it by. Behind this drum or " cylinder and in the end of the case there is a hinged door, fold-" ing downwards, and fitted with a mirror for throwing light " into the interior of the case. The pictures are disposed in the " chain form over the drum or roller, and so arranged that one " end of the chain can fall down into the bottom of the case at " the front and the other at the back portion of the case. With " this arrangement, as the drum is turned, the pictures are suc-" cessively drawn up from the back section of the bottom of the " case, passed over the faces of the drum, on the vertical side of " which for the time being, they are successively displayed, and "then passed down in a zig-zag or regularly folded pile in the " bottom of the front portion of the case." If necessary, two per sons can see pictures at once by means of stereoscopic glasse fitted "on the top of the back part of the case, to look in the " reverse direction of the fixed glasses. The sight is, in this i " stance, directed upon a mirror," which receives " the image from " the pictures upon the drum beneath it." There are also mirro and side doors to improve the effect of the light.

"After a picture has been seen and passed on, it can at once brought back, if necessary, and any picture seen by one view can be passed on to be seen by the other."

[Printed, 3d.]

A.D. 1858, December 27.—N° 2961.

MARION, CLAUDE MAMES AUGUSTIN.—"An improved box case for containing and preserving sensitive photographic paper, called 'Marion's box.'"

This invention "consists of a box with a double bottom he metically closed, and containing in the one part chloride calcium, and in the other the paper to be preserved."

The first arrangement consists of a rectangular box, "divided" into two parts by wire gauze, the upper part of the box con

" taining the paper to be preserved, and the lower part containings. "

" a drawer in which is placed chloride of calcium;" the lid of the upper part of this box is hermetically closed by means of a strip of India-rubber.

The second arrangement consists of two rectangular boxes placed one on the top of the other; the upper one contains the Paper to be preserved, the lower one the chloride of calcium. The upper box is made in a similar manner to the upper compartment of the first arrangement, it has, however, a perforated bottom which fits hermetically on to the lower box.

The third arrangement consists of a "cylindrical box for con-" taining a roll of the nitrated paper, the bottom of which is pierced with holes, and forms the lid of the lower box, which is filled with the chloride of calcium." The lid of the top box, and the upper and lower boxes are respectively joined together hermetically.

A "reservoir" of chloride of calcium, to be used separately, mists of a frame strengthened by means of divisions, and having bottom formed of a zinc plate and the upper surface of muslin and wire gauze.

"In cylindrical boxes, the chloride of calcium may be contained in an open cylinder which would serve as a roller for the paper Placed at the centre of the box."

[Printed, 8d.]

1859.

A.D. 1859, January 7.-No 51.

SPENCE, WILLIAM (a communication from Charles B. Boyle).— Improvements in the mode of taking photographic pictures on wood."

This invention "consists in a process of preparing the block and applying the silver solution thereto, by which an unchange-

able picture may be produced directly upon the surface of the wood without injury to its fibre."

The white of an egg, mixed with water, is beaten into a white Broth: the face of the block is moistened with this fluid, which is Mowed "to sink in and dry by natural evaporation." An aqueous and warm solution of Russian isinglass and chloride of sodium is then rubbed over the face of the block and allowed to sink in and dry. The underlying albumen is coagulated by heat, another coat of gelatine applied, and the excess of gelatine scraped off, sufficient friction being used to enable the silver solution to be brought into direct contact with the surface of the wood itself. The photographic impression is then made in the ordinary manner, except that it is much darker than usual. The solvent or fixing and toning solution is then applied in a heated state; the solution removes the gelatine and effaces all parts of the picture except those on the surface of the wood.

The following process may be applied to blocks which have been previously pumiced and whitened:—The albumen of an egg, mixed with salt and water, is beaten up; the mixture is then poured upon the horizontal block, and is coagulated by heat; this process is repeated until the pores are filled. The surface is then ready for the nitrate solution, and the picture is "taken on sub—" stantially the same principle as a photograph on paper."

[Printed, 4d.]

A.D. 1859, February 2.-Nº 296.

ALLEN, EDWARD ELLIS.—"Improvements in stereoscop—
"apparatuses." The complete apparatus is called "a compou—
"collapsible stereoscope."

"The object of these improvements is to render stereosco

" apparatuses portable."

The views are attached to one side or to both sides of a flexiband which passes round rollers. Each roller rotates in a case cits own, the cases of the two rollers being capable of sliding rinside the other; by this means, when the instrument is out use, the cases are brought close together, but "when the apparatus" is in use the cases are forcibly kept apart by flaps, rods, or otherwise," "so as to ensure the straining of the views."

The Drawings show another arrangement, in which the cases are cylindrical and have slits in them for the passage of the views. These cases are connected together by means of a "lazy-tongs;" they can either be thus shut together or kept apart as desired.

The stereoscope moves in slits in the case, "and is made " collapsible, being kept rigid when in use by a flap" hinged on



"the piece containing the eye glasses." The following modes of fitting the stereoscope to the cylindrical cases are described and shown:—The sides and eye glasses are made to fold down close to the cylinders. The eye pieces are divided, each being attached to a "mouse-trap" spring. The eye-glass frame "is attached at "either end to rods hinged on the cylinders." "A system of bars" connect the eye-glass frame and the "lazy-tongs."

PHOTOGRAPHY.

Cases of glass or card slides are rendered portable by arranging the views in two piles, one on each side of the stereoscope; those from the top of one pile are successively transferred to the top of the other, and the bottom slides at the same time undergo an inverse transfer. A system of rods or levers are used for this purpose.

[Printed, 11d.]

A.D. 1859, February 7.-Nº 344.

SIMS, THOMAS.—(Provisional Protection only.) "Improvements " in the application of photography to engraving and printing."

A collodion photograph is produced "either in the wet or dry state in the ordinary manner," and is submitted "to the action of bichloride of mercury and ammonio-chloride of gold or other chemicals capable of causing the lines of the picture to swell or rise and become absorbent." "This operation is however not always necessary." The film is then covered with a thin coat of varnish, which speedily dries on the porous raised lines or parts, leaving the other parts wet or damp." A quantity of powdered resin or other suitable powder is then dusted over the picture; this "adheres to the wet parts, and does not adhere to the dry parts." The picture can now be printed or transferred, "or otherwise converted into a printing surface or "plate."

The invention further states:—"I also make electrotypes from the films prepared as above-mentioned after metallizing the surface, or rendering it a conductor of electricity. In some cases I apply plumbago or other suitable powder to the film without varnish, and it then adheres chiefly to the raised lines or parts, and can be transferred or electrotyped. Or, I thoroughly dry the film on the glass, and coat it or not with oil of turpentine or other essential oil, and then apply resin or other suitable

" powder, and fix it by heat, and I then etch the glass by hydro-

"fluoric acid. The glass so etched is then used for printing, or "the pictures may be preserved on the glass itself."

[Printed, 3d.]

A.D. 1859, February 14.-No 410.

SANDERS, CHARLES.—" Certain improvements in ornamenting "English passe-partouts for photographic pictures, also the glasses "used with the same, and which said modes of ornamenting are "also applicable to ornamenting photographic frames generally."

This invention relates to "the application to the passe-partouts" and front glasses of photographic portraits or pictures (either

" singly or combined) of ornamental designs."

The invention consists in "applying to photographic mounts" the well-known process or processes of gilding, painting, staining, etching, or printing, singly or combined, the inner side of the front glass around that portion that does not intercept the picture or the moulding that surrounds it, or to ornament in like manner by any suitable means, such as by gilding, painting, staining, printing, or embossing, or either one or more of these processes combined, that portion of the front of the passe-partout that surrounds the picture before referred to."

In many cases it is preferred to produce a part of the design upon the glass and the remainder of the said design upon the passe-partout; when these come together they form the whole design and improve "the brilliancy and general effect."

[Printed, 4d.]

A.D. 1859, February 17.-No 444.

SAILLARD, Benoit.—(Provisional Protection only.) "An "improved mode of obtaining printing plates from collodion "pictures."

"This invention relates to the obtaining, by the aid of the
"electrotype process, metal printing plates from collodion pic"tures." A collodion photograph is developed by means of a
solution containing water, pyrogallic or gallic acid, and nitrate
of silver; it is then fixed by hyposulphite of soda or cyanide of
potassium solution, washed, and dried. The resulting image

is treated with solution of bichloride of mercury, washed with bichromate of potash solution, and then with distilled water; "when dry, the design will appear on the glass plate in relief."

The inventor further states:—" As a protection thereto I find it convenient to coat the design with photographic varnish, but this will in a measure detract from the sharpness of the plate ultimately obtained. I next submit the design, drawing, or picture to the electrotype process for the purpose of throwing down copper or other metal thereon by electro-deposition, and I thus obtain a reproduction in metal suitable for yielding impressions in ink of the raised picture or design produced upon the glass."

[Printed, 3d.]

A.D. 1859, March 15.-Nº 653.

CLARK, WILLIAM (a communication from Victor Louis Marie Serrin).—" Improvements in the apparatus of electric lamps or "lights," applicable (amongst other purposes) to photography.

This invention relates to an improved self-acting regulator.
The approach of the carbon points is "effected according to the "relative wear of the carbons, so as to maintain the light in one "uniform position, whereby the circuit can also be broken or re"established as often as it is wished, and the apparatus be still "always in working order."

To compensate for the loss of weight of the carbon points in the proportion in which it occurs, the positive electrode actuates a train of wheelwork by its gravity combined with that of a weight; whenever the wheelwork is allowed to act (by reason of the electric current ceasing to permit the full action of an electromagnet in the circuit), the positive electrode descends and actuates a chain passing round a drum, which causes the negative electrode to ascend in a proportion to the movement of the positive electrode which is defined by the relative leverage at which their chains are attached to the said wheelwork.

The other apparatus in the lamp, combined with that above described and compensating the variation in electric force, consists of an "oscillating frame," which is acted upon by the electromagnet and sustained by a "suspension spring;" by the joint and alternate action of these contrary forces the wheelwork is fixed or liberated.



PHOTOGRAPHY.

"As a permanent light this regulator can be applied to light"houses, fixed lights, optical experiments, physical and photo"graphical purposes."

[Printed, 10d.]

132

A.D. 1859, April 21.—No 1011.

PEPPER, JOHN HENRY.—(Provisional Protection only.) "Im-"provements in apparatus for showing stereoscopic pictures."

This invention consists "in so combining apparatus, that the " two stereoscopic pictures shall be thrown side by side on to a " screen or surface by means of lanterns having suitable lenses. " in such manner that when seen by several persons through " different lenses (having focal powers according to their several " distances from the screen or surface) each person shall see the "two projected pictures as one largely magnified stereoscopic " picture. For these purposes, a theatre or room is fitted at one " part or end with a suitable screen or surface to receive the two " pictures thrown thereon, by two suitable lanterns, and in front " of the seat for each observer is stationed a suitable standard or " holder of lenses of focal powers coinciding with their distance " from the two projected pictures on the distant screen or surface, " by which, when looked at through such distant lenses, the two " pictures will be resolved into one largely magnified stereoscopic " picture."

[Printed, 3d.]

A.D. 1859, May 6.—No 1139.

HART, FREDERIC WILLIAM. — (Provisional Protection only.) "Improvements in photographic apparatus."

1st. "Constructing a photographic printing frame in such a "manner as to admit of adjusting thereby the negative stencil or "mask on the prepared paper or surface, and securing the same "thereon as required." A frame, capable of being moved in any direction over the bed on which the prepared surface is fixed, is secured in the required position by screws, "so as to hold the "stencil mask or negative on the prepared surface ready for printing." This frame is hinged at one end, so that the reverse end may be raised when required in order to inspect the picture as a whole, and afterwards secured in its position "without disturb-

" ing the original arrangement of the stencil mask or negative on the prepared surface."

2nd. "Constructing the said moveable frame so as to adapt it "for holding tablets or surfaces to be printed from of various "sizes. For this purpose a curved or other slide is adapted and "applied thereto so as to be capable of being moved along the "frame to the position required in order to grasp or hold the said printing tablet or surface."

3rd. "Applying vulcanized india-rubber, or other similar "elastic material, to the bed or backboard for the prepared surface to rest upon, in order to facilitate the bringing of the printing and the prepared surfaces into the required close contact."

[Printed, 3d.]

A.D. 1859, May 7.-Nº 1156.

TEFFERY, WALTER.—"Rendering more convenient out-door manipulations in photography, by means of an improved Portable photographic tent and tent camera."

In one form of the apparatus the base "folds in two towards the under side." The sides "are formed of folding frames, and covered first with stout cartridge paper, and then with an American cloth," "to prevent the light from penetrating into the chamber." "These sides, when shut up, fall towards the base, thus the whole folds into a space of half the surface of the base." The sides of the chamber are kept apart by means of a double framework, which is hinged at either end to the said less and fastened by means of hooks and eyes.

When the manipulating chamber is "required to be used as a camera," the following apparatus are added:—A camera front ith an opening for the lens, a frame to carry the sensitive plates, and a stereoscopic camera. These are respectively made to fold down upon the base of the instrument, when not in use.

"When the tent is fixed for use, the whole of the upper part is covered by a double thickness of calico;" an apron is fixed to the front, which apron reaches to the ground and entirely covers the manipulator. The lenses are covered by means of bags with elastic rings sewn in them; these bags are fastened to the front. The lenses can be opened and shut from the interior.

When the apparatus is in use it is fixed on a tripod stand by means of battens carrying angle pieces; the battens are fixed to the base of the chamber by thumb screws.

Ventilators "made at right angles" are placed in the tent; by this means no light is allowed to enter.

Another form of framework is described and shown, which is hinged to one of the sides, and folds up against the said side.

[Printed, 1s.]

A.D. 1859, May 26.-N° 1300.

PATRICK, Hugh William.—"A new substance or material "to be used in lieu of ivory and other like substances;" amongst the applications of this invention "photographic pur-"poses" is mentioned.

In preparing the new material the following substances are employed, either separately or combined in suitable proportions:—
"Amber, Canada balsam, the Australian gum kowrie, potato
"flour or fecula," "meerschaum, paper pulp, calcined bones,
"fluorate of silicia, sulphide or sulphurets of mercury (vermilion)
"or of other metals, chlorides of zinc or other metals, alkaline pre"parations, asbustos, fluxed or fritted colors, or finely powdered
"pumicestone, sulphur. India-rubber, or similar gums."

"The combinations may be effected in unique ware such as be

"The combinations may be effected in various ways, such as by "reducing the gums to solution or 'hard bodies' or precipitates, "or by the application of heat." Where solutions are adopted, the gums employed are dissolved in "naptha, mithilated spirits, "chloroform or essential oils, or other suitable solvent." In this state of solution, or "in a state of precipitate," the gums are added to the above-mentioned substances or to such of them as may be necessary; the latter substances being in a state of powder, "or they may also be mixed with the gums whilst they are in a "state of fusion." When thoroughly mixed, the whole is evaporated "to a thick paste, and when at a proper consistency" it is rolled, cut, or moulded. "Where shaped or moulded, the "new material is hardened by the application of heat, and will bear a very high polish."

This invention is (amongst other purposes) applicable to "photographic purposes, such as the working into sheets or "tablets."

[Printed, 8d.]

A.D. 1859, May 31.-No 1343.

WANSBROUGH, JAMES (a communication from Egbert Mocham).—"Improvements in the construction of stereoscopes."

This invention "relates to a mode of rectifying in the stereoscope the distortion which is common to photographs of " architectural subjects, and which arises from the camera used in " taking such pictures being set at an incline, in order to take in " the upper portion of the view." In the photographic representation of a street, for example, made by this method, the rows of buildings appear falling forwards, "the vertical lines being at the same time elongated or thrown out of proportion." "To "remedy this defect when viewing such pictures stereoscopically," the plane of the pictures may be adjusted at a suitable inclination to the axis of vision. "The optical laws on which this adjustment " is based being that the apparent size of an object diminishes proportion as it recedes from the eye, or as its distance from The eye of the observer is increased," "the want of parallelism the vertical lines" is thereby neutralized, and the truthfulness of the representation restored.

The Drawings show a stereoscope whose bottom plate, that ries the views, is hinged to the front of the instrument, and is pable of being fixed at the required inclination by means of a Dring catch bearing against the back of the case. The said ck is provided with a stop, which prevents "the frame from swinging loose on its hinges."

[Printed, 5d.]

A.D. 1859, June 16.—No 1450.

JONES, THOMAS WHARTON.—The title of this invention is,

Stereoscopic glasses for single pictures," and it relates to "a

mew form and arrangement of optical glasses or lenses which

my give a stereoscopic effect" "to single pictures of any kind,"

and to real objects "viewed through them with both eyes, that is

my one glass before each eye."

The fundamental form of the glasses is "plain on one side and "concave on the other;" other glasses or curved surfaces, suitable for near or long sight, may be superadded to the above-mentioned glasses, if required. The concave curve of the horizontal section

22

in its fundamental form "is a somewhat cycloidoidal curve;" that of the vertical section "is parabolical."

These glasses are mounted either in spectacle frames or in double eye-glass frames, and give a dissimilar perspective of picture on each retina, "and the result is in accordance with the "conditions for stereoscopic vision, the perception by the observer " of a stereoscopic effect or appearance of relief in the picture."

Other forms of glasses besides that above described are capable of producing a stereoscopic effect. Glasses of the fundamental forms above described may be fitted to a binocular, opera, or field glass arrangement of the ordinary kind, and thus enable the relative position of real objects at some distance to be determined with greater exactness than is possible under ordinary circumstances.

[Printed, 6d.]

A.D. 1859, June 17.-No 1463.

VASSEROT, CHARLES FREDERIC (a communication from Henry Adolphe Corbin).—" Improvements in the construction of "stereoscopes."

"The object of this invention is to give the power of seeing in "relief pictures of any size (according to the proportions of the "apparatus) much more enlarged or amplified than can be "effected by the present system of stereoscopes."

In this invention the stereoscopic pictures are separate and are inclined to one another in such a manner that one of them is viewed directly by the eye, and the other is viewed by means of a mirror placed at the bisection of the angle that the views respectively make with each other. The two views are thus made to coincide, and are viewed by means of a pair of lenses. It will be immediately perceived that by this means an angle of vision is obtained "more considerable than it is possible with the ordinary "system."

Although it is preferred to place the reflected picture at right angles to the one viewed by direct vision, and to see one picture direct and the other reflected, both pictures may be seen by reflection from a mirror. When this is the case the mirrors make equal angles with the axis of vision, and the pictures are placed at a suitable angle, the angle of each picture with the mirror reflecting it being the same.

The Drawings show a box made according to the above principles, which is covered by rough glass or a removeable opaque lid so as to regulate the light. By cutting out the partitions at the back of the pictures and closing the lid, transparent pictures may be shown.

The picture viewed in the instrument by reflection must be taken "inverted," or with its unprepared surface towards the object.

[Printed, 9d.]

A.D. 1859, June 25.—Nº 1527.

NEWTON, WILLIAM EDWARD (a communication from J. Stuart Perry).—"Apparatus for exhibiting stereoscopic pictures."

This apparatus consists of "a movable framework for holding" a series of stereoscopic pictures, from which the pictures are brought to be inspected, and then returned to it again by a mechanism operated by the user."

The instrument shown in the Drawings consists of a cylindrical drum mounted on a centre. The views are placed in radial compartments of the drum, and each picture or pair of pictures is brought in succession underneath a vertical frame into which it is projected from its compartment to be exhibited.

The action of the apparatus is as follows:—The rotation of the driving spindle, by means of a hand winch, moves one picture underneath the vertical frame for every revolution of the spindle; a tooth for this purpose gearing into a cog wheel fixed on the drum axle. The picture is then risen into the frame by the half-revolution of a crank on the driving axis, and depressed into the box by the other half-revolution of the crank; the tooth then brings another picture under the vertical frame, which is in its turn elevated and depressed, and so on. The centre on which the drum revolves is fixed by means of a friction brake during the movement of the views into and out of the vertical frame.

The carrying frame that catches each picture in succession is moved by the action of the crank in a horizontal slot.

One or two lens frames are placed opposite to the picture, to produce the stereoscopic effect; when two frames are used, one is placed on each side of the pair of pictures.

[Printed, 7d.]



PHOTOGRAPHY.

A.D. 1859, July 12.-Nº 1653.

PROAL, CAMILLE JOSEPH (a communication from Jules Berward).—"The application of photographic impressions or pictures "upon fabrics or tissues for rendering such fabrics or tissues applicable to various useful purposes."

This invention consists "in applying to oilcloth, glazed cotton, " leather, and other fabrics or tissues, one or more photographic "impressions, and employing the fabrics thus prepared for " making up pads for writing blotters, chimney fronts, table " covers of any form, lamp and other stands, portfolios, purses " or money holders, tea trays, covers for books and journals, and " other similar articles, and more especially such articles as boxes, " and objects of cardboard. The fabrics having received photo-" graphic impressions may be ornamented with gilt thread, or gilt " decorations of any kind, and enriched by designs of various " colours appropriate to the photographic subjects. "The photographic pictures may represent views, portraits, " monuments, battles, or other photographic reproduction; they " may be colored or not colored, ornamented or not ornamented " with decorations. A varnish may at option be applied over the " photographic impressions to preserve their duration and bril-" liancy."

[Printed, 3d.]

A.D. 1859, September 3.-Nº 2020.

SWAN, HENRY.—(Provisional Protection only.) "Improve-"ments in stereoscopes and stereoscopic pictures."

The inventor states:—"According to my invention I construct stereoscopes with prisms or lenses of different magnifying powers, that is to say, the prism or lens opposite one eye exceeds in magnifying power the prism or lens opposite to the other eye, and I use such instruments in conjunction with pictures in which the two views forming the stereoscopic combination are of different sizes, corresponding with the different powers of the prisms or lenses opposite the two eyes, and these pictures according to my invention, I connect together by attaching them both in suitable positions to the same mounting. In this manner, by the use of the large picture only, I am

138

" enabled to obtain stereoscopic effect combined with minute" aess of detail, such as a large picture alone can give; and am
" also enabled to arrange the instrument in a form which is much
" more convenient than that of the instruments heretofore em" ployed for viewing large pictures. In some cases I construct
" instruments having one prism or lens only, the large picture
" being then seen without the aid of a prism or lens.

"Magnifying mirrors may be employed in place of prisms and lenses, but not so advantageously."

[Printed, 3d.]

A.D. 1859, September 8.—No 2050.

SMALL, THOMAS OSWALD.—The title of this invention is, "Improvements in the stereoscope by means of tinted media, and "by the application of the pulley and lever or spring in changing "the lights."

The inventor states:—"My invention consists in the first place in the substitution of coloured or tinted glasses or other tinted media in place of the uncolored glasses or other substances heretofore used for the purpose of reflecting light in stereoscopic slides; and, secondly, in the application of a pulley or lever for the raising or depression of such media, by the use of which coloured or tinted glasses, or other tinted media, assisted by the said pulley or lever, I am enabled to throw upon stereoscopic slides every degree and variety of light which may be required."

[Printed, 3d.]

A.D. 1859, September 12.—No 2081.

COLLINS, HENRY GEORGE.—1st. Certain improvements in producing printing surfaces and in transfer inks.

2nd. "The application of india-rubber in obtaining printing "surfaces from enlarged or reduced photographic images." A mixture, containing water, gum arabic, bichromate of potash, and sugar is applied to the surface of a sheet of vulcanized India-rubber, and a photographic image is produced thereon in the ordinary manner. "In order to bring the photographic image to "the size desired," the sheet of India-rubber is either extended or allowed to contract, and the sensitive coating is transferred "on

"to a stone, metal, or other surface." The coating is the washed with a mixture of gum arabic, yellow soap, and water, "which removes the portions of the coating unchanged by the "light." The surface is then inked and printed from "as is "usual in lithographic printing." Another method consists in producing the photographic image directly upon a stone or other printing surface covered with the above described sensitive coating, washing the surface with mucilage, charging it with ink, and transferring the same to a sheet of India-rubber which is allowed to extend or contract as may be desired; the design is then transferred on to the printing surface, "from which the copies re-" quired may be taken." The method of operating with the India-rubber is set forth in No 439 (A.D. 1858).

3rd. Methods of producing printing surfaces.
[Printed, 3d.]

A.D. 1859, September 14.—No 2095.

BESLAY, CHARLES.—The title of this invention is, "Improve-"ments in preparing and obtaining printing surfaces with designs "sunk, as also in relief," and some of the processes set forth involve the employment of photography.

The general outline of the process constituting the improvements is as follows:—A design is drawn on a varnish-coated sheet of glass "by removing the varnish from the glass, so as to pro"duce the design or drawing required." Increased thicknesses of the varnish are applied "at places where large blanks or whites "are to appear in the print." An electrotype is then taken of the glass plate thus prepared, and backed with lead or other suitable material; a printing surface, representing the design in relief, is thus produced. When it is required to produce a sunken design, it is drawn on the glass in varnish, so as to form a raised surface; a sunken design is then produced in the electro-deposited metal.

In order to test the effect of the design made by removing the varnish from the glass, "a sheet of sensitive photographic paper" is placed on the design, the plate is then reversed, exposed to "the light, & a positive proof thus obtained."

To reproduce a photograph.—The photograph is fixed on the sheet of glass, which is then coated, on the reverse side, with transparent varnish; the photographic proof is then copied

"through the transparency of the glass." "This method may be varied by covering the photographic proof on the glass with a transparent varnish. The varnish may further be first prepared, and then covered with a layer of sensitive varnish, and so obtain a proof on the glass thus prepared." A design also may be obtained by photographing a proof fixed on the glass, also by means of a paper or other proof.

Other details not photographic are also fully set forth.

[Printed, 4d.]

A.D. 1859, September 16.-No 2112.

BECK, JOSEPH.—" Improvements in stereoscopes."

To admit light to the picture "the stereoscope is left entirely open in front and at the two sides," and a reflector of silvered stass is fixed to the back of the instrument; by this arrangement the texture of the paper will not be prominently seen." The dission of light at the sides of the stereoscope is not an essential texture of this invention, although it is preferred.

The Drawings show a stereoscope in which the back or body of the instrument is made in two parts, one of which supports the lens frame, and the other the platform carrying the picture. The Pictures are held on the under side of the platform by means of springs, hinged so that they may be turned back, and thus allow the instrument to stand flat when not in use. A screen of ground slass is attached to the middle of the platform, at right angles to the plane of the picture, so as "to limit the sight of each eye of the person using the instrument to one only of of the pictures forming the stereoscopic combination;" this is an important feature of the invention. The distance between the lenses and the picture is alterable by means of a rack and pinion movement which connects the two parts of the instrument.

[Printed, 6d.]

A.D. 1859, September 28.—No 2193.

SUTTON, THOMAS.—"Improvements in the construction of apparatus for taking photographic pictures, consisting of and entitled an improved panoramic lens for taking photographic pictures."

No. 20.

" The compound lens is composed of two single thick concavo-" convex lenses made of glass, the curved surfaces of which are " portions of concentric spheres. They are secured to a suitable " mount in such a manner and position that the curved surfaces " of both of them (that is to say, all the four curved surfaces) are " concentric, their common centre being a point in the axis of the " compound lens, and the lenses having their concave surfaces " opposite to each other. In the space or cavity between the con-" cavo-convex lenses is contained a transparent fluid of lower " refractive and dispersive power than the glass of which the " lenses are made." "The two glass lenses may be made of the " same kind of glass, and equal in all respects;" or they may be made of different kinds of glass, having suitable radii in order to correct the compound lens for colour and for spherical aberration. To give sharp definition when objects at different distances from the lens are included in the view, a diaphragm of suitable size is placed between the lenses, within the fluid, at the centre of the compound lens.

The photographic pictures taken with this lens "should be pro"duced upon tablets, forming either a segment of a sphere or a
"segment of a cylinder so placed in the camera as to have the
same centre as the curved surfaces of the lenses."

The Drawings show the two lenses mounted in a zone of brass, which slides in the boss of the usual mounting.

In the Provisional Specification it is proposed to use a conical box, open at each end, fitted with plane partitions, to supply the place of the above-described central diaphragm.

[Printed, 6d.]

A.D. 1859, October 3.—No 2238.

EARLE, WILLIAM RICHARDSON, and BARNES, EDWIN JOHN. ——(Provisional Protection only.) The title of this invention is, ——"(Improvements in photographic and other portraits."

The inventors state:—"Our invention of improvements in photographic and other portraits relates to the application of some of the hair of the person, of whom the portrait is a representation, to the portrait in the position and in the natural manner of the hair of that person or otherwise, or it may be one

" the hair of any other person or kind.

"In its application to photographic portraits, I cement the hair to the front or back of the material on which the portrait is taken, if that material is transparent it must however be in front in cases where the material is opening.

" front in cases where the material is opaque.

"We also apply hair in like manner to oil and other painted portraits to enhance the effect and produce greater resemblance.

[Printed, 3d.]

A.D. 1859, October 5.-No 2258.

FISHER, ROBERT, and ASPRAY, CHARLES.—(Provisional Protection only.) The title of this invention is, "Improvements in "photographic stereoscope slides, and in the stereoscopes emuliation of the stereoscopes emuliation of the stereoscopes of the same."

The inventors state:—"We take, with a single camera, two photographs of the same object, but in different attitudes or positions, and in the stereoscope employed in viewing them we provide a sliding shade by means of which the right or left hand picture is viewed alternately, by this arrangement the effect of motion or change of position is produced."

[Printed, 8d.]

A.D. 1859, October 19.—No 2393.

COWPER, CHARLES (a communication from John Henry Pein).

"Improvements in photographing on uneven surfaces, and in apparatus for that purpose."

** By the present invention, the focus is obtained in a direct manner on the uneven surface itself by means of the apparatus herein-after described, and the uneven surface is then removed and covered with a coating of collodion, or other suitable material, and rendered sensitive to light, and it is then replaced in the camera in the same position as when the picture was focussed, and it is exposed a sufficient time, and developed and fixed in the usual manner."

The apparatus, as shown in the Drawings, is as follows:—A ble at the bottom of the camera carries a plate, capable of Miding horizontally in "lateral grooves;" on the plate is fixed a pertical rod that supports a "pan holder," by means of a clamp

screw, in a similar way to that of supporting a retort, by an ordinary retort stand; a picture frame is connected with the "pan holder" by a similar supporting apparatus; the vase or other object is placed in a plastic material, with which the pan is filled. A photographic picture is taken by placing the vase in the pan with the surface to be sensitized vertical, and fixing it upon the clay, then focussing the image upon it (having adjusted the vase properly by means of the sliding plate, rod, and clamp, also the picture frame upon it by means of its rod and clamp, removing it to be sensitized, replacing it in exactly the same position, exposing, developing, and fixing it. The camera lens is fixed in a sliding box to facilitate focussing, and the picture or object which serves as the original is placed in front of the lens, at a distance from it depending upon the size of the picture desired.

[Printed, 7d.]

A.D. 1859, November 10.-No 2557.

MELHUISH, ARTHUR JAMES.—"Improvements in the con-"struction of cameras for obtaining photographic pictures."

The body of the camera is made "of metal (usually of brass), " the bottom, top, and sides of the body are soldered, or otherwise " fixed together, and the front which carries the lens or lenses" " slides in guides fixed to the sides of the body," so that the position of the image can be thereby adjusted "before taking the " picture," and the front "may be entirely removed from the " body of the camera for convenience of packing the slides "therein." The lens may be mounted on a tube fixed to the front, thus reducing the depth of the camera as much as possible. The "dark slide" is introduced into the camera in the usual manner, but the slide is drawn down through a slit in the bottom of the camera in order to expose the sensitive surface when taking a picture; the said "dark slide" is made entirely of metal, and the front slide thereof, when closed, is secured by bolts; spring handles are fitted to the "dark slide" for the convenience o packing. The "dark slide" may be made double, "to receiv-"two sensitive plates or surfaces back to back;" "for this pur-" pose both sides of the case slide out to expose the sensitive " plates or surfaces, and the top of the case or slide also alides " out to allow the plates or surfaces to be put in. The groun of

"glass used in focussing is mounted in a metal frame, that it "may frack" [pack?] "into as small a space as possible."

The Drawings represent a camera of the above description with two lenses, in order to take stereoscopic pictures. In this case there is a partition that separates the images, which partition takes out "in order that the dark slides and focusing glass may "be packed away in the interior of the camera."

[Printed, 1s. 1d.]

A.D. 1859, December 5.-Nº 2755.

NEGRETTI, ENRICO ANGELO LUDOVICO, and ZAMBRA, JOSEPH WARREN.—(Provisional Protection only.) "Improvements in stereoscopes," to render them portable.

"The instrument is composed of a shallow rectangular box, " capable of containing from six to eight or more stereoscopic " pictures, together with the eye-piece of the instrument, which, " with the pictures, is covered in the box by a moveable lid, pro-"vided with flexible bands or other convenient attachments, " whereby the lid or cover may be temporarily secured to the "box. When the instrument is required for use, the moveable " lid or cover is to be fixed in a vertical position across the centre " of the box, in notches made therein for the purpose. The eye-" piece has a notch or groove cut across the middle of it on the " under side, and is fixed on the top edge of the vertical lid which " fits into the notch on the under side of the eye-piece, the vertical " lid thereby forming a support to the eye-piece, and also forming "a central vertical division between the line of sight of the two "eyes. The pictures are made much smaller than usual, and when the two views which form a stereoscopic picture are placed " aide by side, their edges are made to touch;" the junction line is hid beneath the edge of the vertical lid. "By making the pictures without any margin round them, the instrument may be reduced in size without materially or injudiciously increasing ** the minuteness of detail in stereoscopic views or pictures." [Printed, 3d.]

A.D. 1859, December 19.—No 2891.

SMITH, JOHN.—"Improvements in the manufacture of composistion jewellery and ornaments, and in cases for jewellery, photographs, and for other similar purposes." This invention consists in the production of the above-mentioned articles "from a composition or plastic material not "hitherto used for these purposes, and in the process of pre"paring the said composition."

To make a black composition, certain proportions of shellac, ebony dust, "black asphaltum," and ivory black or charcoal powder, or lamp black, are used. The melted shellac is mixed with the ebony dust, and the other materials added as colouring matter.

To make a chocolate-coloured composition, "brown asphaltum" is used in place of the black asphaltum, and ordinary rouge is added "according to the tint required."

"To produce greens, blues, or other dark colours," any suitable colouring matter is employed in proper proportions.

For light colours, dust of boxwood is used as a principal colouring agent, "to which, if still lighter tint be required, a more "intense white in the shape of pigment may be added."

These ingredients may either "be thoroughly amalgamated" so as to produce an even colour, or masses of differently coloured compositions may be twisted or rolled together so as to produce "imitation marbles, onyx, malachite, or other stones."

To manufacture the article required, a lump of heated composition of sufficient size is placed in suitable dies, and "the article" is completed by pressure."

[Printed, 3d.]

A.D. 1859, December 28.—No 2962.

ROSTAING, CHARLES SYLVESTER.—"Improvements in com"bining and mixing gutta percha with mineral and vegetable
"substances capable of altering its quality in such a manner as
"to produce hard, resistent, unalterable, and imputrescible com"pounds diversly colored." These compounds are applicable,
amongst other purposes, to "photographic and mirror plate
"frames," and "to replace wood, ivory, wax, cloth, and other
"substances used by photographers upon which to adopt photo"graphs."

The colours used in this invention are obtained by baking in a muffle or crucible a suitable metallic oxide mixed with water or a mineral acid. The baked oxide after cooling is reduced to impalpable powder and then dried and sieved.

The preparation of the various compositions is divided "into eight different operations," as follows:—

1st. The partial purification of the gutta percha by boiling it in soft water, flatting it, and again boiling it "in a decoction of "radix saponaria alba' or soap wort."

2nd. The complete purification of the gutta percha by boiling it in a caustic lye and flatting it.

3rd. The preparation of "artificial silicate of zinc."

4th. The preparation of "silicate of alumina and of zinc."

5th. The preparation of tale "rose colored by oxyde of cobalt."

6th. The preparation of a combination of zinc blende "with kaolin or with felspar."

7th. The preparation of a combination "of tannin, gutta percha" chloroform, benzoin, balsam of tolu, or essential oil."

8th. The preparation of a combination of gutta percha with catechu, to which camphine or benzin may be added.

The Drawings show a machine for mixing the above-mentioned compositions, consisting of a vessel heated by a steam jacket and having suitable rollers and scrapers.

[Printed, 1s. 5d.]

A.D. 1859, December 28.—No 2965.

MELHUISH, ARTHUR JAMES.—(Provisional Protection only.)
"Improvements in cameras," relating to the use of thin sheet
metal in the construction of cameras, "so as at the same time to
"obtain compactness and lightness with the requisite degree of
"strength and stiffness."

The body of the camera and the dark slides are constructed of thin sheet metal properly strengthened by flattened wire or other suitable means. In folding cameras where the joints butt or come together, a strip of metal is soldered to one of the two parts, so as to overlap and cover the joint when in use. "Where the front "and other parts of sheet metal cameras alide together," guiding ribs are used; "and in some cases the sheet metal front of a "camera is hinged to and is caused to fold into the interior of a "camera, and velvet or cloth (by preference black) is applied to "parts where they come or butt together, in order to shut out the "light from the interior of a camera." A recess in the frame of the camera receives the dark slide which is pressed into the re-

cess by means of springs. Lap joints connect the sides of th camera. The body of the camera may be formed of an ope frame of metal covered with an opaque material. The frame treceive the dark slide may be made "distinct from the body of th" camera, but hinged to the bottom of it, so that it will fold dow "on to the bottom of the body of the camera to allow of it, th "said body, folding down upon it." This frame serves as a support for the body of the camera when it (the frame) is lifted u for use. Spring handles are applied to the shutters of the dar slides, and the edge of the shutter is bent "over the edge of the door when only one shutter is used, thus keeping out th "light."

[Printed, 3d.]

PHOTOGRAPHY.

INDEX OF SUBJECT MATTER.

[The numbers refer to the page in which the paragraph containing the subject commences.]

berration:

Hodgson, 7. Sutton, T., 142.

>sorption of light, photo-

Reaphy by:

Clark, 109. St. Victor, 109.

to-nitrate of silver:

Ferrier, 93. Stewart, zviii.

inic influence of light:

Bunsen, xix. Ritter, x. Roscoe, xix. Scheele, x.

Ctinograph:

Herschel, xiv.

Avertizing tablets:

Baxter, E. W., 90.

-Cetic acid:

Angamarre, 59. Cutting, J. A., 34. Fontainemoreau, 38. Newton, W. E., 85. Talbot, 4, 14. Thistlethwaite, 59.

Air-pump used to iodize paper:

Stewart, xviii.

Albumen:

Boyle, 127. Perrier, 93. Grier, xix. Malone, 13, 14.

Albumen—cont.

Norris, 67.
Poitevin, 53.
Rollason, 46.
Sabatier, 71.
St. Victor, xvii.
Spence, 127.
Talbot, 13, 14. Taupenot, xviii.

Alcohol:

Llewellyn, xix.

Alcoholic solution of iodine:

Becquerel, xv. Wood, xvi.

Alumina, salts of: Cornides, 51.

Ambrotype: Cutting, J. A., 34.

Ammonia:

Fontainemoreau, 38. Talbot, 11.

Ammoniacal hyposulphites:

Garnier, 42.

Ammonio-chloride of gold:

Sims, 129.

Ammonio-cupric solution : Schweitzer, xix.

Amphitype:

Talbot, 14.

Animal tissues:

McCraw, 88. Maw, 56.

PHOTOGRAPHY.

Animating stereoscopic figures:

Aspray, 143. Benoist, 65. Claudet, 21. Dean, 114. Fisher, 143. Jundzill, 61.

Apparatus (photographic):

Bourne, 44, 45.
Bourquin, 28.
Brooman, 97, 110.
Chevallier, 112.
Coggan, 116.
Cowper, 143.
Dancer, 68.
Deroxy, 114.
East, 31.
Garella, 97.
Johnson, J. H., 15. Johnson, J. H., 123. Manwaring, 111. Mayall, 20. Merritt, 35. Nadar, 123. Newton, F., 16. Palmer, 74. Pein, 143. Purnell, 83. Sabatier, 69, 70. Tournachon, 123.

Arabic, gum:

Bradford, 109. Collins, 139. Confins, 189.
Cutting, A., 109.
Hunt, xvi.
Newton, W. E., 100.
Norris, 67.
Poitevin, 55. Pouncy, 113.

Arrow root:

Ferrier, 93.

Articles for sale represented by means of photography:

Orange, 47.

Artificial ivory:

Mayall, 52. Patrick, 131.

Asphalt:

Baxter, E. W., 90. Grant, 117. Grier, xix. Newton, W. E., 84. Rollason, 46.

Aurum musivum:

Grier, xix.

Background:

Beard, 3. Claudet. 6. Claudet, 6. Clive, 51. Dean, 114. Hay, D. 8., 54. Hay, G. H., 54. Thompson, 39. Wagstaff, 39.

Balloons used in photograp

Johnson, J. H., 123. Luff, 38. Nadar, 123. Tournachon, 123.

Balsam:

Cutting, J. A., 35. Grant, 117.

Baths, reducing photogram to the proper temperature

Gaudin, 48.

Bee's-wax:

Sarony, 118.

Benzole:

Grier, xix.

Bi-chloride of mercury:

Clark, 110. Fontainemoreau, 38. Saillard, 130. St. Victor, 110. Sims, 129.

Bi-chromate of ammonium:

Beauregard, 102. Cowper, 102.

Bi-chromate of potash:

Beauregard, 102. Becquerel, xv. Bradford, 109. Collins, 139. Colinis, 139. Cowper, 102. Cutting, A., 109. Hunt, xvi. Negre, 87. Newton, W. E., 87, 109. Perry, J., 66. Poitevin, 55. Ponton, viii Pontey III, 15.
Ponton, xiii.
Pouncy, 113.
Pretsch, 37.
Saillard, 130.
Talbot, 17, 115.

151

nocular vision:

Ruclid, ix. Galen, ix.

tumen:

Dufresne, 60. Niépce, N., xii. Pouncy, 113.

tters, pads for writing:

Bernard, 138. Proal, 138.

ie glass:

Beard, 3. Lucenay, 19.

ne:

McCraw, 88. Mayall, 52. Rollason, 46.

Ok covers:

Bernard, 138. Proal, 138.

TRX:

Cheetham, 75. Pretach, 87.

>xes:

Bernard, 188. Proal, 138. Wood, xvi.

omic acid:

Beard, 4.

romide of ammonium:

Augamarre, 59. Pretsch, 37. Thistlethwaite, 59.

romide of potassium:

Llewellyn, xix. Hunt, xvi. Talhot, 5. Wood, xvi.

romide of silver:

Bayard, xv.

romine:

Beard, 4. Bincham, zvii. Goddard, zv. Talbot, 5.

Fronze powder:

Grier, xix.

Calcium, chloride of, to preserve sensitive paper: Marion, 126.

Calico printing cylinders, photography applied to: Pretsch, 49.

Calotype:

Cundell, xvi. Talbot, xii, 4, 9, 10.

Calotype paper:

Talbot, 4, 10.

Camara chora: East. 31.

Cameras (photographic):

Brooman, 97. Chevallier, 112. Cowper, 143. Dancer, 68. Garella, 97. Johnson, J., 8. Johnson, J. H., 123. Melhuish, 33. Merritt, 35. Nadar, 123. Olley, 57, 73-Palmer, 74. Pein, 143. Purnell, 83 Spencer, 33. Tournachon, 123. Tournacion, 125.
Walcott, 8.
Copying the images in;
Berry, 1, 2.
Daguerre, 1, 2.
Niepce, J. I., 1, 2.
Dark slides of; Park slides of;
Berry, 2.
Claudet, 6.
Dancer, 82.
Dancer, 82.
Dancer, 84.
Dancer, 85.
Langlois, 71.
Lewis, W., 94.
Melhuish, 144, 147.
Merritt, 85.
Newton, F., 17.
Niepec, J. I., 2.
Palmer, 74.
Sabatier, 70.
Skaife, 62.
Folding;

Folding;
Bourne, 44.
East, 31.
Fowke, 61.
Jeffery, 133.

Mawson, 53.

Cameras (Photographic)—cont.	Cases for photographs:
Lenses of; Bourne, 45,	Berry, 2. Daguerre, 2.
Claudet, 6. Derogy, 114.	Mander, 80. Morgan, 80.
East, 31.	Niepce, J. I., 2,
GPUDD, 98.	Quin, 95.
Hodgson, 7. Newton, A. V., 95. Sutton, T., 141.	Rostaing, 146. Sanders, 130.
Sutton, T., 141.	Smith, 145.
woodwara, vo.	G-4-1
Portable ; Fowke, 61.	Catalysotype:
Jeffery, 138.	Wood, xvi.
Mawson, 53. Melhuish, 144, 147.	Cellulose, solvents of:
Talbot, 15.	Monkhoven, xix.
Reflecting;	Schweitzer, xix.
Beard, 3. Brooman, 97.	
Garella, 97.	Changing negatives in
Hodgson, 7.	tives:
Hodgson, 7. Johnson, J., 8. Olley, 57, 78.	Malone, 13.
Walcort, 5.	Martin, xvii. Talbot, 13.
Stereoscopic;	
Brett, 23. Dancer, 68.	Chimney fronts:
Jeffery, 133. Massi, 77.	Bernard, 138.
Massi, 77. Wolhnigh 145	Proal, 138.
Melhuish, 146. Newton, W. E., 28. Purnell, 83.	Chloride of ammonium
Purnell, 83.	Angamarre, 59.
Saugrin, 30.	Petit, x.
Camphor:	Thistlethwaite, 59.
Cutting, J. A., 34.	Chloride of gold:
Cutting, e. A., oz.	Clark, 110.
Canvas :	McCraw, 88. Sabatier, 71.
Stortz, 121.	St. Victor, 110.
	Chloride of iodine:
Carbon photographs:	
Beauregard, 101.	Claudet, xv.
Cowper, 101.	Chloride of silver:
Pouncy, 118.	Alchemists, ix.
Carbon (photographic) vessels:	Davy, x.
Burleigh, 104.	Seebeck, xi. Wedgwood, x.
Danchell, 104.	, · · · · · · · · · · · · · · · · · · ·
	Chloride of sodium:
Carbonate of soda:	Boyle, 127.
Pretach, 37.	Cundell, xvi. Dreyfus-Werth, 33 .
O 11 1	Herschell, xiv.
Cardboard:	Hunt, xvi. Meunier, 33.
Bernard, 138,	Spence, 127.
Proal, 138. Rollason, 46.	Talbot, xiii, 11.
	Chlorine: .
Caseine :	Bingham, zvii.
Words #7	Talling R.

Chloroform: Grant, 117.

Chromate of ammonium:

Perry, J., 66.

Chromate of iron:

Perry, J., 66.

Chromate of potash:

Dreyfus-Werth, 33. Meunier, 33. Poitevin, 55.

Chromatype:

Hunt, zvi.

Chromic acid:
Dallas, 62.

Chrysotype:

Herschel, xv.

Citric acid:

Llewellyn, xix.

Collodion:

Archer, xvii.
Archer, F. S., 50.
Beauregard, 102.
Bérard, P. H. G., 89, 90.
Cornides, 51.
Cowper, 102, 143.
Cutting, J. A., 34.
Ferrier, 93.
Le Grey, xvii.
Lucenay, 18.
Mabley, 19.
Martin, xvii.
Newton, F., 16.
Newton, W. E., 84.
Norris, 67.
Parkes, 58.
Peis, 143.
Rollason, 46.
Saillard, 130.
Sarony, 113.
Sims, 129.

Colour Printing, photography applied to:

Böhm, 81. Lewis, E., 81. *Nègre*, 86. Newton, W. E., 86. · Coloured media that do not affect sensitive plates:

Clandet, 6, 7.
East, 32.
Johnson, J. H., 123.
Melhuish, 33.
Moule, 82.
Nadar, 123.
Palmer, 74.
Purnell, 83.
Spencer, 33.
Tournachon, 123.

Coloured screens for stereoscopes:

Browning, 77. Chevallier, 112. Small, 139.

Colouring matter, fixing photographs by means of:
Pouncy, 113.

Colouring photographic pictures:

Baxter, G., 120.
Beard, 7.
Cornides, 51.
Duppa, 24.
Fontainemoreau, 38.
Garnier, 42.
Harmer, 75.
Hay, D. 8., 54.
Hay, G. H., 54.
Laverdet, 25.
Poitevin, 55.
Sarony, 118.
Tardieu, 15.
Thompson, 39.
Wagstaff, 39.

Colours, natural, on Photographs:

Herschel, xiv. Seebeck, xi.

Composition used for photographic cases and plates:

Rostaing, 146.

Copal varnish:

Pretsch, 37. Talbot, 115.

Copper:

Cheetham, 75, 76. Stortz, 121. Talbot, 5.

Copying frame:

Elliott, 92. Hart, 132, 133. Pretsch, 37. Sabatier, 70. Talbot, 5.

Copying paper: Talbot, 11.

Cotton (glazed):

Bernard, 138.

Proal, 138.

Covers for books:

Rernard, 138.

Proal, 138.**

Covers, table:

Bernard, 138. Proal, 138.

Crystallization affected by light:
Petit, x.

Cyanide of potassium:

Angamarre, 59.
Fontainemoreau, 38.
Newton, W. E., 84.
Saillard, 130.
Thistlethwaite, 59.

Cyanide of potassium and silver:

Martin, xvii.

Cyanogen:

Perry, J., 67.

Cyanotype:

Herschel, xv.

Daguerreotype:

Board, 7.

Dagnerre, xiii.
Draper, xii.
Draper, xii.
Johnson, J., 8.
Niepce, L., xiii.
Walcott, 8.

Apparatus;
Berry, 1, 2, 3.

Dagnerre, 1, 2, 3.

Niepce, J. I., 1, 2, 3.

Developing processes;
Berry, 2.

Claudet, 8.

Dagnerre, 2.

Niepce, J. I., 2.

Daguerreotype—cont.

Fixing processes;
Berry, 2.

Daguerre, 2.

Niepce, J. I., 2.

Plates;
Beard, 3.

Berry, 1, 2.

Monson, 36.

Niepce, J. I., 2.

Niepce, J. I., 2.

Niepce, J. I., 2.

Petre, 44.

Power, 21.

Talloot, 5.

Sensitizing processes;
Berry, 1.

Bingham, xvii.

Daguerre, xvi, 1.

Goddard, xv.

Niepce, J. I., 1.

Dark boxes for preserving se sitized plates, paper, &c.

Beard, 4.
Berry, 2.
Daguerre, 2.
Fontainemoreau, 27.
Marion, 123.
Morritt, 35, 36.
Niepce, J. I., 2.

Depth of colour produced means of the soluble salts silver, copper, tin, lead, sin cadmium, antimony, nicks or bismuth:

Perry, J., 66.

Dextrine:

Beauregard, 102. Blot, xviii. Cowper, 102. Norris, 67.

Dials, photography applied to Bold, 82. Glover, 82.

Diaphragms:

Brooman, 97.
Dancer, 68.
Derogy, 114.
East, 32.
Garella, 97.
Hodgson, 8.
Bcott, 73.
Sutton, T., 142.

isc (revolving): Mayall, 20. ssimilar colouring of stereoscopic pictures: Harmer, 75. ssimilarity of images seen by >a.ch eye: Buclid, ix. torted pictures: Johnson, J., 8. Walcott, 8. torted views, apparatus to n spect: Brooman 98. Garella, 98. Moxham, 135. Wansbrough, 135. Collodion: Meline, xviii. Montreuil, xviii. Norris, 67. **Dactonometer:** Claudet, xv. Setric light used for photographic illumination: Clark, 131. Lucenay, 18. Serrin, 131. Talbot, 15. photoectric telegraphs, graphy applied to: Baggs, 121. Highton, 102. Thomson, 105, 106, 107, 108. Lectro-deposition used in connection with photography: Beslav, 140. Cheetham, 76. Claudet, 12. Devincenzi, 29. Dufresne, 60. Dufresne, oc. Nègro, 86. Newton, W. E., 86. Petitjean, 44. Petre, 44. Poitevin, 56. Power, 20. Pretsch, 37, 49. Saillard, 130. Sims, 129. Talbot, 5, 116.

Enamel: Fontainemoreau, 38. McCraw, 88. Energiatype: Hunt, zvi. Etching (photographic): Berchtold, 41. Cheetham, 76. Claudet, 11. Claudet, 11.
Devincenzi, 29.
Fizeau, xvii.
Negre, 86.
Newton, W. E., 86.
Sims, 129.
Talbot, 17, 115. Exhibiting photographic pictures: Brooman, 110. Brooman, 110. Chappuis, 120. Johnson, J., 9. Manwaring, 111. Newton, W. E., 137. Pepper, 132. Perry, J. S., 137. Walcott, 9. Fabrics. See also Textile fabrics: Bernard, 138. Dreyfus-Werth, 33. Meunier, 33. Proal, 138.

Ferrocyanates of iron:

Fischer, x. Ferrotype:

Hunt, xvi. Fibrine:

Poitevin, 55. Fixing the pictures in the camera:

Daguerre, xi. Niépre, N., xi. Talbot, xii.

Fluoride of sodium: Hunt, xvi.

Fluorotype: Hunt, xvi.

Focimeter: Claudet, xv. Forceps for use in sensitizing and developing photographs:
Bryer, 117.

Forts, the plans of, obtained by means of photography: Luff. 38.

Fulminate of silver:

Hunt, xv. Towson, xv.

Galipot:

Ferrier, 98.

Gallic acid:

Ferrier, 93.
Malone, 13.
Perry, J., 66.
Saillard, 130.
Stewart, xviii.
Talbot, 4, 10, 18.

Gallo-nitrate of silver:

Malone, 14. Talbot, 4, 14.

Galls, infusion of : Reade, xiii.

Galvanism:

Nègre, 86. Newton, W. E., 86. Talbot, 5.

Gelatine:

Bauuregard, 102.
Boyle, 127.
Clark, 110.
Cornides, 51.
Cowper, 102.
Dallas, 82.
Ferrier, 93.
Malone, 14.
Negre, 87.
Newton, W. E., 87.
Norris, 67.
Perry, J., 66.
Pretsch, 37.
Pottevin, 55.
St. Victor, 110.
Spence, 127.
Talbot, 14, 17, 115.

Glasses to give a stereoscopic effect to single pictures :
Jones, T. W., 185.

Glass stereoscope:
Browning, 77.

Glazed cotton:

Bernard, 138. Proal, 138.

Glue:

Pretsch, 37.

Gluten :

Norris, 67.

Gum:

Beauregard, 102. Clark, 110. Cowper, 102. St. Victor, 110.

Gum guaiacum: Wollaston, xi.

Gutta percha:

Archer, F. S., 50. Cheetham, 75. Ferrier, 93. Rostaing, 146.

Hair (natural) applied to graphic portraits:

Barnes, 142. Earle, 142.

Head-rest: Beard, 3.

Heliochromes (naturally c

photographs):

Herschel, xiv.
Seebeck, xi.

Heliograph:

Jordan, xiv.

Heliography :

Nègre, 86.
Newton, W. E., 86.
Niépoe, N., xi.

Hyalotypes:

Langenheim, xvii.

Hydrobromate of potash: Herschel, xiv.

Hydrochloric acid:

Fontainemoreau, 38. Hunt, xvi. Wood, xvi.

Hyposulphite of soda:

Berry, 2. Cutting, J. A., 34. Daguerre, 2. Dreyfus-Werth, 38. Ferrier, 98. Hunt, xvi. Malone, 14. Meunier, 33. Niepce, J. I., 2. Reade, xiii. Saillard, 130. Stewart, xviii. Talbot, 9, 10, 11, 14.

Ill a strating literary productions, Photography applied to: Godet, 94.

In dis-rubber:

Bryer, 117. Collins, 139. England, 120. Ferrier, 93. Grant, 117. Hart, 133. Marion, 126. Moseley, 84. Nunn, 103. Sabatier, 70. Shears, 49.

Instantaneous photographs:

Daguerre, xvi. Derogy, 114. Skaife, 63. Talbot, 15.

Chemical rays:

Young, xi.

I dide of ammonium:

Angamarre, 59. Pretsch, 37. Martin, xvii. Thistlethwaite, 59.

Todide of gold and platinum: Daguerre, xvi.

Iodide of iron:

Wood, 1vi. No. 20.

Iodide of potassium:

Cundell, xvi.
Cutting, J. A., 34.
Dallas, 63.
Malone, 14.
Poitevin, 56.
Pretsch, 37.
Stewart, xviii.
Talbot, 4, 10, 14.
Wood, xvi.

Iodide of silver: Norris, 67.

Iodide of Starch : Becquerel, xv.

Iodine:

Beard, 4.
Becquerel, xv.
Berry, 1.
Bingham, xvii.
Daguerre, 1.
Goddard, xv.
Johnson, J., 8.
Malone, 13.
Niepce, J. I., 1.
Niepce, N., xii.
Talbot, 5, 13, 15.
Walcott, 8.
Wood, xvi.

Iodized paper:

Talbot, 4, 10.

Io-gallic paper : Talbot, 10.

Ivory:

McCraw, 88. Mayall, 52. Möller, 54. Rollason, 46.

Kinimoscope: Jundzill, 61.

Jundzill, 61.

Lamp stands:

Bernard, 138. Proal, 138.

Lead, puce-coloured oxide of: Davy, xi.

M

ŧ

Leather:

Bernard, 138. Davy, x. Proal, 138. Wedgwood, x.

158

Lenses to give a stereoscopic effect to single pictures: Jones, T. W., 185.

Lensular defects (colour) of photographic processes avoided: Elliott, 92.

Life-size photographs taken from smaller pictures or photographs: Stortz, 122.

Lights (artificial) for photographic illumination:

Alliott, 13. Claudet, 6. Lucenay, 18. Moule, 82.

Lime:

Bingham, xvii.

Looking glasses, photography applied to:

Schottlander, 40.

Magnet:

To move the lens slide for instantaneous photographs; Skaife, 63. Used in a "plate-holder"; Avery, 64. Millot, 64.

Marble:

Dreyfus-Werth, 33. Meunier, 33.

Marion's box:

Marion, 126.

" Matts" (photographic): Shaw, 85.

Mercury:

Berry, 2. Cheetham, 75. Claudet, 6. Daguerre, 2. Harup, xi. Johnson, J., 8. Niepce, J. I., 2. Walcott, 8. Metal:

Berchtold, 41. Böhm, 81. Bradford, 109. Collins, 139. Cutting, A., 109. Fontainemoreau, 38. Fontainemoreau, 38.
Jones, D., 76.
Kloen, 76.
Lewis, E., 81.
Nègre, 86.
Newton, W. E., 86, 109.
Poltevin, 55. Rollason, 46. Stortz, 121.

Metal cameras:

Melhuish, 144, 147.

Microscopic objects, taking pho-

tographs of: Olley, 57,73. Shadbolt, xviii.

Millboard:

Stortz, 121.

Money holders:

Bernard, 188. Proal, 138.

Moon (photographs of):

Edwards, xviii. Forrest, xviii Hartnup, xviii.

Mother-o'-pearl: McCraw, 88.

Mucilaginous substances:

Collins, 139. Ferrier, 93.

Natural hair applied to photographic portraits:

Barnes, 142. Earle, 142.

Negatives:

Angamarre, 59. Archer, F. S., 50. Baxter, E. W., 90, 91. Brooman, 98. Clark, 110. Cundell, xvi. Garella, 98. Mabley, 19. McCraw, 88. Malone, 13.

Organic matter: Negatives-cont. Nègre, 86. Newton, A. V., 95. Newton, W. E., 86. St. Victor, 110. Stewart, xviii. Talbot, 5, 10, 13. Thistlethwaite, 59. Wood, xvi. Woodward, 95. Nitrate of magnesia: Crookes, xviii. Spiller, xviii. Nitrate of potash. Petit, x. Nitrate of silver: Angamarre, 59. Boyle, 128. Clark, 110. Cutting, J. A., 34. Dallas, 62. Davy, x. Dreyfus-Werth, 33. Fontainemoreau, 38. Fyfe, xiv. Herschel, xiv. Hunt, xvi. Llewellyn, xix. Malone, 13. Martin, xvii. Meunier, 33. Poitevin, 56. Pretsch, 37. Reade, xiii. Smilaru, 100. \$t. Victor, 110. \$cheele, x. \$pence, 128. Talbot, xii, xiii, 4, 10, 11, 13, 14. Thistlethwaite, 59. Wedgwood, z. Wood, zvi. Nitrate of zinc Crookes, xviii. Spiller, xviii. Nitric acid: Beard, 4. Cutting, J. A., 84. Martin, xvii. Scheele, z. Oilcloth: Bernard, 188. Proal, 188.

Oiled paper:
Malone, 14.
Talbot, 14.

```
Nègre, 87.
Newton, W. E., 87.
Ornamenting fabrics and sur-
    faces:
         Devincenzi, 29.
Dreyfus-Werth, 33.
Meunier, 33.
Pretsch, 48.
Ornamenting glass:

Baxter, E. W., 90.

Mabley, 19.
 Ornamenting metals:
          Cheetham, 75.
Devincenzi, 29.
Dufresne, 60.
Pretach, 48.
 Oxymel:
          Llewellyn, xix.
 Pads for writing blotters:
           Bernard, 138.
Proal, 138.
 Panoramic lens:
            Sutton, T., 141.
  Panoramic photographs:
           Brooman, 97.
Chevallier, 112.
Garella, 97.
Hardie, 100.
Talbot, 14.
  Paper (photographic):
            Davy, z.
Fontainemoreau, 27.
            Fyfe, xiv.
Grant, 117.
Reade, xiii.
            Reade, XIII.
Rollsson, 46.
Schultz, 57.
Scoutetten, 23.
Talbot, XIII.
Wedgwood, X.
   Passe-partouts:
             Sanders, 130.
   Pentagraph (photographic):
             Brett, 23.
Gedge, 47.
Johnson, J., 8, 9.
Lucensy, 18.
Samson, 47.
Stortz, 122.
Talbot, 10.
Walcott, 8, 9.
```

Phore	•
10	Photo-lithography:
a :a :	
erchloride of iron:	Böhm, 81.
Talbot, 115.	Bradford, 109.
Taibou, 220 and hodies	
Permeability of different bodies	Collins, 139. 109,
ermeabling ical ravs:	Cutting, 200
remeability of times to the chemical rays:	Devincenzi, 29.
Somerville, xii.	
	Poitevin, 55.
Persalts of iron reduced to partial salts by the action of light:	Pretsch, 37- Talbot, 18, 116.
Person of the action of the	malbot. 18, 116.
Herschel, xiv.	Tatoon
	Photo-zincography:
Phenakistoscope, used in one nection with the stereoscope	. Photo-zuicog
Phenakistosith the stereoscope	Baxter, G., 124
nection with the	Baxter, G., 120. Pretsch, 37.
Benoist, co. Jundzill, 61.	
Jundzill, 61.	Pictures, photography
ada ·	Dictures, photography
Phosphate of soda:	110000
Pyle, xiv.	of Bold, 82.
influences	of Bold, 82.
Phosphorescent influences	Glover, 82. Newton, A. V., 95. Newton, 4. V., 95.
solar rays:	Newton, A. Woodward, 95.
80101 127	
Kircher, X. Licotas, X.	Plaster of Paris, backing
Liceras,	Plaster of Paris,
Photo-chemistry:	tograbus was
Bunsen, xix.	Langlois, 71.
	Urie, 27.
Photo-chérographie chlorid	
sherographie culos	Plate-holders (photogr
Photo-cheron	Plate-holders (Pilot
Garnier, 41.	
Photo-chromography:	Bryer, 117.
Böhm, 81. Lewis, E., 81.	England, 120.
Bonn, R. 81.	Lewis, W", H., 94
Lewis, 20	Lewis, W. Zay
Photo-galvanography:	Ryer, 117. Bryer, 117. England, 120. Lewis, W., 94. Lewis, W. H., 94. Millof, 63. Moseley, 84.
Photo-Ran,	Moserch
Böhm, 81. Dallas, 62. Lewis, E., 81.	1
Dallas, Gar. 81.	Plates:
Lewis, E., 81. Nègre, 86. Newton, W. E., 86.	Plates: Stortz, 121. Composition of gutta
Newton, W. E., 80.	Composition
Menor .	
Photogenic drawing:	Concave; Johnson, J. 9.
Talbot, 5.	Sweet, 99.
Tarbon, or	walcott, 9.
Photoglyphic engraving	Convex
Photogry Pine	Sweet, 99.
THIDOL,	1 The mintre Out Po,
Photographic veils:	1 Restrute
Photographic Volume	Berry, 1.
Talbot, 18.	Daguerro, I. 1.
1	Berry, 1. Daguerre, 1. Niepce, J. I., 1. Niépce, N., Ii.; noticion, 44.
Photographometer:	Petitjean, 44.
Claudet, xv.	the plans Petre, 44.
Lando ohtail	n the plans Power, 20.
Claudet, xv. Photography to obtain	Talbot, 5.
WE TOTAL	1
Loff, 38.	
Ton' oo.	

lates—cont.	Positives:
Glass;	Angamarre, 59. Baxter, E. W., 90, 91.
Baxter, E. W., 90.	Baxter, E. W., 90, 91.
Bold, 82.	Beslay, 140.
Fontainemoreau, 38.	Brooman, 97. Clark, 110.
Gedge, 47. Glover, 82.	Clive, 51.
Herschel, xiii.	Cornides, 51.
McCraw, 88.	Garella, 97.
Malone, 13.	Gedge, 47. Jones, D., 76.
Poitevin, 55.	Kloen, 76.
Sabatier, 69. Samson, 47.	Langenheim, xvii.
Schultz, 57.	Mabley, 19.
Talbot, 13, 14.	McCraw, 88.
Japanned metal;	Malone, 13. Nègre, 86.
Johnston, 69. Jones, D., 76.	Newton A. V., 95.
Jones, D., 76.	Newton, A. V., 95. Newton, W. E., 86.
Kloen, 76.	rerry, J., UO.
Papier Máché; Jones, D., 76.	St. Victor, 110.
Kloen, 76.	Samson, 47.
Polishing;	Talbot, 5, 10, 13. Thistlethwaite, 59.
Beard, 3.	Woodward, 95.
Beaud, 30.	
Berry, 1.	Potash:
Daguerre, xv, 1. Johnson, J. H., 30.	Garnier, 42.
Monson, 36.	Malone, 14.
Niepce, J. I., 1.	Talbot, 14.
Sabatier, 70.	_
Porcelain;	Pounce:
Pontainemoreau, 38.	Ferrier, 93.
McCraw, 88.	
Malone, 13.	Preserving sensitive collodion
Talbot, 13.	plates:
Steel ; Malone, 14.	Crookes, xviii.
Nègre, 86.	Spiller, xviii.
Newton, W. E., 86.	
Talbot, 14.	Printing (photographic):
	Elliott. 92.
Olarization of chemical rays:	Hart, 132, 138.
Berard, xi.	Talbot, 10.
•	
	Printing surfaces produced by
ortfolios :	means of photography:
Bernard, 188.	Roeley 140
Proal, 138.	Cheetham, 75, 76.
	Collins, 139.
ortraits (photographic):	Devincenzi, 29.
Barnes, 142.	Poitevin, 55.
Beard, 3.	Pretsch, 48. Saillard, 130.
Claudet, 6.	Sims, 129.
Derogy, 114.	1 . 1.1
Earle, 142.	Proto-iodide of iron:
Rast, 31.	Talbot, 15.
Hodgson, 8. Lucenay, 19.	Desta and had a file-
Mayail, 20.	Protosulphate of iron:
Sarony, 112.	Angamarre, 50.
Sarony, 112. Talbot, 5, 10.	Fontainemoreau, 38.

Protosulphate of iron—cont. Gedge, 48. Hunt, xv, xvi. Martin, xvii. Newton, W. E., 84. Perry, J., 66. Poitevin, 86. Samson, 48.	Relief, the effect of, giv photographs: Negre, 88. Newton, W. B., 86. Thompson, 39. Urie, 28. Wagstaff, 39.
Talbot, 15. Thistlethwaite, 59. Protosulphite of iron:	Resins: Ferrier, 93.
Cutting, J. A., 34. Publication (photographic): Talbot, 10. Purses:	Screens: Beard, 3, 7. Browning, 77. Chevallier, 112. Johnson, J., 9. Pepper, 132. Taylor, 81. Walcott, 9.
Bernard, 138. Proal, 138. Pyro-gallic acid: Archer, xvii. Perry, J., 66. Saillard, 130.	Walcott, 9. Sea salt: Berry, 2. Daguerre, 2. Niepce, J. I., 2.
Pyrotechnic compositions used for photographic illumina-	Siccative oils: Ferrier, 93.
tion: Moule, 82. Raised designs, the production	Silver, precipitates of: Herschel, xiii.
of by means of photography: Beslay, 140. Poitevin, 55. Pretsch, 37.	Single pictures, a stered effect given to: Jones, T. W., 185.
Reflectors: Beard, 3. Beck, 141.	Slides for instantaneous tographs : Skaife, 63.
Browning, 77. Chappuis, 86. Claudet, 6. Gill, 100.	Sobroscope : Jundzill, 61.
Lucenay, 18. McCraw, 88. Maclehose, 126. Newton, A. V., 95. Newton, H., 100. Noé, 86. Nunn, 103. Quin, 79.	Spectrum, chemical actio Bunsen, xix. Herschel, xiv, xv. Ritter, x. Roscoe, xix. Scheele, x. Seebeck, xl.
Sands, 100. Swan, 125. Taylor, 81. Woodward, 95.	Spherical lenses : Hermagis, 104. Sutton, T., 142.
Registering apparatus (photo- graphic): - Alliott, 12. Claudes, zv. Herschel, ziv.	Spherical tablets for pho phic pictures : Johnson, J., 2. Sutton, T., 142.

Spring-folding camera shutters: Stereoscopes-cont. Ocular; Elliot, xiii. Skaife, 62. Riliot, xiii.
Pocket;
Beau, 123.
Negretti, 145.
Zambra, 146.
Reflecting;
Benoist, 65.
Chevallier, 112.
Claudet, 21, 22.
Corbin, 136.
Hardie, 99.
Newton, W. E., 28.
Nunn, 103.
Swan, 138.
Vasserot, 136.
Wheatstone, xii. Stand for cameras: Grant, 118. Stands: Bernard, 138. Proal, 138. Starch: Ferrier, 93. Garnier, 42. Norris, 67. Stereoscopes: Brewster, xvii. Browning, 77. Chappuis, 86. Claudet, 42, 43. Stereoscopia: Coggan, 116. Claudet, 42, 43. Cooke, 64. Hermagis, 104. Jones, T. W., 135. Nunn, 103. Phillips, 78. Scott, 72. Swan, 138. lox: Stereoscopic pictures: Aspray, 143. Beckers, 96. Benoist, 65. Brooman, 110. Claudet, 21, 43. Box; Bauerrichter, 91. Cooke, 64. Corbin, 136, 187. Ferrier, 93. Fisher, 143. Gill, 100. Godet, 94. Chappuis, 119. Godet, 92. Gottgetreu, 9 Johns, 72.
Folding;
Alleu, 128.
Chappuis, 119.
Claudet, 32.
Godeth, 92.
Goëthel, 24. Godet, 94.
Hardic, 99.
Harmer, 75.
Jundzill, 61.
McCraw, 89.
Maclehouse, 125, 126.
Newton, H., 100.
Newton, W. E., 28.
Pepper, 132.
Phillips, 78.
Swan, 134.
Vasserot, 136, 137.
Zambra, 146. Hardie, 100. Mathieu, 105. Noé, 86. Quin, 79, 80. Shears, 49. Sutton, E., 65. Zimmerman, 24. Mechanical; Allen, 128. Beck, 141. Stereotype used in connection Beckers, 96 with photography: Brooman, 110. Brooman, 110. Chevallier, 112. Claudet, 21, 43. Coggan, 116. Maclehose, 125. Manwaring, 111. Moxham, 135. Newton, W. E., 28, 137. Perry, J. S., 137. Pershouse, 101. Sands, 100. Small, 139. Pretsch, 37. Stone: Böhm, 81. Bradford, 109. Collins, 139. Cutting, A., 109. Dreyfus-Werth, 33. Fontainemoreau, 38 Lewis, E., 81. Meunier, 33. Newton, W. E., 109. Poitevin, 55. Rollason, 46. 8mall, 139. 8wan, 125. Taylor, 81. Wansbrough, 185.

Newton, W. E., 109. Wood, xvi.

Sulphate of copper: Hunt, xvi.

Sulphuretted hydrogen: Malone, 14. Talbot, 5, 14.

Sulphuric acid:

Angomorre, 59.

Angomorre, 59.

Beard, 4.

Dreyfus-Werth, 33.

Fontainemoreau, 38.

Meunier, 33.

Thistlethwaite, 59.

Sunk designs, the production of by means of photography: Bealay, 140. Pretsch, 37.

Syrup of iodide of iron: Wood, xvi.

Table covers:

Bernard, 188. Proal, 188.

Tablets -- lication of photo-

llts of:

0.

10.

110.

114.

157.

4.

110.

1158.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

110.

GRAPHY. 165

Warming photographs:
Talbot, 10.


Waterproof photographic paper:
Grant, 117.


Wax:
Ferrier, 93.
Grant, 117.
Senebier, x.

Waxing photographs:
Dupps, 24.
Garnier, 42.
Talbot, 9, 10.

Wood:
Böhm, 81.
Boyle, 127.
Dreyfus-Werth, 33.
Jones, D., 76.
Kloen, 76.
Lowis, E., 81.
Meunier, 33.
Newton, W. E., 84.
Poitevin, 55.
Rollason, 46.
Spence, 127.
Stortz, 121.


Writing blotters, pads for:
Bernard, 138.
Proal, 138.







LONDON:
Printed by George E. Etre and William Spottiswoods,
Printers to the Queen's most Excellent Majesty.



ABRIDGMENTS

Specifications.

RELATING TO

PHOTOGRAPHY.

PART II.—A.D. 1860–1866.

PRINTED BY ORDER OF THE COMMISSIONERS OF PATENTS.

SECOND EDITION.



LONDON:

INTED BY GEORGE E. EYRE AND WILLIAM SPOTTISWOODE,
PRINTERS TO THE QUEEN'S MOST EXCELLENT MAJESTY.

OFFICE OF THE COMMISSIONERS OF PATENTS FOR INVENTIONS, 25, SOUTHAMPION BUILDINGS, MOLDORY,

1872.



TR 195.5 .G78 9 23-4

PREFACE.

THE Indexes to Patents are now so numerous and costly as to render their purchase inconvenient to a large number of inventors and others, to whom they have become indispensable.

To obviate this difficulty, short abstracts or abridgments of the Specifications of Patents under each head of invention have been prepared for publication separately, and so arranged as to form at once a Chronological, Alphabetical, Subject-matter, and Reference Index to the class to which they relate. As these publications do not supersede the necessity for consulting the Specifications, the prices at which the printed copies of the latter are sold have been added.

The number of Specifications from the earliest period to the end of the year 1866 amounts to 59,222. A large proportion of the Specifications enrolled under the old law, previous to 1852, embrace several distinct inventions, and many of those filed under the new law of 1852 indicate various applications of the single invention to which the Patent is limited. Considering, therefore, the large number of inventions and applications of inventions to be separately dealt with, it cannot be doubted that several properly belonging to the group which forms the subject of this volume have been overlooked. In the progress of the whole work such omissions, as may from time to time become apparent, will be supplied in future editions.

This volume is a continuation of the "Abridgments of "Specifications relating to Photography" already pubph.

lished, and brings the Abridgments to the end of the year 1866. From that date the Abridgments will be found in chronological order in the "Chronological and Descriptive "Index" (see List of Works at the end of this book). It is intended, however, to publish these Abridgments in classes as soon as the Abridgments of all the Specifications from the earliest period to the end of 1866 have appeared in a classified form. Until that takes place, the reader (by the aid of the Subject-matter Index for each year) can continue his examination of the Abridgment relating to the subject of his search in the Chronologica and Descriptive Index.

The following quotation from the Preface to the first par also applies to the present volume.

- "The Specifications included in this series of invention relate:—
 - " 1st. To the processes of Photography.
- "2nd. To the chemical, optical, and mechanical appa" ratus used in the practice of the art, or its applications.
 - " 3rd. To the various applications of Photography.
- "4th. To the camera obscura, so far as its use for photo graphic purposes is concerned.
 - " 5th. To the stereoscope; this instrument depends upor
- " the results of Photography for its efficient action; i
- " gives to photographs the nearest possible approach ${\bf t}$
- " reality; therefore, all Specifications relating to stereoscope
- " are included in this series."
 - "The definition of 'Photography' for the purpose c
- "these abridgments is, 'the art of copying designs o
- " 'images, however they may be produced, by the chemics
- " 'action of light upon surfaces prepared to receive tha " 'action.'"




PREFACE.

In the Subject-matter Index, the most recent chemical names of substances are placed (in *Italic*) after the names that have been obtained from the respective Specifications; this addition is rendered necessary by the general adoption of the new chemical nomenclature.

The Abridgments marked thus (* *) in the following pages were prepared for another series or class, and have been transferred therefrom to this volume.

B. WOODCROFT.

February, 1872.

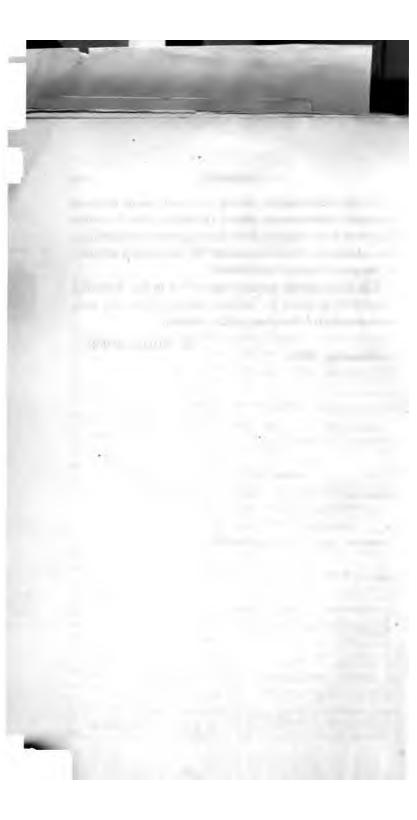

INDEX OF NAMES.

ames printed in *Italic* are those of the persons by whom the inventions are been communicated to the Applicants for Letters Patent. The loman numerals refer to the Introduction.]

_	_
Page	Page
us, J87, 93	Brooman, R. A2, 15, 25, 34,
G. Bxvii, xviii	36, 41, 43, 49, 53, 58, 59,
s, P. M. T. O. C6	63, 72, 90, 100, 113
s, P. M. T. O. C13	Brown, W23
, C87	Bullock, E
nder, T18	
	, J
let, S35, 59	Bünger, W125
ni, C. G20	Bunsen, —xvii
n, R. H139, 159	Capello, —xix
, E. I4	
H122, 136	Carlevaris, P119
•	Carlevaris, P130
s, I131	Carter, C. P46
r, W. H109	Cassaignes, V. J63, 75, 82
	Ceileur, A73
sson, A100	Chambers, Cxxii
ıdell, —xxii	Charavet, N25
y, F. S	Cherrill, N. Kxxi
P. A. A8	Chevallier, F. A105
ett, T71	Clark W. OO 22 53 CC CO
ey, B. W109	Clark, W20, 33, 52, 66, 69,
eri, L154	73, 151
g, F. W61	Claudet, A. F. Jxii, xix, xxi,
L149	xxiv, 105
E42	Committee of the Board of
	Tradexxii
J. B. S66	Cook, H78
onneau, E151	Cornides, L160
lli, G78, 118	Corradi J63
eville, H. A89	Courtenay, R. H
lette, L. H37	
lin, G. J106	Cox, E141
quin, J. P33, 60, 77	Crozat, L103
ster, Dxiii, xiv	Czugajewicz, P1
ley, J. H74	Dagron, A. P. P
M do 150	D D D D
s, M. de152	R. P. P31
kerhoff, J. de Witt 123	Dalglish, A. A
ke, —xvii	Dalfas, D. C144

_		_
Dallmeyer, J. H101, 134,	Gengembre, P. W	Page
146 150	George, B. G	30
146, 150 Dancer, J. Bxi	Gibbons, W. J	91
Davies, G82, 132	Gibson, W	
Debenham, W. E38	Gillett, H.	
De Briges, M	Gilpin, C	
De Fontainemoreau, P. A. le	Girdler, C. M	117
Comte86, 99	Gittens, A. W	
De Lafarge, J. J. L. R58, 72	Goddard, J. T.	xiv
De la Rue, Wxiv, xv, xix,	Gould, W	
xx. xxi	Grainger, A	
De Montgolfier, L123	Greenwood, B	74
Desbarats, G. E118	Grisdale, J. E32,	44, 93
Despratz,xxiv	Griswold, V. M	129
De Šusini, J151	Grumel, F. R	14
Desvignes, P. H3, 83	Grüne, W142, 15	l, 1 54
Dixey. L57	Gruner, C. B	
Dixo2, H26	Gye, F	107
Draper, Hxii		
Du Mont, H27	Harrington, J	48
Du Motay, C. M. T90, 113	Harrison, C. C	15
Dupuy, J. T53	Harrison, J. A	56
m1 . m	Hart, F. W	
Eden, A. F	Haseltine, G	
Egloffstein, F. Von127	Hedler, C	
Eidlitz, L2	Heisch, C	XVI
Eidlitz, L8	Helsby, W. G8	1, 108
England, Wxxiv	Henry, M11, 24, 12	2, 130
Fargier, A25	Hirst, J., jun	50
Farrenc, L49	Hooman, T	
Field, L	Houbigant, A	
Flounders, C. F13	Houzeau, P	
Fontaine, F. H44	Hughes, J Hyvelin, J. A	
Fontainemoreau, P. A., le	11youn, J. A	
Comte de86, 99	James, H	viv
Forestier, P. L56	Jaubert, L	
Fournet, A	Jeffreys, C	
Fox, T102		
Fruwirth, D95	Johnson, E. D	6. 164
	, J. R	56
Garnett, J47	Joubert de la Ferté, F. J.	
Garnier, H2	Joubert, F	
Gay, D110	Julien, G. J	
Gebhardt, J. J. H42		
Gedge, J161	Knight, J	25
, W. E87, 93	———, J. A	

	Page
Korn, C. F	15
Kossuth, F, L. T	1.35
T /m	195
———, <i>L. T.</i>	. 1 35
Kugler,	42
, , , , , , , , , , , , , , , , , , , ,	
T-4 T T T D J. 50	70
Lajarge, J. J. L. K. aeo	5, /Z
Lafarge, J. J. L. R. de58 Lafon-Saint-Cyr, J Lamplough, H	86
Lamplough H	49
T P	157
Lane, F	.10/
Lane, F, K. H	98
Laroche, W. S	139
T C	. 100
Lea, C	.xxı
Lee, J	85
Leggo, W. A	118
13cygo, 77 - 11	.110
Lewis, J	29
Laebert, A	86
Lissagary, H	51
Lassagary, II	01
Loewy, Bxx,	XXI
Loewy, Bxx, Ludeke, J. E. F	77
Ina D	
Late, F	20
Macaire, L. C	. 12
M'Dougall, A	
M Dougan, A	xx
McFarland, C	. 146
Macfarlane, H	17
Mariane, II	
Miclachian, L	4/
Maliszewski, J	27
Mann,—	vii
· A	45
, A	45
Maréchal, C. R	113
C R ive	90
16	
Maréchal, C. R., jun, C. R., jun, C. M., jun, C. M. A. Marquier, F. L. Martius, C. A.	34
, C. M. A	33
Maravier F L	50
M. C. O. A.	104
Martius, C. A	104
Maugey, P	164
Medd, H	150
36 11 T A	102
Mello, J. A	20
Mennons, M. A. F37	. 62
Miller W A	70
Mello, J. A. Mennons, M. A. F37 Miller, W. A. Monckhoven, D. C. E. Van. Monckton, E. H. C	A.V
Monckhoven, D. C. E. Van.	89
Monckton, E. H. C	49
Mont, H. du	97
M-4-16- T J-	100
Montgolfier, L. de	123
Morris, T	49
Mornon A G	43
Maan O M T J. O	110
Morris, T	113

75 7 75	Page
Mouat, M Murray, J	00
Nadar. —	24
Nadaud, O	.156
Neville, H	29
Newton, A. V61, 87,	, 127
, н. Е	.136
Nadar, —	, 124
Obernetter, J. B	
Obert, L. H	. 11
Pallu, C	22
Palmer. J	. 159
Parker, T	.130
Pegram, T	79
Perkins, T	48
, W	67
Petschler, —	XII
Pettitt, E	111
Pinard, A	164
Pleteen	TY!
Plateau, —	. 62
Pohl. L	23
Pointeau. J. E	.161
Poitevin, A. L	73
Polyblank, G. H	35
Pont, B	.161
Ponti, C	55
Ponti, J	55
Pouncy, J	70
Prang, L	90
•	
Reissig, T	.112
Reissig, W	.112
Rieder, A	91
Kisler, M., the younger	oz
Roberts, L. A	90
Rogers, W. B	XÌ
Rollason, A Roscoe, H. Exvii, xviii,	90
Roscoe, H. Exvii, xviii,	XIX,
Rowland I A	115
Rowland, J. ARowsell, C. J	84

INDEX OF NAMES.

Page	1
Rue, W. De laxiv, xv, xix, xx,	Strelisky, L
xx i	Susini, J. De
Russell, S53, 68	Sutton, Txiv, xvii,
Rutherford, J. C6	Swan, H
	Swan, H
Sabine, Exii, xiii, xv, xvii,	,
xxii, xxiii	Tamin, J. M. O
Sarony, N	Taylor, A
, O126	Teissonnière, A
Saugrin, L. F41	Thomas, R. W
Schloss, J38, 39	Thomson, J
Schloss, S38, 39	Toovey, W
Schott, J. B96	Tournachon, G. F
Schottlander, H40	Tour Racholing T No
Schulze, P61	Truchelut, J. N
Secchi — xx	Van Monckhoven, D. C.
Ségoffin, C. D41	Van Monckhoten, D. C.
Selwyn, —xvi	Vasseur, J. B Vernon, W. W
Seropyan, C. D162	Ver Estation
Shadbolt, Gxi	Von Egloffstein, F
Shaw, W. Txiii, 9, 127	Wallis, G
Sidehothem I	Watson, A
Sidebotham, Jxi	Wasse P
Skaife, T	Weare, R
Skinner, J	Wells, F. R.
Smith, Axxiii	Wheatstone,
Smith, G57	Whipple, J. A
Smith, J12	White, G. G
——, J. H114	Wilcock, J
——, <u>T</u> . J28	Willème, —
, W51	Willème, F
	Williams, V. V
Smyth, C. Pxviii	Willis, J
Southwell, E145	, W
F 145 '	Wilson, A. B
, W. H145	Winstanley, D., jun13
Spiller, Jxxiii	Wood, J Woodbury, W. B9
Spiller, T	Woodbury, W. B 9
Spooner, J146	138, 14
Steele, B. H	Woodward,
Steinheil, C. A	Wortley, A. H. P. S
Stewart, Bxiv, xviii, xix, xx,	Wothlij, J
	Wrat W
Strange II 26	Wray, W
Strauss, H36	Wright, A. J

INTRODUCTION.

THE advancement of Photography and of its applications, during the seven years embraced by this volume (1860 to 1866) has been considerable. In this Introduction, every paper on Photography, or involving the chemical action of light, that has been read to the Royal Society, within the above-named seven years, is alluded to.

The following notice should have been inserted in its proper Place (chronologically speaking) in the Introduction to Part I. of this series of Abridgments.

A.D.

1853. J. B. Dancer, "early in 1853," gave to Joseph Side-Botham two microscopic photographs; "they are about "one sixteenth of an inch in diameter." George Shad-Bolt, in accordance with this announcement, gave up his claim to being the prior producer of "micro-photographs." (See The Photographic Journal, edited by George Shadbolt, of April 15, 1859, p. 91; of May 1, 1859, p. 104; and of May 15, 1859, pp. 118, 125, and 126).

The paragraphs that follow are in continuation of the Introduction to Part I., accordingly they resume the chronological arrangement from the beginning of the year 1860.

1860. Professor William B. Rogers, in June or July 1860, read a paper to the British Association, entitled "Experiments and conclusions on binocular vision." By means of "two slightly inclined luminous lines" "combined into a perspective line," he arrives at the conclusion that the visible direction of an object is not always "in the normal to the point of the retina impressed," but is felt to be in the middle line" between the two eyes, "that is, in the binocular direction." (See British Association Report of the meeting in 1860, p. 17.)

1861. THOMAS SUTTON, in September 1 British Association, "On the par has concentric surfaces, and is perfect optical image, "which in "of 100"." (See British Association 1861, p. 33.)

. . ---,

- 1861. J. T. GODDARD, in September 186
 British Association, "On the closs" recorder." In the sunshine recoin a box carrying photographic paper during sunshine, but not a Association Report of the meeting
- 1861. WARREN DE LA RUE, in Septemb

 "Report on the progress of cele
 the British Association. Heliogra
 and stellar photography, is allude
 images of the fixed stars visible,
 them out of focus. (See British
 the meeting in 1861, p. 94.)
- 1861. Colonel Sir Henry James, in Se paper to the British Association, "(An inked gelatine and bichromate

- "in constant operation." (See Phil. Trans. vol. 151, p. 423; also Proceedings of the Royal Society, vol. XI., No. 46, p. 407.)
- 1862. Major-General Edward Sabine, on Feb. 27, 1862, read to the Royal Society, "Notices of some conclusions "derived from the photographic records of the Kew "declinometer in the years 1858, 1859, 1860, and 1861." The methods and processes employed in the elicitation of the results were fully described in a paper communicated by the author to the Society in 1860. (See Proceedings of the Royal Society, vol. XI., No. 48, p. 585.)
- 1862. F. JOUBERT, on March 4, 1862, read a paper to the Photographic Society "On enamel photographs." A positive picture, made by means of bichromate of ammonia, honey, and albumen, is gently rubbed over with an enamel colour. After the picture is fixed and washed, it is dried and fired. (See The Photographic News of March 14, 1862, p. 125.)
- the Bakerian Lecture to the Royal Society, "On the total "solar eclipse of July 18th, 1860, observed at Riva-"bellosa, near Miranda de Ebro, in Spain." About 35 effective photographs of the eclipse were taken by means of the "Kew heliograph;" two totality pictures were obtained (negatives), these showed the rose-coloured prominences with great distinctness. An accurate map of the prominences was made by means of a measuring instrument. The usual collodion process was employed for the negatives; the collodion was iodized in London; hyposulphite of soda was the developing medium. (See Phil. Trans., vol. 152, p. 333.)
- 362. Dr. W. A. MILLER, on June 19, 1862, read a paper to the Royal Society "On the photographic transparency of "various bodies, and on the photographic effects of "metallic and other spectra obtained by means of the "electric spark." The following results were arrived at:—1. Colourless bodies, which possess equal powers of transmitting luminous rays, vary greatly in diactinic

INTRODUCTION.

xvi A.D.

- power. 2. Diactinic solids preserve their diactinic pov both when liquened and when converted into vapo 3. Colourless translucent solids, which absorb chemi rays, "preserve their absorptive power with greater " less intensity both in the liquid and the gaset " state." 4. When polished surfaces are employed reflect the chemical rays, an amount and character absorption is exercised by each metallic and other surfadiffering with each surface used. 5. The electric spect of the principal metals, taken in air, exhibit characteris points, especially the following: -Silver, thallium, b muth, antimony, tellurium, manganese, iron, cadmiu zinc, and magnesium. 6. In alloys, the presence of ca. metal is for the most part indicated in the spectru 7. When the metals are ignited by the electric spark various gases, "each gas tinges the spark of a charact " istic colour; but no judgment can be formed from tl " colour of the kind of spectrum which the gas w " furnish." 8. Lines characteristic of the gas are most cases produced. 9. "The lines due to the gaseo " medium are continuous." The apparatus used in the researches had a prism of rock crystal, and a quartz le was attached to the camera next to the prism. (See Pi Trans., vol. 152, p. 861.)
- 1862. Professor Selwyn, in October 1862, read a paper to a British Association "On autographs of the sun." The "autographs" were taken with the "heliautograph which consists of a camera and instantaneous altached to a refractor. (See British Association Report of the meeting in 1862, p. 17.
- 1862. CHARLES HEISCH, in October 1862, read a paper to 4
 British Association "On a simple method of takis
 "stereomicro-photographs." A microscope, at its a
 end, is fitted to a single lens stereoscopic camera; to
 apparatus is used in connection with a sliding tube t1
 carries a stop which cuts off half the light and can
 turned half round. (See British Association Report
 the meeting in 1862, p. 46.)

٠,٠

- A.D.
 1862. T. Surrece, in October 1862, read a "Description of a
 "rapid dry-collodion process" to the British Association.
 Brome-iodised collodion is used in conjunction with gum
 arabic. (See British Association Report of the meeting in
 1862, p. 54.)
- 1862. Messrs. Bunsen and Roscoe, on December 11, 1862, read a paper to the Royal Society entitled "Photo-" chemical researches.—Part V. On the measurement " of the chemical action of direct and diffuse sunlight." These gentlemen proved, within the limits of their experiments, that "equal shades of blackness correspond to " equal products of the intensities of the acting light " into the times of exposure." A pendulum, in connection with the withdrawal of a sheet of darkened mica from a strip of paper prepared with chloride of silver, and with a millimetre scale, is used to expose photographic sensitized paper for times which can be very accurately measured. To compare a given photographic tint with the point of equal shade on a strip, a sliding board is employed in conjunction with the light of a bright soda flame. In the preparation of a standard sensitive paper, nitrate of silver and chloride of sodium baths are employed; the fixing agent is hypo-sulphite of soda. (See Phil. Trans., vol. 153, p. 139; also Proceedings of the Royal Society, vol. XII., No. 53, p. 306.)
- 1863. G. B. Airy, Astronomer Royal, on the 23rd of April 1863, read a paper to the Royal Society "On the diurnal "inequalities of terrestrial magnetism, as deduced from "observations made at the Royal Observatory, Green-"wich, from 1841 to 1857." During the last ten years of this time "the magnetic indications have been "automically recorded by photographic self-registration," Mr. Brooke's photographic apparatus being employed. (See Phil. Trans., vol. 153, p. 309; also Proceedings of the Royal Society, vol. XII., No. 56, p. 529.)
- 363. Major-General EDWARD SABINE, on June 18, 1863, read two papers (one a continuation of the other) to the Royal Society, on the "Results of the magnetic observations at Ph.



xviii

INTRODUCTION.

- the Kew "Observatory, from 1857 and 1858 to 1862 "inclusive.—Nos. I. and II." The laws of the disturbances of the magnetic declination at Kew are derived from photographic records. (See Phil. Trans., vol. 153, p. 273; also Proceedings of the Royal Society, vol. XII., No. 56, p. 263.)
- 1863. Dr. H. E. Roscor, on June 18, 1863, read a paper to the Royal Society "On the measurement of the chemical "brightness of various portions of the sun's disc." The result obtained (by the use of "standard photographic "paper," in conjunction with "a graduated photographic strip insolated in the pendulum photometer") was "that the intensity of the chemically active rays at the centre is from three to five times as great as that at the edge of the disc." (See Proceedings of the Royal Society, vol. XII., No. 46, p. 649.)
- 1863. Balfour Stewart, on the 18th June 1863, read a paper to the Royal Society "On the magnetic disturbance "which took place on the 14th December 1862." This disturbance "was registered by means of the Kew magnetographs." (See Proceedings of the Royal Society vol. XII., No. 56, p. 663.)
- 1863. Professor C. Piazzi Smyth, in August or September 1863, read a paper to the British Association "On a proof of "the dioptric and actinic quality of the atmosphere at a "high elevation." Photographs of distant hills taken at a high level were distinct, and taken at or near the sea level were wanting in details. (See British Association Report of the meeting in 1863, p. 25.)
- 1863. Dr. T. L. Phipson, in August or September 1863, read a paper to the British Association "On a new method of "measuring the chemical action of the sun's rays." A solution of sulphate of molybdic acid is used for this purpose; this solution becomes bluish-green on exposure to sunlight, but is colourless at night. (See British Association Report of the meeting in 1863, p. 50.)
- 1863. G. B. AIRY, Astronomer Royal, on December 17, 1863, read a communication to the Royal Society, on the "First

- "analysis of 177 magnetic storms, registered by the "magnetic instruments in the Royal Observatory, "Greenwich, from 1841 to 1857." "The photographic "ordinates" are converted into numbers. (See Phil. Trans., vol. 153, p. 617; also Proceedings of the Royal Society, vol. XIII., No. 59, p. 48.)
- 1863. Balfour Stewart, on December 17, 1863, read a paper to the Royal Society "On the sudden squalls of 30th "October and 21st November 1863." "The gas lights "in the room which contained the barograph" [worked by photographic agency?] "went out;" the barograph curve, although "incomplete," gives a very rapid rise. (See Proceedings of the Royal Society, vol. XIII., No. 59, p. 51.)
- Senhor Capello and Balfour Stewart, on Jan. 28, 1864. 1864, read a paper to the Royal Society on the "Results " of a comparison of certain traces produced simulta" neously by the self-recording magnetographs at Kew " and at Lisbon." These instruments record the results by photographic means. (See Proceedings of the Royal Society, vol. XIII., No. 60, p. 111.)
- 1864. Balfour Stewart, on March 17, 1864, read a paper to the Royal Society, entitled "Remarks on sun spots," in which he says, "In examining the pictures taken with the "Kew heliograph under the superintendence of Mr. "De la Rue, it appears to be a nearly universal law "that the faculæ belonging to a spot appear to the left "of that spot, the motion due to the sun's rotation "being across the picture from left to right." (See Proceedings of the Royal Society, vol. XIII., No. 62, p. 168.)
- 1864. Dr. Roscor, in March 1864, used the magnesium light for photographic purposes with success. (See The Photographic News of March 18th, 1864, p. 137.)
- 1864. A. CLAUDET, in September 1864, read a paper to the British Association, on "Photo-sculpture," the invention of M. WILLEME. Single profile photographs, in con-

A.D.

junction with a pantagraph, were used to work upon the clay, a number of profiles taken at the same moment being used in succession. (See British Association Report of the meeting in 1864, p. 10.)

ARTHUR M'DOUGALL, in a paper read to the Chemical 1864. Society, and dated October 1864, "On a mode of "measuring the relative sensitiveness of photographic papers," arrived at the result "that the sensitiveness of papers containing the same quantity of chlorine and bromine combined with sodium, potassium, ammonium, and barium is constant." (See The Journal of the Chemical Society, July 1865, p. 183.)

- 1864. WARREN DE LA RUE, in the latter part of 1864, presented a communication to the Royal Society, entitled "Com"parison of Mr. De la Rue's and Padre Secchi's eclipse
 "photographs." By means of an enlargement from a positive print of Padre Secchi's negative, as it was originally, the two photographs (allowing for difference of position) were found to "accord in their most minute "details." (See Proceedings of the Royal Society, vol. XIII., No. 67, p. 442.)
- 1864. Dr. H. E. Roscoe, on December 22, 1864, read the Bakerian lecture to the Royal Society, "On a method of "meteorological registration of the chemical action of total daylight." This method is founded upon that described in Phil. Trans., vol. 153, p. 139. "The re-ciprocals of the times during which the points on the strip have to be exposed in order to attain the normal tint, give the intensities of the acting light" in terms of the unit of photo-chemical intensity. (See Phil. Trans., vol. 155, p. 605; also Proceedings of the Royal Society, vol. XIII., No. 71, p. 37.)
- WARREN DE LA RUE, BALFOUR STEWART, and BEN1865. JAMIN LOEWY, on January 26, 1865, contributed to the
 Royal Society a paper entitled "Researches on solar
 "physics.—Series I. On the nature of solar spots."
 These researches were aided by pictures taken by the Kew
 heliograph, and by certain stereoscopic pictures. (See
 Proceedings of the Royal Society, vol. XIV., No. 71, p. 37.)

- A.D.
- WARREN DE LA RUE, BALFOUR STEWART, and BEN1865. JAMIN LOEWY, on February 2nd, 1865, contributed to
 the Royal Society the second series of their researches on
 solar physics, "On the behaviour of sun spots with
 "regard to increase and diminution." The Kew photograms, in connection with Carrington's observations, were
 used for these investigations. (See Proceedings of the
 Royal Society, vol. XIV., No. 72, p. 59.)
- 1865. W. WILLIS, on April 11, 1865, read a paper to the Photographic Society on "The aniline process of photographic "printing." The sensitising liquid is an acid bichromate. After exposure to light under a positive photograph, the sensitised paper is placed in the vapour of aniline, the print is then washed. (See The Photographic News of April 21, 1865, p. 186; and of April 28, 1865, p. 196.)
- 1865. A. CLAUDET, in September 1865, read a paper to the British Association "On moving photographic figures." The instrument described in this paper is a combination of the stereoscope with the phenakistoscope of PLATEAU by means of photography. (See British Association Report of the meeting in 1865, p. 9.)
- Ses. Mr. Carey Lea, in November 1865, published his new form of developer, "in which the decomposition pro"ducts of gelatine by sulphuric acid take the place of
 "acetic acid in controlling the development." Iron and acetate of soda are employed in conjunction with the above decomposition products. (See The Photographic News of November 24, 1865, p. 560.)
- Sec. Mr. Jabez Hughes, on January 9, 1866, read a paper to the Photographic Society, entitled, "Further observations " on the preparation of the iron developer, so as to pro"duce dense negatives." To produce the result easily and successfully, a small quantity of solution of "sul"phuro-gelatine," or of gelatine, is added to the ordinary iron developer. (See The Photographic News of January 19, 1866, p. 26.)
- 1866. Mr. Nelson K. Cherrill, on January 9, 1866, read a paper to the Photographic Society of London on "The

INTRODUCTION.

xxii A.D.

- " new organic developer," in which he proposes to add glycocine to the ordinary iron developer. (See *The Photographic News* of January 19, 1866, p. 28.)
- 1866. Dr. Roscor and Mr. Baxendell, on February 22, 1866, read a "Note on the relative chemical intensities of direct "sunlight and diffuse daylight at different altitudes of "the sun." The results arrived at were:—1. That the effect of the atmosphere upon chemical rays is not accounted for by reflection by means of hollow vesicles of water. 2. That the ratio of the chemical intensity of direct to diffuse sunlight for a given altitude of the sun at different localities is not constant. 3. That this ratio of "chemical" intensity does not in the least correspond to the ratio of "visible" intensity as estimated by the eye (See Proceedings of the Royal Society, vol. XV., p. 20.)
- 1866. Lieut.-General Sabine, on March 8, 1866, read to the Royal Society a "Note on a correspondence between Her "Majesty's Government and the President and Counci "of the Royal Society regarding meteorological observa "tions to be made by sea and land." Self-recording instruments (by photographic registration) are recom mended; these comprise instruments for recording (I the variations of the atmospheric pressure; (2) those of the dry and wet thermometers; (3) those of the force and direction of the wind; and (4) those of the atmospheric electricity. (See Proceedings of the Royal Society vol. XV., p. 29.)
- 1866. Lieut. General Sabine, on March 23, 1866, publishe a Postscript to his "Note," &c. of March 8, 1866, in which a Committee of the Board of Trade report favourably on the advantages of self-recording meteorological instruments. (See Proceedings of the Royal Society vol. XV., p. 37.)
- Mr. Charles Chambers, in a letter read to the Roys
 1866. Society, on April 26, 1866, mentions that, in his Report to the Government, he has, amongst other requirements requested a set of Kew Magnetographs for the Bomba Magnetic Observatory. (See Proceedings of the Roya Society, vol. XV., p. 111.)

- A. D.
- Dr. Angus Smith, F.R.S., made a communication to the Photographic Society of Scotland, which was read to the 1866. Society on May 8, 1866, entitled, "On a method of " removing the last traces of hyposulphites from positive

" prints." He proposes peroxide of hydrogen for oxidising the hyposulphites. (See The Photographic News of May 18, 1866, p. 233.)

p. 441.)

- 1866. Mr. ARTHUR TAYLOR, on June 1, 1866, published his shellac printing process. A solution of bleached shellac in phosphate of soda is used to prepare the paper, instead of albumen. Photographs prepared by this process are remarkable for their permanency. (See The Photographic News of June 1, 1866, p. 256.)
- 1866. Mr. John Spiller, F.C.S., on June 6, 1866, read a paper before the North London Photographic Society on "Pho-" tography in its chemical aspects." In this paper he points out the use of carbonate of ammonia in combination with hyposulphite of soda to extract the silver from the albumenised coating of an ordinary finished print. (See The Photographic News of June 15, 1866, p. 280.)
- 866. Mr. F. W. HART, on June 14, 1866, read a paper before the South London Photographic Society "On the elim-" ination of the double hyposulphites of soda and silver " from photographic prints." He proposes to use the hypochlorite of soda to oxidise the hyposulphite with. (See The Photographic News of June 22, 1866, p. 290.)
- 866. Lieut.-General EDWARD SABINE, on June 21, 1866, read a paper to the Royal Society on "Results of the " magnetic observations at the Kew Observatory.-" No. III." "The instruments employed for the deter-" mination of the lunar-diurnal variation furnish a " continuous photographic registry of the changes in the " direction of a magnet whose motion is limited to a " horizontal plane, and in the amounts of the horizontal " and vertical components of the force acting on a freely

" suspended magnet." (See Phil. Trans., vol. 156,

INTRODUCTION.

xxiv

- A.D.
 1866. Mr. WILLIAM ENGLAND, on June 29, 1866, publish his modification of the method of preparing dry resinis plates recommended by the Abbé Despratz. To on nary bromo-iodised collodion, bromide of cadmium a ordinary resin are added. The sensitising bath requirectification; ammonia or carbonate of soda and cyani of potassium are used for this purpose. (See 1 Photographic News of June 29, 1866, p. 306.)
- 1866. Mr. A. CLAUDET, F.R.S., at the end of August 18 read a paper to the British Association entitled "Opt "of Photography.—On a new process for equalizing "definition of all the planes of a solid figure represen "in a photographic picture." This is done by chang the focus during the time of sitting, by altering distance between the two lenses in a double combinati (See Phil. Mag., vol. 32, p. 212.)

PHOTOGRAPHY.

1860.

A.D. 1860, January 9.-Nº 58.

CZUGAJEWICZ, PIERRE.—" Certain improvements in stereo-" scopes."

"This invention consists of a compound stereoscope, in which general or panoramic views of boulevards, streets, the banks of rivers, and coast lines, monuments, sea views, et cetera, may be displayed by means of the gradual unrolling of one or more endless slides or bands carrying pictures."

The distinctive feature of this invention is "the adaptation to " stereoscopes of one or more symmetrical independent movable " endless bands, on which are right and left-hand halves or " corresponding parts of a stereoscopic panorama or succession of " pictures. The following is the construction of the aforesaid " improved stereoscope:-The top thereof consists, as usual, of " two lenses or eye glasses, and the bottom thereof is mounted " on a box containing rollers, on which are wound the before-"mentioned endless slides or bands, on which are printed, pasted. or otherwise appropriately attached the views or pictures in panoramic succession, also a train of wheelwork for setting the " aforesaid bands in motion. The aforesaid bands and corresponding parts of the pictures thereon are brought under their " respective eye glasses upon a flat stage or platform over which " the bands pass, so that when set in motion a panoramic stereo-" scopic view or picture is thus obtained." Two methods of imparting motion to the bands are described and shown.

The Final Specification sets forth the following method of inclining the upper part of the stereoscope as may be desired:"

—The case is hinged to a bottom frame or base plate, and to the opposite side, external to the spectator, a "flexible piece" is.

PH.

affixed; a winch handle, working a rack and pinion movement, enables the upper part of the stereoscope to be brought to the desired inclination.

[Printed, 8d. Drawing.]

A.D. 1860, January 20.—No 149.

JOUBERT DE LA FERTÉ, FERDINAND JEAN.—(Partly a communication from Henry Garnier.)—"Improvements in repro"ducing photographic and other pictures, engravings, prints,
devices, and designs on the surfaces of glass, ceramic and other
substances requiring to be fired, to fix the same thereon."

This invention is carried out by coating the above-mentioned surfaces "with a stickey composition acted on by light, then "printing on the surface in the manner of photographic printing, "thus destroying or changing the stickey composition where the "light acts upon it and consequently causing a suitable coloring "matter to adhere to such portions of the surface as remain "stickey."

The glass is first coated with a solution which, when dry, furnishes the above-mentioned "stickey composition," it is then heated, so as to dry the solution perfectly, and receives the photographic negative image by "printing" in the usual way. The whole surface of the glass, on the image side, is then rubbed over with suitable vitreous colour by means of a camel-hair brush, and the film on the glass is well soaked with an acid solution of spirits of wine; the glass is then dried. When completely dry, the glass is washed in a weak alkaline solution, and when it is again dried, it is "ready to be placed into the muffle and to be fired."

The photographic image can also be produced in a similar manner on well glazed china, or other ceramic substance, and, by successive firings, or even in one firing, polychromes may be produced.

The above-mentioned solution contains bichromate of ammonium, honey, albumen, and distilled water.

[Printed, 4d. No Drawings.]

A.D. 1860, February 23.—No 493.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Leopold Eidlits.)—"An improved method of producing documents suitable for bank notes and other instruments of value," in order to prevent forgery thereof."

ention "consists in the employment of paper having ular surface as ornamental pressed paper, or of paper tured with a movable or variable water-mark, and upon arked portions of the paper, some part of the design, as ettes, words, or denominations, is to be produced by ographic process, either directly or indirectly."

"hand-made paper with a variable or movable water-"before the pump is spread upon the web or dipper, water-mark is dropped upon the web or dipper at points at random."

ds, letters, or figures to compose the bank note, may be engraved, by the ordinary process, upon the photopression of some changing object.

ne photographic process is to be employed alone, a phonegative is taken of a screen, on which the letters, &c.,

the note are printed or painted "in connection with ect selected for the vignette."

notographic devices may appear either on the surface of r or below the surface and within the body of the paper, er of them may be produced by means already known. he surface they may also be made by printing from r plates prepared by the photographic process."

entor relies upon the impossibility of taking a photonese bank notes, without photographing the water-mark preventive of forgery.

, 4d. No Drawings.]

A.D. 1860, February 27.-Nº 537.

VES, PETER HUBERT.—"Improvements in apparatuses biting photographic, stereoscopic, and other pictures, figures, and designs."

ext of this invention "is to show in one apparatus a stereoscopic or other representations or models taken ent views, as if the same or the things represented were in."

aratus "are cylindrical or polygonal, and are caused to ther vertically or horizontally."

nit stereoscopic views, a certain number of them are hin a cylinder whose periphery "has formed across it as ots as there are views." The glasses for viewing the

X

pictures are "held stationary outside of the periphery of the "cylinder." "The views may represent, for instance, a steam "engine, and each view must be taken when the engine is at "different parts of its stroke. The views being placed in the "said cylinder, and the cylinder being caused to rotate, will show "to the eye the steam engine as if in actual movement in all its "parts."

To exhibit models and drawings, they are arranged "round a "cylinder placed and caused to rotate horizontally; vertical alots "are made in the periphery to see through." In some cases, a sort of fixed camera, in combination with a cylinder and disc or discs is used.

Endless bands and other combinations of moving alots and pictures are described and shown in detail; the theory of these apparatus is amply set forth, and methods of varying the optical effects are fully stated.

Various methods of shading extraneous objects from the observer, and of illuminating the views or figures under examination, are described. Electric sparks, elicited at the proper time, may be used to make every change of figure, "visible at its proper time "and place."

[Printed, 1s. Drawing.]

A.D. 1860, February 28.-No 543.

ASSER, EDOUARD ISAAC.—"A process of photographic proofs "with printing or authographic ink, for the purpose of either "using them as such, or placing them back on lithographic stones "or on metal."

"I take paper prepared without size, and steep it in a solution of bichromate of potash; I then dry it in the dark, and by a negative on glass or other transparent negative, placed in an ordinary frame and exposed to the light with the paper, prepared as above described, I bring the object upon the paper. The impression thus obtained, I dissolve in water the bichrownate of potash upon which the light has not struck. After perfectly drying the paper bearing the impression, I wet it on the back, and place it upon a paper not sized, but damped and stretched upon a glass or other flat and hard object, the impression being uppermost; I then pass over it a roller charged with printing ink until the impression shews well in black. I

"then steep the impression in water containing a little nitric or " other acid, which will dissolve the bichromate of potash still 46 upon the positive, and remove it from the paper. After drying "the positive is ready." "By passing a roller charged with " authographic ink over the impression obtained by bichromate " of potash, and treated as above described, I obtain a stereotype " suitable for transfer by pressure on to a lithographic stone, " from which I draw, by the process known as lithography, auto-" graphic prints; this transfer may be made in like manner upon " any of the matters which may be used on the same principle " for every description of autographic printing, as, for example, " zinc or copper, either for reproduction after what is usually " termed zincography, or by the aid of galvanoplastic, hollow, " or in relief. In some cases the inking may be effected with " a rubber instead of a roller, as above described." [Printed, 4d. No Drawings.]

A.D. 1860, February 29.—No 559.

SWAN, HENRY.—"Improvements in stereoscopes, sterescopic " pictures, and cameras for taking the same."

According to this invention stereoscopes are constructed with lenses of different magnifying powers, and are used "in conjunc-"tion with pictures in which the two views forming the stereo-" scopic combination are of different sizes, corresponding with "the different powers of the prisms or lenses opposite the two " eyes;" these pictures are connected together "by attaching "them both in suitable positions to the same mounting." In this manner a stereoscopic effect is obtained by the use of one large picture only, the said effect being "combined with minute-" ness of detail, such as a large picture alone can give;" the instrument is arranged in a more convenient form than that of the instrument heretofore employed for viewing large pictures.

"Instruments may be constructed having one prism or lens " only, the large picture being then seen without the aid of " a prism or lens. Magnifying mirrors may be employed in place " of prisms and lenses."

"My improvement in cameras has for its object the so arranging " the same that a large and a small picture forming a stereoscopic " combination, as above explained, may be taken at the same time " and on the same plate or surface. For this purpose the camera " is fitted with two lenses, the focal length of the lens for taking " the larger picture being greater than that of the lens for taking

" the smaller picture; these lenses are so placed as to focus on

" the same plane or flat surface, and are furnished with separate

" adjusting screws or means of adjustment."

[Printed, 4d. No Drawings.]

A.D. 1860, March 2.—Nº 581.

ALBITES, PIERRE Modeste Titus Octave Corn.—(Provisional protection only.)—"Improvements in photographic ap" paratus."

"The object of this apparatus is to simplify the work of the photographic manipulator, for which purpose the ordinary dark chamber and travelling tent are dispensed with. The whole of the process being done in the dark chamber of the apparatus, and as it is done mechanically, the work is performed more regularly, and it is more accessible to every one."

The drawings show the sensitizing bath, a movable slide to hold the sensitive plate and put the ground glass in position, two grooves "fixed to the drawer of the apparatus" to move the said slide backwards and forwards, the positive developing bath "placed in the interior of the apparatus," a cord and pulleys to manipulate the slide, and the negative developing bath.

[Printed, 6d. Drawing.]

A.D. 1860, March 21.-No 735.

NEWTON, WILLIAM EDWARD.—(A communication from Joseph Chase Rutherford and Benjamin Hinman Steele.)—(Provisional protection only.)—"An improved preparation or solution for "toning photographic pictures."

"The improved preparation or solution for toning photographic pictures which forms the subject of the present invention is composed of corrosive sublimate, tartaric acid, sal soda, hydrochloric acid, and aqua distillata. This solution after well mixing is left standing for forty-eight hours, and after filtering is ready for use. The picture when taken from the printing board is passed through the toning bath, then immediately immersed in a clean water bath to give it a thorough rinsing. As a rule this will be sufficient to tone a picture, but when it is printed down very dark it may be necessary to go through the same manipulation the second time. Care should be taken to have the print well washed before it is put into the fixing bat

"The advantages of the above toning solution are 1st., that it greatly cheapens the process of toning pictures; 2nd., that the toning of a print with this solution is an instantaneous process thereby saving a great amount of valuable time; 3rd., that it gives a sharpness and distinctness to the picture; 4th., that it can be worked in a clear light without injury to the toning solution or the print; and 5th., that the colors are permanent."

[Printed, 4d. No Drawings.]

A.D. 1860, March 28.—Nº 801.

DAGRON, AENÉ PRUDENT PATRICE.—"An improved micro" scope to be used for exhibiting photographic views and
" productions."

The eye glass is fixed in a socket placed in a slide holder, the socket being surrounded by a ring, by which the eye glass can be adjusted to the proper focus. A stud in the said socket, working into an inclined notch in the slide holder, regulates and adjusts the focus. The slide holder is movable, and consists of two tubes, which support the glass in which the microscopic image is to be placed.

A microscope in solid glass is "of a cylindrical form, rounded "at both ends, or it may be divided into two parts, one part serving for the eye glass, and the other for the object glass; the image to be viewed being placed between the two glasses, may be fixed thereto by means of any suitable adhesive substance or material. In adapting the microscope to a ring to be worn on the finger the stone or centre ornament of the ring is made to open on a hinge, and the microscope is fixed inside the lid, or cover of the hinged part." Two modifications of the miniature microscope are thus obtained, "in which the image may be either permanent or variable, one being mounted in a metallic setting the other formed of solid glass." Either of these instruments, furnished with a permanent object, may be set in jewellery, &c., "so as to obtain artistic or useful observations with "or without stereoscopic effect."

In a double-image microscope, the eye glasses are fitted at each end of a cylinder, and the glasses carrying the images are placed at the focal point of their respective lenses within the cylinder;

the image only occupies the centre of the glass to which it is fastened.

[Printed, 8d. Drawing.]

A.D. 1860, March 30.—Nº 823.

BEAU, PAUL ADOLPHE AUGUSTE.—(Provisional protection only.)—"A neomonoscope or apparatus for viewing photographic "and other like pictures."

"My invention consists in constructing a neomonoscope of apparatus with one glass or several glasses superposed for the purpose of obtaining a similar effect to that derived from viewing pictures in or through a stereoscope. The monoscope is a pyramidal or conical-shaped case, with a part of one of the sides removed to admit light, fitted with a flap or not as desired. The glass is fitted in the top of the apparatus, and in some cases flaps for forming, when raised, a dark chamber between the eye and the glass, are added. The bottom of the apparatus is made to slide to admit of its being entirely removed, in order to view transparent objects or others apart from the apparatus itself. The sides of the apparatus are either made rigid or to fold. I sometimes add a pocket which forms part of the sides or bottom of the apparatus to contain photographic or other representations."

[Printed, 4d. No Drawings.]

A.D. 1860, April 9.—Nº 893.

EIDLITZ, LEOPOLD. — (Provisional protection only.)—" Im" provements in producing printing and other irregular surfaces
" by the aid of photography."

A hot solution, containing gelatine and bichromate of potash, is poured upon a sheet of glass, so that when dry it will form a thin film. The edges of the dried plate are coated with varnish, and the plate put into the printing frame under a photographic negative. When the surface of the plate is of a brown colour, it is "immersed for about 5 minutes in a bath of cold water." The effect of this will be that where the lights were strongest "the gelatine will have been rendered incapable of being expanded by the action of the water, while where the shades were deepest the amount of that expansion will be the greatest, and "this difference will be on all parts of the plate just as the plate

" at each part has been exposed to more or less light." The plate is now left in an aqueous solution of sulphate of copper for some time, washed, dried on the surface, and metallized; this is effected by pouring upon it a solution of chloride of gold, and exposing the apparently dry surface to the fumes of phosphorus dissolved in sulphuric ether; the layer of gold thus obtained enables the plate to receive an electro-deposit of copper or other metal upon it. "When removed from the trough, the glass will readily "separate from the gelatine, and that may be washed off, using "warm water and a soft brush."

"If the plate is to be used for letter-press printing, a positive photograph should be employed in the printing frame, or a cast in wax may be taken from the gelatine plate, and the metal be deposited upon that." An engraving or other design may be employed in the printing frame instead of the photograph.

[Printed, 4d. No Drawings.]

A.D. 1860, May 22.-No 1260.

SHAW, WILLIAM THOMAS.—" Improvements in thaumatropes " or phenakistoscopes."

This invention "consists in the application of the principle of the stereoscope" to instruments "which depend for their results on 'persistence of vision.'"

" The thaumatrope and the phenakistoscope, as is well known, " give to objects shown by them an appearance of motion; by " my improvements I cause these objects to appear also in solid " relief, as when seen in the ordinary stereoscope. I take from a " suitable object a number of photographic pictures, the pictures * being taken in pairs having a stereoscopic relation the one to " the other as is well understood. Between the taking of each " pair of pictures the object is caused to perform a portion of the " movement which it is desired to represent, the first pair of " pictures being taken at the commencing point of the movement, " and each successive pair showing the same somewhat further pro-" gressed than the previous pair, until the last pair shows the "object at a point just before it regains its first position. "Having obtained these pictures, I view them by means of a " stereoscope, and by mechanism I cause the pairs of pictures to " be changed rapidly, each pair being submitted to the eyes in " succession for a moment of time. When thus seen an appear-" ance is obtained as of a solid body in motion."

An apparatus "on the principle of the reflecting stereoscope" has (besides the synchronously revolving "picture" discs) revolving eye discs, which limit the time during which the pictures can be seen. In a refracting instrument, a revolving octagonal drum carries the pictures, and a revolving slotted drum limits the time of sight of the pictures as well as the sight of each eye to the picture which is intended for it.

[Printed, 1s. 4d. Drawings.]

A.D. 1860, May 25.-Nº 1299.

WALLIS, George.—"New or improved methods of preparing drawings, writings, designs, prints, or impressions of engravings and photographs, for the purpose of impressing or engraving the same in or upon metallic surfaces, and thereby producing printing or embossing surfaces or ornamental metallic surfaces for such purposes as the same are or may be applicable to; also new or improved machinery to be employed in the said impressing or engraving."

In treating photographs according to the first part of the invention, two methods are used; by one, all the parts it is wished to impress in metal are drawn on with a certain drawing material; by the other method, the photographic image itself is caused to stand out in relief. The drawing material by which the relief is obtained in the first method "is composed of finely "pulverized or levigated hard or granular substances in combi"nation with soft mineral substances and glutinous or adhesive "materials, and a soluble chromic salt for fixing the same." In the second method, paper or other suitable material is coated with a compound containing bichromate of potash, gum arabic, or gelatine, and a granular powder; or a metal plate may be coated with a mixture of these with water. The coated surface is then dried, exposed to light, and washed; the parts to be impressed then stand out in relief.

The second part of the invention "consists essentially of a "pair of plain rolls mounted upon horizontal axes." Between the rolls a horizontal table with a hard metal bed is made to slide. To impress the photograph upon a soft metal plate, it is placed on the said hard metal bed with the prepared surface uppermost; upon this the soft metal plate is placed, and the table is passed between the rolls. The impression thus produced may

either be used as a printing surface or as an ornamental metallic surface.

[Printed, 1s. Drawing.]

A.D. 1860, June 14.-Nº 1454.

HENRY, MICHAEL.—(A communication from Louis Henry Obert, Jean Baptiste Vasseur, and Auguste Houbigant.)—"Improvements "in treating vegetable substances so as to obtain paper pulp and "other useful products therefrom."

The products obtained by treatment of the said substances according to this invention, consist of "materials for textile and "fibrous manufacturing purposes, alcohol, essential, and other oils, "fecula and gums, colouring, saponaceous, and tanning matters, "&c." By means of the "successive and simultaneous" processes and mechanical operations comprised in this invention, the Specification sets forth that the parties communicating "have obtained from all, or nearly all plants the materials of photographic paper met with in cotton, and thus collodion and photographic paper can be manufactured from textile and fibrous plants other than cotton."

The said substances are first crushed "by means of an ar-" rangement of rollers one pair over another, in such manner " that the substances may pass down and between them, together " with a continuous stream of liquid, either clear or charged with " matters, whereby they are caused to travel along and away " more readily;" the fibrous substances, materials for paper pulp, and the liquid products are then separately collected. The disintegration and decolorization are accomplished " more especially " by the action of steam," in a "closed receiver or boiler, in " which also" the vegetable substances "are distilled by steam, " when desired, and the liquors used in the operations performed " in the boiler are" "run into" a "soaking vessel to be used for " soaking or steeping the substances, instead of alkaline " salts, and for being again returned into the boiler or closed " receiver for fresh operations therein, until sufficiently concen-" trated."

The machinery for carrying out this invention is shown as it would be arranged in a factory, and the use of each apparatus in the successive stages of operations is distinctly described.

[Printed, 1s. Drawing.]

A.D. 1860, June 21.-Nº 1503.

SMITH, JOHN.—"Improvements in the manufacture of com-"position jewellery and ornaments, and in cases for jewellery, "photographs, and for other similar purposes."

This invention consists of certain improvements upon that set

forth in No. 2891 (A.D. 1859).

The said composition consists of shellac dissolved by heat and mixed with ebony dust; the whole is then treated with the colouring matter. If a very intense black is wanted, and at the same time hardness, a mixture of black asphaltum and ivory black is used; if hardness be not desirable, charcoal or lamp-black takes the place of ivory black. A mixture of brown asphaltum and rouge gives chocolate. To produce light colours, the dust of boxwood is employed "as a colouring matter in itself;" if a still lighter tint be required, barvtes may be added. Veined composition may be produced by twisting or rolling together masses of different coloured compositions.

The components of the composition having been well mixed whilst the lac is in a plastic state and under heat, the composition is stamped between suitable dies.

The quality of density may be imparted to the composition by barytes or oxide of manganese. The admixture of vegetable fibre will give great tenacity.

The dies and presses employed "are of the same kind pre"cisely as those now in use by the manufacturers of horn
"buttons."

[Printed, 4d. No Drawings.]

A.D. 1860, July 24.—Nº 1788.

MACAIRE, Louis Cyrus.—(Provisional protection only.)—
"A substitute for nitrate of silver, particularly applicable to
"photographic purposes."

"In forming my substitute for nitrate of silver, I propose using, in combination with the pure silver and nitric acid now employed, certain quantities of azotate of potash and a small portion of a baser metal, such as copper, tin, zinc, or bismuth. These materials mixed in the proportions below mentioned I have found to answer well: pure silver 1, nitrid acic 1.50, azotate of potash 1.50, zinc or other metal 1, this combination producing 3.1" [4.1.7].

"The substitute thus produced is cheaper and more efficient for photographic purposes than the ordinary nitrate of silver "now in use."

[Printed, 4d. No Drawings.]

A.D. 1860, July 31.-Nº 1860.

WILLCOCK, JOSEPH.—(A communication from Pierre M. T. O. Coen Albites.)—"Improvements in photographic apparatus."

According to this invention "the ordinary dark chamber and "travelling tent are dispensed with." The whole of the process is gone through "in the dark chamber of the apparatus, and as "it is done mechanically, the work is performed more regularly, "and it is more accessible to every one."

A movable slide drops into the sensitizing bath; the said slide serves to hold the sensitive plate and to put the ground glass in position; it can be moved backwards and forwards by means of "two grooves fixed to the drawer of the apparatus." "The " positive bath" is made of coloured glass, "it is placed in the " interior of the apparatus, and receives the glass after the im-" pression by the light, and developes it instantaneously." cord passing over two pulleys, is employed "to move the slide " carrying the prepared glass, and to dip it into the sensitive " bath." An india-rubber framework serves "to prevent the " light from penetrating into the apparatus, and to detach the " silver hook that holds the ground glass, and slide it into the " bath." The negative and positive developing bath "permits " you to judge the progress of the developement of the image." " When required, a hole may be made in top partition of the dark " chamber of the apparatus, and in the objective or in the last " only because a ray of light penetrating by this hole upon a " mirror that should be placed in the objective, and which reflects " this ray upon the ground glass without destroying the ray upon " the first glass upon which is the image, thus rendering the " production more instantaneous."

[Printed, 8d. Drawings.]

A.D. 1860, August 8.—Nº 1922.

FLOUNDERS, CHARLES FONTAYNE.—"An improvement or improvements in duplicating photographic impressions, and "also for certain machinery for the same."

This invention consists of a machine for photographic printing. The sensitive material may be exposed to light "until the impression is fully made," or it may be exposed for a shorter period and then developed by chemical means.

The sensitive paper or other material "is confined in a dark " space, and, by mechanical means, is made to traverse an aper-" ture through which ordinary or concentrated light, or the " image of the negative is received. The light is admitted and " shut off by a perforated slide, which passes over a similar or " other suitable perforation in a fixed part." The sensitive paper may be applied " to a cylinder or polygonal prism within the dark " space, and the same is then made both to revolve and to move " axially" until the paper is entirely covered with photographic "Springs, slides, levers, and various mechanical " devices are employed, either separately or mechanically com-" bined, to impart the proper motions to the several parts, so that " the sensitive material shall be caused to traverse during the " interval while the light is excluded, and to present a fresh sur-" face firmly held in its proper position during the period that " the light is admitted."

[Printed, 8d. Drawing.]

A.D. 1860, August 22.—No 2022. (* *)

GRUMEL, FRANÇOIS REMY.—"Improvements in the albums of "collection of photographic and lithographic proofs, engravings, " and other drawings."

Each leaf of the album is composed of three layers, by preference of thin cardboard; the outside ones "have a portion of "their central parts cut out in form a little less than the cards" to be inserted, and the middle one "has also a portion out out in "the centre, but larger than the other two, and in addition it "has a portion cut away from the bottom." The edges of the layers are glued or cemented all round, "save where the portion "of the middle layer at its bottom edge is cut away;" care must be taken that the central spaces coincide. The card is pushed through the bottom opening to the central spaces, and if two cards are inserted, they must of course be placed back to back. "A small slip of cotton or skin attached to one side forms a "hinge or substance to bind the leaves so as to form a book." Each leaf may be made to "contain several spaces, each holding "cards."

[Printed, &d. Drawing.]

ţ

A.D. 1860, October 13.—Nº 2496.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Charles C. Harrison.)—"Improvements in lenses."

This invention consists of a compound lens, which is "de-"signed primarily for use in cameras for taking photographs, daguerreotypes, and other pictures, but is also adapted to "microscopes, telescopes, and similar instruments."

The lens is formed by "an achromatic combination of two "lenses which are meniscuses, the outer surfaces of which are segments of similar spheres, and which lenses are so placed in "the combination that their axes shall coincide, and their outer surfaces form portions of a sphere of like diameter."

The achromatic combination, of which each meniscus consists, is a meniscus of flint glass, to the outer surface of which is cemented a concavo-convex lens of crown glass; the achromatic combinations are so mounted for use that their axes coincide, "and their surfaces if produced would form a complete globe;" the convex surface of the crown glass lens forms a portion of the said "complete globe." The centre of the sphere is the focal point of each compound lens, and at this point a diaphragm is fixed.

Any object being properly placed, will be exactly reproduced, on the opposite side of the combination, of a size proportional to the respective distances of the object and of the image from the lens; for, "whatever be the angle at which the rays are refracted to the centre" "of the sphere, they will so pass out through the opposite lens as to restore the angle of incidence of the entering rays, and will thus unite to produce the image upon a plane parallel with that from which the incident rays proceeded." A flat field of 90° range is obtained by this lens.

The mounted combination "forms the object glass of the camera."

[Printed, 8d. Drawings.]

A.D. 1860, October 29.—No 2639.

KNIGHT, JOHN ADAMS.—(A communication from Charles Felix Korn.)—(Provisional protection only.)—"A new system of photo"graphic or daguerrean apparatus or objective to be called Korn's
"polyograph."

"This invention relates to photographic or daguerre apparatus
or objective which may be used for both near views (such as

" portraits, &c.) and for distant views (such as landscapes and reproductions) by means of an easy change in the relative position, or removal of the different parts of the apparatus or objective.

"The apparatus or objective used for taking near views (or portrays) in the ordinary way having two lenses, the outer one of which has a wide broad inlet, and for distant views (such as landscapes and reproductions) having only one lens with a smaller inlet of light limited by diaphragms of various sizes. I do not change the system of objectives used in these two different cases.

"But the invention I have made consists in so mounting the said outer lens on suitable tubes fitted with diaphragms and screw threads that {supposing said apparatus or objective to be fixed on the camera obscura in the usual way for taking near views (such as portrays)} the outer lens with its tubing and diaphragms or place for the same, may be unscrewed from the tubing appertaining to the inner lens, and the inner lens with its tubing and appurtenances being unscrewed from the camera obscura, the outer lens with its tubing, diaphragms, and appurtenances may be inverted or turned round bodily and screwed on the camera obscura, thus forming or procuring at once a perfect apparatus or objective for taking distant or extensive views, such as buildings, landscapes, and reproductions of large objects or paintings and vice versa."

[Printed, 4d. No Drawings.]

A.D. 1860, November 13.—No 2772. (* *)

WILLIAMS, VALENTINE VAUGHAN.—(Provisional protection only.)—"An improved method of constructing stands for cameras, "telescopes, surveying and other instruments, parts of which are "applicable to other purposes."

This invention "consists in constructing a supporting tripod "stand, so designed that it is capable of being closed up as a "walking stick." "A supporting tripod is formed out of a "metal tube divided lengthways into three equal parts which are "united by suitable joints at their upper ends to a small tubular socket through which socket passes a metal tube, this tube is "continued at its lower end by a small metal rod so as to form a central or fourth leg." At the end of the central leg is a tapering screw, and the extremities of the other legs consist of points

and shoulders. A hollow metal slide works in the central tube or leg, the said slide having a rack. The skeleton table top is fitted to the upper end of the slide.

The mode of action of the instrument is as follows:-

When the case, &c. is removed the tripod legs are opened, and the middle leg is shifted up and screwed into the ground by hand, being made fast by a thumb screw; the top is then opened out and secured by an elastic band. "The camera can then be raised "by the metal slide which gives the horizontal movement while the vertical movement is obtained by means of a joint situated between the table top and the socket."

A slight modification is made to adapt the top to telescopes of various diameters and descriptions.

[Printed, 4d. No Drawings.]

A.D. 1860, November 17.—N° 2832.

MACFARLANE, Hugh.—(Provisional protection only.)—" Inf-

provements in cameras such as are used by photographers." " This invention relates to improvements in cameras such as are " used by photographers, such improvements whilst of a simple " and inexpensive character permitting of a slight inclination " being given to the picture plate, which is in many cases of great " benefit as is well understood by photographers. In a camera " embodying the improvements the back portion of the box. " instead of being as ordinarily rigidly fixed to the inner shell " which is drawn out with the back, has such inner shell entered " loosely a short distance and attached by a single screw or pin at " the top, and another at the bottom, so that the back can be " inclined slightly in either direction about a vertical axis. The " back of the box can be fixed at any inclination by means of a " screw working in connection with the guide in the back sup-" porting flap. A slight inclination about a horizontal axis is " obtained by means of a pair of levers inside the box, against " which levers the frame for holding the picture plate bears, these " levers being inclined by means of pins projecting through " slots to the outside, and being fixed by means of external screw

[Printed, 4d. No Drawings.]

A.D. 1860, November 24.—No 2881.

M DALGLISH, ANDREW ADIE.—"Improvements in engraving or "for producing printed surfaces."

" nuts."

This invention relates to the application of photography, in conjunction with certain other processes, to the above-named

purposes.

In producing printed surfaces upon the "cylindrical dies used "in preparing rollers for calico printers," a photograph of the design is transferred to the circumference of the die, which is coated with etching varnish for that purpose. The design is "then etched or engraved through the film," the coating of varnish entirely removed, and a fresh coating put upon the die up to the etched outline. Lastly, the die is immersed in acid "which eats away the metal to the required depth," and, when necessary, is finished by an engraver. When there are several colours in the design, an impression is taken from an original die (to which the photograph has been transferred, and which has been etched), "upon as many dies as there are colours to be "printed, the surfaces of these several dies having been pre"viously varnished;" each die is then prepared, as set forth above.

In another method a "mill" is made from the above-mentioned original die, "which is caused slightly to impress the surfaces of "the several dies required for the separate colours," and those outlines are erased which are not required.

In a third method a photograph is taken for each colour.

In applying this invention to ordinary printing from metal plates, the metal is re-varnished after the outlines are engraved in order to engrave the shading.

An apparatus for transferring photographic films to cylindrical surfaces is described and shown, which consists of a plane table on which the photograph is fixed, and over which the die or roller is made to traverse uniformly by means of a rack and pinion movement.

[Printed, 8d. Drawing.]

A.D. 1860, November 27.—Nº 2913.

BEATTY, Francis Stewart, and ALEXANDER, Thomas.—
"Improvements in the production of photographic proofs and
"their application to printing purposes."

This process is called "heliographic printing."

Lithographic transfer paper is treated with a solution containing bichromate of potash and gelatine. The photographic image having been impressed, the surface is carefully covered with printer's ink and allowed to dry; it is then placed in hot water, which swells the composition, and dissolves the bichromate of potash and gelatine which has not been exposed to the light; the photographic image is thus fixed and retains the printing ink on its surface. The greasy ink on the unlighted portions of the proof is removed by rubbing with a sponge in warm water. The printer's ink left upon the proof, and forming the design, may be transferred to zinc or stone for printing.

According to a modification of the above process, a polished surface is coated with the transfer medium and sensitive coating, exposed to light, and washed. A plaster cast of the resulting proof is hardened by immersion in "liquid silex," and employed as a printing surface.

Printing surfaces may also be obtained by floating the sensitive coating alone upon the surface of a metal plate, exposing it to light, covering the whole plate with an acid-resisting composition (printer's varnish, asphalte and lampblack), washing the said composition from the illuminated portions of the proof, and acting upon those parts with acid.

When a sensitive solution is applied to a lithographic stone, the said stone is hardened by means of "liquid silex," or "silicate "zopissa."

The transfer and sensitive compositions may be applied to other surfaces besides those of paper with the admixture of pulverized mineral substances. The adaptation of grained plates to the invention, and printing in colours, are set forth in detail. Other details and modifications are described.

[Printed, 6d. Drawing.]

A.D. 1860, November 28.—No 2923.

GILLETT, HENRY.—(Provisional protection only.)—"Improve"ments in the ornamentation of the edges of the leaves of pho"tographic albums especially intended for 'cartes de visite.'"

- "The object of this invention is to ornament or illuminate the edges of the leaves of albums generally, but more especially those containing photographic pictures known as 'cartes de visite.'
- "I propose ornamenting such edges with various designs, such as flowers, designs in the style of Arabesque, Italian, Grecian, Alhambran, or any other style suitable for such purpose,

- " either plain or in colours, or gold, or gold intermixed with
- " colours, such ornament being either printed, stencilled, painted
- " by hand, transferred, or placed upon the edges by any conve-" nient process."

[Printed, 4d. No Drawings.]

A.D. 1860, December 10.-No 3024.

CLARK, WILLIAM.—(A communication from Charles Gustave Anthoni.)—"Improvements in photographic apparatus."

This invention comprises a "mechanical laboratory" connected to the dark chamber of the camera used in photographic operations; by means of this invention damp collodion can be operated upon in the open air. The nitrate of silver or sensitizing bath " is at the opposite side to the object," and the sulphate of iron or developing bath "is placed at the under part of the dark " chamber." The collodionized glass, after having been fixed on certain hooks, is treated with the nitrate of silver solution by inclining the bath, the bath being hinged to the dark chamber for that purpose. The sensitized collodion film is then submitted to the action of light. In order to dip the impressed plate into the sulphate of iron bath, the apparatus is inclined, the hooks lowered and again lifted, and the plate allowed to descend so as to lie in the said bath, being guided in its descent by lateral guides; a small door in front of the apparatus is then opened, the trough containing the sulphate of iron solution removed, and the plate taken out therefrom by means of a hook. The sheet of glass is finally washed with water, or placed in a grooved box previously filled with water. The motion of the above-mentioned hooks, and a certain rocking motion imparted to the baths, is accomplished from the outside of the dark chamber, by means of spiral springs and ratchets connected with the axes of the hooks, and by means of slotted links.

An arrangement for taking stereoscopic views is described, in which certain partitions are added to the collapsible chamber.

[Printed, 8d. Drawing.]

A.D. 1860, December 13.-Nº 3073.

MELLO, JOHN ARNOLD.—(Provisional protection only.)—" Im-" provements in the manufacture of stereoscopic alides."

"This invention has for its object improvements in the manu"facture of stereoscopic slides. In order to give a more natural

"appearance to the sky of opaque stereoscopic slides which usually appear white, or nearly so, I cut away such portions of the pictures as represent sky, going very carefully up to the outline of the objects represented in the pictures. Then in viewing stereoscopic slides thus manufactured I employ a stereoscope with an open or transparent stage, and I allow light to pass through this stage, as is usual in viewing transparent stereoscopic slides; this light I color by causing it to pass through a colored medium, and in this manner I obtain the appearance of a transparent sky, either blue or of other tint or tints, which may be desired. By the same method I give a more natural appearance when water is represented, or when objects are represented which produce or reflect a bright light."

A.D, 1860, December 24.—N° 3153. GIBBONS, WILLIAM JOHN.—(Complete Specification, but no

Letters Patent.)—" Improvements in stereoscopes and their cases." 1st. An instrument which combines the stereoscope with the case that contains the slides.-A box having a lid, which may be secured by a lock, contains the slides, and has such fittings as are necessary to view them stereoscopically. A "lens plate" is hinged to the inside of the front edge of the lid, and a "bracket " piece" or stay (serving "also as a separator for the two pictures " to be viewed") is hinged to the lid so as to unfold itself at right angles to the lens plate. A sliding carrier, furnished with spring holders, receives the picture; it "is adjustable, sliding in " grooves at each end of the case; it can be advanced or with-" drawn at will, and thus this form of stereoscope accommodates " itself to different visions, allowing a long or short focus, as may " be desired." In closing the instrument, the bracket is folded down into the lid of the case, the lens plate is folded upon the bracket, the carrier is advanced to the back of the box, and the

2nd. An improved "folding stereoscope" without the case.—
"It consists simply of a back plate" "upon which is hinged a
"bracket" "and lens plate," "the carrier" "for the slides being
"placed at the bottom edge of the back plate. On packing away
"this instrument" it folds in manner precisely similar to that set
orth in the 1st improvement, the bracket "folding first upon
"the back plate, and then the lens plate upon the bracket."

pictures are laid in the bottom of the box.

The sliding carrier described in the 1st improvement may be used in the "folding stereoscope."

[Printed, 6d. Drawing.]

A.D. 1860, December 28.—No 3181.

PALLU, CLAUDE.—(Provisional protection only.)—"Improve-"ments in the apparatuses and process for producing photographic "pictures without working in dark rooms."

"The camera obscura which I make use of is composed of two " boxes exactly adjusted in one another, so that the smaller one " can slide in the larger, the latter carrying the object glass, and " the first one the ocular, so that when the prepared plate is placed " vertically in the sliding box it can be easily brought to the very " point or focus of the object glass,. The plate intended to re-" ceive the picture, whether glass, metal, or paper, is prepared as " usual with the chimical agents used by photographers, but the " last preparation for producing the action of the light is made " in a closed gutta percha box or vessel impervious to light, of a " size corresponding to the one of the camera obscura; diluted " nitrate of silver is placed in that vessel, which is closed on the " top by a narrow sliding board; the plate is placed in a small " case closed at its lower part by a little sliding plate, carrying " the plate prepared for dipping in the solution contained in the " gutta percha vessel, over which the case is placed, instead of its " sliding lid, which is removed; then the lower slide being drawn " out, the prepared plate drops down in the solution, where it is " left as long as required, and raised up back in the case by means " of a thin hooked silver wire running through a small hole. "When up, the lower slide is pushed back to hold it and hide " the light, the upper case is then taken out and carried over the " camera obscura, where a similar disposition of sliding lids per-" mits also exclusion of light; now the lower slide of the plate " case being drawn out, the photographic plate drops down into " the camera obscura, falling into its right place, when, by un-" covering the object glass for a few seconds, a positive picture is " produced with great correctness, even to the most minute size." [Printed, 4d. No Drawings.]

1861.

A.D. 1861, February 13.-Nº 360.

BROWN, WILLIAM.—" Improvements in the manufacture of frames suitable for containing photographic and other portraits " and pictures."

" My said improvements consist in making the said frames " whole or entire from clay, and by preference I use that kind of " clay used in the making of tobacco pipes, and known as pipe " clay; but compounds of clay and other substances which are " capable of receiving a very sharp impression of the mould may " be used. The clay is taken in a moist state, and is forced into " a mould to give it the desired shape and pattern. The said " mould should be slightly oiled on the inside, and the back of " the clay should be covered with a tin plate, to which the clay " will adhere and facilitate the withdrawal of the frame from the " mould. The moulds when filled are subjected to pressure in a " suitable press, to give strength to the frames and sharpness to " the impression; after leaving the press the frames are removed " from the moulds and placed in a kiln and burnt to give them " the necessary hardness, after which they may be gilded, or other-" wise ornamented as desired."

[Printed, 4d. No Drawings.]

A.D. 1861, February 23.—No 469.

POHL, Ludwig.—(A communication from Paul Luz.)—"Improve"ments in albums or books for holding photographs, engravings,
"and other representations, and in binding together sheets or
"pieces of pasteboard or such like stiff materials, especially for
"the purpose of forming such albums or books."

The pages have no raised parts on their surfaces, so that when the book is closed the pages lie flat over one another.

1st. To facilitate the sliding out of the photographs.—"At the "under edge of the slit or opening contrived for the purpose, and "on the inner side, I attach a strip or piece of paper or equivalent "material by another strip placed over their junction, (that is, the "part where they touch,) in such manner that this arrangement destroys the obstructive effect of the edge, the strip first named merging as it were into the same plane with the cardboard or

" material of the sheet to which it is attached, and acting as if it were a continuous surface with it, so that the picture or such like " article may slide smoothly over it when being drawn through."

When there are pictures or the like on both sides of the sheet,

" this arrangement also serves to keep them separate."

2nd. To bind together sheets of pasteboard.—The following mode is adopted, which is especially applicable to photographic albums:—"I attach the thick sheets to be bound to folded strips "or pieces of leather, cloth, or similar flexible material, which I "call connecting strips, each strip connecting one side of one sheet with the adjoining side of the next; I bind or connect together a required number of folds of paper or equivalent material; I attach the back of the leather or other flexible connecting strips to and between the sets of paper (or equivalent) folds. The order of the operations may be varied."

[Printed, &d. Drawing.]

A.D. 1861, February 27.—No 508.

HENRY, MICHAEL. — (A communication from Gaspard Felix Tournachon called Nadar.)—(Provisional protection only.)—" Im" provements in photography."

"According to this invention I combine the employment of " electric light or of gaslight with Moitessier's mode of obtaining " positives." Effects dependent upon the control of the artificial light may be obtained, and the operator may dispense "with a " separate room for preparing and developing his plate as he can " direct the circumscribed rays of the reflector on the objectivity " (objectivité), for the use of this artificial light permits the per-" formance of various operations that have hitherto been per-" formed away from the room exposed to the full daylight. I " propose to modify, as follows, Moitessier's method to adapt it " for purposes of taking positives by artificial light. Hitherto in " known processes frames only have been employed, whereas I " propose to use two dark chambers, in one of which are placed " the negative plates, or stereotype plates, or clichés, and in the " other chamber are placed the glasses treated with collodion " intended for the reproduction of the positive stereotype or " cliché. The two dark chambers are placed opposite one another, " and the space between them is kept dark by a covering; the " chambers can be brought mutually nearer or further according " to the sizes to be produced; the light is placed in front of the "first dark chamber and concentrated by a reflector on the
"negative plate, stereotype plate, or cliché."

[Printed, 4d. No Drawings.]

A.D. 1861, April 6.-Nº 852,

KNIGHT, JAMES.— (Provisional protection only.)—" Improve"ments in the manufacture of baths and trays, and other vessels
"for photographic purposes, which improvements are also applic"able in the manufacture of galvanic battery and other gal"vanic chambers or cells, and other vessels to contain chemical
"solutions."

"Peths trans and other vessels for a betavarable was a solutions."

"Baths, trays, and other vessels for photographic uses, as also for galvanic battery and other galvanic chambers or cells and vessels for other chemical solutions, are now commonly made of gutta percha. But in addition to the cost of the material, vessels made entirely of such material are very liable to leak at the joints and elsewhere, and my improvements consist in forming such vessels of a comparatively thin lining of gutta percha or india-rubber, or compounds thereof, and then coating the same with layers of paper or other fabric or material united together by means of solutions of india-rubber, gutta percha, shellac, or other suitable adhesive material.

"By these means economy of manufacture and increased strength and durability are obtained."

[Printed, 4d. No Drawings.]

A.D. 1861, April 18.—Nº 955.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Adolphe Fargier and Nicolas Charavet.)—" Improvements in "producing photographic pictures."

"A coat of gelatine, holding in suspension a carbonaceous or "other powder," is spread upon a surface of glass, and sensitized by means of bichromate of potash. The coating is then dried, the picture impressed by exposure to light, and a coating of "non-iodized collodion" poured upon the gelatine; the collodion film is removed from the glass by immersion in hot water, "and the sheet of collodion floats in the water, showing the picture which has now become visible." The picture, so produced is washed, received upon a sheet of gelatinized paper, and, finally, the coat of collodion is "removed from the picture by alcoholized ether or other solvent."

A modification of the above-described process consists in applying a coat of the said gelatinous solution to a sheet of thin paper made from homogeneous pulp. The coating is dried, exposed to light on the ungelatinized side, and the resulting reversed picture detached by washings in warm water.

" A further modification is as follows:—Spread upon a glass a " first coating of the gelatinous solution, but without powdered " coal, dry and expose for a few minutes to the light, and then in "the dark; apply "[and then, in the dark, apply?] "over the " first coating a second coating with the powdered coal, allow to " dry, place the glass in the frame upon the plate, not on the " gelatinized but on the opposite side, expose to solar rays, and " the picture is obtained upon glass, from which it is removed by " washings in warm water."

" The action of light coagulates the gelatine and retains it on " the surface of the collodion, of the paper, or of the glass with " the powdered coal."

[Printed, 4d. No Drawings.]

A.D. 1861, April 29.—Nº 1074.

DIXON, HENRY.—(Provisional protection only.)—" Improve-" ments in photography."

" This invention consists in mixing nitrate of silver with collo-" dion or other coating medium prepared in the ordinary manner, " in the proportion of about five grains of silver to each ounce " of collodion or other coating medium. The mode ordinarily " practised for coating plates of glass with collodion or other " coating medium has been first to pour the prepared collodion " on the plate, and then to immerse it in a nitrate of silver bath " to coat it with silver. . Now, the intention of this invention is " to dispense with the use of said bath by mixing silver with the " collodion or other coating medium, so that after pouring the " collodion or other coating compound on the plate intended to " receive the picture, it is simply necessary to wash the plate in " water to remove the grease therefrom. The plate is then ready " for exposure in the camera. The usual developing solutions " may be employed. By this invention the numerous objections " attending the use of a nitrate of silver bath are entirely dis-" pensed with, and the process rendered more certain, convenient, " and considerably less expensive than heretofore."

[Printed, 4d. No Drawings.]

Morange 22, 617 in the Course

A.D. 1861, May 1.—No 1089.

OOMAN, THOMAS, and MALISZEWSKI, JOHN.—"Improvements in photographic printing upon the interior of any glass or other transparent vessel."

A waxed paper photographic negative is fixed "upon the exterior" of that part of the vessel wherein the picture is tended to be made; for this purpose a gutta percha mould mpletely covers the vessel, "with the exception of an aperture of the size of the negative wherein it is placed, the light being thus wholly excluded from all other parts of such vessel." ollodion is then poured into the vessel, sensitized, and exposed to the even light in such manner that the power of light shall act equally around and through the transparency of the vessel upon the sensitized substance fixed on the interior of such glass or other transparent vessel;" the picture is developed in e usual manner. "When dry, we back the interior of such glass or other transparent vessel with oil colors in imitation of marble, alabaster, wood, or any other fancy decoration, by which means the portrait, landscape, view, picture, arms, device, or ornament is rendered permanent, and thus protected on the inside thereof by such body of oil paint, and on the outside it is protected by the glass or other transparent vessel."

[Printed. 4d. No Drawings.]

A.D. 1861, June 8.-Nº 1457.

U MONT, HENRY.—"A photographic apparatus, having for object to reproduce the successive phases and shiftings of a motion."

A succession of sensitive surfaces "succeeding each other at regulated intervals" are exposed to light "at regulated intervals, and in due time, that is to say, when the plane of the sensitive layer is perpendicular to the axis of the ray."

A prismatic drum, whose periphery is mounted with sensitive yers, is caused to revolve so that the sensitive layers "succeed each other in the focus of the obscure chamber."

"Another means of obtaining the quick succession of the sensitive layers is to place them together side by side on an ordinary sash, but much longer, and moving intermittently in its groove, vertically or horizontally."

PHOTOGRAPHY.

A third method of accomplishing the said object "is to set "them behind each other in a long box with vertical grooves, "and moving in a contrary direction to a similar box situated "under it, and intended to receive the layers impressed by the "light." A ratchet wheel and ratchet movement enable the sensitive layers to fall into the lower box as they are impressed.

The exposure of the sensitive layers to light at the proper instant is accomplished by means of "a black moveable screen, " the regulated motions of which are connected with the motions " of the system bearing the sensitive layers."

"The series of images thus produced, viz., the series of motions of a dancer, of one or more soldiers, of a machine, &ca., &ca.," may be utilized, "both for the pleasure of the eyes and for other purposes."

[Printed, 6d. Drawing.]

28

A.D. 1861, July 12.—No 1756.

SMITH, THOMAS JOHN. — "Improvements in photographic "albums."

This invention "relates to an improved manufacture of photo"graphic albums, the improvements consisting in the manufac"ture of the leaves of such albums of parchment, vellum, textile
"fabric, or paper mounted upon textile fabric, such materials
"being more durable and less liable to be torn by the insertion
"and removal of the photographic pictures than the paper or
"cardboard hitherto employed in the manufacture of the leaves
"of books for this purpose.

"In addition to the advantage of greater strength and durability, a further advantage arises from the use of the materials above mentioned, inasmuch as the sewing or stitching of the leaves when binding the album is entirely dispensed with, there being sufficient strength in the leaves to admit of their being simply glued to the back piece."

The Specification describes, and the drawings show a sheet of parchment pasted "over the two contiguous faces of any two of "the leaves, the body or inside part of such leaves being com"posed of cardboard" "cut out in the centre to allow for the
"thickness of the photograph in the usual manner." The series of leaves being united by the cementing of the above-mentioned sheets of parchment thereon "are glued to the back piece," "and "thus the necessity for sewing is avoided."

[Printed, 6d. Drawing.]

A.D. 1861, July 24.-Nº 1855.

NEVILLE, HENRY.—(Provisional protection only.)—"Improved apparatus for taking photographs."

" My invention consists of apparatus made of wood or metal, " or both, for taking micro-photographic and other minute " photographs; also for taking magnified microscopic photo-" graphs on metal, glass, or paper, by means of which apparatus " the reduction of the photographs as at present performed is " rendered unnecessary, the photograph being obtainable from "the object itself. The instrument is in shape similar to a " common camera, about eighteen inches in length; at one end " is attached a brass telescopic tube, forming what is termed 'the " 'coarse adjustment.' Outside of the last-mentioned tube is " placed a larger tube having a fine threaded screw or rack " and pinion forming 'the fine adjustment.' Attached to these " tubes is a piece of metal or wood, dovetailed into which slides a " box containing the prepared plate, which rests upon silver pins, " and is secured in its proper position by means of springs " attached to a lid covering it, made of metal or wood. Inserted " in the centre of this lid is a microscope for the purpose of " focusing the object to be copied, which, when once adjusted, " enables the operator to take any number of photographs with-" out further adjustment or alteration."

[Printed, 4d. No Drawings.]

A.D. 1861, August 3.—Nº 1936.

LEWIS, Joseph.—"Improvements in producing and treating "printing surfaces, in producing and preparing transferring surfaces, in transferring, in producing impressions on an altered "scale, in preparing or treating surfaces of lithographic stones, and in obtaining devices or designs; also in agents and apparatus used in some of such improvements, parts of the invention being also applicable to photography, and to "ornamenting pottery, porcelain, and glass."

Of the 26 heads under which this invention is set forth, the following have the most immediate reference to photography:—
5th head.—An "automaton register," consisting of certain fastening frames by which etchings, exposures to light, &c., can

be repeated until perfect results are obtained.

X

6th head.—"Obtaining photographs, photo-lithographs," and photo-prints by means of the "automaton register."

7th head.—To transfer photographs to a printing or transferring surface.—"Oil of lavender and asphaltum" is the sensitizing mixture used. When the image is impressed, it is fixed by means of a mixture of turpentine and bisulphide of carbon. Successive sensitizings and fixings take place until a perfectly developed copy is produced, such of the fine tints as are sufficiently developed from time to time being protected from further action by means of an opaque powder.

10th head.—Using "oil of lavender and asphaltum as a sensitive "medium in photographic operations."

11th head.—" Producing printing surfaces by means of re" peated photographic or other impressions on extended india" rubber or gutta percha, which is afterwards allowed to collapse
" or not."

13th head.—Bichromate of potash is employed "as a photo"actinic medium," "in combination with gelatine or other sub"stance, which will" "retard the crystallization of such bichromate
"using the compound either in solution or in powder upon stone,
"cardboard, paper, or metal, previously covered with transfer ink,
"also as a sensitive mixture instead of asphaltum and oil of
"layender."

23rd head.—Photographic negatives are obtained by means of "a modification of the automaton register" in which the plate is placed for the negative. A first picture having been produced thereon, it is again coated with a sensitive medium and the picture reproduced. This is repeated as often as desired.

24th head.—The use of successive sensitive coatings and reproductions as a means of raising the design to a sufficient height to be stereotyped or electrotyped.

25th head.—The application of the "automaton register" "to "the production of printing surfaces by the photoglyphic and "other processes."

[Printed, 4s. 2d. Drawings.]

A.D. 1861, August 20.—No 2073.

SUTTON, THOMAS.—"An improved camera for taking photo-"graphic portraits and instantaneous pictures,"

"The body of the camera is an oblong box of the usual shape, " having the end open for the reception of the dark slide, and "having an orifice in the front for the lens. At the upper edge of the open end of the camera is hinged a moveable plane reflector." "When this reflector is placed within the camera at an angle of 45° with the top or bottom, and the sensitive plate is put in its place behind it, with the front shutter of the dark slide open, the reflector must be large enough to shield the sensitive plate from the light which passes through the lens. Thus, when the reflector is turned up on its hinge till its lower edge touches the top of the camera, the image formed by the lens will be thrown upon the sensitive plate; but when the reflector is turned down till its lower edge touches the bottom of the camera, and makes an angle of 45° with it, none of the light from the lens can fall upon the sensitive plate. The reflector may be turned up and down on its hinge instantaneously by any suitable contrivance with an external handle.

"Instead of a focussing screen, which in an ordinary camera if its into the open end of the camera, the focussing screen is if itted into an open panel in the top of the camera, so that when the face of the reflector is turned towards the lens at an angle of 45° with its axis, an erect image is thrown upon the screen."

The plates of the focussing screen, the sensitive plate, and the reflector must have a common line of intersection, and the latter plane must bisect the angle between the two former planes."

"The focussing screen may be made either of plain ground glass or or of ground glass of an orange tint, so as to intercept the entrance of actinic rays into the camera."

[Printed, 6d. Drawing.]

A.D. 1861, September 19.-Nº 2347.

DAGRON, RÉNÉ PRUDENT PATRICE.—"An improved micro-"scope to be used for exhibiting photographic views and productions."

This invention is based upon certain parts of N° 801 (A.D. 1860); it consists of a double-image tubular microscope. Each lens is fixed to its own tube which slides on a smaller tube, the smaller tube serving to connect the lens tubes together and to enable them to be placed properly for focusing; the said smaller tube "can be furnished with a diaphgram" [diaphragm?]. The photograph to be viewed, by means of the lens at one extremity of the apparatus, is placed on the lens at the other extremity.

According to another arrangement the said microscope may be made entirely of glass. When three pieces of glass are used, the external pieces are plano-convex, and are glued to a cylindrical piece at opposite ends, with the photographs placed within the joint. The cylindrical portion of the microscope may consist of three separate portions, so as to render the instrument achromatic. The intermediate glasses may be dispensed with, a cylindrical piece convex at each end being employed; in this case a photograph is placed on each end and is protected from injury by varnish. The photographs may be fixed on a piece of glass placed between the lenses; the distance between the lenses should be such that each lens renders the image in front of it distinctly enlarged.

[Printed, 8d. Drawing.]

A.D. 1861, September 30.-Nº 2434.

GEORGE, BENJAMIN GEORGE.—"Improvements in the mount-"ing of tablets, show bills, prints, photographs, and drawings, "and of producing embossed ornamentation applicable to various "purposes."

This invention consists in improvements in the processes set forth in No. 3004 (A.D. 1860), "and relates chiefly to the "mounting of tradesmen's show bills and other similar articles."

The said article is mounted upon a slab of plaster of Paris or composition "by means of any suitable cement." To put an ornamental border to the article, the inventor uses "moulds "formed from a model of the pattern or design required, and "from which casts may be taken in plaster of Paris or other "composition; and these ornamental portions, which may re"present the frame, or any other part of the show bill or other "design, may be gilt or painted or otherwise ornamented, as "desired, and the show bill or design may be mounted upon the "smooth or other portion of the cast, and the whole or any part "thereof may then be covered with varnish, gelatine glass, or "other suitable preserving material."

[Printed, 4d. No Drawings.]

A.D. 1861, October 8.—Nº 2513.

GRISDALE, JOHN EDWIN.—(Provisional protection only.)—
"Improvements in certain tickets or passes for railway and other
"purposes."

"This invention consists in the production of a new description " of tickets or passes, particularly where such tickets or passes " are granted by railway companies and others to persons travel-" ling or having rights of admissions for stated periods of time, " and the object of the improvements is a safeguard to the com-" panies or others issuing them against the transfer of such " tickets or passes to others than the persons entitled to use the " same; this object is effected by manufacturing or producing in " any simple and convenient manner, and by the aid of photo-" graphy, tickets or passes, each of which bears upon a con-" spicuous part of it a portrait of the person to whom the ticket " or pass is issued, so that upon the customary production of " such ticket or pass the person appointed to check the same " would at once see by comparing the portrait on the ticket or " pass with the person presenting the same, that such ticket or " pass was presented by its true owner."

[Printed 4d. No Drawings.]

A.D. 1861, November 1.—No 2739.

CLARK, WILLIAM. — (A communication from Claude Mamès Augustin Marion.) — (Provisional protection only.) — "Improve- ments in photograph albums."

"This invention relates to improvements in albums for holding photographic portraits, the object of which is to facilitate the introduction and removal of said portrait cards from the frames or cases forming the leaves or divisions of said albums. At the present time the cards are introduced at an opening, of the same width as the card, made at the lower part of the leaf, which being made in the thickness of the card leaves a projecting edge, and renders the picture difficult of removal. I obviate this disadvantage by covering the projecting edge with a sheet of paper, which guides the picture card over the projection, and prevents its catching."

The drawings show the ordinary arrangement at present in use as well as the improved arrangement.

[Printed, 6d. Drawing.]

A.D. 1861, November 5.-No 2781.

BOURQUIN, JOHN PETER.—(Provisional protection only.)—
"Improvements in ornamenting the covers of photographia
"albums, books, writing cases, and other like articles."

"wood, I attach the same to cloth by a protect it from breaking or splittin which it will be subjected. The wood in the lithographic press to receive th is then transferred thereto in the same designs are applied to paper. When promiser of colors to complete the property aside for the colors to harden, and who the wood is polished and varnished, as to the book or other cover in the form of lines, panels, or even as an entire covering back, as may be thought desirable."

[Printed, 4d. No Drawings.]

A.D. 1861, November 13.-

BROOMAN, RICHARD ARCHIBALD.—(Auguste Marion.)—" Improvements in photographic and other pictures."

The two parts which, when united, form of are attached to a zig-zag backing of parciparts of the said backing, through certai "intermediate folds" "of the backing re bendent of one another, and enable the without

f the hinge pieces are inserted between the intermediate pieces nd the leaves, "and the backs of the hinge pieces are sewn to the backing." "The threads which secure each sheet of the album pass through the middle of the hinge pieces, and when the two parts" "have been fixed together the sewing is entirely hidden."

[Printed, 10d. Drawings.]

A.D. 1861, November 21.—No 2924. OLYBLANK, GEORGE HENRY.—(Letters Patent void for

cant of Final Specification.)—"A new or improved method of ' protecting and preserving photographic and other prints, water-' color drawings, and other works of art from injury and " If the paper, material, or fabric upon which the print or work ' of art has been produced be of such a nature as to absorb the ' preserving or any liquid put upon it, I first saturate the material ' or fabric with some clear size which will not injure the work of ' art printed or otherwise put upon it, and when the sized print " or work of art is dry I press it, when necessary, in order to " make it flat and level and it is then ready for the next process. " I take the print or other work of art to be preserved, either " previously sized or not, as may be necessary, and entirely coat it " with paraffin, made fluid by means of heat, so as to be capable " of being spread over the print or work of art without injuring " it. The coating is then to be allowed to set or become dry, and " the covering thus put upon the print or other work of art will " protect and preserve it from the injurious effects of atmospheric " and other influences."

[Printed, 4d. No Drawin gs.]

A.D. 1861, November 27.—N° 2996.

AMPHLET, SAMUEL.—"An improvement or improvements in "ornamenting surfaces."

This invention "consists in ornamenting surfaces by the com-"bination herein-after described of tartan or Scotch plaid patterns "or imitation tortoise-shell, with photographs of objects without any other background than the said tartan or Scotch plaid

" patterns or imitation tortoiseshell.

"In carrying my invention into effect I employ photographs " taken on paper or other flexible material on which positive " photographs are or may be taken, and I prefer photographic " portraits or groups or photographs of sculpture or statuary. I " cut away all the background of the photograph, leaving only " that portion of the said photograph which consists of the por-" trait or group, or picture of the sculpture or statuary or other " detached object or objects. I rule the tartan or Scotch plaid " patterns on the surface to be ornamented, or I paint, print, " stain or otherwise colour the said surface in imitation of tortoise-" shell, and I attach the photograph thereto by paste or size or " other adhesive material. I then size, varnish and polish the " surface in the manner commonly practised in finishing surfaces " ornamented with tartan or Scotch plaid patterns. Or instead " of producing the tartan plaid patterns or imitation tortoise-" shell upon the surface of the article to be ornamented. I rule " paper with tartan or Scotch plaid patterns or paint, print, stain " or otherwise colour paper in imitation of tortoiseshell, and I " affix the photograph to the said ruled paper or paper colored in " imitation of tortoiseshell. I afterwards apply the said tartan " plaid or imitation tortoiseshell paper with the photograph upon " it to the surface to be ornamented."

[Printed, 4d. No Drawings.]

A.D. 1861, December 4.-No 3044.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Henry Strauss.)—"Improvements in albums or books for containing and showing photographic and other pictures, and in slides for the same."

"I take two of such sheets of paper with apertures in the centre as are generally used in albums for showing photographic pictures, and unite them at three sides, after having interposed a strip or strips of thick paper, cardboard, or the like, equal or nearly so to the thickness of two of the pictures to be contained and shewn. Thus the sheets will be united at their edges on three sides to interposed filling pieces, and one side will be left open for the insertion of the slide hereafter described."

"The slides consist of a frame of cardboard or thick paper equal in thickness to the interposed filling pieces. To one edge of the frame on both sides a sheet of gelatine, tale, or

"other transparent material is attached, the space left in the frame is calculated to receive two pictures back to back. After being inserted in the space in the frame, each picture is entirely covered by the gelatine or talc. The slide is formed with angle pieces, and when inserted between the sheets of paper, the outer edge of the slide fills up the space between the unclosed edges of the two sheets."

The drawings show a card placed in the frame which "may be "used as a support to the pictures which are placed back to back, "one on each side of the card."

[Printed, 6d. Drawing.]

A.D. 1861, December 9.—No 3080.

MENNONS, MARC ANTOINE FRANÇOIS.—(A communication from Louis Henri Bouillette and Jean Amable Hyvelin.)—"A new or improved combination of microscopic photographs and lenses with certain precious stones or imitations thereof."

"This invention consists in the application of microscopic photographs and lenses or lenticular surfaces to such precious stones and imitations thereof as possess a sufficient degree of transparency to allow the passage of the visual rays.

"To this end the microscopic photograph is applied either directly or by transfer to the under surface" of a section of the gem, cut in the form of a thin zone or frustrum of a cone. "To this surface is then adapted, by Canada balsam, Venice turpentine, or other suitable adhesive matter, the pyramidal counterpart," to the apex of which is cemented a small magnifying lens." "The complete gem" "is then mounted in a ring, watch key, breast pin, or other setting, the point of which is pierced to form eye piece in the axial line of the lens corresponding with the microscopic object in the centre of the front plate. "Instead of adapting a separate lens as above, the apex of the gem may, in certain cases, be ground to a lenticular surface, but this process is generally more difficult and less economical than that just described.

"Or, again, the photograph, instead of being applied directly to the plane surface of the front plate, may be formed on a separate disc of transparent matter, which is interposed between the sections of the gem, and secured by cement as above."

[Printed, 4d. No Drawings.]

3

A.D. 1861, December 11.-Nº 3105.

SCHLOSS, JOSEPH.—(A communication from Simeon Schloss.)—(Provisional protection only.)—"An improvement in forming the "leaves of albums, and books for containing photographic portraits "and views."

"In the leaves as now made, the pictures are introduced into, and when required removed from each leaf through an aperture or space made or left at the side, top, or bottom, or through a slit made above the top or under the bottom of the window, or space, made for showing the picture. Now in this invention neither such space, aperture, nor slit is made, but the leaves are so put together that the pictures are introduced and removed through the windows themselves.

"The invention consists in interposing between two sheets of paper with windows cut therein, and which are intended to form the front and back of a leaf of the album, or book, one or two thicknesses of stout paper, equal in size to the window sheets, but without any parts removed, then in fixing along the edge of these interposed pieces of paper, and on both sides thereof, a frame or beading of card, or millboard, or other suitable material extending inwards from the edge, only about a quarter of an inch more or less. The two first named sheets of paper are next attached to the cardboard frames, and the leaf for the album or book is complete. The photographic picture is introduced cornerwise through the window, and is worked into position by pressure of the finger."

[Printed, 4d. No Drawings.]

A.D. 1861, December 14.-Nº 3147.

DEBENHAM, WILLIAM ELLIOTT. — (Provisional protection only.)—"An improved plate holder for photographic purposes."

"The invention consists in so forming the plate holder for the purpose of holding photographic plates while undergoing chemical action, that there shall be no risk of the hands of the operator being stained or soiled by the spilling of the chemicals used, nor danger of the plates falling off the holder,"

The Specification describes and the drawing shows a holder having a handle "in which is inserted a stout metal wire or other "material," which is bent into such a form as to afford three points of support to the plate; the wire also branches into two

parts from the handle; one of the parts being straight may be used as an additional support to the plate, the other part carries the points of support or "guards" above mentioned. " guards" "may be made of gutta percha, wood, glass, metal, " caoutchouc, or other suitable material," and " serve to prevent " the plate from falling off the holder. The guards are so formed " as to present a surface slightly slanting outwards, in order that " the lower edge only of the plate touches and rests on the holder " and guards (the upper edge never coming in contact therewith), " so that the danger of staining the plates which might arise " if any part of the holder were to touch their upper or coated " edge is entirely obviated. The handle is raised above the level " of the surface of the plate, the wire" being bent upwards " previously to its insertion into the handle. The shape of the " holder may be varied according to circumstances, and the " guards may be arranged in different positions to those shewn in " the drawing, the principle of the invention being nevertheless " adhered to."

[Printed, 6d. Drawing.

A.D. 1861, December 26.-Nº 3232.

SCHLOSS, JOSEPH.—(A communication from Simeon Schloss.)
—(Provisional protection only.)—"Improvements in envelopes for containing photographic portraits and pictures."

"This invention consists in forming envelopes, intended chiefly " for containing 'carte de visite' portraits, and for their being " forwarded conveniently by post as hereafter described. I take " a sheet of paper or paper cloth, or other material suitable for " envelopes, and of a breadth equal to the length of the envelope " when finished. I form the usual flap at one end of the paper, " and form a frame in or on the opposite end, either by folding "the paper over on itself, or by the employment of a separate " frame of paper. In the first case, that is, where the paper is " folded over, I first cut the 'window' or aperture therein, for " showing the picture, and cement the top and bottom edges " to the other part of the sheet; one side will thus remain " unattached for the insertion of the picture. Where the frame " is in a detached piece, I attach it at top and bottom and one " side. After insertion of the picture, that part of the sheet on " which the frame is applied, together with the picture and frame, " is folded over, and the flap is folded over the back of that part " on which the frame is applied. When several pictures are to be enclosed, I use a greater length of paper, and apply additional frames, and where only two pictures are to be enclosed.

" I apply an additional frame on that part of the paper which " when the envelope is folded covers the face of the first picture."

[Printed, 4d. No Drawings.]

1862.

A.D. 1862, January 13.—No 95.

SCHOTTLANDER, HENRY.—(Provisional protection only.)—
"Improvements in albums for containing photographic and other
"pictures."

"My invention consists in so forming the leaves of albums "that the picture or pictures, together with part of the leaf "holding the same, may be placed and held at an inclination so "as to obtain the most suitable light for viewing the pictures."

"I apply on each side of every leaf, or on one side only, a frame for holding one or two pictures, and unite it at one side or end only, and I make a tongue or frame in or on the holding frame. When the album is closed, or when the leaves and pictures are in their ordinary position, the holding frames, pictures, and tongues do not protrude beyond the thickness of the leaves. "When the album is opened, and any picture is to be viewed, the holding frame is raised and the tongue or back frame is protruded outwards and the frame resting partly upon it is maintained inclined. If desired, pictures may be held in the

" maintained inclined. If desired, pictures may be held in the leaves which are covered by the holding frames, and which can only be seen when such frames are raised.

"Again, instead of the tongue or supporting frame before mentioned, I sometimes form the support by hinging a piece of cardboard, or other suitable material to the top of the holding frame which is pushed outwards for supporting the holding frame, and which is folded inwards and under the holding frame when the pictures are not required to be raised to be viewed."

[Printed, 4d. No Drawings.]

PHOTOGRAPHY.

A.D. 1862, February 7.-No 322.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Louis François Saugrin.)—" Improvements in stereoscopic albums, books, and cases."

"This invention consists in combining a stereoscope with an album case or book in such manner that both may be folded and occupy a small space."

The stereoscopic case contains the photographic pictures, and its hinged cover has a lock for securing the case when closed. By means of flaps united to a hinge, "the rod of which is sur-" rounded by an adjusting screw" or helical spring, on opening the case the instrument is placed ready for observation. The base of the stereoscope "forms an ordinary slide;" the sides are united by flexible joints, so that they may fold easily. The top plate carries the glasses, which sink down with the sides when the case is closed. This stereoscope may be fitted in the lid of any book or album, or "in a slot in each intermediate leaf." The pictures are all placed one on another in the case on a frame. or movable bottom plate, which rests on helical springs, the pictures are thus raised within the focus of the stereoscope; as they are done with, an axis with a disc at each end and carrying two rollers, causes the pictures to fall into a drawer. So soon as the upper picture has thus slidden away, the spring frame raises the succeeding picture.

When the stereoscope is applied to an album, the slight projection which forms the stereoscope when folded, lies in a recess formed in the cover; a "compass joint" maintains the opening " of the album at the desired inclination."

In "a stereoscopic pocket book," the bottom is made in two parts, and a vertical partition "acts as a support to the apparatus "when open." When the instrument has been partially opened, spring hinges wholly place the parts ready for use.

[Printed, 8d. Drawing.]

A.D. 1862, February 18.—No 429.

SÉGOFFIN, CHARLES DENIS.—(Provisional protection only.)—
"An improved apparatus for the purpose of viewing photographs
"on cards."

" My invention consists in the construction of an apparatus of a rectangular form, three sides of which are closed, the fourth

"being partly open for the admission of light on to the card placed at the back, the smaller side opposite, having a magnifying glass which allows of a good view of all the details of the photographic card.

"For viewing proofs placed in albums I make the apparatus without a back so that all that is required to be done is to place the apparatus over the proofs to see them distinctly. The sides of these instruments are formed with stiff or flexible materials, and of a bellows form, that is to say, with parts folding on themselves. To these small apparatus I have given the name of microphore."

[Printed, 4d. No Drawings.]

A.D. 1862, February 25.-No 504.

BLISS, EDWIN, and LAMPLOUGH, HENRY.—"Improved "means for viewing microscopic photographs and other minute "objects."

"Our invention consists in having a circular disc of metal or other suitable material, with small sight holes perforated therein at a convenient distance from the edge, and at a proper space apart, and placing opposite to each hole the photograph or object to be inspected, and having such disc and objects enclosed in a case with a microscopic lens fixed therein in the line of the holes in the disc, and a hole through the other side of the case directly opposite the lens, so that by causing the disc to revolve the objects placed on or connected with the disc may be brought seriatim in front of the lens in the case, and viewed through it. Of course if the disc be of clear glass no sight holes will be required in it. The disc may be caused to revolve by means of toothed wheels or other known means."

The drawings represent a disc turned by means of an ornamental boss placed on the side of the case opposite to the eye piece. "At the outside edge of the disc, and in perfect truth "with each object, holes are made that will in conjunction with "a bolt and spring," "stop each object exactly opposite the eye "piece."

[Printed, 8d. Drawing.]

A.D. 1862, March 8.—N° 636. (* *)

GEBHARDT, JOHN JAMES HENRY. — (A communication from Herr Kugler.) — (Provisional protection only.) — "An improved.

g for albums and other books, bags, reticules, and ticles."

inner side of a plate attached to one side or edge of to be fastened, is secured a sliding piece, wherein spiral or other springs in grooves or recesses, "and inner surface of the outer plate are studs, stops, or ats so placed that the springs may abut against them nd." The sliding piece carries a knob or finger piece ng itself on the outer side of the first-named plate a slot or opening" in which it or its shank pin works. of the outer plate are by preference bent inward to es for the sliding piece, which carries or is formed with catch intended to engage with an eye, staple, or its on the opposite side or edge of the article. "The g may be somewhat modified by using a single spring op) instead of two or more, and also by having the g plate outside instead of inside the other plate, and on the travelling, the spring on the other plate."

, 4d. No Drawings.]

A.D. 1862, March 10.—Nº 640.

IN, RICHARD ARCHIBALD.—(A communication from y Morvan.)—" Improvements in producing by the aid graphy copies of maps, charts, plans, and drawings." ig a positive image on cloth, paper, or glass, "without of a negative."—A tracing of the design, on transparent loth, is placed in contact with the sensitized paper, or ice, the face of the design being next to the sensitive he frame containing this arrangement is exposed to the light, and the image is fixed and finished in the usual The sensitizing solution described in the Provisional on contains iodide of silver, that set forth in the Final on contains "azotate" of silver.

ring the design upon the transparent cloth to stone.—
is prepared with acid, washed in water, dried, coated sitive varnish, allowed to dry, and exposed to the action it is then washed with white wine, with water, allowed shed with soapy water, again washed, "and then dried we or otherwise." Ink is then applied, the stone is rest 24 hours, and washed with essence of turpentine.

Again ink is applied, and the subsequent inking operations are facilitated with phosphoric acid and gum, so as to bring out the design; impressions may then be taken from the stone. By this process the stone gives off positive impressions. The varnish contains white of egg and bichromate of ammonium, and those parts exposed to light become more or less insoluble. The ink first used contains transfer ink and lithographic crayon, that employed the second time consists of transfer ink and phosphoric acid.

[Printed, 4d. No Drawings.]

A.D. 1862, March 12.—Nº 677.

GRISDALE, JOHN EDWIN.—(Provisional protection only.)—
"Improvements in photographic cameras, and in the mode of
"fixing the lens therein."

The two ends of the camera "are connected together on the "four sides" by "lazy-tongs levers," which "are braced to"gether" by "metal braces which pass round and enclose them.

"The whole may be covered by the ordinary bellows covering or

" by a bag."

×

The lens tube is secured in front of the camera by three or more pairs of hinged radial flaps or arms. By this means different sizes of lenses may be readily fitted into the same camera, provision being made "for excluding the light which would otherwise "enter the camera when fitted with this arrangement for securing "the lens.

" a peculiar hinged cover for the dark slide in lieu of the ordinary sliding cover, the improved cover being made in four parts, and so arranged that each part will fold back inside the camera, the divisions in the cover being so disposed as to admit of each part folding back into a tapered camera when required to do so."

"Another part of my invention consists in the substitution of

[Printed, 4d. No Drawings.]

A.D. 1862, March 13.—Nº 681.

FONTAINE, FORTUNE HIPPOLYTE.—(Provisional protection only.)—"A process for reproducing photographies, drawings, "paintings, and engravings engraved on metal."

To reproduce engraved plates by "negative stereotypes."—A gelatinous solution of bichromate of potash is poured upon a since

nen dry, the gelatinous surface is placed in contact with id side of the negative, and exposed to light. The zinc moved and placed in lukewarm water to dissolve the bi; the picture appears engraved, and is covered with a of gallic or pyrogallic acid and washed. A gutta percha en taken of the plate and a mould in relief is made from the latter is suitably prepared, and an electrotype is from it.

roduce engraved plates by "positive stereotypes."—A copper plate is covered with a gelatinous solution of biof potash and gum arabic; when dry, the gelatinous placed in contact with the printed side of the positive, sed to light. The copper plate is then removed and rith a solution of perchloride of iron; this solution exhe unimpressed or soluble parts of the gelatine dissolves bromate and prepares the way for the acid, by which I out the picture or image in presenting it in relief to its;" when the picture is developed and engraved by the iod, the acid is poured off, "and the plate is ready for sion and the reproduction of copies identical with the I."

xd, 4d. No Drawings.]

A.D. 1862, April 3.—No 948.

ALEXANDER.—"Improvements in photographic appa-

camera shutter for covering and uncovering the lenses eously.—The covering consists of two pieces, which, by a spring and elastic bands, are separated in front of the 'the lens, and their motion takes place "in opposite ons towards the edges of the lens."

Changing the direction of the lens and picture without the apparatus."—A "turntable movement" is arranged front part of the instrument. The Final Specification mention this improvement.

Affording a longer period of time for the action of light foreground of the picture than on the sky or upper pert." ain of dark paper, with the horizon line cut away upon its rt, is situated in the interior of the camera near the picis capable of being removed downwards by means of an elastic cord. Another apparatus for effecting the same object consists of a small rectangular box, placed upon the front of the lens tube, which contains a frame carrying a number of uniform pieces of metal capable of sliding up and down with friction; a light-proof covering is thus formed to the upper part of the front of the box.

4th. Apparatus for finishing paper photographs.—The sliding table on which the picture rests is heated by means of gas, so as to afford "the advantages of hot-pressing with perfect safety from "charring the picture." This arrangement is not alluded to in the Final Specification.

[Printed, 6d. Drawing.]

A.D. 1862, April 8.-Nº 996.

CARTER, CHARLES PEMBERTON.—(Provisional protection only.)
—"An instrument for inserting photographic or other pictures
"into or removing them from between the 'mounts' of photo"graphic albums or other flat spaces, into which the fingers
"cannot be inserted."

The instrument resembles a pair of pliers, "but with the iaws " gradually thinned down to an edge at their extremity, and more " or less widened out." The inner surface of the lower jaw is roughened, "whilst the corresponding surface of the upper jaw is " made quite smooth. When quite closed, these surfaces " meet " only at their extremity." "The ends of the jaws being made " quite thin they can be inserted with facility into the narrow " space of the mount, together with the picture, so as to adjust it " accurately in its position, or they can be easily inserted between " the surfaces of the picture and the 'mount' for the purpose of " removing the former from between the latter. The handles of " this instrument may be formed straight, and in a line with the " jaws, or, by preference, I bend them, so as to be at an angle " with the same for more convenient manipulation, or they may " be first bent up at an angle, and the extremities bent down again " parallel with the jaws. I sometimes also introduce a spring " between the handles to press them open when let go by the " hand; and in some cases I form one of the jaws with a sharp " knife-edge for cutting the pictures; or I form the handles close " to the hinge as scissor blades for the same purpose. This " instrument may be formed of any suitable material, and it may

" be employed for inserting pictures into any other flat spaces

" besides those in the 'mounts' of photographic albums."

[Printed, 4d. No Drawings.]

A.D. 1862, April 11.-No 1042.

GARNETT, JOHN.—(Provisional protection only.)—"Improve-" ments in apparatus for washing photographic pictures."

"This invention relates to a peculiar construction of apparatus

" for washing photographic pictures, and consists in the employ-

" ment for that purpose of a shallow box perforated on its upper

" and under side, into which box the prints or pictures requiring to be rinsed or washed are deposited, suitable divisions being

to be rinsed or washed are deposited, suitable divisions being

" placed in the box to separate the different sizes of prints, which

"divisions or partitions are made moveable to suit different sizes.

" The box with the photographs therein is placed inside a con-

" venient reservoir of water, and a vertical motion is imparted to

" the box whilst submerged by means of a handle or other

" suitable device so as to cause the water to flush alternately

"through the top and bottom perforations in the box and thereby

" effectually rinse the pictures on both sides."

[Printed, 4d. No Drawings.]

A.D. 1862, April 25.—Nº 1222.

McLACHLAN, LACHLAN.—"Improvements in governing or "regulating light used for taking photographic portraits and other photographic pictures, part of which improvements is also ap-"plicable to lighting picture galleries."

1st. "A method of preventing the direct rays of the sun from "falling upon the sitter or other object to be copied, and of mo"difying or directing the light as occasion may require."—Strips of wood are mounted upon centres so as to hang downwards from the roof or to be inclined at any angle; cross pieces may be placed within the spaces formed by the strips. To regulate the aide light, projecting slips, which extend sideways, are used "in combination with partitions situated within the spaces "between them."

2nd. "A method of preventing light from being reflected from "the surface used as a background in taking photographic "portraits."—Over the framework of the background is stretched a surface "of gauze or other material, which is partially trans-

" parent." Behind this is placed black velvet " or other " material which will absorb light," the effect of which is, that, instead of the light being reflected from the surface of the background, it passes through it and becomes absorbed by the black velvet screen; or a second transparent surface placed at an angle may be used, one part of the background can thus be obtained of a darker shade than the other. The angle at which the lastmentioned surface is placed may be determined by means of bolts which pass "through rails at each side."

3rd. "The application of the above-mentioned method of re-" gulating light to the lighting of picture galleries."

[Printed, 8d. Drawing.]

A.D. 1862, April 30.—No 1267.

HARRINGTON, JOHN, and PERKINS, THOMAS.—(Provisional protection only.)-"An improvement or improvements in mounting " photographic portraits for visiting cards, and in mounting pho-" tographs in general."

"Our invention consists in making a depression in that part of " the card at which the photograph is to be mounted; the said " depression being of the size and shape of the photograph, and " constituting a sunk recess, in which the photograph is placed, " and secured by gelatine or other adhesive material. The de-" pression or recess may either extend through only part of the " substance of the said card mount, or through the whole sub-" stance of the said card mount; that is, the depression or recess " may be made in the front of the card mount without any cor-" responding projection at the back or opposite. The depression " in front may be a corresponding projection at back. When we " make the depression in front without a projection at back, the " card is compressed at the sunk part into a less thickness than " that of the other parts of the card. When we make a pro-" jection at back, a thinner card may be employed than when there " is no projection at the back. The depression may be sur-" rounded with an ornamental border. The sinking of the ", photograph in the card mount preserves the photograph, and " gives it an elegant appearance.

"Our invention is particularly applicable to small photographs " for visiting cards, but is also applicable to photographs of " larger size. We make the depression in the card mount by

" means of dies and pressure."

[Printed, 4d. No Drawings.]

A.D. 1862, May 14.-No 1453.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Leon Farrenc.)—"An improved method and apparatus for the production of photographic and stereoscopic portraits and pictures."

"This invention consists, first, in the construction and employment of instruments containing lenses capable of producing
portraits or pictures, distorted in length, breadth, and obliquity;" "second, in the production of a new style of photographic portrait, distorted in length, breadth, and obliquity,
possessing all the clearness of an ordinary portrait;" "third, in
the application of these portraits to the stereoscope;" fourth
in uniting and combining a pair of distorted portraits, according to the plan adopted for stereoscopic pictures reciprocally
taken at the desired angles.

"The instrument is chiefly composed of two cylindrical lenses, of different focus, both convergent, the generating lines of one being perpendicular to the generating lines of the other, and combined in such manner that the images they produce are superposed on the same plane." This combination concentrates the rays of light so as to give an elliptical image. If the object is set on the small axis of the ellipse, the portrait will be short in comparison to its width; "if it is set on the chief axis it will be lengthened, enlarged, and thin." If the two cylindrical lenses are not quite perpendicular, or if the object is not set on either axis of the ellipse, the figure will be distorted throughout, Ordinary lenses may be used in combination with the cylindrical lenses. "If two stereoscopic prints are distorted, they will remain stereoscopic after the distortion."

[Printed, 8d. Drawing.]

A.D. 1862, May 19.—No 1516.

MORRIS, TIMOTHY, WEARE, ROBERT, and MONCKTON, EDWARD HENRY CRADOCK.—The title of this invention is "Improvements in obtaining and applying light and heat by "electricity;" "light suitable for various kinds of photography" is mentioned in the Provisional Specification.

"Our invention consists in obtaining light by passing electricity through vacuum tubes or other suitable vessels, the
electricity employed being obtained from frictional, electroPH.
D

" magnetic, magneto-electric, or hydro-electric machines, and also "from other sources, but we prefer to obtain it from our induction "coils, as patented on October 24th 1861, No. 2661, in connection "with our patented batteries, and to obtain heat also with or "without such induction coil by means of such batteries."

After mentioning several applications of their methods of obtaining and applying light, the Patentees state:—"We also use our "light in conjunction with lenses and glass of various colors and variously compounded, in order to produce light suitable for "various kinds of photography; and we also use ground glass and other suitable media over our vacuum vessels, in order to "diminish the light; and we further use a metallic or other cover of a suitable shape and contrivance to place or draw over the "light, in order to shut it off as required."

[Printed, 4d. No Drawings.]

A.D. 1862, May 29.—No 1611.

HIRST, JOHN, junior, and WOOD, JOSEPH.—" Improvements " in stereoscopic apparatus."

"The object of the improvements is to neutralize the granular, fibrous, and general coarseness of objects seen through stereo- scopic glasses, especially when high magnifying powers are employed, and also to produce various changes of effect to such objects."

Tinted, transparent, or semi-transparent media are so applied that the light falling on the front of the picture may pass through them without intercepting the vision, When the picture is transparent, the said tinted media may be appled in combination with other tinted media at a short distance behind the picture.

When the picture is transparent, tinted transparent, or semitransparent media are applied "at a short distance behind the "picture, so as to produce varied effects to the picture;" the media are connected "by cords, strings, or chains, or otherwise, " so that there may be intervals between the respective media, "when the natural color of the transparency may be seen."

In connection with stereoscopic apparatus, a lamp is applied, "with a shade or shades, lenses, and transparent or semi-trans-"parent media of various tints and shapes." Separate slides may also be added to the transparent picture. The drawings show apparatus in which flexible transparent media are mounted on rollers, which are turned by means of suitably placed milled heads. Parts of the media are shown removed, to allow the light to fall direct on the picture.

[Printed, 1s. 8d. Drawings.]

A.D. 1862, June 7.-Nº 1712.

HASELTINE, GEORGE.—(A communication from Allen Benjamin Wilson.)—"A new and improved photographic camera."

The camera box is made to serve as a dark chamber, besides being employed to expose the sensitive surface to the action of the light that has passed through the lenses of the instrument. Opposite to the camera tube is a door shutting tightly. Bearings, rotated by a key, enable the focus and negative glasses to be turned up and down. The negative glass holder and the bath are combined in one instrument. The journal is hollow and has a crooked stem funnel inserted from the outside of the box.

The focus glass holder being placed in the bearings, is turned into a vertical position, and the focus is obtained. The negative collodionized glass, secured to the plate holder, is then placed in the bearings with the collodion towards the lens. When the "tunnel," and the key are inserted, the nitrate of silver solution is poured through the tunnel on to the horizontal plate. The plate, being sensitized, is turned into a vertical position and the nitrate solution runs off, through the depressed tunnel, into its phial. The plate is then exposed, brought to the horizontal position, and the "developing bath is introduced and removed "as was the first." The tunnel and key may then be removed "and the negative cleaned in the light."

By means of tubes, these operations can be performed when the combined bath and plate holder is vertical.

[Printed, 8d. Drawing.]

A.D. 1862, June 10.—Nº 1724.

SMITH, WILLIAM.—(A communication from Henri Lissagaray.) — (Provisional protection only.) — "Improvements in photo-" graphy."

"These improvements relate to the ornamentation of photographic, works, and chiefly to the production of backgrounds, borderings, and such like aids to the art of photographing "objects. For these purposes I produce the design required by employing a sheet of glass or other equivalent transparent substance, upon which by galvanic agency I deposit first a coat of gold or other metal suited for the purpose, and next a coat of platina or other equally suitable metallic surface. I then engrave by means of a stile or point the required ornamental design, so that the light may pass through the lines so marked, engraved or cut into or through the metallic surface. An open space may be left in the centre or other part or parts of the plate prepared as described, so that a portrait or portraits, or other subject or subjects intended to be reproduced may be introduced behind or before such space or otherwise in combination with such engraved plate.

"This process when used for ornamenting photographic proofs, is employed by means of double stereotype plates of glass or other equivalent transparent substance prepared as described and used together by superposition or in succession."

[Printed, 4d. No Drawings.]

A.D. 1862, June 25.—N° 1871.

CLARK, WILLIAM. — (A communication from Gustave Jeanne Julien.)—"An improved frame for holding photographic pictures."

The "portable sliding frame" consists "of grooved bars in "which the pictures slide, and are held in position," thus the inventor is "enabled to combine in one frame of variable dimen"sions, which may be of any desired form or ornamentation any "number of photographic pictures."

The drawings show an arrangement for holding three pictures, a second frame for holding five pictures, and a third frame for holding a still greater number of pictures.

"The facility for producing these combinations consists in the arrangement of parallel bars forming the frame or holder, which may be made of greater or less length, and placed at various distances apart in any number of rows in such manner that the whole shall present an artistic appearance."

The horizontal bars of the arrangement are grooved, so that the pictures are held securely, and in the grooves the said pictures may slide easily. The horizontal bars are connected together by vertical bars placed behind, which have perforations or screw rings at their upper ends to facilitate their suspension in any desired position. In cases where all the pictures may not be of the same size, the horizontal bars are furnished with a thumbscrew, and nut sliding in a slot in the vertical bars, "whereby pictures "may be fixed in any desired position."

[Printed, 8d. Drawing.]

A.D. 1862, June 27.—Nº 1888.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Jean Théodore Dupuy.)—"A method or methods of preparing "paper for the reception of photographic pictures or impressions, "in order that the said pictures or impressions may be transferred to and fixed on wood, porcelain, and other surfaces."

The sized paper is covered with a solution of ammoniacal citrate of iron and bichromate of ammonium and dried in a dark room it is then submitted to light and damped; the dampness condenses only on those parts which have been shaded from the light. The impression is developed in a solution of iron and fixed by hyposulphite of soda and cyanide of potassium, it is then washed and placed on gummed paper, coloured with a vegetable or mineral colour, and varnished.

To transfer a paper photograph to any desired object, it is coated with a thin coating of transfer varnish, placed with its prepared side next to the object, covered with damp cloth, and rubbed evenly with a paper knife. The cloth is then raised, the paper is wetted with water, and when it (the paper) is peeled off, the photographic print will be found to be transferred to the surface on which it was placed. The print is then washed, dried, and varnished.

Other sizing materials, sensitizing agents, and varnishes, besides those mentioned above, are alluded to.

[Printed, 4d. No Drawings.]

A.D. 1862, July 4.—No 1944.

RUSSELL, SAMUEL.—(Provisional protection only.)—"Im" provements in stereoscopes."

The stereoscopes made according to this invention are in the form of a box, "so that the interior of the instrument is conveiniently used as a case to contain pictures." "Against the front
of the box and within it a mirror is fixed and the lenses or eye
in pieces are mounted in apertures in the lower part of the back

an angle of more than 16 or 17 d " The light falls directly on the picture en " of the case, and to admit more light to " portion of the front of the case over the " small portion of each of the sides, to tur " this piece, when turned back, also serves " its upper edge resting against it." To give to the pictures, the mirror or lenses may be n or pieces of coloured glass may be placed in " convenient to place a disc carrying it n " number of pieces in front of each of the " rotating the discs either of the colors may " the eye pieces, either the same colors may " each eye piece, or one eye piece may have " opposite to it, and the other another color." [Printed, 4d. No Drawings.]

A.D. 1862, July 8.-Nº 196

GRUNER, CARL BERNHARD .- "Improvem

" apparatus."

By means of this apparatus the "dark char "dispensed with, and the operations of prep "of developing, strengthening, and fixing the "so in the camera." djustable sliding box, which has, however, a projecting part eaching above the body of the camera and fitted with a door. The uprights of the slide box acts as guides to a counterbalanced ross bar that supports the plate frame. The dipping baths are, one after another, placed immediately under the plate frame, and slide is removed when the plate has to be lowered into a bath. Whilst the plate is being sensitized the focussing screen may be ntroduced for setting the lens.

The process is applicable, with suitable modifications, to dry plates as well as to wet.

[Printed, 10d. Drawing.]

A.D. 1862, July 10.-Nº 1988.

PONTI, JOSEPH.—(A communication from Carlo Ponti.)—(Provisional protection only.)—"An improved apparatus for viewing photographic pictures, and the preparation of photographic pictures to be used in such apparatus."

The apparatus resembles, in general form, that of a stereoscope, but it is of considerably larger dimensions, and is "provided with " only one large magnifying lens, and only one representation of " the picture" of large dimensions, the object of the invention being to present, by means of one lens, a magnified representation of the picture readily to both eyes of the observer, thus making the object appear of the natural size and with a certain amount of stereoscopic effect; a shade prevents the eyes from being affected by extraneous light. The instrument is placed in a horizontal position, and the end carrying the pictures is made to revolve, so as to bring its longest dimension either into a horizontal or into a vertical position at will. For pictures to be viewed by light reflected from their surfaces, two reflectors are provided; these are closed when transparent pictures are to be viewed, and the opaque end of the apparatus is let down, so that the light passes through the picture. The picture, when inserted, is caused to be slightly concave to suit the form of the lens. During the changing of the pictures, an opaque flap prevents the sudden accession of light from blinding the eyes.

The paper photograph that are to present day and night and other effects, are made so as to reflect the light and yet to be artially transparent. Tinted transparent surfaces are also used in

connection with the photograph, when it is viewed by transmitted light.

[Printed, 4d. No Drawings.]

A.D. 1862, September. 5-Nº 2459.

JOHNSON, JOHN ROBERT, and HARRISON, JOHN ASH-WORTH.—"Improvements in apparatus for taking photographic "panoramic pictures."

In the curved-plate camera, the sensitive surface forms a part of a cylinder, and the panoramic picture is produced by rotating the instrument upon a vertical axis that passes through the centre of the lens, the sensitive surface being stationary. If the sensitive surface be flat, the panoramic picture is produced by making the plate or surface traverse in the opposite direction to the direction of rotation of the lens.

lst. The lens is in the centre of the camera when a flat plate is used, and rollers that support it are equally disposed round its centre of motion. The plate holder slides within the camera. It is preferred to mount a narrow box at the back of the lens holder to contain the plate holder and to allow of its motion.

2nd. The movement of the plate from the vertical axis is accomplished either by a toothed wheel and rack, or by means of cords and pulleys.

3rd. Adding a fly wheel to the gearing for working all forms of panoramic cameras.

4th. The adaptation of a spring or falling weight to give motion to such cameras.—A fly vane, the arms of which may be set at a varying angle, or a pendulum, may control the rate of motion; a piston working in a tube of water is also used.

5th. The exposure, in cameras moving at an invariable rate, is regulated by an expanding diaphragm which is placed near the lens.

6th. To regulate the form and dimensions of the aperture that admits light to the plate, two slips of sheet zinc, curved so as to admit of a suitable relative proportion of light to the sky and to the foreground respectively, are employed.

[Printed, 2s. Drawings.]

A.D. 1862, September 20.-Nº 2579.

FORESTIER, PIERRE LOUIS.—" Improvements in photographic " albums."

"Cartes or portraits are surrounded by a bevil edged border having the appearance of a frame, and ornamented in any suit"able manner."

"To this end, I commence by cutting in thin cardboard or " strong paper of the required dimensions an opening, correspond-" ing with the outline of the proof to be framed, and ornamented " or left plain at will. Over this first sheet I paste a second " formed of cardboard, corresponding in thickness with the depth " of bevil required, and having a centre opening somewhat larger " than the first. Over this I apply a third sheet of thin card, " with a smaller opening than the preceding provided with an " ornamental border, from which the bevil is formed by pressure " as in ordinary passe-partouts. Finally, I apply, when necessary, " a fourth sheet formed of Bristol board or other paper, the open-"ing of which precisely corresponds with the outline of the bevil " edge, and which may be gaufered or otherwise ornamented at " will. To form a double faced leaf, from each pair of single " frames completed as above, I glue them back to back, after " interposing at the centre two thicknesses of cardboard, which " represent the space to be occupied by the photographic proofs. " The slideway for the introduction of the proofs may be reserved " at any suitable point, top, bottom, or side. The leaves, pre-" pared as above, are bound into albums in the ordinary way, the " form, dimensions, and decorative details being varied according " to circumstances."

[Printed, 4d. No Drawings.]

A.D. 1862, September 20.—Nº 2582.

DIXEY, LEWIS, and SMITH, GEORGE.—"A new or improved "method of tinting, by lithographic printing, photographic portraits and backgrounds, and embossing the same."

A photographic print is obtained from a negative in which the background is blocked out with opaque paper, thus producing a white background in the print. Wherever it is desired to preserve the photograph from the tint about to be applied, in the usual manner from a lithographic stone, a piece of tracing paper is gummed upon the photograph with its outline suitably placed. When the tint has been printed on to the photograph and tracing paper, the tracing paper is removed with a damp sponge, leaving a photograph with an evenly tinted background. The tone of the photograph may, in some instances, be improved by printing

" again with the lithographic press all over the picture unprotected

" by the tracing paper."

Embossing the photograph gives it "the appearance and ad"vantages of drawing paper." The damped photograph is laid
upon a silk "or other fabric that has the resemblance of wire
"mark, such as the drawing papers usually show impressions of,"
the whole is then placed under a press "with several thickness of
"blotting paper next the photograph between it and the press,"
and submitted to severe pressure. "The photograph will have
"the impression of the fabric or block used, and should then
"have very much the appearance of a photograph taken upon
"drawing paper with a fine even background tinted," and may
be mounted on cardboard.

[Printed, 4d. No Drawings.]

A.D. 1862, September 23.-Nº 2598.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Jean Jacques Leopold Rousseau de Lafarge.)—(Provisional protection only.)—" Improvements in photographic apparatus."

"This apparatus enables the manipulator to operate in full " light upon damp collodion, to sensitize the glass, and to finish " the proof in the light. The apparatus does not alter the ne-" gative now used, but it serves as an auxiliary to it. In the " apparatus the following characteristic elements are combined :-"The employment of two vertical and independent bath vessels " arranged to allow of the glasses being easily plunged therein; " one vessel, containing the bath of silver for sensitizing the " damp collodion, may be of gutta percha, hardened rubber, or " other material having no action on the bath; the other, con-" taining the iron bath for developing the picture, should be of " yellow or orange colored glass, if made of any other material it " should be lined with yellow colored glass. There is a frame " for holding the glasses to be exposed, capable of being opened " and closed at bottom by withdrawing or inserting a sliding bar. " There is a second frame for holding the collodionized glass in " the former frame, which second frame is styled the plunging " frame because it is used for introducing the glass into the bath " vessels entering also with it; it is insulated from the first " frame and may oe passed through it; a piece of cat-gut is " attached to the plunging frame to raise and lower it into and " out of the baths."

[Printed, 4d. No Drawings.]

A.D. 1862, October 4.-No 2682.

AMPHLET, SAMUEL .- (Provisional protection only.)-" An im-" provement or improvements in ornamenting surfaces of wood." "My invention consists in ornamenting surfaces of wood by " mounting directly thereon photographs of objects from which "the background has been cut away, the surface of the wood on " which the said photographs are mounted constituting the back-" ground to the said photographs. Or the said photographs " may be mounted upon plain, colored, or ornamented paper or " fabric secured to the middle or other part of the surface of " wood to be ornamented, the size of the said paper or fabric " being larger than that of the photograph to be mounted thereon, " and having any desired figure, but leaving part of the surface of " the wood exposed. The photographs I prefer to use are photo-" graphic portraits, or groups, or photographs of sculpture or " statuary, or other detached object or objects, the background " of which has been cut away. I use positive photographs taken " on paper or other flexible material, and I attach the photo-" graphs to the surface of the wood or the background on the " surface of the wood by paste or size, or other adhesive material. "The photographs are then sized and varnished, and may after-" wards be polished in the manner commonly employed in finish-" ing surfaces ornamented with tartan or Scotch plaid patterns. " The surfaces of wood which, among others, I ornament accord-"ing to my invention are surfaces of plane tree or sycamore, " satin wood, maple, walnut, and mahogany."

[Printed, 4d. No Drawings.]

A.D. 1862, October 20.-Nº 2820.

BROOMAN, RICHARD ARCHIBALD.—(A communication from François Louis Marquier.)—(Provisional protection only.)—" Im- provements in transferring designs and prints produced by pho- tography to stone or zinc."

A grained lithographic stone is treated with a composition containing "water bi-chromatized to saturation" and a "thick "solution of gum arabic." The face of a glass positive is then

X.

į

applied, in contact with the stone, and the arrangement is exposed to the action of light. The inventor then raises the positive, and throws "on the stone a solution of potass, for the purpose of " destroying the coat of bi-chromatized gum in those parts pro-" tected from the action of light, and to form a slight engraving; " in about a minute or more I incline the stone and allow it to " drain, then place it flat, and pass over it a sponge containing " some such fatty matter as soapsuds, which I cause to enter into " the engraving produced by the solution of potass, I next wipe " the surface with a soft linen or other rag, and when dry I gum " the stone, as in the ordinary lithographic process, after it has " been acidulated, I leave the stone to rest for about a quarter of " an hour, and then, inclining it, wash it with plenty of clear " water and allow it to drain, I again gum it and place it on a " lithographic press, allow about a quarter of an hour or more to " elapse, and then ink the stone and proceed to print as in the " ordinary process."

[Printed, 4d. No Drawings.]

A.D. 1862, October 25.-Nº 2882.

BOURQUIN, JOHN PETER.—(Provisional protection only.)—
"An improved manufacture of mount for photographic and other
"albums, miniatures, and other pictures."

"The object of this invention is to manufacture mounts that
"will not soil with the touch and which when dirty may be

" will not soil with the touch, and which when dirty may be " readily cleaned without injury thereto; this I propose to effect by " substituting veneers of choice woods for the cardboard facings " of mounts, which veneer facings will admit of being French " polished, and of receiving various kinds of ornamentation. In " making album mounts I first back leaves of veneer with paper " or cloth, and then cut out the openings for the pictures; I next " place two leaves back to back, so that the openings in each shall " correspond, and apply cardboard filling at certain parts so as to " leave space between the leaves of veneer for the insertion of the " photographic or other pictures, as is well understood; then by " glue or other cement applied to the filling pieces and leaves " where in contact therewith I connect the leaves of veneer to-" gether. When preparing mounts for passe-partouts and minia-" tures as well as albums mounts, I propose to ornament the " mounts either by guilding, painting, or printing, preferring to

" apply mosaic printing which I have already adapted to the or-" namentation of book and album covers."

[Printed, 4d. No Drawings.]

A.D. 1862, October 28.—No 2906.

SUTTON, THOMAS.—" Improvements in preparing albumenized " paper for photographic purposes."

" In the ordinary method of preparing albumenized paper for " photographic printing purposes, the sheet of paper is floated " upon the surface of liquid albumen, but without having under-" gone any previous preparation, in order to render it impervious " to liquids; the albumen therefore soaks into it more or less ac-" cording to the nature of the common sizing which it contains. " Moreover, in the subsequent operations of printing, the various " solutions employed penetrate the paper in the same way. The " prints are therefore less vigorous and brilliant, and also less " permanent, than if the albumen had been applied to the sur-" face only or to a sheet of paper which had been previously " rendered impervious to liquids by the application of some water-" proof sizing. In order to remedy this defect it is proposed, " according to this invention, to prepare the paper before albu-" menizing it, by soaking it in a solution of india-rubber or gutta-" percha, in benzole, or any of the other suitable solvents of these " substances, for example, chloroform, kerosolene, or bisulphide " of carbon. A very good solution for the purpose consists of " five grains of india-rubber dissolved in one ounce of benzole. " After the paper has been immersed in this solution and dried, " it is to be albumenized in the usual manner." [Printed, 4d. No Drawings.]

A.D. 1862, November 5.-No 2997.

NEWTON, ALFRED VINCENT.—(A communication from Paul Schulze and Frederick William Billing.)-" A new process of obtaining printing surfaces, dies, and substitutes for photo-" graphic negatives."

The objects of this invention are:-

1st. "To procure a cheap substitute for wood engraving," from which to obtain electrotype printing surfaces.

2nd. To make easy the process of etching metal surfaces.

3rd. To obtain an easy mode of making dies for seals.

4th. To obtain by drawing, "substitutes for photographic negatives, which may be printed from in the same manner as
those negatives by the action of light acting through them upon
sensitive paper."

The principal feature of the invention consists in, first, making a drawing in ink, which is soluble in water, upon a hard surface which has been previously coated with an alcoholic solution of shellac, then covering the whole surface with thin varnish; the plate is then acted upon by water, so as to wash off the latter coating only from the lines of the drawing, the ink of the drawing being itself washed away. The plate, in this condition, can be used for the above purposes.

To carry out the 4th part of the invention, a surface of finely-ground glass is used, the thin varnish consists of beeswax, asphalte, rosin, and lampblack, and when the ink is removed, the dry surface is dusted over with lampblack and varnished. The plate thus prepared "is used for printing upon prepared paper in " the same manner as a photographic negative obtained by the " camera."

[Printed, 4d. No Drawings.]

A.D. 1862, November 7.—No 3009.

MENNONS, MARC ANTOINE FRANÇOIS. — (A communication from Eugène Murie Mathieu Plessy.)—(Provisional protection only.)
—"Improvements in the manufacture of paper."

1st. "The addition to paper pulps of albumen, gluten, scrum," or other analogous substances coagulable by heat."

2nd. "The application to the surface of the manufactured paper of one of these substances, either alone or in combination with coloured or colourless powders."

"The object of these processes is to produce a glazed paper or cardboard for general printing and photographic purposes, applicable in certain cases as paper hangings, which being thus coated with a transparent and insoluble matter, may be readily washed or otherwise cleaned at will. The albuminous matter is incorporated with the pulp by any convenient means, the remaining processes of manufacture being carried out in the usual way. The coating of the manufactured paper may be effected either by immersion in a bath of the albuminous matter, or by simple brushing of the latter over the surface. The paper thus treated is then dried and glazed in the ordinary manner.

"returns the wheel to its original position when released." A pinion engages both fourth or seconds wheels, its pivot "next the secondary fourth wheel being mounted in a bar moving on a stud to and from the said secondary fourth wheel. This bar is acted upon by a spring that keeps it out, thus when not in action the spring detaches the pinion from the secondary while it remains in gear with the primary seconds wheel. A small stud is passed through the watch case and when pressed upon moves the bar forward and makes connection with the second wheel, which then starts and moves forward carrying the seconds hand."

This improvement is called the 2nd improvement in the Final Specification.

[Printed, 10d. Drawing.]

A.D. 1862, December 3.—No 3247.

EDEN, ALFRED FREDERICK.—"Improvements in apparatus for taking minute photographic pictures and magnified pictures of microscopic objects."

lst. "Adapting to the object end of the camera a small re"moveable box or dark chamber in which is placed the glass
"plate with the sensitive surface when it is desired to obtain a
"minute photographic picture. In order to obtain an enlarged
"or magnified picture of a microscopic object the latter is placed
in the small removeable dark chamber, and light is admitted
through a proper aperture and allowed to pass through the
object and also through an arrangement of lenses, which will
throw the magnified image on to a sensitive surface placed at
"the proper focal length behind."

2nd. In taking micro-photographs, a stop with an aperture of less than one-fiftieth of an inch is placed behind the lens and in front of the negative.

3rd. "Adapting to the object end of the camera a focussing lens, which is screwed on to the small removeable box or dark chamber, and is adjusted by means of a sliding tube. This lens is only used for focussing when it is desired to produce micro-photographs, but it will also serve as a condensing lens for throwing light on the object when the apparatus is employed for taking photographic pictures of microscopic objects."

PH.

This apparatus will also serve for taking full-length microphotographs from life by removing the negative from the large end of the camera and placing the sitter opposite to the said end.

[Printed, 8d. Drawing.]

A.D. 1862, December 4.—No 3249.

SWAN, HENRY.—" Improvements in stereoscopic apparatus."

Stereoscopic pictures are combined with glass prisms in such manner that the pictures, which are in fact depicted on the exterior of the glass, shall produce an image apparently solid and imbedded in the glass. Two prisms are placed "with a side or " surface of the one in contact with a side or surface of the other. "The prisms each have one of their angles a right angle, or " nearly so, and they are so placed together that they produce a " solid having parallel sides. The stereoscopic pictures are either " produced on, applied to, or placed near the adjacent sides of "this solid, one picture on one prism, and the other on the " other. On looking at one of the sides of the solid unoccupied " by a picture the image is seen, the light from one picture " coming from it through the two prisms and direct to one of " the eyes of the observer, whilst the light from the other picture " is reflected at the surfaces of the prisms which are in contact, " and is thus directed to the other eye of the observer." "The " side of the prism through which the pictures are viewed is con-" veniently made convex, the image is then seen magnified more " or less."

The drawings show various methods of mounting the prisms. If the apparatus is of large size "prisms of water contained in " glass vessels" may be employed. When a certain size is ex-

ceeded, the illumination of the pictures is regulated "so that the " light coming from a direction directly or nearly directly opposite

" to each picture is confined to such a space as to reach that " particular eye only for which it is intended."

[Printed, 6d. Drawing.]

A.D. 1862, December 9.—No 3298.

CLARK, WILLIAM. - (A communication from Jean Baptiste Sabatier Blot.)-(Provisional protection only.)-" Improvements " in photographic apparatus."

" This invention relates to an improved arrangement of dark " chamber for photographic purposes, having a laboratory com"bined therewith, which permits of its being used in the open air. This laboratory, which is completely closed, is placed under the chamber, and is formed of several compartments containing the different baths, in which the plates descend successively by varying the position of said compartments or baths."

A "lower rectangular box" is placed under the dark chamber of the camera, and has a smaller one "in its interior, open at top, " and containing a series of vertical divisions" "ranged parallel " to each other, their number being varied according to the number " of operations to which the plates are to be subjected." The smaller box is moved into a position suitable for the manipulation to be performed, by means of a rod which passes through the end of the rectangular box, the plate holder is then made to descend into the requisite bath by means of a button at the back of the dark chamber. A spring catch holds the plate holder at its The groove which the above-mentioned highest elevation. button moves in, is closed by a strip of india-rubber, so that no light is admitted into the interior of the apparatus. A space in the rectangular box is set apart "for depositing the plates, bottles, " and other requisites."

[Printed, 8d. Drawing.]

A.D. 1862, December 20.—No 3410.

PERKINS, WILLIAM. — (Provisional protection only.) — "Im" provements in the manufacture of a substitute for turpentine,
" which is also applicable to the manufacture of varnishes and to
" purposes to which turpentine is now ordinarily applied."

"I propose to effect the purification of amyle or fusel oil, or of the oxides of amyle by means of hypo-chloride of calcium, chromic acid, sulphuric acid, or any mixture of them, in about equal proportions, and afterwards to effect the rectification or distillation of the same at a temperature of not less than 270 degrees Fahrenheit upon such bodies." An admixture of the said amyles, with their equivalent proportions of liquid hydrocarbons, constitutes the said substitute for turpentine. The amyle, treated as described above, is united "with liquid hydrocarbon in such proportions as to make it analogous to the ultimate analysis of spirits of turpentine, say one part amyle to ten parts of liquid hydrocarbon. In some cases I propose to use other deoxidizing agents for reducing the amyle as above, such as potassium or sodium. This substitute for turpentine

"will dissolve gum copal, damar, mastic, lac, or other gums, and will form an improved varnish, the natural texture of the gums not being destroyed by fusion, which is not necessary. The varnishes will be elastic and capable of receiving any amount of polish, they will also be especially applicable to photographs."
[Printed, 4d. No Drawings.]

A.D. 1862, December 23.—No 3429.

RUSSELL, SAMUEL.—"Improvements in stereoscopes."

The instrument is in the form of a box, and, when out of use. contains the stereoscopic pictures. A cover or covers closes or close the apparatus, and against one side mirrors are fixed. "The " stereoscopic pictures or slides are, when about to be observed. " placed in suitable grooves or holders opposite the mirrors, and " on the side where the lenses or eye-pieces are applied they are " held in a position inclined to the plane of the lenses and also " to the plane of the mirrors;" the light thus falls directly upon the pictures. In some cases the box is made "in two similar " parts, and each part, when separated from the other, becomes " a stereoscope." Sometimes a stereoscope, fitted as described above, is arranged with both top and bottom open, and a handle with spring arms is added, so that the instrument "can be turned " as on an axis between the ends of the two arms," concave cups being applied "to the outer ends of the arms and convex projec-" tions to the ends of the instrument."

To determine the respective angles of the prisms, the picture, and the reflectors:—The distance of the image which is to be produced is marked opposite and parallel to the eye piece. The lower edge of the picture is then placed immediately over the prism, this point and the bottom of the image already drawn is joined by a line, and a perpendicular is raised to the said line, at its bisection. The reflector is placed in the perpendicular, and "the line of the image" being produced upwards so as to cut the perpendicular, will give a point which, if joined by a straight line to the bottom of the picture, determines the position of the picture.

Modifications of the above are set forth.
[Printed, 8d. Drawing.]

PHOTOGRAPHY.

1863.

A.D. 1863, January 21.—No 185.

CLARK, WILLIAM.—(A communication from Adolphe Teissonnière.)
—"Improvements in preparing and obtaining photogenic pictures
" or representations."

A positive image is obtained "direct from a positive by the use "of ammoniacal salts combined with the organic matter," and by throwing down black precipitates from certain metallic solutions. When tannate of iron is precipitated from a solution of sulphate of iron, by means of tannic acid, a positive impression is obtained in common black ink.

"A sheet of paper, albumenized with chloride of sodium or hydrochlorate of ammonia," is sensitized by means of "bichro"mate of potash (or other ammoniacal salt)," exposed to the action of light, immersed in water, and its whole surface treated with the precipitant. The excess of the precipitant is then removed by means of water, and the "proof" is plunged into a bath of the metallic solution. When the image has acquired a certain distinctness, the "proof" is washed, dried, and coated "with white "varnish dissolved in alcohol."

The principle upon which the process is based is as follows:—
The "bichromate of potash or bichromate of ammonia," when
combined with organic matter, becomes insoluble under actinic
influence, the parts of the paper which are unaffected by actinic
force remaining soluble. The soluble parts, on being washed,
"give up the substance and leave the paper exposed in its pri"mitive condition." When the precipitant is applied, the "chlo"ride of sodium or hydrochlorate of ammonia" acts "as a mor"dant in the formation of peroxide of iron," and only those parts
which have been unaffected by actinism absorb the precipitant,
and become black by immersion in the metallic solution.

The sensitizing solution is applied, by means of a sponge, on to the sheet of albumenized paper.

[Printed, 4d. No Drawings.]

A.D. 1863, January 28.-Nº 256.

CLARK, WILLIAM.—(A communication from François Willème.)
—"Improvements in the means and apparatus for copying and
"reproducing sculpture and other objects of art."

This invention relates to "photo-sculpture," in which photography is employed in connection with the photograph. This process enables sculpture to be produced of any size, from either a living or inert subject.

The model is placed "on the centre of a ring furnished with "object glasses" or photographic cameras, "placed at equal "distances apart, at the same height." Of the series of photographs thus obtained, two are taken that represent views of the model at right angles one to the other, and on these views two pantographs are employed to act upon the material to be sculptured, one pantograph acting in a plane at right angles to the plane in which the other pantograph delineates. When the said two photographs have yielded their contour to the solid figure, by means of the pantographs, the two next photographs, at right angles to one another, in the series are taken, and so on, until the whole of the photographs have been similarly employed. The figure is revolved, in the requisite degree, by means of a suitably divided platform, between each application of the pantograph.

To obtain bas-reliefs the cameras form a semicircle.

The photographs are contracted or extended, by means of indiarubber, in order to produce sculpture in caricature.

The photographs may be enlarged by means of a solar microscope.

Thin strips of wood, &c., may be used in conjunction with a plastic material, to give the requisite sections of the model and thus to produce mechanical sculpture.

When one pantograph only is used, the platform has a backward and forward as well as a rotating motion.

[Printed, 1s. 2d. Drawings.]

A.D. 1863, January 29.—Nº 267.

POUNCY, JOHN.—" Improvements in obtaining, transferring, " and printing from photographic pictures or images, also in " preparing materials for the same."

This invention consists in the employment of a sensitive ink, which may be transferred or printed from. The surfaces used for the reception of the pictures "may be paper, silk, linen, cotton, "or mixed fabrics, leather, wood, ivory, glass, porcelain, or stone, "or surfaces of metal or metallic alloys," or any other suitable surface. The ink or composition employed to coat the surface selected consists of colouring matter, "fat, tallow, or oil, bichro-

" mate of potash, or bitumen of Judæa, or both of such last" mentioned substances, and benzole, turpentine, or other hydro" carbon or analogous solvent;" these ingredients are used in suitable proportions.

When the photograph is to be transferred on to a printing surface, a larger quantity of fatty matter is used in the preparation of the ink than when the picture is not to be transferred from the surface on which it is taken.

To produce a positive photograph by means of a negative picture, the negative is placed on the uncoated surface of a transparent material prepared as described above; the parts not acted on by light, remaining soluble, are dissolved off with benzole or other solvent. The picture is left in printing ink.

The pictures obtained as described may be transferred to a porcelain surface and "burnt in."

When a lithographic stone is the surface operated upon, it must be "grained" before the application of the ink, "and the surface "of the coating should be also 'grained' after it has been laid "on the surface of the stone."

[Printed, 4d. No Drawings.]

A.D. 1863, January 31.-Nº 286.

BENNETT, Thomas.—"Improved arrangements for obtaining "pictorial backgrounds, foregrounds, and perspectives when "taking photographic portraits or sun pictures."

"In taking photographic portraits or pictures in which it is desired to adopt suitable backgrounds, foregrounds, or perspectives, it has been hitherto the practice to use a painted canvas descending to, and terminating at the floor or standing place of the apartment or place. Now, according to my invention, I use a canvas (or equivalent substance) suspended upon a roller, with pulleys and cords, by which the canvas can be raised or lowered, the said canvas being always of sufficient length to allow it to be brought down to the floor, then stretched along the same, and kept in position (if desired) by catches or grippers, so that the person or persons, or principal object or objects to be pourtrayed may stand upon a part of the canvas. The background, which is to remain perpendicular, is to be painted in the ordinary manner, and that part of the canvas which is to lay upon the floor is to be painted so as to have the

" same concurrent effect as the upright part, and so as imper" ceptibly to 'run into' the same, for which purpose I have
" hitherto adopted the plan of first painting the upright part,
" and fitting the same to a corresponding position to that in
" which the same is intended to be used, and then stretching the
" horizontal part upon the floor, drawing lines or objects by the
" aid of camera."

The arrangements have to be varied for landscapes, in this case the perpendicular part being "continued in the horizontal part "with a curve," and not with an angle as is the case with "interiors."

[Printed, 8d. Drawing.]

A.D. 1863, February 11.-Nº 376.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Jean Jacques Leopold Rousseau de Lefarge.)—"Improvements in "photographic apparatus."

"This apparatus enables the manipulator to operate in full " light upon damp collodion to sensitize the glass, and to finish " the proof in the light. The apparatus does not alter the " negative now used, but it serves as an auxiliary to it. In the " apparatus the following characteristic elements are combined:— " The employment of two vertical and independent bath vessels " arranged to allow of the glasses being easily plunged therein; " one vessel, containing the bath of silver for sensitizing the " damp collodion, may be of gutta percha, hardened rubber, " or other material having no action on the bath; the other " containing the iron bath for developing the picture, should " be of yellow or orange colored glass; if made of any other " material it should be lined with yellow colored glass. There " is a frame for holding the glasses to be exposed capable of " being opened and closed at bottom by withdrawing or in-" serting a sliding bar. There is a second frame for holding the " collodionized glass in the former frame, which second frame is " styled the plunging frame, because it is used for introducing " the glass into the bath vessels entering also with it, it is insu-" lated from the first frame, and may be passed through it. A " piece of catgut is attached to the plunging frame to raise and " lower it into and out of the baths." [Printed, 8d. Drawing.]

A.D. 1863, February 21.—No 478.

CEILEUR, ALBERT .- (Provisional protection only.)-" Improve-" ments in apparatus for taking photographic impressions or " likenesses by means of the camera."

These improvements "consist of an arrangement of parts for " holding the negative plate in camera obscuras while taking the " impression therein by means of the lens in such manner that " the plate can be moved laterally and also vertically for the pur-" pose of changing its position and presenting a new surface to " receive an impression."

For the above-mentioned purpose, a plate holder is arranged " with a series of divisions having suitable holes to form catches " at regular intervals according to the size of the impression to be " taken." Slides and stops are employed to traverse and fix the slide holder in a horizontal or a vertical direction, so as to suitably adjust the position of the impression.

"The opening of the plate carrier to the dark chamber is ar-" ranged according to the size of the impressions to be produced, " while the movements of the plate holder must be regulated to " shift accordingly. The plate holder is made of a size and " arranged for a number commensurate with the size of the " impressions to be taken and convenience of operation, as for " instance, for small impressions the plate holder may be arranged " for a hundred or more impressions on the same plate without " removing it from the plate holder, while for large impressions " two dozen may be a convenient limit.

" Instead of or in addition to the plate holder sliding up and "down," the lens or lenses may be mounted on a vertical slide, and the camera may contain two or more dark chambers, "so "that the lenses may be moved to a position opposite a part of "the negative plate and unoccupied by impressions previously " taken, and the plate holder then traversed in its transverse " slide so as to produce another horizontal row of impressions on " the plate."

[Printed, 4d. No Drawings.]

A.D. 1863, March 2.-Nº 586.

CLARK, WILLIAM. - (A communication from Alphonse Louis Poitevin.) - (Provisional protection only.)-" Improvements in X " preparing and obtaining photographic impressions and in the " application of such impressions."

In this invention a positive image may be produced from a positive.

1st. Obtaining permanent images on paper.—The surface is sensitized by means of a mixture of perchloride of iron and tartaric acid, the impression is produced through a positive, and a developing bath of caseine or albumen is used; when the photograph is plunged into the coagulating mixture of carbon or other inert colour, the image appears; the sheet is then washed, dried, treated with weak hydrochloric acid, again washed, and, finally, dried. If a negative be used to produce the impression, a developing bath of gelatine is employed. Thus plates either for relief or for copper-plate printing may be obtained.

2nd. Obtaining permanent positive photographs on paper. glass, or other surface.—A uniform layer of gelatine containing the colour is sensitized by means of a solution of perchloride of iron and tartaric acid. When the sensitive surface is dried, the organic matter is insoluble in water, and, in order to take proofs. the coloured coating is impressed by means of "a positive image " (reversed)." The image is developed by plunging the sheet " into warm water, when all the parts which have received the " action of light will disolve." The sheet is then dried, washed in acidulated water, rinsed, and, finally, dried. The organic matter may also be fixed "either with alum, perchloride of mer-" cury, tannin, or other body in solution." Ceramic manufactures may be ornamented, and printing surfaces, and surfaces in relief produced by means of this invention.

[Printed, 4d. No Drawings.]

A.D. 1863, March 17.—Nº 711.

BRIERLEY, JOHN HENRY, and GREENWOOD, BARZILLAJ. -(Provisional protection not allowed.)-" An album belt."

" Having cut a piece of leather or any other material to the " requisite dimensions or size for a lady's or a boy's belt, we cut " out pieces of the material and insert in the place from which "the material has been cut any selection of photographs, say " 'the royal family,' or any persons of distinction, and afterwards " complete the manufacture of the belt in the usual manner; or " having by means of a die and an embossing press embossed " the belt at certain distances, we insert or attach the photographs to the embossed portion of the belt by means of gum,
 paste, or glue, or any solution of the like nature."
 [Printed, 4d. No Drawings.]

A.D. 1863, May 13.-No 1204.

CASSAIGNES, VICTOR JULIEN.—" Improvements in stereo" scopes."

This invention "consists in colouring the prisms or lenses of stereoscopes, so that each prism or lens presents several different tints or colors, and so that consequently the pictures or images seen through these glasses will appear under different aspects, giving, for example, the effects of morning, of sunrise, or of moonlight. Thus, for example, to have the foreground of a golden color, the distance neutral, and the sky blue, the upper parts of the prisms or lenses should be colored blue and the lower parts yellow, and between the two there should be a gradual gradation of the two colors, the one passing into the other."

Another arrangement consists in placing a flat glass, coloured as above described, over or under the ordinary lenses.

The coloured glasses or lenses may be either fixed or moveable. The way preferred for colouring the said prisms, lenses or glasses is that set forth in No. 2618 (A.D. 1863), "that is to say " I employ plano-convex prisms or lenses, and I paint on to their " flat sides a cement (I prefer a resinous cement) colored with " transparent colors to the tints required, and by means of the " cement so applied I attach to the prism or lens a piece of " flat glass which serves to cover and protect the painted " surface."

The above improved stereoscopes are called "chromo-stereo" scopes."

"In place of glass, other transparent substances capable of being colored may be employed, such as gelatine and others."

[Printed, 4d. No Drawings.]

A.D. 1863, June 9.-Nº 1434.

MURRAY, JOHN.—(Provisional protection only.)—"Improve-"ments in clips or holders for inserting and fixing photographic. "pictures in albums."

х

"The clip holder or instrument according to my invention " consists of two thin plates of metal or other material superposed " and fixed one upon the other with a sufficient interval between " to receive and hold loosely the photographic picture. These " plates I form of considerable breadth, say of about half the " whole breadth of the picture, and form them somewhat of " a pointed spade-like form, the principal and lower one being " longer than the other; I also thin them at the point so as to " effect easy access in the slits of the album. The lower and main " plate is extended to a convenient length to form a handle, and " of a suitable shape. Instead of superposed plates this clip or " holder may be made of one piece, and of ivory, or other suitable " material; in either case suitably ornamented and finished. The " great breadth of the clip gives considerable command over the " photographic picture in inserting and placing or fixing it " in position, while at same time the slight hold taken of it " between the spade-like plates enables it to be freely withdrawn " after adjusting the picture."

[Printed, 4d. No Drawings,]

A.D. 1863, June 23,-Nº 1588.

TOOVEY, WILLIAM. — "Improvements in photolithography, "photozincography, and photographic engraving on copper or steel plates, or on any other suitable substances."

"To produce on a lithographic stone an impression suitable to " be printed from."-Sized paper, coated with a solution containing gum arabic and bichromate of potash, is exposed "to " light behind a negative." The sheet of prepared paper is placed face downwards on a lithographic stone previously arranged in a percussion press. Several sheets of damped paper are then placed on the stone over the photograph, and a heavy pressure is applied; such parts of the gum as are soluble are thus dissolved and attached to the surface of the stone, producing thereon a negative image. The stone is then dried, coated with greasy ink (the said ink being brought into contact with all the parts of the stone untouched by gum), the coating "removed by passing " through the lithographic press, by spirits of turpentine, or other-" wise," and all the gum washed off. "The stone is then rolled " in with ordinary printing ink, and the positive image appears " in black; it is then printed as every lithographic drawing."

In photo-zincography a zinc plate is substituted for a lithographic stone.

In photographic engraving on copper, &c., the operations are the same as those set forth above, except that a positive is used to impress the image. When the plate is dried, after the photograph has been detached, it (the plate) is varnished. When the varnish is dry, the gum is removed by means of water, and the plate is etched in the usual way; "wherever the plate is protected from the varnish by the gum it will be attacked by the acid."

[Printed, 4d. No Drawings.]

A.D. 1863, July 10.-No 1729.

BOURQUIN, JOHN PETER. — (Provisional protection only.)—
"An improved construction of rolling press."

"The chief object of this invention is to improve the rolling " presses used by photographers for glazing photographic paper " and pictures. Hitherto the travelling table of such presses has " been made with a surface of polished iron or steel, which, " besides being expensive to manufacture, is liable to injury from " rust and scratches. In my improved press I retain the steel " pressing roll, but the travelling table I fit with a slab of polished " glass, which will retain its smoothness for an indefinite time. " In order however to prevent the fracture of the glass under " the severe pressure of the pressing roller, I support the table " upon rollers in such a manner that the glass will not be subject " to a direct bite from the upper and under rollers. To this end " I employ two rollers to carry the table, and mount them in such " a position that a vertical line, drawn from the axis of the " pressing roller, will cut about the middle of the space between " the supporting rollers. This allows of a slight yielding of the " glass to any excessive pressure of the upper roller, sufficient to · " prevent the fracture of the glass slab, without interfering with "the glazing action of the press. The surface to be glazed will, " of course, be laid in contact with the glass slab. This arrange-" ment of glazing press is susceptible of extended use in the " arts."

[Printed, 4d. No Drawings.]

A.D. 1863, August 15.-Nº 2028.

LUDEKE, JOHANN ERNST FRIEDRICH.—(Provisional protection only.)—"Improvements in the means of keeping cameras or other apparatus steady when suspended to balloons."

My invention consists in keeping cameras or other apparatus "steady when suspended to balloons at certain distances from the earth, which is effected by means of a peculiar arrangement of "two or more ropes attached to the car of a balloon, so that "when the balloon is waving about the camera will be kept "comparatively steady."

One of the ropes has a weight attached, another rope is "fastened to the ground at one end by any suitable contrivance," and then passes over a pulley to a roller or drum "for the purpose "of raising and lowering the balloon, although other means for obtaining the same result may be employed in place of the "roller. By this arrangement the camera will be kept steady and in its place." The camera "may be raised or lowered by means of a rope, and is opened and shut by suitable mechanism; or I can make use of a wire in connection with a battery for the same purpose. I do not restrict myself to the use of any precise number of ropes, as they may be varied if considered necessary."

[Printed, 8d. Drawing.]

A.D. 1863, August 19.—No 2063.

BONELLI, GAETANO, and COOK, HENRY.—(Provisional protection only.)—"An improved mode of and apparatus for pro"ducing by the aid of photography optical illusions of moving
"animals and bodies."

1st. "Taking a series of representations by means of photo-" graphy of men or animals with limbs in motion, and then " arranging them round a disc, to which rapid rotary motion is " communicated by suitable mechanism, so that by the different " figures in the series being brought in rapid succession before "the eye of the observer, the effect of figures in motion will be " produced. In carrying out this part of the invention the " figure or body in motion to be represented is photographed in a " variety of positions, that is to say, supposing the effect of rais-" ing an arm or leg is to be produced the limb must first be " represented in its lowest position, then slightly raised, then " raised still higher, and so on, until the last figure represents it " as raised to its fullest extent." "We prefer to produce these " representations on a microscopic scale arranged in a circular " series round a small glass or other disc, which may be mounted " on a central spindle, and adapted to the optical apparatus " which forms the next feature of the invention."

2nd. The said apparatus "consists of an ordinary compound microscope mounted in a brass or other tube, to which is adapted a spindle for carrying the figure disc at one end, and a perforated rotating eye-piece at the other. Rapid rotary motion is communicated to this spindle by means of a small winch provided with a screw wheel, which gears into and drives a snail or screw on the spindle. The figure disc is placed at the proper focal distance from the object glass, and the lens at the eye end is capable of adjustment in the ordinary manner."

[Printed, 4d. No Drawings.]

A.D. 1863, August 22.—Nº 2083.

PEGRAM, THOMAS.—(Provisional protection only.)—"A plate "holder for the photographic camera adapted to carry different sized plates, each plate being on the same plane, and in the same focus."

"This invention consists in the use of two moveable slips of " wood or other material or materials to carry different sized " plates instead of the usual carriers. Two pieces of grooved " wood, or other material or materials, are fitted into the camera " back or dark slide, in the top and bottom, or in the sides, in " which grooves two strips of wood or other material or materials " are fitted, having the sides towards the centre curved or straight. " or notched and rabbited, if notched they can either be rabbited " or have wire attached. The strips move in the grooves, and " can be drawn together or extended according to the size of the " plate so as to receive the plate in the rabbits or on the wires as "the case may be. The slips may be made to slide either by " hand or by means of a left and right screw. If made to slide " by hand a piece of elastic or a spring fixed on the top or at " each end of each slip will hold the slips in position. A spring " fixed upon the door of the dark slide, so as when the door is " closed to press lightly upon the plates will keep them in " focus."

[Printed, 4d. No Drawings.]

A.D. 1863, August 22.—Nº 2085.

WATSON, ALFRED.—"An improved method of and apparatus of for inserting pictures in and withdrawing them from photographic albums."



"without making th
by the thickening l
The drawings show
inserted at the top
which are slit or m
the picture. The
through an aperture
album." "I prefer
album." "I prefer
album with pieces of
and which I remove l
is capable of holding
[Printed, 8d. Drawing.

A.D. 186:
WHIPPLE, JOHN AD
"supporting photograp.
This invention consist
tain the photographic of
supporting pillars, to
"supporting pillars, to
"may be applied; and i
pillars are hollow, and i
attached to the upper end
lower ends of the rods, we
pillars. From each end
upper ends, bearing plates

"the supporting pillars, and are made to impinge the sliding camera rods by the action of the spring. When it is required to adjust the camera the toggle arms are withdrawn from the sliding rods by means of a hand lever operating against this spring."

The object of this invention is to obtain "an easy and quick "adaptability of adjustment, and noiseless movement, so as to make the least possible jarring, and so as to readily catch the "proper time of expression or pose of the subject."

[Printed, 8d. Drawing.]

A.D. 1863, September 24.—No 2354.

HELSBY, WILLIAM GEORGE.—"Improvements in mounting "or setting transparent photographic pictures."

1st. "Mounting or setting at the back and front, but preferably
"at the back only, of photographic pictures, taken on a so-called
"transparent substance or material 'vignette' coloured or shaded,
"or other coloured, shaded, or ornamented transparent or trans"lucent sheets, or one sheet only, of glass or other material, to
"give to the pictures a mellow and artistic tone."

2nd. "Mounting or setting transparent photographic pictures arranged as above described, or transparent photographic pictures of any kind, in hinged or folding cases, somewhat similar in appearance to those at present employed, but having oval or other shaped openings in or through one or both of the sides or leaves thereof, so that such pictures when so mounted or set are in a conveniently portable and ornamental state."

Two transparent sheets may be used, according to a modification of this invention, "the vignette one being in front of that on "which the picture is taken."

Another modification consists in only using one transparent sheet, "the picture being taken on a vignette coloured or other "illuminated or shaded or ornamented sheet, and the picture side protected by varnish or other means."

A thin heet of paper or other suitable material, that may represent colour paint, may be placed between the front and middle plates of glass, and either before or behind the photograph.

The edges of such sheet may be plain, pectinated, or of any other ornamental form, and may have any desired figure or design thereon."

[Printed, 6d. Drawing.]
PH.

A.D. 1863, October 23.-No 2618.

CASSAIGNES, VICTOR JULIEN.—(Provisional protection only.)
—" Improvements in the manufacture of the prisms, lenses, and
" glasses of stereoscopes, and in ornamenting glass."

The tinted prisms described in No. 1204 (A.D. 1863) are, according to this invention, produced by applying to the flat surface of the prism transparent cement of different colours, laid on so as to produce the required gradation of tints. "The cement colors being thus laid on I place a flat glass over them, and this by the cement becomes attached to the prism or lens and serves to protect the painted surface from injury. Or the prisms or lenses may be made each in two or more parts, as in forming an achromatic combination, and in place of cementing the parts together with colorless cement, as now practiced, one part is tinted with graduated colors, as above described, and the other part is then attached to the first by the cement so applied. Flat plates of tinted glass and glasses of other forms I make for use in stereoscopes in a similar manner.

"In some cases I obtain the gradation of tint by varying the thickness of the layer of cement, thus, if two surfaces are put together with a colored cement between them, and the surfaces be pressed together more nearly into contact on one side than the other, a regular gradation of color will be obtained, the color increasing in intensity with the thickness of the layer of cement."

In ornamenting glass, the ornament is painted on the glass in transparent cement colors, and, by the cement so applied, a second sheet of plain glass is fixed to the first. Resinous cements are preferred.

[Printed, 4d. No Drawings.]

A.D. 1863, November 24.—No 2954.

DAVIES, GEORGE.—(A communication from Mathieu Risler, the younger.)—(Provisional protection only.)—"Improvements in "photography."

The squares of glass used to obtain collodion negative proofs being "fragile, heavy, and expensive," are replaced by tale or mica in sheets. "The improvement then forming the subject " of the present invention is characterized by the employment of " tale or mica in sheets as a substitute for the glass, such sheets " being prepared in the following manner:-A sheet of talc or " mica is to be cut of a corresponding size to the dimension of " the negative which it is desired to produce, and fixed on a piece " of ordinary glass by smearing the edges with a thick gum, the " talc is then to be cleaned simply by a tuft of carded cotton-" wool, the collodion is then poured on the surface, over which " it flows freely. The other operations of sensitizing, developing, " washing, and fixing are effected in the usual manner, and " by means of the ordinary accessories. When the negative is " finished it is only requisite to remove the talc from the glass, " and to place it in contact with the prepared paper to obtain the " positive proof. The advantages resulting from this substitution " of tale or mica for ordinary glass will be readily perceived from " the previous explanation, in fact these sheets are better suited " to all the manipulations, not only from their lightness, but also " from the small space which they occupy, and also from their " non-liability to fracture."

[Printed, 4d. No Drawings.]

A.D. 1863, December 8.—No 3089.

DESVIGNES, Peter Hubert.—"Improvements in apparatus "for exhibiting dissolving views."

"My invention consists in constructing an apparatus which I may term a double stereoscope with screens for admitting and excluding light when and as it may be necessary, and with two holders for containing the stereoscopic or other pictures or objects to be viewed. In addition to the ordinary glasses I employ a diaphanous reflector placed at an angle to those glasses in such manner that when one screen is raised to admit light, the picture in a line with the ordinary glasses shall be viewed, then, upon gradually closing that screen and opening the other, the picture first seen gradually fades away or dissolves, while another picture gradually appears in its place, and so on alternating for any given number."

The apparatus consists of "two boxes or cases similar to that " of an ordinary stereoscopic," placed at right angles to one another, one carrying the ordinary lenses and partition, and having the picture placed in the line of direct vision, the other without lenses, but meeting the first box in such a manner that the diaphanous reflector reflects the picture to the eye as if it were

placed in the position of the picture in the first box, when the shutter of the first box is shut, and that of the second box open. Buttons, in connection with rods, levers, and springs, are used "to drive out or remove the views or slides." A hood is used to exclude false light from the eyes of the observer. In this arrangement the reflected view is placed downwards; in another arrangement the reflected view is placed upwards.

[Printed, 10d. Drawing.]

A.D. 1863, December 17.-No 3187.

JEFFREYS, CHARLES. - (Provisional protection only.)-" Im-" provements in jewel, photograph, instrument, and other cases." "My improvements in jewel, photograph, instrument, and " other like cases for holding fancy and other goods, consist in " the application of a spring thereto to throw up the lid or cover " when it is unlocked or the snap released. For light leather " goods such as jewellery cases, I find a small piece of watch " spring answers the purpose, which I simply place within the " lining and the body of the case, carrying the double or middle " part of it round outside the hinge, the one end terminating in " the lower part of the case, and the other in the cover wherein "they are properly secured. The spring is enclosed and hidden " from view by the lining and covering of the case. Springs " may be otherwise applied to answer a like purpose, for instance, " it may be a spiral or other spring, and act on the hinge with " like effect, or it may be a spring compressed between the cover " and the lower part of the case, in closing which again throws " it up when released. In all cases the spring is put in tension " by the closing of the case."

[Printed, 4d. No Drawings.]

1864.

A.D. 1864, February 1.-No 270,

ROWSELL, CHARLES JOHN. — (Provisional protection only.) —
"Improvements in apparatus for viewing photographic and other
"pictures, coins, and medals, which is also applicable in the pro"duction of drawings and paintings."

This apparatus consists of an easel for viewing the abovementioned objects "by the aid of a magnifying glass." Boards are "hinged together at one end, the lower one forming the base. " while the other may be raised at one end, and inclined at any "angle." "Towards the lower end" of the inclined board a rest is mounted and hinged, against which the objects to be viewed are placed; at the higher end is mounted a hinged transverse bar, on which a magnifying glass is placed. "The object of hinging " these pieces is to fold them down flat." To view single pictures a large magnifying glass is used, "through which a person can " look with both eyes." "With this apparatus a person desiring " to view the picture places it on its rest, raises or lowers the " inclined board to suit his convenience, and in looking through " the glass regulates the position of the picture to the focus best " adapted to his sight by moving it toward or further from his " magnifying glass. The same apparatus I adapt for viewing " stereoscopic pictures." "To the inclined board I hinge a thin " black partition piece, disposed at right angles to the plane of "the pictures or glasses," and "hinged, so as to be laid down " flat when viewing single pictures," but the partition "is raised " in a vertical position for stereoscopic pictures, and I substitute " double eye glasses in lieu of the single one before mentioned, " when the apparatus becomes in fact an open stereoscope."

[Printed, 4d. No Drawings.]

A.D. 1864, February 5.—No 305.

LEE, Joseph, and THOMSON, James.—(Partly a communication from Malcolm Mouat.)—"Improvements in mounting "photographic and other pictures."

"The object of this invention is so to mount or combine pic"tures" that softness of tone and agreeable depth" shall be
produced.

Two pictures of the same subject are used "to produce or make "one picture. We mount or place one immediately over or in "front of the other so that the characteristics of both pictures are blended together, the front picture being in all cases of a semi-transparent character." "The back picture may in some instances have only some of the outlines of the front picture, and such back picture to produce artistic effect might be "variously shaded, coloured, or tinted."

To adapt these improvements to photographs, an ordinary photograph is suitably tinted for the back picture; the front picture is taken on transparent paper and placed "over or in front of the back picture either in immediate contact therewith, or, which "we prefer, a short distance therefrom. When the front picture is to be kept a short pistance from the back one we have found it convenient to attach the front picture to the back of a sheet of glass by a transparent varnish and to place a separating piece between the front and back pictures round the edges thereof, or we may place a thin sheet of glass between the pictures."

[Printed, 4d. No Drawings.]

A.D. 1864, February 11.-Nº 363.

FONTAINEMOREAU, PETER ARMAND LE COMTE DE.—(A communication from Alphonse Liébert and Jean Lafon-Saint-Cyr.)—
"Improvements in photographic apparatus."

This invention "consists in the construction of cameras for magnifying, in which the solar rays are received direct on the "condenser without the use of a reflector." A sensitive sheet placed at one extremity of a wooden cone, receives a magnifical image from a negative plate placed at the other extremity, the solar rays passing through the condensing lens, through a convexo-concave lens, then through the negative plate, and through "a "double ith usual size objective glass" to the frame carrying the sensitive sheet. Wheel and rack movements, that are worked by hand, are attached to the stand of the instrument to enable "the solar chamber" to receive "the rays of the sun perpendicularly to its axis during the magnifying operation;" a heliostat may replace the hand instrument.

"I make use also of a triplet actinic lens with diaphragmed centers, and replacing the one-half, one-fourth, one-sixth, and one-ninth objectives."

The above-mentioned convexo-concave lens renders the converging solar rays parallel and achromatic.

This chamber can be used for the production of positives from a small negative, of a large negative from a small positive, of "reproductions" either reduced or enlarged, and "of direct "images of large dimensions."

[Printed, 8d, Drawing.]

A.D. 1864, February 22.-Nº 441.

GEDGE, WILLIAM EDWARD. — (A communication from Jules Abelous.)—(Provisional protection not allowed.)—"A kind of pho-"tographic album forming a new method of publicity, or photographic and commercial propagator."

"This album will contain, firstly, photographic pictures either of illustrious personages, artists, reproductions of ancient or modern paintings, drawings, and engravings, carriages, horses, objects of art, merchandise, shops, workshops, private houses, public edifices, and establishments, factories, and new inventions; secondly, inscriptions placed on the drawings or around them on the margins behind and facing the photographs, which will be pasted or otherwise secured in the album which will be designated the photographic and commercial propagator. One or more photographs may be placed on each leaf of the album; these photographs may be square, round, oval, octagonal, hexagonal, or triangular, at pleasure. The album to be of any form which may be found suitable in folio, quarto, octavo, 12mo, or other of any desired thickness, and the binding to vary in design and colour at pleasure."

[Printed, 4d. No Drawings.]

A.D. 1864, February 22.-Nº 446.

NEWTON, ALFRED VINCENT.--(A communication from George Gardnier White and Charles Alden.)—(Provisional protection only.)
—"An improvement in photography."

In order "to prevent the reproduction of photographic pictures "it is proposed to apply to paper such colors as picric acid, "which by proper mordants can be combined with the fibres of "the paper in a manner that will prevent their removal without destroying the texture of the paper, and any picture which may have been produced on the same either before or after it had been tinted. The yellow color of the picric acid absorbs the "chemical rays of light or fails to transmit or reflect the same, and a picture produced on paper tinted or dyed with such color either before or after the picture is taken cannot be reproduced. By the application of such a picture to a bank bill or other paper of value, the reproduction by photographic process or the counterfeiting of such paper is effectually prevented.

"It should be remarked that the invention is not confined to "the use of the picric acid, as other tints or dyes possessing the

" like chemical qualities may serve for the same purpose."

[Printed, 4d. No Drawings.]

A.D. 1864, February 29.—No 503.

SWAN, JOSEPH WILSON.—"Improvements in photography."
This invention relates to "carbon or pigment printing," a "gelatinous photographic tissue" being used instead of paper, or only in conjunction with paper as a temporary packing.

The said tissue consists of a mixture containing gelatine, water, sugar, colouring matter, and bichromate of ammonium. When the tissue is not required for immediate use, the bichromate of ammonium—the sensitizing medium—may be applied subsequently to the tissue. Either a surface of glass or of paper may be used to form the tissue upon, by pouring the above-mentioned mixture (suitably heated) on to the said surface, and allowing the film thus produced to solidify. The tissue is then exposed to light in the usual way and mounted temporarily upon paper, with the photographically impressed surface next to the paper. The mounted tissue is submitted to the action of warm water, so as to remove those portions of the coloured gelatinous matter of the tissue which have not been rendered insoluble by the action of light. The tissue is then removed from the water, dried, and transferred to the surface to be permanently ornamented, the temporary paper mounting having been removed by the soaking in water.

The above-mentioned temporary mounting of the undeveloped prints may be done by means of a solution of india-rubber in benzole; albumen is the cementing medium, when the undeveloped print is mounted upon the surface to which it is to be permanently attached. Gelatine is the cement for remounting the print after development, if such remounting be necessary.

[Printed, 6d. No Drawings.]

A.D. 1864, April 5.—N° 843.

SARONY, Napoleon. — (Provisional protection only.)—" Im" provements in photography."

"My invention has for its object the production of 'cartes de
"'visite,' or other photographs similar in appearance to crayon

" drawings, ordinarily known as Richmond drawings, and cravon " heads. I effect this by a double process of vignetting direct " within the camera; firstly, I produce the bust of a person " sitting, or other object required, vignetting that portion only "that is seen in the finished picture by the use of a properly " graduated glass suspended within the non-focal rays of the " posterior of the lens, thus protecting certain portions of the " sensitive plate from the action of the light; secondly, I place " before such portion of the said plate as has already been acted " upon by the light an inverted or reverse vignetting glass in " such a manner as to secure the said part from any further " action of the light, whilst that portion of the plate previously " unacted upon is now brought into the focus of a drawing " which is placed before the lens, and which represents the " afore-named Richmond or scroll drawing, the result being a " scroll vignette or photograph. The same effect may also be " obtained by the process known as 'double printing."

[Printed, 4d. No Drawings.]

A.D. 1864, April 21.—Nº 1000.

BONNEVILLE, HENRI ADRIEN.—(A communication from Desiré Charles Emanuel Van Monckhoven.) - "Improvements in pho-" tographic apparatus."

"This apparatus is a solar microscope, which serves to project " upon a sensitized surface the enlarged image of a photographic " negative on glass." This apparatus is composed of two distinct parts—the condenser, and "the enlarging objective."

The condenser, although not achromatic, has no spherical aberration. A crown glass outer double-convex lens having "a very " large ratio of diameter to its focal length" is employed; exactly midway between the said crown glass lens and its focal point, is placed a concavo-convex lens, "which completely corrects the " spherical aberration of the condenser." At the back of the latter lens the photographic negative is posited. This arrangement ensures that any one point of the negative will only be traversed by one luminous ray, of a given refrangibility, from the condenser.

"The enlarging objective" is free from spherical and chromatic aberration—so far as the yellow and indigo rays are concerned: it is an ordinary photographic lens with a negative achromatic lens behind the objective to render the field flat.

X

The complete apparatus is mounted so that the photographic negative "is placed in the cone of solar rays so as to to be "completely surrounded and equally heated."

[Printed, 8d. Drawing.]

A.D. 1864, April 27.-No 1060.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Charles Raphael Maréchal, junior, and Cyprien Marie Tessié du Motay.)—" Improvements in producing photographic pictures "photogenically indelible."

The following process is employed to obtain photographically indelible pictures on siliceous substances generally:—A coating of sensitive collodion is laid upon collodionized caoutchouc; the picture being produced and developed upon the said sensitive collodion, is fixed "by the consecutive action of soluble iodides "or iodo-cyanides, cyanides, or hyposulphites;" the salts or "subsalts of silver are then reduced upon the picture by means "of a solution of sulphate of protoxide of iron." The picture is then "strengthened" by the action of pyrogallic acid or other reducing agent on an acidulated solution of silver. "The strength-"ening may be continued successively in a number of baths." The "strengthened" picture is then washed "in the baths of "cyanides, iodo-cyanides, or hyposulphites, or in ammoniscal "baths."

By plunging the cleansed picture into baths of salts of platinum and gold, the metal of the bath "becomes substituted galvanically "for the coating of silver." The substituted picture is again washed in the above-mentioned cleansing solutions, coated with caoutchouc, submitted to heat in a muffle, covered with a siliceous, boracic, or lead flux, and finally "submitted to the action of the "fire, which fixes and solidifies it."

[Printed, 4d. No Drawings.]

A.D. 1864, April 30.-Nº 1093.

PRANG, Louis.—(A communication from Lewis A. Roberts.)—(Provisional protection not allowed.)—"Improvements in preparing "sheets of paper or cardboard for holding photographs and other "articles."

This invention consists in stamping or otherwise making a "recess or recesses of about the depth and size of the photo-

" graph or other article to be held in sheets of paper or card-" board, and in cutting or stamping a slit in each corner of each " recess; the slits are made either at the same time, or before or " after the recesses, and the corner of the photograph or other " article to be held are inserted into the said slits. The sheets " of paper or cardboard so prepared may be used in the con-" struction of books for the preservation of photographs, cards, " pictures, or other articles, the recesses not only serving to " protect the photographs or other articles from injury, but " also to aid with the slits in keeping them in their places."

[Printed, 4d. No Drawings.]

A.D. 1864, May 3.-No 1111.

GITTENS, ALFRED WATSON.—(Provisional protection only.)— " An improved method of finishing photographic pictures and " marbled papers, and improvements in pressing rolls employed "therein, and applicable to other pressing rolls."

"My invention consists in subjecting photographic pictures, " after being developed, and marbled papers, to pressure between " one or more heated rolls or plates."

My improvements in pressing rolls consist in heating "the " upper or lower roll by means of a spirit or other lamp extending " the length of the roll; the lamp is maintained stationary " while the roll is free to revolve; this part of my invention " also consists in raising or lowering one or other or both rolls by " means of screws which work in nuts in boxes in which the axles " of the rolls are carried."

[Printed, 4d. No Drawings.]

A.D. 1864, May 6.—No 1149.

RIEDER, AIMÉ.—" Improvements in shades, spectacles, and eye " glasses, which can also be applied to telescopes and stereo-" scopes."

" My improvements relate to the manufacture of shades, with " or without glasses, in such manner that they can be folded into " a convenient size for holding in the pocket, and for this purpose " I construct the framework of the shade of four different parts, " viz., the top, the two sides, and the front, in which the glasses " can be inserted, and to which I also attach a handle and unite " the edges of the three latter parts to those of the former either

" by a metallic joint or by a joint of flexible material, so that they can be easily folded flat, one on the other; and in order that such article be further reduced in size, I divide the top and front parts into two halves down the centre, which parts are

ïΕ

1 ئ

" connected as above-mentioned so as to be easily folded one on
" the other."

"Another improvement in folding opera glasses consists in constructing them so that they pivot on a central axis passing "through the line of their diameter."

The first-mentioned improvements are applied "to stereoscopic boxes, the bottom and back pieces of which being united to the four other parts mentioned on one or both of their edges by a fixed flexible joint, or a fixed metallic joint, or by a metallic attachment, such as a hook capable of being disconnected."

[Printed, 10d. Drawing.]

A.D. 1864, June 9.-Nº 1438.

SARONY, Napoleon.—"Improvements in the production and "treatment of photographic portraits or pictures."

An ordinary negative vignette is combined with a "second or "etching negative photograph" in such a manner as to produce (by the action of light) a photograph having the appearance of a drawing or engraving, the said second negative consiting "merely " of the hatching or sketchy lines photographed upon the glass "from a chalk, pencil, or other drawing of such lines."

Another process for producing the effect of etched vignettes consists of "etching the lines by acid upon the usual vignetting "glass, employing if necessary thin varnish or any other suitable "medium as a coating for the etching lines, and to produce half "tints, if the crude lines should print too darkly; or I can coat "the vignetting glass with japan varnish, then acratch the etching lines through the varnish, and produce the half tint, as "above described, by coating the lines with thin varnish or any other suitable material. To produce the same effect by other modes of printing, such as lithography, copper-plate, or wood engraving, I merely print the lines from the stone, plate, or block upon the paper upon which the photographic picture is "to be taken, or after it has been taken."

[Printed, 4d. No Drawings.]

A.D. 1864, July 6.—Nº 1676.

GEDGE, WILLIAM EDWARD. — (A communication from Jules Abelous.)—"An improved album."

"The improved album, the subject of this invention," contains:

"In the first place photographic pictures, either inserted in the
"usual way of inserting cartes de visite, or permanently photo"printed on the leaves of the album."

"In the second place the above-mentioned pictures are surrounded with ornamental, printed, engraved or embossed framework, leaving when engraved or embossed blank spaces in the
grouping, in which spaces are printed in typographical characters, inscriptions of every character, whether analogous with
the object they surround or distinct therefrom, and intended
for other purposes."

"It is to be understood that one or more photographs may be placed on each leaf of the album, and that the photographs themselves may be of any form, square, round, oval, hexagonal, or triangular at pleasure. The album itself to be of the form most suitable to the pictures or objects illustrated on or in its leaves, and its size may be folio, quarto, octavo, or duodecimo, or any intermediate or other size at will, the thickness dependant partly on the size of the pictures, but not confined to any proportion, the binding to be varied as taste may direct in design, material, or colour."

[Printed, 4d. No Drawings.]

A.D. 1864, August 23.—No 2079.

GRISDALE, JOHN EDWIN.—"Improvements in apparatus for "washing photographic prints."

Centrifugal machinery is employed for washing photographic prints.

In one arrangement, a revolving drum is used in connection with a trough in which the drum is partially immersed. The prints (fresh from the water in which they have been placed on their removal from the fixing or other bath) are placed in piles round the circumference of the drum, each pile being composed of alternate prints and sheets of wire gauze. The piles are held in their places by means of gratings that form a part of the drum itself.

"According to another arrangement, the piles above described " may be laid flat upon a disc, which is made to revolve either " vertically or horizontally in a trough or cistern, provision being " made in the horizontal arrangement for allowing the piles to be " brought in or out of contact with the water as required; or in " lieu of the photographic prints being disposed in the form of " piles or packs round a drum or revolving disc, they may be laid " separately and individually round the surface of a drum, a " webbing of open or reticulated fabric being wound on such " drum simultaneously with the placing of the prints thereon, so " as to interpose a thickness of the fabric between each succeeding " layer of prints. The process of washing consists in alter-" nately driving out the moisture from the prints by the centri-" fugal action of the revolving drum or disc, and saturating the " prints again," the trough being supplied with water during the latter operation.

[Printed, 10d. Drawing.]

A.D. 1864, August 29.—Nº 2122.

THOMAS, RICHARD WHEELER.—"Improvements in tents and apparatus employed in taking photographic pictures."

This invention consists of a certain "combined arrangement of parts," "whereby a box or case combined with flexible material " is arranged to open into a tent, in which the apparatus and " materials employed in photography are fixed in position suitable " for use as soon as the tent is opened out."

The apparatus and materials "retain their positions when the box or case is contracted for transport, thus dispensing with "the packing and unpacking of the apparatus and materials."

The tent, when in use, is fixed at the top of a tripod stand, and "is constructed of a box, "having the two ends and back fixed "to the bottom, whilst the front is hinged at its bottom edge in "such manner that it may fold down." The inclined bath is secured in the position in which it is used, either during transport, or when the tent is in use. The top or cover of the box is in two parts, respectively hinged to the two ends of the box; "when "closed the cover comes just above the top of the inclined bath." The flexible material is fixed to the edges of the cover in such manner that, when its two parts are open, the flexible material forms a covering to the tent as well as a part of the back of the tent; two sliding bolts hold the upper part of the front above the

head of the manipulator. "The gutta percha sink is placed in "the centre of the bottom of the box or case, and the camera is "arranged to be strapped or fixed to the bottom of the tent when "placed on the cover of this sink."

[Printed, 4d, No Drawings.]

A.D. 1864, August 31.—N° 2143. ROLLASON, ALEXANDER. — (Provisional protection only.) —

" Improvements in glazing and varnishing paintings, prints, and " photographs, and which improvements are also applicable to " plain paper, woven fabrics, leather, and other substances." " I take collodion, either alone or in combination with any " other suitable gum, such as gum animi, common resin, balsam " of aniseed, or oils, such as linseed, nut, or castor, that will " dissolve therein, and in about the proportion of one pound " of collodion to half an ounce of gum, resin, or oil, and having " poured or otherwise placed the same into a polished surface of " glass or metal, I allow it to become quite dry. Upon this " collodion or its compounds when so dry I brush or pour a " cement of gum arabic, dextrine, albumen, gelatine, sugar, " honey, isinglass, or of a nature similar to these, either sepa-- " rately or combined, and if combined in about equal pro-" portions, upon which again, when sufficiently dry, I place my " painting or photographic or other material, having previously " wetted or moistened the same. When quite dry I cut rounds " its outside, upon which it may be removed from the glass or " metal together with the cement and collodion or its compounds " all firmly attached together, producing a beautifully glazed and " varnished surface."

[Printed, 4d. No Drawings.]

A.D. 1864, September 8.—Nº 2197.

FRUWIRTH, DANIEL.—"An improved apparatus for cutting "photographic impressions, cartes de visite, stereographs, and "other such like purposes."

By this apparatus "all four sides of the card or paper are cut " away by one stroke of the cutter."

"The apparatus consists of a table plate of metal or other material on which a block or rest of iron or steel is fixed, its dimensions and form corresponding to the size and pattern to

ward powers to the outer of the table provided with a hand, operator. The surface of oblique or incline during highest point a vertical ledge its revolution it acts upon a the cutter, and raises the san the card or paper is then arricutter, and the cam being escapes over the ledge and shearing all sides of the pap edges."

[Printed, 6d. Drawing.]

A.D. 1864, Septem SCHOTT, JOHN BERNARD.—
"An improved envelope frame for thers."
Upon opening the envelope,

Upon opening the envelope, several are enclosed, "will be at o "I purpose effecting this by paper, millboard, or other suit "linen for example), one end of "of the overlap of an envelope, "I cut out an

which the photographs are inserted, the upper one appearing framed in the opening cut out of the overlap. The part containing the photographs is then folded over on to the sheet, the end cut and gummed like an ordinary envelope, overlap brought over, and the envelope is closed, leaving the usual back for address. The paper on the right of the photograph and upon which the case or frame folds, that is to say, the inner face of that part which carries the address, gives space for writing a letter or note. I have stated that I use an oblong sheet of paper or other material, but it is evident that this shape is not obligatory."

[Printed, 4d. No Drawings.]

A.D. 1864, September 23.—No 2338.

WOODBURY, WALTER BENTLEY.—"An improved method of "producing or obtaining by the aid of photography, surfaces in "relievo' and 'intaglio' upon aluminous, vitreous, metallic, or "other suitable materials."

When the said surfaces are viewed as a transparency, the varying thicknesses in the material will show the design.

This invention may also be used to produce any design in relievo or intaglio, or copies of such articles.

** mould is first obtained, according to the chief feature in the invention, in which the thicknesses of material "are a tran" script of the light and shadows in a photographic negative;" castings may be obtained from an electrotype of this mould.

A film, one-eighth of an inch thick, is spread upon a sheet of glass and allowed to solidify, the said film containing sugar, gelatine, albumen, and "bichromate of ammonia." The film, so produced, is cut into pieces, stripped from the glass, and has its polished side laid on the negative; the said film and negative are then placed in the focus of a solar camera, so that the design is produced clearly at the back of the film. Another mode (not mentioned in the Provisional Specification) consists in the interposing tale between the glass and the film, and placing the tale side next the negative in printing. According to another method (also not mentioned in the Provisional Specification), the film is thoroughly dried in a dessicating box and then used. When sufficiently exposed, the non-actinized portions are washed away by means of hot water, and an image is produced in which the lights are depressed and the shadows raised.

By printing from a deeply-coloured negative, a gelatine mould is obtained which will bear casting from.

[Printed, 4d. No Drawings.]

A.D. 1864, September 24.-No 2347.

WORTLEY, ARCHIBALD HENRY PLANTAGENET STUART, and VERNON, WILLIAM WARREN.—(A communication from Jacob Wothlij.)—"A new chemical process for producing photographic "pictures," also "an invention" "in the preparation and manner "of using the materials in such process."

1st. Preparing photographic paper.—The surface of ordinary photographic paper is enveloped with a solution of starch, albumen, or other simple medium, in combination with any other material suitable for any special purpose, and is either placed under pressure between two polished surfaces, or subjected to a suitable rubbing process, or the prepared paper may be passed between specially constructed rollers; in either case the fibre of the paper is brought into actual contact with the starch or other medium, and, after being fully charged, the fibre is laid down again.

2nd. Sensitizing photographic paper.—A mixture containing collodion, nitrate of uranium, and nitrate of silver, is employed for this purpose. The sensitive solution is poured on to the surface of the paper, in a properly lighted room; the paper is then floated, and the superfluous quantity of solution poured off; it is then dried in a dark room. When this process is used, the positive is printed to the actual intensity of colour required, and not over-printed.

3rd. Producing on photographic paper a "matt" or "dead" surface.—The sensitive salts are dissolved in alcohol and water, instead of in collodion; the paper is prepared by covering it with the said solutions. Saccharine substances may be added to the solutions if necessary. The paper, thus prepared, is hung up in a dark room to dry, when it is ready for the process of printing.

[Printed, 4d. No Drawings.]

A.D. 1864, September 27.—N° 2373.

LANE, KEDGWIN HOSKINS.—"Improvements in cases or re "ceptacles for photographs."

"I form a square, polygonal, or cylindrical box, inside which I place a case or chamber mounted upon a spindle, which has its bearings in the top and bottom of the outer box; upon this inner case the photographs are placed, which case can thus, by means of the spindle before named, be caused to revolve so as to bring each photograph in rotation opposite to a door or opening which is formed in one portion of the outer box.

Lockets may be thus made to contain many miniature photographs in small compass, whilst in larger forms, such as may be required for drawing-room tables, the case may assume very ornamental shapes, such as a pagoda, which could be made by mounting several cases in tiers one over the other; each tier containing its revolving chamber caused to rotate by the same spindle.

"Another modification of my invention consists in forming lockets or cases for the same purpose upon the plan of a ribbon measure, hinging together a number of frames for photographs, which frames may be made, by preference, in thin metal, in such manner that the ribbon or chain thus formed could be wound round a spindle within an outer box, so that upon the ribbon being drawn through an opening in the outer box, the photographs may be successively exposed to view, and by turning the spindle they may be again enclosed."

The drawings show this invention applied to a locket, a cabinet, and a pagoda; a locket constructed upon the principle of a ribbon measure is also shown.

[Printed, 10d. Drawing.]

A.D. 1864, October 6.-No 2465.

FONTAINEMOREAU, PETER ARMAND LE COMTE DE.—(A communication from Jean Nicolas Truchelut.)—"Certain improve"ments in photography for obtaining images direct on cloth and
"other materials."

Instead of employing dessicated oil for preparing the cloth, virgin wax or spermaceti, together with resin and elemi, is dissolved in essence of lavender, and mixed with carbonate of lead, and used for the said purpose. When the cloth is dry, it is heated, and its surface is spread over with a thin layer of white wax, to which has been added the above-mentioned resinous substances. The collodion is spread on the resulting waterproof war-

face, and "is employed to make a negative or a positive." "To "render the proof indestructible," after the development and fixation of the picture, it is "allowed to dry for some days; then "a flat iron, with a long handle is moderately heated and passed behind the proof over all its surface;" the proof thereby becomes "an entire homogeneous substance with the layers of paint, oil, "and collodion."

The method of operating "at the moment of producing the " image " is :- The glass-" the negative and objective "-being in their places, the cloth is fixed, the focal distance ascertained, and "the objective" is covered. The cloth is taken off, and the collodion spread over it; when the latter is dry, the sensitive plate is put into the silver bath, the cloth replaced, and "the objective" uncovered. "When the proof is slightly indicated," it is developed, fixed, and washed. "For the proofs on glass I use collodion " preferably to the iodites" [iodides?] "of ammonia and potas-" sium mixed in equal quantities"—this is not mentioned in the Provisional Specification. "The collodion is spread with rectified " alcohol." The silver bath contains nitrate of silver and acetic acid. The developing solution contains gallic acid and acetic acid. The fixing is done by means of hyposulphite of soda. A blue shade may be given to the proof by means of a solution of chloride of gold.

[Printed, 4d. No Drawings.]

A.D. 1864, October 13.—N° 2526. BROOMAN, RICHARD ARCHIBALD. — (A communication from

Arthur Baudesson and Paul Houzeau.)—" Improvements in the "manufacture of prussiates of ammonia, and the application of "prussiates of ammonia to dyeing, printing, and to photography." "This invention consists in depositing under the influence of light upon paper, textile fabrics, wood, glass, porcelain, and other suitable substances, a matter colored or ready to become colored, by the aid of chemical agents, by immeraion, dyeing, "printing, or otherwise."

The invention also consists in the manufacture of "prussiates " of ammonia." For this purpose sulphate of ammonium acts upon prussiates of potash; the proportions, together with the salts of potash used, determine the salt obtained.

In applying the said prussistes to photography, the following sensitizing solutions are used:—1. A solution of ferrioyanide, or

ferrocyanide of ammonium, or a mixture of these salts. 2. A solution "of prussiate of potash or other prussiates." 3. A solution "of prussiate with a base of iron at the maximum, and of organic "acid salts of iron;" the image appears in blue. 4. A solution "of double salt of iron and of ammonia, an oxalate, a tartrate, a "citrate, or otherwise;" acid prussiate of potash developes blue tints, tannin yields black tints. Sulphocyanide of ammonium or of potassium yields blood red tints.

In the "application upon textile fabrics," for blue, the prussiates of ammonia or of potash, with or without citrate of iron, are used; for black, the blue image is dyed with logwood and glue; for violet, the blue is decolorized by carbonate of soda, then treated with madder, chloride of lime, and soap; for bronze, the decolorized image is dyed with madder and quercitron, and for olive and brown the decolorized image is dyed with quercitron, and is brought up in a soap bath.

[Printed, 4d. No Drawings.]

A.D. 1864, October 14.-Nº 2539.

DALLMEYER, JOHN HENRY.—"Improvements in the con-"struction of lenses, which improvements are especially applicable "to lenses for photographic purposes."

This lens "is chiefly intended for landscape photography."

"I form two lenses of crown or plate glass, by preference of two different kinds of crown or plate glass, and divide for a given focal length the focal power between the two lenses, by preference in the ratio of 1 to 3, both acting therefore as positive or collecting lenses. The form of the first or anterior crown or plate lens is by preference a concave meniscus. The second or posterior crown or plate lens is also by preference a concave meniscus. The central lens situated between the two crown or plate glass lenses is made of flint glass and concavo-convex, and of such focal power as when placed between the two crown or plate glass lenses the adjacent surfaces having the same radii of curvature and being cemented produce an achromatic whole or nearly so."

When architectural objects are to be photographed, the straightness of the lines will be better maintained if the anterior lens placed at a distance from the other parts of the compound lens.

The diaphragm is placed in front of the anteror lens.

A.D. 1864, Nov

FOX, THOMAS.—(Provisional " photographic process." " This invention relates to . in which bichromate of pot logwood; and in practising t floating it upon or steeping it " potash and sulphate of coppe " in the dark is exposed to the s " or in the camera, and is aftern " logwood, which is by preference " a minute thereafter the print is " hot water, which carries off the s " is a very distinct print with th " or transparency printed from, or " reproduced as lights, and with tl The print is completed by dry. " sensitising solution is made by " bichromate of potash to two I " whilst the tone of the print may " the strengths of the sensitising a print may be transferred to paper by passing it through a press with " therewith; and it may be transferr " stan-, and the like, if a metiBy this invention a positive photographic copy may be at once a obtained.

The principal feature of the invention "consists in obtaining copies or reproductions by the action of light by preparing a surface with a solution containing a soluble chromate mixed with an acid which will combine and form a compound with the oxide of chromium formed by the action of light, and darkening the impression produced by the unaltered chromate by means of aniline or other organic substance capable of forming a dark and insoluble compound with the said unaltered chromate,"

In copying a mechanical drawing on paper, the sensitizing solution contains certain proportions of bichromate of ammonium and phosphoric acid. When the paper has been impressed, in the usual way, in the printing frame, it is laid on the bottom of a wooden box; in this situation it is exposed to the vapour of aniline, that evaporates from bibulous paper fastened to the lid of the box, and thus developed. The fixing takes place by alternate washings in weak acid and in water.

Another sensitizing solution contains chromate of copper, sulphuric acid and phosphoric acid. A third contains phosphate of copper, sulphuric acid, and chromic acid.

The pyrrol bases may be used instead of aniline for developing. [Printed, 4d. No Drawings.]

A.D. 1864, November 25.—No 2953.

CROZAT, LEANDRO.—(Provisional protection only.)—"Improve"ments in photographic processes, and in portraits or images
"produced thereby."

To produce portraits in "double ground," the sitter is placed before a white cloth, the ground of which is coloured and graduated or shaded. The negative is taken in the ordinary way.

"To produce a shaded bust terminated in white."—A piece of paper is applied to the non-collodionized side of the plate, and the size of the bust traced thereon; this outline is marked on a piece of opaque cardboard, and the said cardboad placed in the pressure frame. The "shading ground" has thus been obtained. To obtain the "general ground," a proof of the bust is stuck on the painted side of the glass. "Then continue applying the white "ground portraits on the glass so that the head perfectly covers "the silhouette, and this in its turn should entirely over the

" shirt front, and by thus supporting the portrait with a tablet of " the same size as the card," expose it to the sun. The double ground, when obtained, must be toned and fixed as usual.

The eyes and shirt front are then to be covered with gum arabic solution to preserve them from the colouring which is to be applied to the whole face. When coloured, greater brilliancy is given to the portrait by stretching it on prepared glass and allowing it to dry; it is then detached from the glass and stuck on cardboard with a solution of gum arabic.

The colouring contains alum, cream of tartar, cochineal, saffron, and magenta. The preservative varnish for preparing the glass contains sulphuric ether, alcohol, and "photographic cotton;" the second solution for preparing the glass is a solution of gelatine.

[Printed, 4d. No Drawings.]

A.D. 1864, December 6.—No 3048.

MARTIUS, CARL ALEXANDER.—(A communication from Johann Baptist Obernetter.)—" Improvements in the application of photography to the ceramic art or to glass."

"This invention consists, firstly, in a combination of processes whereby photographic pictures are obtained, applied to, and burnt in upon articles of porcelain or glass; and, secondly, in a peculiar method of causing the said photographic pictures to be composed of materials which can be fused or enamelled upon ceramic articles including glass."

A glass plate is coated, in the ordinary way, with a sensitive solution containing gum, sugar, glycerine and bichromate of ammonium; the plate is then dried, in the dark, in a drying stove. A positive picture is placed on the prepared surface of the plate and the combination is exposed to the action of light, for the time requisite to impress the image. The plate, on which the image is now slightly visible, is next treated with a mixture containing porcelain colour with its flux and some dry powdered soap; this operation is continued until the requisite density is attained, the porcelain colour and its flux being deposited upon those parts of the plate which were protected from the action of light by the superposed positive. To effect the removal of the picture in porcelain colour from the supporting surface, it is coated with collodion, dried and immersed in alkaline water. The washed film is then pasted, picture side undermost, on the ceramic article.

The picture, so adapted, is dried spontaneously, and the collodion film is dissolved therefrom by the action of solvents, "after which "the article with its applied picture is burnt in an ordinary muffle furnace, as conducted in the usual process of enamelling."

[Printed, 4d. No Drawings.]

A.D. 1864, December 14.—No 3107.

CLAUDET, Antoine François Jean.—"Improvements in "photo-sculpture."

"The original photographic pictures similar to those hereto"fore used to aid the artist's eye when modelling by hand are
"themselves enlarged to the exact size intended to be given to
"the model, and are projected on to the block of clay or other
"material by a camera or cameras, whilst two pictures at right
angles of like size previously drawn by hand," "are generally
"employed at the same time to further aid the artist's eye in
"judging of the progress of his work, and to determine the
"various planes at which every part of the block is to be
"brought during the modelling."

A revolving table, the axis of which is capable of being moved to and fro, is used to place the block of clay upon. Thin blades are pressed into the clay so as to receive the picture and thus to afford a guide to the tool. If the work is pushed back and a piece of ground glass brought into focus, the image received on the glass will guide the artist. If a screen be used, it is stated (in the Final Specification) that, "it is better that it should be on "the tool employed by the artist in modelling;" an apparatus for guiding the tool in this case (called the "plastimonograph") consists of a disc, fixed in the middle of a flat bar, which slides in slots that are made through the upright sides of a frame placed in the plane of the image. "By means of a weight, cord, and " pulleys, the bar is suspended horizontally between the sides of " the slots in the uprights, and remains supported in any position • # in which it is left during the various stages of the operation; " and it can be made to move in all directions required by the " least impulse of the hand of the artist."

[Printed, 8d. Drawing.]

A.D. 1864, December 16.-Nº 3119.

CHEVALLIER, François Auguste.—" Improvements in pano"ramic apparatus."

" with and superimposed one on the other on a sheet of glass. "The two pictures are produced on paper, one on thin paper, " and the other on ordinary photographic or printing paper as the " case may be. The picture on thin paper is made transparent " by means of spermaceti or varnish, or other adhesive matter, " and is made thereby to adhere to the glass. In some cases the " glass is ground or deadened on the side where the transparent " picture is applied. It is preferred in all cases that the two " pictures should be tinted or coloured artistically according to " the effect desired to be obtained, but this is not essential. "Supposing it is desired to mount two photographic pictures " according to this invention, in order to produce a coloured " miniature or colored picture of a person, two pictures are taken " from the same negative such as is used by artists when colored " photographic pictures are to be produced, one picture is on thin " photographic paper and the other on other photographic paper. "The picture on thin paper is tinted or colored and then ren-" dered transparent and caused to adhere to a sheet of glass " by means of spermaceti, or varnish, or sufficiently transparent " cement. The other picture is also tinted or colored and is " placed carefully at the back of the other picture and is retained " correctly in position either by adhesive matter or otherwise, " and the whole so combined are then placed in a frame. In like " manner printed and other pictures are combined together and " with sheets of glass."

[Printed, 4d. No Drawings.]

A.D. 1865, January 3.—No 12. HELSBY, WILLIAM GEORGE.—(Provisional protection only.)—

"Improvements in the manufacture of enamelled glass to render it more useful in photographic art."

"The practice recently introduced by me of polishing the surface of opal or other enamel on sheets of transparent and colourless glass provides surfaces well adapted for photographic pictures and impressions, especially those seen by reflected light and known as positives. There is however a want of 'depth' or 'body' in the 'ground' of pictures or impressions taken on the said polished enamelled sheets, and to remain this defect, or supply the desired 'depth' and 'body,' and to provide a smooth surface, are the objects of my improvements. The opal

" or other coloured enamel and the glass are united together in the process of manufacture in the usual way, but instead of the glass to or with which the enamel is secured or made being transparent and colourless I make it with a 'body colour' of any desired tint or quality by placing the proper materials in the 'glass pot;' rose and cream will be the most desirable colours when the enamel is opal, but the colours may be varied. When the enamelled surfaces are polished the sheets are ready for use."

[Printed, 4d. No Drawings.]

A.D. 1865, January 7.-Nº 56.

BENTLEY, BARROWCLOUGH WRIGHT, and BAILEY, WILLIAM HENRY.—" Improvements in producing and finishing photographs and photographic transparencies on paper and other suitable substances, and in the machinery employed therein."

lst. A photograph, already mounted on cardboard, is subjected to pressure, under a press which forms the second improvement of this invention; it is then placed, upon a suitable matrix, beneath the die of an embossing press. By this means the most prominent parts of the picture are raised, and a picture in "relievo" obtained. The dies may either be produced in the ordinary manner, "or they may be made by any of the well "known photographic processes of engraving or by the 'bichro-" 'matized gelatine process.'" Thus medallion portraits in relievo may be obtained, or imitation "cameos" may be made by colouring the background according to taste.

2nd. "An improved photographic press."—Certain pedestals, upon a cast-iron framework, receive bearings for the roller. The sliding plate, which travels upon the top of the framework and beneath the roller, is actuated by a link which is attached to a centre or pin that passes through lugs attached to the under side of the sliding plate; the other end of the link is connected to the working lever, which is jointed to a pin that passes through lugs fixed to the framework. A sheet of aluminum bronze is affixed to the upper surface of the sliding plate; this is not so liable to corrode as stiel. The roller is pressed upon the sliding plate by means of milled-headed screws. The actuating lever enables the sliding plate, with the photograph upon it, to travel beneath the

pressing roller. In the larger sizes of presses a reciprocating motion is imparted to the plate.

[Printed, 8d. Drawing.]

A.D, 1865, January 10.—No 72.

PETTITT, EDWIN.—(Provisional protection only.)—"Improve"ments in giving permanence to and in ornamenting glass
"transparent positive photographs."

"My invention consists, firstly, in the following manner of giving permanence to glass transparent positive photographs:—
"I coat or cover the collodion side of the said photographs, or the side of the glass on which the picture is situated, with plaster of Paris, cement, wax, or other opaque or semi-opaque substance, either white or tinted with colour, and I afterwards cover the said plaster of Paris, cement, wax, or other substance with a coating of metal which coating of metal may either be applied by the electrotype process or be applied in the form of thin sheets or foil attached by any adhesive matter. By the treatment described the picture is securely protected from the injurious effects of air and moisture, and great permanence in the photograph thereby secured.

"My invention consist, secondly, in ornamenting transparent glass photographs by coating or covering, either wholly or in part, that side of the glass on which the picture is situated with coloured materials, such as velvet, silk, or other fabric, gold and silver leaf, and coloured bronzes, and afterwards coating the photograph in the manner constituting the first part of my invention when permanency is required. By the use of the coloured materials described any required tint may be given to the whole or part of the photograph, or it may be tinted of different colours in different parts."

[Printed, 4d. No Drawings.]

A.D. 1865, January 26.—N° 218.

GAY, DAVID.—(Provisional protection only.)—"Improvements
"in photo-sculpture and apparatus to be employed therein."
This invention consists, "first, in cutting the material on which
"the portrait is taken or printed, as may be found most desirable,
and in using the marginal or outer portions of the material as
"templates." Upon a circular table are arranged a dosen blocks,

capable of sliding in radial groves towards and from the centre of the said circular table. An upright rod is fixed in each block; a clip affixed to each rod holds one template. The circular table is pivoted, and the pivot (by means of a loose slotted collar) receives and holds the several templates. The plastic material is placed upon the upright pivot, and roughly shaped by hand.

The templates—obtained as set forth above—having been fixed in their respective upright rods:—" I take first that template con"taining the most prominent outlines, and pushing it into con"tact with the plastic material aforesaid, hold this template
"steady with one hand, and with the other hand move the plastic
"material partly round backwards and forwards until the template has scraped the material at this part to the shape of the
"template, or partly so, and in like manner I proceed successively
"with all the other templates, until I bring their edges close
"together in the collar that supports them, after which the sculp"tured model may be finished by hand; and where several copies
"are required, I take a mould thereof by any of the well-known
"means, and pour plastic material therein in the manner commonly practised of moulding objects in plastic materials."

[Printed, 4d. No Drawings.]

A.D. 1865, March 4.—Nº 618.

PETTITT, EDWIN.—"A method or process for producing a new "kind of photographic pictures."

One photographic picture is produced "from two photographic " images, the one superimposed upon the other, which picture " possesses great relief. Pictures so produced I designate 'bino-" 'graphs.' If I desire to produce a life-sized portrait, I proceed " in the first place to take a double negative of the sitter by " means of a pair of lenses and a camera obscura in the usual " way of taking ordinary stereoscopic negatives; and having " obtained a satisfactory double negative, I separate the two pic-" tures and transpose them, placing the right-hand picture to the " left and the left to the right; and in this order I cause light to " be passed through them in a dark room or camera obscura, and " receive the rays so passing through the pictures by a pair of " lenses placed at the same distance from them as the pictures " were when taken, and the two pictures now become enlarged, " coalesce, and are superimposed upon each other at or near the " distance from the lenses at which the sitter was originally placed



"a double transparent prin
double negative, and the b.
the said transparent print o
By means of sights, the mid
pointed directly at the point
[Printed, 4d. No Drawings.]

A.D. 1865, Ma REISSIG, THEODOR.—(A com: -(Provisional protection only.) " the presence of 'fixing' agent. " removing the said fixing age " connected therewith." "This invention relates, firstly " is enabled to determine whether " such fixing agent has been reme " employed in the practice of pl " places the prints after they have " larly treated, or the fluid in wh " communication with the poles (" means the fixing agent become " the fixing agent above mentioned " negative pole. If silver be empl " more apparent. As this part of " the elimination of the

Х

" and then confined. This framework or cage is mounted upon a spindle which is caused to revolve rapidly by a winch handle or other ordinary means.

"The two parts of the invention may be combined, the test of the former being applied between successive washings and operations of the centrifugal apparatus."

[Printed, 4d. No Drawings.]

A.D. 1865, March 14.-No 712.

BROOMAN, RICHARD ARCHIBALD.—(A communication from Cyprien Marie Tessié du Motay and Charles Raphael Maréchal.)—
"Improved processes for the production of photographe images
"capable of being inked with fatty inks."

A portion of this invention consists in the employment, for the above-named purposes, of "chromic acid salts, more acid and "more complex than protochromates and bichromates," in conjunction with "bodies more capable of reducing the oxygen of the "chromates than gelatinous and albumenous solutions."

Another portion of this invention consists in the use of "soaps" of silver," in conjunction with gelatinous coatings that contain "salts of chromic acids," also for the above-named purposes.

In one process, "alkaline trichromates" are mixed with a solution of gelatine that contains gums, acids, or salts, having great
affinity for oxygen. Positive inkable images are yielded.

In a second process, bichromates or trichromates of the alkalies, "and of bichloride of mercury," also "bicarbonate of potass "and of bichloride of mercury," are used either pure or mixed with alkaline protochromates, bichromates, and trichromates, with or without the addition of bodies having affinity for oxygen, and added to gelatinous and other similar solutions, for the said purposes, positive inkable images being yielded upon paper.

In a third process, "the chromo-alkalino-mercurial salts above-"mentioned," in connection with gelatinous solutions, spread upon metal, yield ("after prolonged washings") images inkable negatively.

In a fourth process, gelatine, chromatized with one of the above-named chromic acid salts, is laid upon paper, or upon metal; the chromatized gelatine is then dessicated and covered with layers of argentic soaps. Two superposed images are produced.

[Printed, 4d. No Drawings.]

PH.

H



trus plate is secured a piece " being kept damp." " and dimensions of the pic " and when the photographs " damped cloth, and are pre " the air from beneath, the " back will keep them down " gummed or covered with : " difficulty. The backs of the " the cardboard on which the " them, and upon being slig." " will adhere thereto, and u " picture will be found to be I " cardboard is generally some " important that the latter sho " to this end a set of horizonta " with plates at their ends are 1 " end of the glass plate, and are " to be capable of being screwe " according to the amount of 1 " placing the cardboard on the p " should be brought up agains " with very little trouble the pl " mounted with margins of exact [Printed, 4d. No Drawings.]

" zag form like saw teeth," so arranged, "that the points at the one side correspond to the centre of the notches on the other side."

At present a rigid screen board is used in connection with slides of considerable length; in the arrangement preferred, however, flexible sliding shutters that work in guide grooves on the slide are employed. As the slide is pushed forward into the camera the shutter is pushed back by a stud; the shutter travels round a pulley at the rear end of the slide, and passes to the back. A stud on the other shutter draws it back so that it comes in front of the sensitive surface, and protects it from the light. To obtain an accurate representation of the sky at the same time that a foreground is taken, an adjustable screen is employed, by which the light of the sky may be in great part intercepted; this screen is placed at the lower part of the camera, and may either consist of an arrangement of wires that becomes more opaque as it descends from the edge, or a number of lines (filled in with black varnish) ruled at graduated distances apart upon a thin sheet of glass. A clockwork apparatus determines the time of exposure of the plate. The removal of a peg admits light to the camera, and starts the clockwork; when a disc has revolved a certain part of a revolution, the peg drops, the clockwork is stopped, and the light is again excluded from the camera.

[Printed, 1s. Drawing.]

A.D. 1865, April 26.—Nº 1171.

ROWLAND, JOHN ALEXANDER.—Provisional protection only.)
—"Improvements in photographic cameras."

This invention relates to a mode of constructing cameras "so "that large pictures or panoramic pictures may be taken with "lenses of moderate size."

"In carrying out my invention the lens is mounted in a brass chamber or slide, to the end of which is adapted a diaphragm chamber the aperture of which is of a long narrow form placed vertically. The lens chamber is held in a vertical position by means of two fixed studs which work in grooves made longitudinally along the top and bottom of the dark chamber. The lens is also maintained in its proper vertical position by a similar arrangement. The image from the lens passes through the long narrow vertical opening of the diaphragm chamber to the sensi-



" chamber, and this mech " winch with an uniform of " phragm may be moved by " clockwork capable of being to the state of the atmosp [Printed, 4d. No Drawings.]

A.D. 1865,

SMITH, WILLIAM HENRY.

" upon wood, and in the preparation of the substances for the impressions."

"impressions."

"These improvements cons stances in succession to the produce a photographic impression as base in the pores and inters object for the deposition of sensitized to make it receptive. The bases are composed of very gutta percha, or any gum or respective or in any other hydrographics. The bases are composed of complete or general sensitized to make it receptive. The bases are composed of complete or in any other hydrographics are composed of complete or general sensitives are composed of complete of spirits of wine and sensitive constructions."

"In the preparation of papier mache, china, earthenware," and other substances, the proportion of materials in the receptive is slightly different from that employed in the preparation of wood.

According to another method, the base contains gelatine,

whiting, and linseed oil.

In the receptives, "in certain cases iron may be used in combi-"nation with silver in place of the chlorine salts."

[Printed, 4d. No Drawings.]

A.D. 1865, April 27.—No 1184.

GRAINGER, ALFRED, and GIRDLER, CHARLES MITCHEL.—
"Improvements in the production of portraits or likenesses on
"certain materials by means of photography."

" Our invention relates to the production of photographic " likenesses on porcelain or ceramic ware, and consists in pro-"ducing the photograph or likeness of a person or thing on "the ware itself instead of first taking it on paper or other " material, and then transferring it to the earthenware to be " afterwards burnt or glazed as heretofore. We prepare a plate " or other article of the size and shape required of porcelain " or other ceramic material, which we glaze with a transparent " glaze and burn it on as usual; on this we take the likeness " by means of photography, we then paint or color the photo-" graph taken by hand or by other application of color, then " glaze or enamel it again, and burn and complete the article " bearing such portrait or likeness. Instead of coloring the " photograph before glazing a second time it may be left un-" colored, and with the effects produced by photography only " which is glazed and burnt in as before mentioned. Borax or " other suitable flux may be used for the glazing, which is applied " and rendered fluid by heat, as well understood in glazing " ceramic wares."

The photographic representation may be produced upon "metal" or other material," "which in other respects is treated and "prepared as hereinbefore described, the glazing and baking "rendering the representation enduring and applicable as hereinbefore described with reference to plates or pieces entirely of ceramic material."

[Printed, 4d. No Drawings.]

A.D. 1865, June 5.-Nº 1541.

NEWTON, WILLIAM EDWARD .- (A communication from William Augustus Leggo and George Edward Desbarats.)—" An improved " photo-electrotyping process."

A photograph on glass is varnished, allowed to dry, and laid upon a level slab in a dark room; it is then brushed over with " a substance which upon exposure to the light becomes inso-" luble in water," and the coating is permitted to "stand until " it be quite jellied." The sensitive substance employed is a gelatinous solution of bichromate of potash. When coated, the picture is exposed "to the light face downwards" for the requisite time, and the soluble parts of the jelly removed with warm water. Before the remaining part of the jelly is dry, a plaster cast is taken from it.

To produce an electrotype from the said cast, it is dipped into hot water and laid face upwards until all superfluous water disappears; then, while still warm and damp, dipped into melted wax two or three separate times, "allowing the wax to set each " time." The waxed cast being placed face downwards in some hot wax that has been poured upon a metal plate, and allowed to cool, "the wax upon the plate will unite with that upon the cast " and will form a solid mass, from which the plaster may be lifted " away leaving its exact impression in the wax, which when coated " with plumbago will, by the usual process, yield an electrotype

" from which perfect copies of the original may be printed." If desired, a stereotype may be made from the plaster cast as it comes from the gelatinous surface.

[Printed, 4d. No Drawings.]

A.D. 1865, June 12,-Nº 1588.

BONELLI, GAETAN .- "A new or improved method of obtaining " or producing optical illusions."

"It is a well known fact, based on certain optical conditions, " and by the use of an instrument known as a phenakistoscope, " that an appearance of motion or animation may be given to " pictures or subjects that have been expressly drawn or photo-" graphed for the purpose. The phenakistoscopic apparatus or " instrument being known it will not be necessary to state how " the pictures are arranged to produce the optical illusions, it " will be sufficient to say that an identical result will be obtained

+

"with images or pictures of small size and even reduced to a microscopic scale if to each of the images or pictures a lens is applied. It is only by the application of as many lenses as there are images on the disc and not by the successive passage of all the images under a single lens that the effect will be obtained. Thus, if a disc carries sixteen images, as many lenses or magnifying apparatus would be necessary, which receive a rotary motion in the same direction as the images before which each lens will be respectively placed."

"The pictures or images thus reduced enable me to construct phenakistoscopic apparatus, whether simple or stereoscopic, of sizes and shapes not hitherto done, and thereby forming a novel application of microscopic photography."

In the Provisional Specification, the method of making objects appear animated is stated to be by placing the pictures upon a small rotating disc; "each picture is brought in front of a lens " or magnifying glass, whereby the statue or group appears to " the eye in motion in all the different positions in which it is " represented, and in an apparatus of very small or limited " dimensions."

[Printed, 4d. No Drawings.]

A.D. 1865, June 20.-Nº 1653.

CARLEVARIS, PROSPERO. — (Provisional protection only.) — "Producing a light applicable to photographic purposes, to light- houses, and to other illuminations."

One of the scientific principles upon which the obtainment of this light is founded is the property that the oxide of magnesium has "of spreading," on being placed within the oxy-hydrogen flame, "an intense, bright, and constant light, and which is "admirably suitable to photography and general illumination.

"The process is as follows:—A piece of chlorid [chloride?] of magnesium, larger or smaller according to the effects of light required, is placed upon a small prism of gas-retort coal, and upon it, through a small tube purposely made, the flame of thosyhydrogen gas (the mixture of oxygen and hydrogen) is directed; or a prism, or even a small and well compressed cylinder of carbonate of magnesia is placed within the flame from the same mixed gases. The chlorid of magnesium or the carbonate of magnesia is directly decomposed and resolved into oxide of spongy magnesium, from which the interace,

" bright, fixed, and constant light comes forth, causing all the chemical phenomena of diffused sunlight."

In this light, ordinary gas and atmospheric air may be substituted for hydrogen and oxygen respectively. In large quantities hydrogen "is prepared by causing steam to pass over incan"descent charcoal;" "oxygen is prepared with manganese and hypochlorite of lime, with manganese and silicic acid, or with dry sulphate of iron, the products of whose decomposition are "caused to pass upon platinated pumice stone, turning to profit "the sulphurous acid resulting from the process to the preparation of sulphites."

[Printed, 4d. No Drawings.]

A.D. 1865, July 6.—Nº 1791.

SWAN, JOSEPH WILSON.—"Improvements in the production
"of printing surfaces by photographic agency, and in obtaining
prints therefrom."

"Photo-mezzotint printing."—When the image is produced by means of a negative, bichromated gelatine and colouring matter is employed as set forth in No. 503 (A.D. 1864); after the gelatinous tissue has received the actinic impression and previous to its development, the said tissue is mounted upon a surface of glass. The uncoated surface of the glass is placed towards the light. Warm water is used to dissolve the soluble portions of the gelatinous coating, and thus to develop the image. The plate bearing the gelatinous image is surrounded with a rim, hardened by means of a protosalt of iron or of sulphate of alumina, coated with silver whilst wet, and electrotyped in copper. The resulting electrotype is backed up and used for "photo-mezzotint " printing." The said printing is performed as follows: - Warm gelatinous ink is poured upon the greased surface of the electrotype and allowed to cool and solidify; an even pressure is applied to a piece of paper placed over the ink, a press with an elastic The prints thus tympan being employed for that purpose. obtained are fixed by means of a solution of alum. When the image is produced by means of a camera, the surface of the glass to be coated is previously covered with a thin film of caoutchouc or coagulated albumen.

To adapt this invention to copper-plate printing, the sensitive gelatine has an increased quantity of colouring matter, the rim is

not used, and thin walls are formed in the recesses of the plate to prevent the removal of the ink in the act of wiping.

To adapt this invention to typographic and lithographic printing, a "crayon photograph" is produced. For this purpose, charcoal, or other opaque substance, is mixed with the sensitized gelatine. When the image is mounted on glass (by means of a caoutchouc solution) the soluble portions of the gelatine are removed by means of warm water.

[Printed, 6d. No Drawings.]

A.D. 1865, July 7.-Nº 1808.

WILLIS, JAMES.—" Improvements in the construction of port-"able dark tents or chambers for photographers."

A number of steel ribs are attached at their upper ends to the top notch of a tube capable of sliding on a rod. "The lower " ends of these ribs are pin jointed to the outer ends of stretchers, " the inner ends of which are attached to a notched ring fixed " on a tube." When the latter tube is slid upwards, the stretchers and ribs will come towards the stick. At the upper end of the rod a top notch is fixed, from which wires are suspended, as in an umbrella; the said wires are jointed to the ribs at some distance from their upper ends. When the movable tubes are respectively slid down, the ribs will be suspended from the top of the rod, " and will take a curved form like the ribs of an umbrella." The said frame will fold into a small compass, and the tent thus formed should not exceed half a circle. "The stretchers form when " opened out a horizontal frame, which being covered forms a " surface on which a sink and other vessels may be placed. The " frame is covered with a fabric lined with black cotton, velvet, " or other fabric capable of preventing the passage of light into " the interior of the tent or chamber. An apron is formed to the " tent suitable for surrounding the person, as has heretofore been " the case with other forms of portable tents, or dark rooms or " chambers. Light is let into the tent through yellow cloth or " fabric inserted at suitable parts of the tent, as has heretofore " been the case."

[Printed, 10d. Drawing.]

A.D. 1865, August 1.—No 1984.

WELLS, FRANCIS Ross.—(Provisional protection only.)—"A "new or improved method of producing a photographic image "on the surface of copper or other metal plates."

"This invention relates to a new or improved method of producing a photographic image on the surface of a plate of copper or other metal, the object being to etch or engrave thereon. I propose to sensitive the plate by the vapour of iodine or the fumes of bromine, or with iodine combined therewith, when a photographic image can be produced thereon and developed by heat or by the fumes of mercury. A picture or engraving, or any picture or drawing, transparent or semi-transparent, can be produced on the surface of the plate to serve as a guide for etching or engraving thereon, so that facsimiles can be produced. In some cases the solution of iodine or bromine may be used in lieu of vapours."

[Printed, 4d. No Drawings.]

A.D. 1865, August 15.—Nº 2110.

HENRY, MICHAEL.—(A communication from Henry Avet.)—(Provisional protection only.)—" Improvements in the production of "surfaces by means of photography."

This invention relates to the production of printing and other surfaces. On the collodionized side of a glass negative is spread a film of gelatine combined with bichromate of potash, sometimes first forming a border of wax. The plate is then placed horizontal to allow the film to dry, and is exposed to the action of light on "Next, by means of the camera the non-collodionized side. " obscura, the portions of the film which the black and half tints " have preserved from the action of light are dissolved (when " gelatine or gum is used this can be done by hot water). When " dry the subject will appear in relief." "Any antiphotogenic " shade resulting from the bichromate is removed. The subject " being metallized by the nitrate of silver" is then electrotyped. or a gutta percha impression thereof is electrotyped. "Sometimes " instead of applying the film in solution it may be applied in " leaf or scales." Leaf gelatine may be sensitized by immersion in a solution of bichromate of potash. "To produce an artificial " grain a drawing is made in fine white lines on a colored " antiphotogenic background, or vice verså." "A photographic " negative is made by first photographing the grain and then the " object, or vice versa." "The negative is then treated according " to the above-described method. A design of the grain may be " obtained by making a negative from a reduced drawing in black " lines on white ground; it may be used as (a transparent) or " applied on another negative with the collodionized surfaces in contact."

[Printed, 4d. No Drawings.]

A.D. 1865, October 13.—No 2648.

BRINCKERHOFF, JOHANNES DE WITT.—"An improvement "in preparing paper and the surfaces of other materials for use "in photography."

The object of this invention is to produce a partially absorbent but porcelain-like surface.

The paper is treated with a thin solution of gelatinous materials and kaolin, then with a solution of alum or tannin.

French gelatine is softened by soaking in water, and dissolved by heat; with this solution a certain proportion of kaolin is mixed, and the paper is dipped into the resulting solution, whilst the said solution is hot. The paper is then treated with a strong solution of alum or tannin.

"The paper prepared in the aforesaid manner is much stronger than before being prepared, and not being dissolved by the solutions employed in photography, is much more easily manifulated in the subsequent process of toning and fixing the picture, and the washing can be performed much more easily and perfectly than heretofore, because the solutions employed do not become so much incorporated in the paper."

"A solution of borax may be employed in place of alum to combine with the gelatine and form an insoluble compound as aforesaid. In place of employing kaolin I may make use of sulphate of barytes mixed in with the gelatine to give the white color, or said sulphate of barytes may be produced by mixing nitrate of barytes with the gelatine, and then the alum solution effects a double decomposition, forming sulphate of barytes."

[Printed, 4d. No Drawings.]

A.D. 1865, November 25.—No 2754.

NEWTON, WILLIAM EDWARD.—(A communication from Laurent de Montgolfier.)—(Provisional protection only.)—" Improvements " in the preparation of photographic papers."

The object of these improvements is "to simplify the operations "relative to the obtaining of positive proofs, and also to effect "considerable economy in the cost of producing such proofs by

" dispensing with the use of the chloride of gold or platinum " usually employed in the developing process. For this purpose, " a small quantity hypophosphorus acid, phosphorous acid, " phosphoric acid, or any salt having such an acid for its base, such " as phosphate or phosphite of soda, potash, or ammonia is to be " mixed with the albumen prepared for covering the surface of " the paper. The proportion of acid or salt employed in relation " to the albumen may vary from 2 to 20 per cent."

A solution of nitrate of silver sensitizes the paper. " proofs will take different shades of brown according to the " length of time they are in the press. After two or three suc-" cessive washings in distilled or rain water, the proof without " undergoing the changing or developing process," is submitted, in the dark, to a bath of hyposulphite of soda containing chloride of silver, "in order to remove all the phosphate of silver and " leave the lights white; the proof is then to be exposed to light " for several hours while immersed in the hyposulphite bath, " and then washed dark shades will thus be produced which " nearly resemble those produced by printing from copper plate " engravings."

[Printed, 4d. No Drawings.]

A.D. 1865, November 9.—N° 2891.

NEWTON, WILLIAM EDWARD. - (A communication from William Gibson.)—" Improvements in preparing the surfaces of paper, " leather, woven and other fabrics and substances for receiving " photographic pictures, engravings, lithographs, and prints, and " for rendering such substances fire and water proof."

"The chief object of the invention is to provide the above " named substances or materials with a smooth enamel or surface," for the above-mentioned purposes.

"The invention consists in combining with any of the above " named materials," an adhesive mixture, composed of gelatine or albumen, with clay or oxide of zinc. The gelatinous mixture is rendered insoluble in water by means of gallic acid, boracic acid, or tannin, dissolved in water.

The gelatinous mixture may be incorporated "with the paper " pulp in the early stages of the paper manufacture, and the paper " web before delivery from the paper machine may be caused to " pass in contact with the astringent solution, and subsequently

" between drying and calendering rollers."

Cloths and other woven fabrics may be treated with the gelatinous mixture, dried, and then submitted to the action of the astringent mixture and of polishing rolls. Wood, leather, and other substances may be similarly treated.

Layers of the said gelatinous mixture may be applied to a sheet of glass, so as ultimately to form a panel; the addition of plaster of Paris to the adhesive mixture facilitates drying. When the mass is dry, it is rendered insoluble by means of the astringent mixture, and an insoluble plate or panel is thus produced.

[Printed, 4d. No Drawings.]

A.D. 1865, November 15.—No 2937.

BÜNGER, WILLIAM.—(A communication from Charles Augustus Steinheil.)—"Improvements in photographic lenses."

The improved photographic lens "consists of two lenses " arranged and combined with a perforated disc, diaphragm, or " stop placed midway between them, the lenses and stop being " mounted or fixed in correct position in relation to each other." The "periscopic objective lens" "admits of angles of 90°, or " even more, being taken correctly, and the size of this image is " equal to double the length of the focal distance of the objective " lens the latter is calculated from the main point or centre of " the objective lens, which lens consists of two lenses of the same " description of glass and of positive focus. These lenses may " be quite equal or similar to each other, placed in inverted posi-"tion with the concave sides opposite to each other, and at such " a distance apart that all the chief rays cross each other at the " same point in the axis between the two lenses. This is the " only chief point of this combination of parts forming the objec-"tive lens, and the two lenses must be sufficiently curved that the " image shall fall within a plane which is normal to the axis " whereby the lenses take the well known form in which the " raised surfaces project outwards."

With this lens "near and distant objects appear equally clear, "and it is not necessary that the camera should be capable of adjustment, as its correct dimensions can be determinined when "first made," the image is therefore determined "by simply observing the image angle above and on the sides of the camera."

[Printed, 8d. Drawings.]

A.D. 1865, November 16,-Nº 2949.

SARONY, OLIVER.—"Improvements in the rests or apparatus "employed when taking photographs of the human figure."

" For these purposes the stand or pillar which carries the rests " is arranged to be fixed by screws to the floor in any desired " position. Through the upper surface or tube of the stand a " bar (or it may be two bars) slides, and it is capable of being " raised or lowered, and of being retained in any desired position " in respect to the upper part or table of the stand. At the upper " end of this sliding bar are applied two horizontal plates, which " are capable of being drawn towards each other by a screw bolt " and thumb nut. Between these two plates is a third plate, " through which the screw bolt passes, and about which the third " plate can turn as on an axis. On the third or central plate is a " projection to which is fixed a bent or curved plate, which is " formed to receive a slide to which a chair back is attached, " whilst the seat of the chair is separate and the part where the " back is ordinarily fixed to the seat is masked or hidden by a " fringe or drapery. The projection carries a socket through " which an inclined hollow bar or tube slides." The inclined bar can be fastened in any desired position, and carries at its end a hollow socket through which a cylindrical bar slides and turns; this bar receives the rest for supporting the body. The horizontal bar supports a second slide (in a dovetail groove), which slide carries a hollow socket, through which an upright cylindrical bar slides and turns, and can be retained in any desired position. " At the upper end of this bar is a socket which receives a rod, at " the end of which is applied the rest for the head, and such " rod can be retained in any desired position in its socket by a " thumbscrew."

[Printed, 1s. 2d. Drawings.]

A.D. 1865, November 17.-No 2954.

BULLOCK, EDWARD, and BULLOCK, JAMES.—"Improve-"ments in the application of photography to the obtaining of "printed proofs or impressions or engravings."

For the purposes of this invention "reticulated negatives" are produced. One means of obtaining a reticulated or granulated surface upon the negatives is to place such a surface "face to face " with any ordinary negative," and to copy both together through

the light, "thus producing a transparency from which a negative "must be taken, a print from which upon paper prepared by any of the bichromate and ink processes known in the trade will have the reticulated or granulated appearance afore mentioned."

In another process, a transfer paper, with reticulations already imprinted upon it, is employed. Ordinary or photographic paper is coated with a glutinous substance, and printed with a reticulated pattern. "In this case the specks of ink themselves form a "medium, and by their aid excessive contrasts are avoided and half tones secured. Such picture when so obtained is passed to a lithographic stone or zinc plate, and a printed proof produced therefrom; by the aid of chromolithography coloured proofs may be produced." The coating the paper with a glutinous substance may "be conducted in connection with bichromate of potash or bichromate of ammonia." The said transfer paper may be used "whether the impression be a lithograph, a zincograph, an impression from an electrotype, or from an engraved or etched plate."

Other processes for granulating the negative, mainly depending upon the use of the camera, are set forth in the Provisional Specification.

The process in which "the specks of ink themselves form a "medium" is not alluded to in the Provisional Specification.

[Printed, 4d. No Drawings.]

A.D. 1865, November 28.—No 3053,

NEWTON, ALFRED VINCENT. — (A communication from Frederick Von Egloffstein.)—(Provisional protection only.)—"An im" proved mode of obtaining printing surfaces by photography."

"This invention relates to the use of a heliographic and photographic spectrum for producing printing surfaces from transparent photographs. The spectrum may be composed of a single sheet of highly polished level ground plate glass, free from colours and covered with a good asphaltum etching ground, heated and smoked over a wax paper in the manner of the engravers' black etching ground. The plate when cooled off is ruled over by the diamond or other point of a correct ruling machine, using light pressure to prevent the chipping off of the ground and the flaking or breaking of the glass.

"Upon the insertion of an edge guide or pattern, varying in profile from the mathematical line or straight edge of the ruling

1

Birth

" machine, and guiding the course of the diamond or other point " it will be obvious that any system of lines from the stright " line to the semicircle with equal or varying intervals can be " traced with facility and preserving the perfect parallelism re " quired for the different spectra."

"The plate prepared to receive the engraving is coated first with a sensitive heliographic varnish. Upon this varnish the spectral image is produced by the light falling through the opa spaces of the spectrum made as above described. The spectrum is thus imprinted upon the varnish previous to its receiving the photographic image by means of a second exposure to the light. Both images are thus blended into one, the spectrum giving texture to the photographic image. Then may follow the ordinary heliographic manipulations of developing the picture."

"The photographic picture" overpowers the spectral image," the "spectrum," however, remains sufficiently strong to hold the printers' ink.

[Printed, 4d. No Drawings.]

A.D. 1865, December 2.—No 3092.

WRIGHT, Anna Josephine.—"An improved mode of applying photographic paper pictures to glass."

The face of a paper photograph is covered with a varnish composed of Canada balsam thinned with spirits of turpentine. " taking care that the varnish is spread evenly over the entire " surface of the picture." When thoroughly dry the face of the picture is attached to the glass to be ornamented by means of a thick solution of gum arabic. When the gum is quite dry, the back of the picture is coated with the above-mentioned Canada balsam varnish, also taking care that it is evenly spread. When this varnish coating is dry, if the picture be not perfectly transparent, the Canada balsam varnish is again applied. Then, by careful washing with spirits of turpentine, as much of the varnish is removed as will lay bare the surface of the paper. If it be desired to remove the paper, leaving only the picture attached to the glass, a soft rubber is applied evenly over the entire surface of the paper; this rubber is covered with the finest description of glass paper, and it rapidly removes most of the paper; the remaining portion of the paper is carefully rubbed away with a sponge. The picture may now be painted, and is again varnished with the Canada balsam varnish.

Another plan, not noticed in the Provisional Specification, consists in steeping the paper photograph in the Canada balsam varnish until it becomes perfectly transparent. The clarified picture is at once placed on the glass to be ornamented, and is caused to adhere thereto by the varnish. The transparent and affixed picture may then be treated as set forth above.

[Printed, 4d. No Drawings.]

A.D. 1865, December 11.-Nº 3190.

GRISWOLD, VICTOR MOREAU.—(Provisional protection only.)
—"Improvements in photographic surfaces, and the compositions
"and process for preparing the same."

The object of this invention is the production of a photographic picture upon an opal surface in a cheap and easy manner.

To carry out the invention the following solutions and preparations are employed:—

- "Solution No. 1.—Opal collodion." This solution contains alcohol, sulphuric ether, acetic ether, gum kowrie, gum shellac, solution of cotton, castor oil, and glycerine.
- "Solution No. 2.—Sensitizing." This solution contains water, alcohol, muriatic acid, chloride of calcium, chloride of ammonium, and bichloride of mercury.
- "Solution No. 3.—Opal picture enamel." This solution contains shellac, borax, water, linseed oil, sulphuric acid, and albumen.

Solution No. 2 is added to solution No. 1 in certain proportions, to produce a sensitive film, according to the strength of the "ammonia nitrate bath;" a small quantity of the sensitizing solution is only required when the plain silver bath is used with "ammonia fuming." The dried plate is exposed under the negative, then immersed in "solution No. 2," to which water has been added, and gently rubbed with sponge. The picture is then washed, toned, and fixed; "solution No. 3" is used to "finish" the picture.

For printing in the camera "solution No. 1" is sensitized in the same manner as bromo-iodized collodion, and then by nitrate of silver.

A mixture of unslacked lime and ammonia alum is used to produce ammonia fuming for "the plain silver bath." In fixing with cyanide of potassium or hyposulphite of side, the picture is converted into a negative; it is reconverted into a positive by the application of solution No. 2 diluted with water.

The enamel (solution No. 3) "preserves the purity of the "white film."

[Printed, 4d. No Drawings.]

A.D. 1865, December 15.—Nº 3248.

PARKER, THOMAS.—(A communication from Prospero Carlevaris.)—"Producing an oxyhydro-magnesian light applicable to photographic purposes, to lighthouses, and to other illuminations."

This invention "consists in producing a light by placing the oxide of spongy magnesium in a flame produced by a mixture of oxygen and hydrogen."

A piece of chloride of magnesium ("same chloride of mag-" nesium that melts into metallic magnesium") is placed between two platinum wires, or otherwise mounted, so as to permit an oxy-hydrogen flame to be directed upon it. Well compressed carbonate of magnesium may be substituted for the chloride of magnesium. In either case, at the high temperature employed, " spongy oxide of magnesium" is produced, and gives an " intense, bright, fixed, and constant light." "The two gases, " let them be pure or ordinary lighting gas, and atmospherical " air, containing more or less oxygen, must come from two " different gasholders through two separate pipes, and must be " mixed only at the end of these pipes in a very small tube, " forming in that manner a real chalumean (oxy-hydrogen " soldering pipe, or pipe to burn oxygen and hydrogen together.)" The principles involved in the production of this light are:-1st. The infusibility of the oxide of magnesium.

2nd. The volatility of the said oxide (in a small degree) at high temperatures.

3rd. The property that the said oxide has, in an oxy-hydrogen flame, of giving an intense and constant light that may be applied to photographic and other purposes.

4th. "The property that the spongy oxide of magnesium has " of being the best of all magnesium oxides to produce the " oxy-hydro-magnesian light."

[Printed, 4d. No Drawings.]

A.D. 1865, December 29.-Nº 3363.

BAGGS, ISHAM.—(Provisional protection only.)—"Improvements in the construction of stereoscopes and stereoscopic apparatus."
"This invention consists of certain improvements in the construction of apparatus for operating by the reflection, refraction, and transmision of light in such manner as to cause two or more stereoscopic views, pictures, or objects to apppear to meet the eye from the same direction, and capable of dissolving one into the other, or of being caused to appear or disappear at pleasure either slowly or quickly.

" A simple form of the apparatus for producing these effects " consists of a square piece of plain plate glass, the same being " placed at such an angle relative to two stereoscopic pictures " contained in the instrument that whenever required one of the " pictures is seen by the direct transmission of the rays of light "therefrom through the substance of the glass, the other picture " being seen by reflection from the surface of the same glass. By " shutting out the light from either picture and illuminating the " other the first is caused to disappear or dissolve, and the other "to take its place in the organ of vision. Two or more mirrors " or other reflecting surfaces may be used in place of one for " producing these effects upon the well known principle of the " camera lucida. Lenses may also be employed in a similar way " to cast the stereoscopic pictures upon a screen or other surface, " or in the air, so as to form dissolving stereoscopic pictures, and " to render the effects more striking the same may be magnified " on the principle of the telescope or microscope, as well " understood."

[Printed, 4d. No Drawings.]

1866.

A.D. 1866, January 9.-Nº 66.

SKINNER, JAMES. — (Provisional protection only.)—"An im" proved mode of preparing albumenized paper, and the process
" connected therewith."

"The paper is floated on the albumen taken from the eggs of common poultry; the albumen may be used either with or with-



 n this respect or they are not so, but certainly they are of trent or unsymmetrical forms or unequal ratio of radii, i.e. anterior crown lens (No. 1) may be a plano-convex, or ray so, convex side outside, and the posterior lens (No. 2) sep concave meniscus, also convex outside." Between these mass, separated at a certain definite distance, a diaphragm is it is the said diaphragm divides the space between these two kenses in the ratio of their foci, and almost immediately in the with this diaphragm is placed "a flint glass lens, planomave by preference, and of such focal length as with the two wn lenses above named will form an achromatic whole." Trinted, 4d. No Drawings.]

A.D. 1866, February 13.-Nº 449.

"IN, CHARLES.—(A communication from Francis Kossuth and Theodore Kossuth.)—" Improvements in the production of sper or other metallic plates for the purpose of printing sectrom."

obtain the said plates, a photographic glass plate, bearing mitive or negative image of the object or design to be printed, whilst still wet, is treated with a solution containing binate of potassium and gelatine, so as (when dry) to form a rm thickness of sensitised gelatine on the glass plate. The of gelatine is then exposed to light, washed in warm water, and metallised for electrotyping by means of an alcoholic ion of nitrate of silver acted upon by sulphuretted hydrogen. s image on the said photographic glass plate, for relievos, is ned by taking on a plate of glass, a positive image "obtained transparency through another negative one (representing the jest to be reproduced in the relievo engraving), on which a iped plate of glass has closely been applied." For "incision gravings" a negative image is taken from the object, the said live image being grained or shadowed with lines or dots. gious methods of producing the "grain" are set forth. One od consists in the use of a striped glass plate in contact with ensitive surface; the stripes are made with a diamond point. mage of a grain previously lithographed on paper may be on the sensitive surface. To produce the grain at the same

that the image of the object is taken, a camera is employed has two opposite object glasses, the images respectively of

" out admixture with a portion of some gelatinous substance, " such as arrowroot, tapioca, sago, or any other similarly suitable " substance, and in such proportions as not to injure the albumes. "The paper, after the first part of the process is effected, is then " dried off in a temperature varying from 60° to 90° Fahrenheit, " more or less. The albumenized paper is then rendered insoluble " by being put into a case of metal, wood, or other suitable ma-" terial, and each sheet is separately suspended therein, the case " being perforated all round. Steam at the requisite temperature " is then admitted into the case in such quantity and for such " a length of time as is sufficient to render the albumen with " which the paper is coated quite insoluble. Some time after " being taken from the box or case and being perfectly dried " the paper is again coated with ordinary albumen in the same " manner as in the first instance, and dried in the usual manner." [Printed, 4d. No Drawings.]

A.D. 1866, January 12.-No 105.

WOODBURY, WALTER BENTLEY, and DAVIES, GEORGE.—
"An improved method of and apparatus for finishing impressions
"(in colored gelatine or other soluble material) obtained from
"metallic or other plates produced by the aid of photography."

The object of this invention is to produce a clear white margin, with a sharply defined edge, upon the said impressions from metallic or other plates (see No. 2338, A.D. 1864). The margin dispenses with the ordinary mounting upon paper.

The invention consists:-

lst. In cutting or scraping off the superfluous gelatine "by "means of four cutters or scrapers arranged in a rectangular form in such a manner that the area thereby enclosed can be diminished or increased at pleasure."

2nd. Protecting the central picture, and washing off the composition from the edges or margin with warm water. The impression may be laid upon an india-rubber surface; if a plate, of suitable size and shape, be then firmly pressed upon the said impression, the margin may be washed off by means of a sponge. In a second method, a solution of alum (or other solution that will render gelatine insoluble) is poured into an open frame that is suitably placed upon the impression; the solution is then poured off, the impression dried, and the margin washed off. In a third method, an open frame or "mat" being placed over the central portion of

the impression, a solution of india-rubber in benzole is brushed over the impression to render the central portion of the gelatine impervious to warm water.

Another way of producing pictures with clear margins, is to take the original impression on glass that has a waxed surface, and, after removing the margin therefrom, to press thereon a paper already coated with adhesive cement. This paper adheres to the impression, and the paper and impression together may be removed from the glass, the requisite margin being afforded by

the paper.

3rd. Printing impressions on paper direct with a clear margin, by means of a dished plate or frame, the edge of which arrests the flow of gelatine and colour. A press is described and shown, in which a "frisket" (hinged to the interior of the lid of the press) carries the dished frame. When the lid of the press is closed and the impression taken (in gelatine), as the superfluous gelatine is squeezed out it is arrested by the edge of the dished frame, passes between it and the edge of the mould, and does not spread over the paper.

[Printed, 8d. Drawing.]

A.D. 1866, February 2.—No 324.

WINSTANLEY, DAVID, junior.—" Improvements in producing printing surfaces by the aid of photography."

In this invention plane printing surfaces (from reliefs or intaglios produced by the aid of photography) are produced by means of a number of pointed wires.

A layer of bi-chromatised gelatine is exposed to light in the usual manner under a photographic negative; the actinic influence of the light thus admitted to the gelatine renders its parts more or less insoluble in proportion to the extent to which they have been acted upon by that light. In the picture produced, by acting upon the exposed gelatine with warm water, the gradations of light and shade are perfectly represented by corresponding thicknesses of gelatine. Each of the said wires have a like conical or pyramidal termination, and—the surface of points produced by a bundle of such wires being placed upon one of the said protographic reliefs or intaglios—a copy of the respective lights and shades is produced by the relative height of the corresponding points above the plane of the picture. The height of the cone of each wire being equal to the greatest depression of the mould, and the wires being fixed in their containing frame in the position which the said relief has given them, the uneven surface of points thus obtained is planed or otherwise reduced to one general fix surface. The result is a surface in which the lights and shades of the original photograph are represented by dots or marks of a diameter greater or less according to the elevations or depressions of the relief or intaglio from which the uneven surface was produced; this surface can be used in block printing. A cast, in type metal, may be taken from the said wire surface, and, when ground or cut, may be used for printing by the "copper plate" method.

To obtain gradations of light and shade by dots, equal in magnitude but differing in number, a plate (prepared for copper plate printing by the above method), in which the impression has considerable depth, is ground from behind until every point is just represented by a hole. Very fine and equal sized wires are pushed through the said holes, a frame, containing a large number of the said wires, being placed over the plate for that purpose. Upon binding these wires together a surface is obtained "in which the "lights and shades are represented by greater or less numbers of dots having the same size. This surface may then be planed, "cut, or ground, or casts or impressions in reverse or fac-simile "may be taken from it as in the method before mentioned, and used for obtaining pictures or impressions either by the 'block 'printing' or by the 'copper plate' method."

[Printed, cd. No Drawings.]

A.D. 1866, February 8.-Nº 396.

DALLMEYER, JOHN HENRY.—(Provisional protection only.)—
"An improved photographic lens."

This lens embraces a very large angle of view, say 100° or more. " It is composed of three lenses, two of crown glass and one of "flint glass, making a triple combination," and similar in this respect to the triple achromatic lens already manufactured by the inventor; but, "instead of being composed of three combina—" tions, each acromatic or nearly so in itself," it consists of three very thin single non-achromatic lenses, "which, however, when " acting in unison, form an achromatic whole."

The construction is as follows:—Two crown lenses are "wrought" to a sharp edge of suitable focal length;" they are either iden-

tical in this respect or they are not so, but certainly they are of "different or unsymmetrical forms or unequal ratio of radii, i.e. "the anterior crown lens (No. 1) may be a plano-convex, or " nearly so, convex side outside, and the posterior lens (No. 2) " a deep concave meniscus, also convex outside." Between these two lenses, separated at a certain definite distance, a diaphragm is placed; the said diaphragm divides the space between these two crown lenses in the ratio of their foci, and almost immediately in contact with this diaphragm is placed "a flint glass lens, plano-" concave by preference, and of such focal length as with the two " crown lenses above named will form an achromatic whole."

[Printed, 4d. No Drawings.]

A.D. 1866, February 13.—No 449.

GILPIN, CHARLES .- (A communication from Francis Kossuth and Louis Theodore Kossuth.)-" Improvements in the production of " copper or other metallic plates for the purpose of printing " therefrom."

To obtain the said plates, a photographic glass plate, bearing the positive or negative image of the object or design to be printed, and whilst still wet, is treated with a solution containing bichromate of potassium and gelatine, so as (when dry) to form a uniform thickness of sensitised gelatine on the glass plate. The layer of gelatine is then exposed to light, washed in warm water, dried, and metallised for electrotyping by means of an alcoholic solution of nitrate of silver acted upon by sulphuretted hydrogen.

The image on the said photographic glass plate, for relievos, is obtained by taking on a plate of glass, a positive image "obtained " by transparency through another negative one (representing the " object to be reproduced in the relievo engraving), on which a " striped plate of glass has closely been applied." For "incision " engravings" a negative image is taken from the object, the said negative image being grained or shadowed with lines or dots.

Various methods of producing the "grain" are set forth. One method consists in the use of a striped glass plate in contact with the sensitive surface; the stripes are made with a diamond point. The image of a grain previously lithographed on paper may be taken on the sensitive surface. To produce the grain at the same time that the image of the object is taken, a camera is employed that has two opposite object glasses, the images respectively of the object and of the grain are, by this means, focussed at the same time upon the same plane.

[Printed 6d. No Drawings.]

A.D. 1866, February 14.-No 469.

HENRY, MICHAEL.—(A communication from Henry Avet.)—

"Improvements in photography, and in the process of producing
printing surfaces and other like surfaces by the aid of photographic agency."

One method of producing the said surfaces consists "first in producing an artificial grain on plates, then in obtaining a "raised or sunken design or subject on such plates, and, lastly, "in obtaining a metallic surface from the same, the design or subject thereon being raised or sunken."

Gelatine, or other organic substance, mixed with an alkaline bichromate is applied on a translucent plate already bearing a photographic image. The light is caused to act on the said organic substance through the thickness of the plate; when the parts unaffected by the light are dissolved, a subject in relief will remain on the said substance, from which a metal surface suitable for printing may be obtained by means of electrometallurgy.

Printing surfaces may thus be formed from engravings or other pictures, and either sunken or in relief. The figuring of porcelain may also be accomplished by this means.

To produce the above-mentioned grain, a representation of very fine white lines on an anti-photogenic coloured ground is produced on the photographic plate, either before or after the image of the subject is taken; or the representation of the subject and of the grain may be photographed simultaneously by using two plates. The grain may consist of dark lines on a white ground.

Negatives with an artificial grain may be employed to obtain superior photographic positives.

[Printed, 4d. No Drawings.]

A.D. 1866, February 14.-No 473.

NEWTON, HENRY EDWARD.—(A communication from Leon Jaubert.)—" Improvements in optical instruments."

Amongst other details of instruments, this invention relates to the lenses and other parts of photographic cameras.

'The first improvement consists" in the application to all optical " instruments in which it is required to cause one tube to slide " on or in another of a screw guide, whereby great precision and " accuracy of motion for bringing the object into the field is " obtained."

The second improvement relates to microscopes and to verniers.

The third improvement consists in the application of a universal joint to the foot of optical instruments.

The fourth, fifth, and sixth improvements relate to microscopes.

The seventh improvement relates to a new kind of object glass and eye-piece.

The eighth improvement relates to an arrangement of the prisms of the binocular microscope, which "is applicable also to " photographic apparatus employed for producing simply photo-" graphic images having the appearance of sculpture." A number of object glasses may be arranged so as to see the same object through them; "this may also be applied to photography for " obtaining the appearance of relief or intaglio."

The ninth improvement relates to a binocular magnifying glass.

The tenth improvement relates to the stage of a microscope.

The eleventh improvement "consists in the adaptation to " microscopes and other optical apparatus of a new kind of " object glass," which may be applied to photographic apparatus, and which is composed of three lenses; the first "is con-" vergent, the second spheroidal or ellipsoidal, and the third is of " a periscopic form." This compound lens is free from spherical and chromatic aberration and astigmatism. The glasses of optical instruments are composed of concentric layers united in groups. "The forms given to these glasses are obtained by a process " which consists in giving to the glass (when in a soft state) the " form which is required, either by centrifugal force or by means " of a plate which will spread out successively the layers of " glass; or the object may be effected by placing one above the " other thicknesses of glass of different densities softened to " the required point, and then united together by means of heat." The twelfth improvement relates to an apparatus for producing these glasses with concentric layers. A variable rotary motion is

given to the central tube which encloses channels for the supply

of air and gas, whereby the fusion of the glass is effected; the mould is placed upon the said central tube. The grinding of these lenses is effected upon a lathe with two transverse motions besides the ordinary circular motion.

The drawings also show a photographic camera for use is microphotography. A prism enables the operator to focus the object upon the rough glass.

A prism "for photographic apparatus for producing black or "dark parts, framing, &c.," is also shown.

A megascope, with the above improvements, may be constructed to serve as an apparatus for enlarging photographs.

[Printed, 3s. 6d. Drawings.]

A.D. 1866, February 17.-No 505.

WOODBURY, WALTER BENTLEY.— (Provisional protection only.)—" Improvements in the production of ornamental surfaces " for jewellery and other purposes."

This invention relates to the production of the said surfaces by the aid of photography; it "consists in the use of a com"bination of materials one of which is opaque and the other
"transparent or semi-transparent. An ornamental relievo' or
"intaglio' surface being produced on the former the trans"parent or semi-transparent material is forced therein and united
"thereto, and the picture or ornament will be seen through the
"upper material more or less, according to the thickness of the
"same."

An impression in porcelain from a metal mould may be taken for the opaque material, the said metal mould being produced by the method set forth in No. 2338, A.D. 1864. Glass or enamel, as the transparent material, is then forced into the said impression. These two materials being united by fusion, the surface of the latter is ground level.

As a modification, a gilt metallic surface may be filled in with the semi-transparent material, or the impression may be taken in ebonite, and then filled in with semi-transparent material.

"The only condition necessary to this invention being that the "relief shall be upon the lower or opaque material constituting the body of the picture or ornament, which must be of a different or opposite color to that of the semi-transparent material used for filling in the surface."

[Printed, 4d. No Drawings.]

A.D. 1866, March 17.-Nº 797.

ASHTON, ROBERT HOWE.—"Improvements in pictures obtained "upon paper, glass, porcelain, or other surfaces with transparent "or semi-transparent materials."

The first part of the invention relates to improvements upon the Woodbury photo-relievo process as set forth in No. 2338 (A.D. 1864); it consists in combining therewith another printing or other method of tinting in any desired colours.

In the Woodbury process, an intaglio surface is obtained, the concavities of which vary with the lights or shades of a photograph; a cast is obtained from the said surface in gelatine mixed with a pigment. The coloured gelatine is poured upon the said intaglio surface, and the paper or glass to receive the picture being placed thereon, the superfluous colouring matter is squeezed out, and the picture is formed by varying thicknesses of ink.

The paper to receive the picture is first printed upon with the desired number of tints by chromo-lithography, or the tints are produced by any other known process; it then receives the Woodbury relievo picture above referred to. The registration necessary to ensure the correct position of the several parts of the picture is accomplished by a press like that employed in the Woodbury process, the projecting pins for registration being allowed to pass through or on one side of the glass plate of the press.

Other pictures besides photographs may have the gelatine process applied to them, so as to obtain casts similar to those given by the Woodbury process for printing from.

The second part of the invention is as follows:—If the outline of a figure be painted in black upon the negative, the said figure may be combined with the rest of the picture by printing it with the tint obtained by chromo-lithography. Pictorial effects may thus be introduced.

Modifications of the above processes are set forth.

[Printed, 6d. Drawing.]

A.D. 1866, March 20.—Nº 820.

LAROCHE, WILLIAM SILVESTER. — (Provisional protection only.)—" Improved means and apparatus for producing new "effects in photographic portraiture."

This invention consists in placing the person or persons whose portrait or portraits is or are to be taken in front of a background, "and then placing in front of and close to the sitter or sitters a screen or frame about six feet high and five feet wide," covered with canvas, and having an opening cut in the centre of it of any required size or shape. The front of this opening is surrounded with an ornamental frame.

The said frame "is made to slide up and down a groove in a framework, which is made to support it in a perpendicular position, and can be raised or lowered to suit the height of any person or persons by means of counterweights with ropes attached running over wheels fitted to the framework, or by means of a rack and pinion adjustment fixed at the side of the aforesaid framework, and worked with a crank handle, or in any other suitable manner." By means of the ordinary photographic camera and subsequent processes the frame and sitter or sitters are photographed at the same time, "the result being a complete cabinet picture of any size with portrait and ornamental frame complete."

[Printed, 4d. No Drawings.]

A.D. 1866, March 31.-Nº 920.

WRAY, WILLIAM. — "Improvements in achromatic object "glasses."

Amongst other uses, this invention is employed in the manufacture of photographic lenses, so as to ensure "absolute coinci" dence of visual and actinic foci" therein.

By means of this invention "perfect achromatism is obtained, " and the secondary and all sub-spectra are destroyed."

According to this invention, the irrationality existing between flint and crown glass is destroyed by the introduction, between the flint and crown lenses, of a fluid or partially fluid meniscus lens, composed of a mixture of oil of cassia with Canada balsam. "The high irrationality of the meniscus lens is (in contradistinction to Dr. Blair's plan) opposed to the comparatively low irrationality of the crown and flint lenses" in the method employed in this invention.

The drawings show "a triple arrangement of glass lenses with "two cement films, one enclosed on each side of the concave "lens," and "a double arrangement of glass lenses and a cement "film between them."

"The power of correcting irrationality and the dispersion of the cement film increases in direct proportion to the amount of oil of cassia used." Other oils and balsams may be used, but oil of cassia mixed with Canada balsam is preferred. The borosilicate of lead glass may be used as a thin meniscus corrective lens. "The negative solution of the question of achromatism may be used when heavy flint glass is employed. In this case the dense glass is an internal concave lens, and the irrationality is balanced by two external convex lenses which differ in their irrationality."

[Printed, 8d. Drawing.]

A.D. 1866, April 5.—N° 980.

COX, EDGAR.—(Provisional protection only.)—" Improvements "in portable dark chambers or tents for the purposes of photographic manipulation in the field, and of containing and transporting the necessary apparatus."

An oblong box contains a washing trough, tap and tubing, cistern, chemicals, and bath. The hinged lid of this box carries an additional flap, and to each end of the box is hinged a corresponding flap, so that all actinic light may be excluded from the operator while manipulating, by means of the said flaps (when elevated) and a tent cloth suitably stretched across the tops of the said flaps and secured to the waist of the operator. The tent cloth may be carried in the box, beneath the above mentioned trough.

A four-wheeled carriage, constructed with a tank or reservoir, may be used to transport the box from place to place; it is also provided with suitable arrangements for carrying the requisite tripods, and other similar appliances.

"In order to meet those cases in which it may be necessary to dispense with the carriage, as in ascending mountain passes and elsewhere, the upper part of the box with the cover, flaps, trough or sink, and other necessary details may be made capable of removal from the box or case, so as to be carried with the tent cloth and other apparatus by poles or otherwise, and set upon portable legs capable of being screwed or otherwise attached to it."

[Printed, 4d. No Drawings.]

are fixed with "subsulphite" [hyp and dried; they are then placed i mercury, "and there left until the "invisible; they are then soaked fo "water, and afterwards dried."

The reproduction of the photograph by means of "a filtering paper, which "solution of subsulphite of soda, and "it is desired to reproduce the photograph with it is desired to reproduce the photograph uppermost and a sheet of the preparation on the top thereof; both the sheets are and the invisible photograph will rapid "effect is caused by the action of the same filtering paper, which dissolves and graph, The picture is then to be was "water, and when dry may be mounted [Printed, 4d. No Drawings.]

A.D. 1866, April 17.—A GENGEMBRE, PHILIPPE WILLIAM.-only.)—"Improvements in stereoscopes, also applicable to instruments for exhib This invention consists:—lst. In the pand at

open the roller may be reversed. Knobs on each end of the roller enable it to be turned from the outside. The slides are attached longitudinally to the roller by means of elastic loops fixed to two rings at suitable distances from each other on the roller. "If de-" sirable two views or slides may be placed back to back in each "pair of loops, by which means the number of the views may be "doubled. Both sets of views may be exhibited without chang-" ing their position in the loops, by simply turning the roller end "for end." The lenses are placed in a door in the upper part of the box, "and the reflector is secured upon the inside of the "cover above the lenses." For single pictures only one lens is used. A spring retains the slides in position as they are brought before the lenses. "The roller is prevented from turning back-" ward by means of a small ratchet wheel or other suitable "device."

[Printed, 4d. No Drawings.]

A.D. 1866, April 26.—Nº 1179.

HEDLER, CHARLES.—(Provisional protection only.)—"Improve" ments in the production of photographic pictures."

The object of this invention is "to produce around the picture " a narrow white border enclosed within a wide black or darkened " border, covering the remaining surface of the paper." Before subjecting the sensitised paper to the action of light, its border is covered, "leaving only sufficient surface exposed for the produc-" tion of the vignette or picture." For this purpose a sheet of black paper is placed on the prepared paper, the sheet being cut out in the centre to the size and form of the picture required. After exposure to light, a narrow border of flat metal is placed round the vignette, and the vignette or picture itself is also covered; "the border and plate may be held in position by a " series of vertical pins, which may be subjected to pressure " in the apparatus and so held in position." "By a further " exposure the whole external border of the paper beyond the " picture will become darkened, and even rendered black; and " between or within this dark margin and the vignette or picture " a narrow white border will result from the covering by the " narrow border preventing the exposure of that portion of the " paper." "The picture is afterwards to be fixed and treated by " any of the well-known methods to ensure its permanency." [Printed, 4d. No Drawings.]

(

A.D. 1866, May 8.-Nº 1315.

1:

ķ.

WOODBURY, WALTER BENTLEY.—(Provisional proteins only.)—"Improvements in producing designs upon wood and "other materials by the aid of photography."

A metal reverse is taken from an insoluble gelatine moulds put forward in No. 2338 (A.D. 1864). An electrotype from this metal reverse is then obtained in thick metal, the said electrotype being a mould and a fac-simile of that in gelatine above mentioned.

Having obtained this electrotype mould in relief, the inventor heats it "to a dull red heat (or to a sufficient heat to scorch or " discolor wood or other suitable material)," and he presses it "on " to the surface of a piece of truly planed sycamore or other suit-" able wood, and a picture or design will be the result where " the shades are represented by the different amount of burning " or scorching which the wood undergoes, owing to the greater " or less prominence of the various parts of the heated copper " mould, those parts where the heated mould actually touches " the surface being the darkest, and so on in proportion. Instead " of wood other materials may be used, such as velvet, ivory, " cardboard, paper, or other substance capable of being blackened " by heat, and the effect is not necessarily produced by scorching, " as the same effect will be obtained if the wood, paper, or other " material is prepared by any well-known chemical substance " having the property of being blackened or darkened by the " application of heat."

[Printed, 4d. No Drawings.]

A.D. 1866, May 9.—Nº 1334.

DALLAS, Duncan Campbell.—"Improvements in the pro-"duction of printing and other surfaces in relief or intaglio."

The design is photographed or drawn upon a glass plate in a medium that intercepts the actinic rays. Over the design a solution of bi-chromatised gelatine is poured, and (when the coating thus formed is sufficiently dry) the uncoated side of the plate is exposed to light. The parts not acted upon by light are then softened and caused to swell by treatment with cold water; this is poured off and the design is repeatedly washed with warm water till the design is free from the gelatinous mixture, and allowed to dry.

:eased relief or a granulated surface to the design is obtained : following processes:—

f the original design has been produced in bitumen of , increased relief of the design may be obtained by recoating rface with sensitive solution, again exposing to light, and rashing and drying. Repetitions of the process give the 1 amount of relief.

Damping the insoluble design causes increased relief.

If the original design has been produced in a soluble matene said design may be obliterated by the solvent without to the insoluble relief, leaving the glass bare at those parts the coating is dissolved; an increase of depth is thus ced.

A granulated surface may be produced on the relief by laying ir it an aquatint ground, or dabbing the surface with a sticky ial and sifting powdered rosin thereon.

ore or after either of these four methods, a mould of the e is taken by electrotyping, casting, or pressure.

he process is applicable, among other things, to the protion of plates, blocks, or other surfaces for embossing or for ting."

inted, 4d. No Drawings.]

A.D. 1866, May 12.-No 1364.

HWELL, WILLIAM HENRY, SOUTHWELL, FREDE-and SOUTHWELL, EDWIN. — (Provisional protection—"Improvements in the production of photographic prints." nis invention consists in the production of pictures in which aid of lithography is introduced for the purpose of heighten-the effect of photographs, and is carried out as follows:— photographs are obtained in the usual manner, and the its obtained therefrom also in the usual way. The lithophic stone intended to be employed in printing is then pred by the erasing from it or lowering that part of the surface re the photograph is intended to appear, the lithographic ting then takes place, and the result is that the ground or reportions of the entire picture may be of any desired tint hade."

inted, 4d. No Drawings.]

provided with glass-cove having projections which extend th hold the pictures and enable the withdrawn into the closed part of case being suitably provided with slides move freely. "One end of the " a hinge or pivot to allow the sli " carried to be drawn out therefron " out the pictures are inserted into t " pushed back inside the case." Th by a spring catch or other convenient Porcelain photographs, or others v back to show the picture, may be a means of this album. When the a card photographs, two of them "may " each of the slides;" either picture " reversing the box." The drawings show an album sim described above, also an album consi

together "in the form of a book." [Printed, 8d. Drawing].

A.D. 1866, June 18.— DALLMEYER, JOHN HENRY .- (Prot " Improvements in compound lenses s

than the posterior lens. The anterior crown glass lens is a deep concave meniscus, convex side outside. The posterior crown glass lens is plano-convex, convex side outside, and the intermediate flint glass lens is plano-concave with the plane side facing the anterior lens.

In photographic portrait lenses which consist of two compound or corrected lenses with a space and stop between them, the anterior compound lens is made larger than the posterior compound lens. To prevent these lenses as well as those for landscapes representing objects in one particular plane with painful sharpness and giving two little detail in other planes, the simple or compound lenses are so mounted that the distance between them can be slightly altered. This has the effect of impairing the correction of the lens to any desired extent, so that then the focus is spread over a space more or less, "and then the definition of the picture will no where be extremely sharp, nor on the other hand, will there any where be any marked deficiency of detail."

[Printed, 4d No Drawings.]

A.D. 1866, July 6.—Nº 1786.

FIELD, LORENZO.—(Provisional protection only.)—"Improve"ments in photographic printing frames."

Two flaps carry respectively the negative and the paper or material on which the positive is to be printed, they "are hinged " together so as to close upon one another, and studs on the " edge of one take into holes in the edge of the other." "The " negative flap consists of a frame carrying an inner frame in "which a sheet of glass is fixed to support the negative. The " inner frame is connected with the principal or outer frame by " means of springs at its corners, so that the negative can take " an exact bearing on the positive surface pressed against it "during printing. When this bearing is obtained the inner " frame can be fixed by means of clamping screws. The positive 44 flap consists of a frame carrying a panel having a number of " parallel slots in it; an ordinary pneumatic plate holder is fixed " in any required position on the panel by means of the slots, and ** the plate of opal glass or a board carrying the positive paper is " held by the pneumatic plate holder. By the facility which the 46 slots afford for changing the position of the pneumatic plate "holder the surface to be printed can be brought to any requisit" part of the flap so as to take a print from any part of a "negative." "The negative being placed in the negative figure and the opal glass or paper in the positive flap, the latter is "closed or turned down upon the former and secured by hook fastenings." "The frame is exposed to light in the usual "way, and the progress of the printing may be examined from time to time by raising the positive flap from the negative "flap."

[Printed, 4d. No Drawings.]

A.D. 1866, July 24.-Nº 1918.

WOODBURY, WALTER BENTLEY.—"An improved method of "and apparatus for printing from metal intaglice (obtained by "the aid of photography) in gelatinous or other semi-transparent "ink."

"This invention relates to a method of and apparatus for rendering continuous and automatic the process of printing from metallic moulds or intaglies obtained by the aid of photography," according to the process set forth in No. 2338, or in any other analogous manner.

A cylindrical metal intaglio to print from is obtained by a machine of which the following is a description:—Round the central and non-cylindrical portion of a wrought-iron shaft a cylinder of lead or other soft metal is cast. This roller (when truly turned) is mounted "in a machine similar to a rolling press, " having a sliding table traversing beneath the said roller." The gelatine relief is now placed on the table, and motion is imparted to the roller by means of a winch handle and spur gearing; the plate holding the gelatine relief will be drawn through the machine, and an exact intaglio of the gelatine thereby impressed or indented into the cylindrical surface of the soft metal roller.

In the printing machine, the above-mentioned cylinder is supported by standards, and a continuous length of paper is made to pass round a part of its circumference by means of spur gear, suitably placed rollers keeping the said paper in contact with the cylinder. The ink is fed in between the paper and the cylinder at their point of first contact by means of a steam heated hopper.

x

Either a gelatinous ink, or a semi-transparent fatty ink, or a water-colour ink may be employed in combination with the said cylindrical metal intaglios.

[Printed, 8d. Drawing.]

A.D. 1866, August 28.—Nº 2210.

GOULD, WILLIAM.—"A new or improved mode of reflecting "various coloured lights and shades upon stereoscopic and other objects for producing different effects thereon."

This invention "consists in fixing (either at the front or back " of the instrument) glass slides or shades of any required color " or combination of colors, so that when the stereoscopic slide " is placed in the instrument different colored lights are thrown "thereon." The said slides are held by spring catches attached to revolving bars or pins (horizontal or vertical), which are carried by brackets and rotated by thumbscrews "causing the said " colored slides or shades to rise or fall (turning on their axes) " as desired." A coloured glass slide may also be placed over the top light of the stereoscope instead of at the back. For reflecting on glass stereoscopic slides, the said slides or shades may be placed at the back of the instrument, and also over the top light, "or the upper revolving pin can be made to turn " completely over" the said top light, and thus to serve both for glass and paper objects. "Set screws are also used for regulating " the tightening or loosening of the brackets holding the said " revolving bars or pins."

In the Final Specification the inventor states that he can also apply the invention "to the casting of shades on photographic "and other similar pictures placed in conservatories, windows, "and other like places."

[Printed, 8d. Drawing.]

A.D. 1866, September 13.—Nº 2355.

BING, Louis.—(Provisional protection only.)—"An improved "mode of and apparatus for determining the actinic power of light."

To measure actinic power numerically a graduated transparent medium is used "varying in transparency from the unit to any "required degree of opacity;" to this medium is applied a sensitised strip of paper, "placing it under the transparent



plate will have direction of it.

if the vessel will the corner which is lower transparent a equal size which are the wedge-shaped [Printed, 42]. No Dr.

DALLMEYER, JOHN

"Ienses suitable for ph

1st." The production

"large angles." These

"achromatic or actinic or

ing denser material or

exterior position in est

consists of a deep concavo
meniscus of crown glass, est

itself. The diameter of the

front combination. This 1

ensures a nearly perfect con

aberrations, so that it acts on

2nd. The arrange.

chastion; it is composed of a meniscus crown glass lens, with the concave surface facing the front combination, and of a concavepearwex flint lens, with the convex side outside, "these two lenses that the convex side outside," these two lenses the convex side outside, "these two lenses that the convex side outside," these two lenses the convex side outside, "these two lenses the convex side outside," these two lenses the convex side outside, "these two lenses the convex side outside," the convex side outside, "the convex side outs

if [Printed, 8d. Drawing.]

A.D. 1866, September 28.—No 2513.

CLARK, WILLIAM.— (A communication from Joseph de Susini, San Marie Onésime Tamin, and Emile Bondonneau.)—(Provisional pratection only.)—" Improvements in the means of reproducing signs, characters, and other marks in the transmission of messages and signals by electric telegraph apparatus."

This invention relates to the re-transmission of the characters of electro-chemical telegraphs. Either a galvano-plastic or a photographic process may be employed for this purpose. The strip at the receiving station may serve again as a transmitter to another receiving apparatus at a further station, at which a similar reproduction may take place, and so on until the ultimate station is reached.

The strip at the receiving station having been marked by the electro-decomposition of the salts with which it is impregnated, the electric current from the transmitting station having duly acted upon it, a photograph of the message is taken, from which a copy on a conducting ground in non-conducting ink is obtained. The said copy may have a non-conducting ground, the characters being in a conducting material, and it may be produced from the said photograph (either a positive or negative) by photo-lithography or other analogous process. By using this copy in a transmitting apparatus, similar results are obtained to those produced by the original writing; these results may be operated from relay to relay until the ultimate station is reached.

A galvano-plastic process is also given at length.

This process may be applied to the systems of Caselli, Bonelli, Lenoir, Hughes, Gaiffe, and others.

[Printed, 4d. No Drawings.]

A.D. 1866, October 12.-Nº 2641.

GRÜNE, WILHELM.—(Provisional protection only.)—This invention is for "developing invisible photographs by the action of the "ammonia vapours evolved from tobacco, and improvements in



ron one paper and caus For tobacco-pipes the inve " care that the aperture sha " lighted end of the pipe to or he modifies " the arrangen " which holds the tobacco an " which is placed a slide hold " or perforation around the " being impeded. The paper " manner as follows :—Album " desired photograph copied " the paper is then washed an " chloride of mercury until t " after the paper has been well " use."

[Printed, 4d. No Drawings.]

A.D. 1866, Noven

MEDD, HENRY.—(Provisional p " provements in mounts for carte "My improvements on the or " and common playing cards co " engraving, or otherwise deline " mounts or playing cards the arn or other designs representing the

PHOTOGRAPHY.

invention has for its object to produce directly by ... graphy grotesque portraits of persons and things. The seess which has been designed with this end consists in deforming the image of the person or of the object by means " of a mirror, either convex or concave, and photographing the " deformed image produced in the mirror; this deformation may " be regulated by the form given to the surface of the mirror. "Silvered globes of blown glass may be employed, or the " mirrors may be curved in one direction and straight in the " other, and placed either horizontally or vertically and convex " or concave; or concave spherical mirrors or mirrors of any " other form may be employed according as it is desired to " widen, swell out, or shorten the image or deform it in any " other way. The photographic impression is taken directly " from the deforming mirror by the processes and with the " precautions generally used for reflected photographic images. " If desired, parts of pictures thus obtained may be combined " with parts of other pictures obtained in the ordinary manner " so as to limit the grotesque to the extent desired. The pictures " may be copied and enlarged by the ordinary processes."

[Printed, 4d. No Drawings.]

A.D. 1866, November 10.—No 2939.

SKAIFE, THOMAS.—"An improved apparatus to be used in "obtaining photograms."

This invention relates to the construction of an apparatus for igniting any composition, the flame of which is sufficiently actinic to produce photographs.

A platform, perforated with one or more touch-holes, is supported by springs so as to permit of its being easily vibrated by a touch of the finger. Connected with the platform is a reflector pierced with a groove, "through which communication is made "with one end of the platform by which it may be touched, or struck, so that by means of the aforesaid springs it may sud-"denly vibrate." The deflagrating powder being placed upon the platform is suddenly brought into contact with the light from a spirit lamp placed underneath it, and "at the same instant the platform being thrown into vibration communicates this motion to the particles of the powder or other substance to be ignited, the result of which action is that every particle

** light may be applied."

[Printed, 4d. No Drawings.]

A.D. 1866, November

BERNIERI, Luigi.-" Improvemen This invention "has reference to grounds with inscriptions, monog " devices thereon so as to present " medallion-like appearance in relie " unfinished borders as at present, " printing the said inscriptions, letters " the ground glass or semi-transluce " image upon the negative or collodion " or blocking out the said portrait or o " required to be acted upon by the lig " devices as aforesaid may be transfer " the deeper tints forming the shade " border in relievo. By this process w " wise are left or produced upon the di " medallion as before described." The drawings represent a medallio

The drawings represent a medallio steps, as described above, and in its con "The disposition and arrangement" together shades, more The design on the negative plate is blackened by chloride of platinum, dried, covered with a flux and annealed. The picture film from this negative is obtained by pouring iodised collodion over its picture side, submitting it to the action of nitrate of silver solution, placing it in a frame and exposing it to light transmitted through the negative. The plate is then placed in a solution of sulphate of iron and sulphuric acid; the portions acted upon by light appear in silver, and the plate is washed, fixed by hyposulphite of sodium and again washed. The picture film is then separated from the negative by immersion in water containing glycerine. The film may be treated with chloride of gold or other metallic salts, according to the colour it is to receive. The picture is then bathed in a solution that will colour it by impregnation of the matter of the film; by annealing it afterwards various combinations in different metals may be obtained.

The film is transferred to the object to be decorated by immersing the film and the article together in a large vessel filled with a mixture of water and glycerine. The film is applied to the surface by means of a hair pencil; a coat of flux is then laid on, and the article is annealed, burnished, and polished in the usual way.

[Printed, 4d. No Drawings.]

A.D. 1866, November 26.—No 3113.

COURTENAY, ROBERT HENELADE.—(Provisional protection only.)—"Improvements in the preparation of printing surfaces by "the aid of photography."

lst. Metal plates engraved in relief for type printing.—A photographic negative is photographically printed on "to a trans"fer paper prepared with a solution of gelatine, sugar, albumen,
"bichromate of potash or ammonia, or both in combination with
"a quantity of bichloride of mercury and hyposulphite of soda."
The design is inked with transfer ink, sponged, dried, and "trans"ferred to the metal plate to be engraved." Either a zinc plate or
a copper plate coated with zinc is employed to receive the photographic design. The plate is etched with nutgalls, the transfer
ink is cleaned off and the plate inked up. The back is then protected by means of varnish, and (in the case of a coated plate)
the zinc that is not covered with the ink is removed, weak acid
being used for that purpose. The plate is then electro-etched,
and is ready for printing from.

" replaced on the edge of the placed on the edge of the placed the print; these clips when a produce contact between the desired."

[Printed, 4d. No Drawings.]

A.D. 1866, Decemb

SWAN, JOSEPH WILSON.—"Im
" gelatinous tissues of gelatine and
" taining such substances."

This invention "consists in the u

" of chromium, as, for example, so chromium or the substance known as a means of rendering gelatine or compounds containing those so Amongst the uses to which this i

The fixing of photographs mounted paration of photographic paper sized

To fix photographic prints mount

messed in a solution of chrome also

I

mersed in a solution of chrome alun on paper wetted with the said solut with the solution is employed as the are mounted, the mixture being m using "in consequence."

PHOTOGRAPHY.

A.D. 1866, December 24.—No 3393.

ASHTON, ROBERT HOWE.—(Provisional protection only.)—
"Improvements in producing printing surfaces and carvings from
"moulds obtained by the aid of photography."

"According to my invention I use moulds, the different depths of which correspond to the lights and shades of a photograph, such moulds being well known and in use for purposes apart from my invention. From these moulds I obtain printing surfaces by passing the tracer of a pentagraph of that construction known as Jordan's or other similar ruling machine over them, and which tracer being acted upon by the different degrees of depression alters the direction in which the etching point moves.

Beneath this etching is placed a sheet of copper, steel, or other metal coated with a protecting medium, wax, for instance, after the usual manner adopted by engravers, and the design which is cut through the said coating may therefore be etched, as is

well understood.
In producing carvings I employ moulds as above described,
but cause the tracer to regulate the depth to which a rotatory
or other cutting tool acts upon the material to be carved; these

carvings may be ornamental in themselves, cameos, for instance,
or may afford dies for embossing."

[Printed, 4d. No Drawings.]

· APPENDIX.

A.D. 1851, August 23.—N° 13,726.

PALMER, JAMES.—"Improvements in delineating objects, and "in apparatus and materials for that purpose."

lst. "Various improvements in delineating objects on sheets of "glass or gelatine placed between the object and the eye of the "operator;" also "various methods of reducing, enlarging, "multiplying, and transferring the drawings thus obtained."

2nd "Various improvements in metasials and appearance

2nd. "Various improvements in materials and apparatus "adapted for the aforesaid purposes." Under this head a mode

" sheets are then taken out a " for use."

To render the gelatine insoluted. The following are other Bi-chloride of mercury, borax copper, sulphate of iron, acetate of baryta, fluoride of sodium, fluoride of potassium, potash, oxalate of soda, oxalate acetate of potash; boracic acid so.

These sheets of insoluble gelat with the gelatine which is then "employed for photographic pur; immersed or covered with the v gelatine being dissolved off the gl [Printed, 16. 4d. Drawings. See Mech

A.D. 1854, December

CORNIDES, Louis.—" Certain im
or covering surfaces of glass or ot
This invention consists of an ag
and ensure the coating or coveri
surfaces requiring to be coated wi
ployed for various purposes.

" æther. This apparatus is used by placing the object to be coated in the receptacle, and after shutting the latter air-tight, the air is exhausted from it by the air pump, and then the collodion is let into the receptacle from the reservoir by gravity, or the action of air force pump, or of an ordinary suction and force pump, placed between the reservoir and the receptacle. After the object is thus immersed, the collodion is withdrawn back into the reservoir by the same means, and the receptacle is then subjected to a temperature sufficient to evaporate the æther which passes off into the worm." The condensed æther may be drawn off from the worm by means of a cock below. The dry plates are removed by withdrawing the upper part of the receptacle, and a fresh supply is substituted. "The operation may then be repeated as before."

[Printed, 8d. Drawing.]

A.D. 1855, February 6.—Nº 275.

GEDGE, JOHN.—(A communication from J. E. Pointeau.)—(Provisional protection only.)—"Improvements in frames suitable for photographic or stereoscopic proofs or portraits."

"Instead of the frames at present in use for receiving and protecting stereoscopic or photographic proofs or portraits," the
inventor proposes "to make frames by which a certain distance
shall be preserved between the prepared glass and the proof or
portrait, making the back framing in such a manner as to
secure the said object of exact distance. It is known that
of stereoscopic proofs two are taken from the same subject at
different angles; these are superposed in frames, and only one
is visible, but that one in great relief." This effect however
will be much increased by the use of this invention, "which,
from the peculiarity of the parts, forming in the whole a frame,
secures the spectator a view of the object, portrait, or proof
in its highest developement, and produces an effect hitherto
unknown in photographic or stereoscopic objects."

[Printed, 4d. No Drawings.]

A.D. 1855, February 9.—No 309.

PONT, BARTHÉLEMY. — (Provisional protection only.) — "A " process of autographic engraving."

This invention "entirely supersedes the object glass, and it is PH.

"the plate itself on which the artist has made his engraving which gives the most faithful impressions."

"Mode of operating.—Take a plate of glass, prepared with "collodion, and sensitived by nitrate of silver, then expose it "in the dark chamber to receive the impression." The plate "then undergoes the ordinary manipulation of photography until "it presents a completely smooth surface, and of an intensity in "harmony with the tint for the positive proof." The plate is then well washed, fixed with "hyposulphate" [hyposulphite?] of soda, and treated with a solution of dextrine; the plate then remains twenty-four hours before it is used.

"Execution of the autographic engraving on the plate.—The
"plate on a black ground, the part prepared with collodion
"uppermost, the artist, with points, pens, or any other instru"ment fit for taking off cleanly the collodion, is to draw all the
"tracings which are to serve as a model for his engraving; he
"will easily be able to judge of the effect of his work, for each
"part removed presents black tracings, as is the case in a pen
"and ink or pencil drawing. Should the black masses appear
"to him too heavy, he can lighten them by using silver white
"diluted in water, and applied with a very fine brush. If he
"wishes to obtain spots completely white he has only to lay on
"a thicker coat. The striking off impressions is produced by
"the same means as in photography, but only more rapidly."

[Printed, 4d. No Drawings.]

A.D. 1857, June 22.—No 1744.

SEROPYAN, CHRISTOPHER DICRAN.—" A mode of preparing bank notes, bills of exchange, and other papers to prevent counterfeiting by photography and its kindred processes, and a mode of preparing an ink for the same."

This invention "consists in using two or more colours, which do not reflect nor transmit but absorb the chemical rays of light; one of which shall be applied to the paper either by printing, staining, or other mode, so as to cover the surface with a tint or ground of a red, orange, or yellow shade or color, while an ink of a different color or shade from the tint or surface color shall be used for printing the other parts of the note, that is the obligatory and ornamental parts upon the said "surface; the said ink consisting of such ingredients as will

" render it equally or more fugitive than the color forming the tint or surface color of the paper." The inventor has "for this "purpose invented an ink, which is composed of a black precipitate, produced by the action of an alkali upon sulphate of iron in aqueous solution; this is washed with water and mixed with gallic acid or extract of logwood. This mixture well dried is then ground in boiled linseed oil or painters' varnish. If not found sufficiently black a little blue may be added. Other organic or metallic substances may be also employed, provided they possess the required relative properties of absorption and fugitiveness to the other shade or color."

[Printed, 4d, No Drawings.]

A.D. 1858, April 13.—No 793. SPILLER, Thomas.—(Provisional protection only.)—" Exhibit-

"ing slides in the stereoscope and preserving them from injury, to enable each slide to be conveyed to the point of view, and then after use deposit them each in its place in the box without

" handling, or exposing the slides to the chance of being soiled, "keeping them always under cover in safety, a box 18 in. by "8 in. square will hold and exhibit near 1,000 slides." "The box is made in two compartments, with a square drum " on the top over the parting. Inside the box are placed guide " lines or wires, the slides are then fixed in a chain made ex-" pressly" "the length required, one end of such chain is then "fixed to hooks on the guide lines (which slide on them, and "traverse from top to bottom in each compartment of the box), " the chain is then properly folded and laid in one compartment " of the box, and the other end of the chain carried over the "drum, and fixed in like manner to the hooks on the guide ilines in the other compartment of the box. By turning the drum, over which this chain of views passes, the slides will be brought before the lens or sight of the stereoscope (which is " fixed on a line with the axis of the drum), and exhibited. When done with, the drum is turned one-fourth round, and " another view exhibited in the same manner, untill all the pictures are brought in rotation from the full compartment of the box exhibited in the stereoscope, and carried into the other " compartment and folded carefully up in their place, when by " turning the drum the reverse way, the views repass through

A.D. 1858, Ap

MAUGEY, PIERRE.—(Partly " ments in diaphragms for optic This invention "relates to a m " whereby the size of the aperture " or regulated at pleasure to the "This object is effected by m " elastic material, which is car " stretched. The material which " of india-rubber, either vulcanize " some other analogous elastic " circular opening is made in this " securely held or clamped, and by " means of any convenient instru " material, the central opening or " be expanded; or by drawing back " aperture will be contracted. "The stretching instrument ma " rack and pinion motion, which " trivance for the purpose, but ot " for effecting the object, if preferred [Printed, 6d. Drawing.]

A.D. 1859, Novemb

1/1

PHOTOGRAPHY.

165

"relation to each other to give the effect of a solid mount with
a considerable degree of relief. The inner rim of the mount
next to the picture consists of a suitably stamped or moulded
frame of cardboard or thin metal, and may be tinted, bronzed,
or left plain as desired. Upon this rim is laid a flat piece of
cardboard, having an aperture of such a size as to enclose the
moulding of the rim, and this second piece may either be plain
or ornamented, or tinted according to taste; over this again is
placed a third sheet of cardboard, the aperture in which is large
enough to show a considerable portion of the second piece last
referred to. It is obvious that the apertures may be of any
desired form, whether round, square, or oval, and that the
tints and ornamentation of each of the three component parts
may be varied according to taste."

[Printed, 4d. No Drawings.]

北京東京はは、東京の日

INDEX OF SUBJECT MATTER.

[The numbers refer to the pages in which the Abridgments commence. The names printed in *Italia* are those of the persons by whom the inventions have been communicated to the Applicants for Letters Patent. The Roman numerals refer to the Introduction.]

Absorption of chemical rays: Miller, xv.

Acetate of baryta (barium acetate):

Palmer, 159 (Appendix).

Acetate of copper (copper acetate):

Palmer, 159 (Appendix).

Acetate of lead (lead acetate): Palmer, 159 (Appendix).

Acetate of potash (potassium acetate):

Palmer, 159 (Appendix).

Acetate of soda (sodium acetate):

Palmer, 159 (Appendix). Lea, xxi.

Acetic acid (hydric acetate):

Fontainemoreau (Truchelut), Acid prussiate of potash (potas-

sium ferri-cyanide): Brooman (Baudesson and Hou-

zeau), 100. Actinic power (measuring): Bing, 140.

Actinic quality of the atmosphere at a high elevation: Smyth, xviii.

Albumen:

Joubert (*Garnier*), 2. Joubert, xv. Brooman (*Morean*), 48. Sutton, 61. Mennons (Plessy), 62. Clark (Toissonière), 62. Clark (Poilevis), 78. Albumen—cont.

Woodbury, 97.
Wortley and Vernon (Wothlij),

Newton (De Montgolfter), 123. Skinner, 131.

Grüne, 142. Grüne, 151.

Courtenay, 155.

Albums (photographic):

Gillett, 19. Pohl (Luz), 23.

Smith, 28. Clark (Marion), 33.

Giara (Marion), so.
Bourquin, 33.
Brooman (Marion), 34.
Brooman (Strauss), 36.
Schloss (Schloss), 88.
Schottlander, 40.
Schottlander, 40.

Bruoman (Saugrin), 41.

Carter, 46. Forestier, 5

Bourquin, 60. Gedge (Abelous), 87. Gedge (Abelous), 93. McFarland (Spooner), 146.

Alcohol: Griswold, 129.

Alloys (photo-spectra of):

Miller, xv.

Alum (aluminic potassium sulphate):

Palmer, 159 (Appendix). Clark (Poitevin), 73. Woodbury and Davies, 182.

Aluminum, salts of. See, Alum.

Ammonia (ammonium hydrate):

England, xxiv. Despratz, xxiv.

Grüne, 151.

"Ammoniacal citrate of iron": Brooman (Dupuy), 53.

Ammonium, salts of. See,
Ammonia.

"Ammoniacal citrate of iron."
Bichromate of ammonia.
Carbonate of ammonia.
Chloride of ammonia and iron.

"Iodites of ammonia and potassium."
Oxalate of ammonia and iron.
Prussiates of ammonia.
Sulphocyanide of ammonium.
Tartrate of ammonia and iron:

Aniline process : Willis, 102. Willis, xxi.

Antimony (photo-spectrum of):
Miller, xv.

Apparatus for exhibiting dissolving views:

Desvignes, 83. Baggs, 131.

Apparatus for igniting compositions that give actinic flames:

Skaife, 153.

Apparatus for sensitising and developing photographic pictures:

Albites, 6.
Willicock (Albites), 13.
Clark (Anthons), 20.
Pallu, 22.
Henry (Tournachon called Nadar), 24.
Haseltine (Wilson), 51.
Gruner, 54.
Brooman (De Lafarge), 58.
Clark (Blot), 68.
Brooman (De Lafarge), 72.
Thomas, 94.
Johnson (Bourdin), 106.
Willis, 121.
Cox, 141.

Apparatus for viewing photographs (not stereoscopes or phenakistoscopes):

Dagron, 7.
Beau, 8.
Ségoffin, 41.
Bliss and Lamplough, 42.
Ponti (Posti), 55.
Rowsell, 84.
Fournet and Nadaud, 156.

Apparatus (photographic) to reproduce the successive phases and shiftings of a motion:

Du Mont. 27.

"Autographs of the sun": Selwyn, zvi.

Backgrounds for photographic portraits:

Bennett, 71. Bernieri, 154.

Balloons, apparatus for keeping cameras steady when suspended to:

Ludeke, 77.

Barium, salts of. See Acetate of Baryta.

Bi-carbonate of potash (hydric potassium carbonate):

Brooman (Du Motay and Maréchal), 113.

Bi-chromate of ammonia (ammonium anhydro-chromate):

Joubert (Garnier), 2.
Joubert, xv.
Brooman (Morees), 43.
Brooman (Dupuy), 53.
Clark (Trissonière), 68.
Swan, 83.
Woodbury, 97.
Willis, 102.
Martius (Obernetter), 104.
Bullock and Bullock, 126.
Courtensy, 155.

Bi-chromate of potash (potassium anhydro-chromate):

Asser, 4.
Eidlits, 8.
Beatty and Alexander, 18.
Brooman (Fargier and Characet), 25.
Lewis, 29.
James, xiv.
Fontaine, 44.
Brooman (Marquier), 59.
Clark (Teissonière), 69.
Pouncy, 70.
Toovey, 76.
Foz, 102.
Newton (Leggo and Desbarate), 118.
Swan, 190.
Henry (Acet), 128.
Bullock and Bullock, 128.

INDEX OF SUBJECT MATTER.

ichromate of potash-cont. Winstanley, 133.
Gilpin (Kossuth and Kossuth),
_135. 185. Henry (Avet), 136. Dallas, 144. Courtenay, 155. Winstanley, 157. inocular instruments: Claudet, xii. inocular lustre: Brewster, xiv. inocular vision: Rogers, xi. Binographs": Pettitt, 110. ismuth (photo-spectrum of): Miller, xv. isulphide of carbon (carbonic di-sulphide): oracic acid (boracic trioxide): Palmer, 159 (Appendix). orax (sodium bi-borate): Palmer, 159 (Appendix). romide of cadmium (cadmium bromide): England, xxiv. Despratz, xxiv. romine: Wells, 121. romo-iodized collodion: Sutton, xvii. England, xxiv Despratz, xxiv. admium (photo-spectrum of): Miller, xv. admium, salts of. See. Bromide of cadmium. Chloride of cadmium. alcium, salts of. See. Chloride of calcium. ameras (photographic): Swan, 5. Knight (Korn), 15. Williams, 16. Macfarlane, 17.

Cameras (photographic)—cont. Clark (Anthoni), 20. Pallu, 22. Sutton, 30. Grisdale, 44. Mann, 45. Brooman (Farrenc), 49. Haseltine (Wilson), 51. Gruner, 54. Johnson and Harrison, 56. Clark (Blot), 66. Ceileur, 73. Ludeke, 77. Whipple, 80. Fontainemoreau (Liébert and Lafon-Saint-Cyr), 86. Prout, 114. Rowland, 115. Newton (Jaubert), 136. Carbon photographs: Brooman (Fargier and Charavet), 25. Clark (Poitevin), 73. Swan, 88. Swan, 120. Carbonate of ammonia (ammonic carbonate): Spiller, xxiii. Carbonate of soda (sodic carbonate): England, xxiv. Despratz, xxiv. Celestial photography (preparing photographs of the celestial bodies): Draper, xii. De la Rue, xiv, xv, xix, xx, xxi. Chemical action of sunlight (determination of the relative amount of): Bunsen and Roscoe, xvii. Roscoe and Baxendell, xxii. Chemical brightness of various portions of the sun's disc: Roscoe, xviii.

Chloride of ammonium (ammo-

Clark (Teissonière), 69. Griswold, 129.

Chloride of cadmium (cadmium

nium chloride):

chloride): 8mith, 116. omith, 116. Grune, 154.

Chloride of platinum (platinic chloride):

Grune, 154.

Chloride of silver (argentic chloride):

As a sensitising medium;
Bunsen and Roscoe, xvii.

To remove phosphate of silver: Newton (De Montgolfter), 123.

Chloride of sodium (sodium chloride):

Clark (Toissonnière), 69.

Chromate of copper (cupric chromate):

Willis, 102.

Chrome alum (aluminic chromium sulphate):

8wan, 158.

Chromic acid (chromium trioxide):

Willis, 102.

Chromium, salts of. See, Chrome alum. Sulphate of the sesqui-oxide

of chromium.
"Chromo-stereoscope":

Cassaignes, 63.

Copp Acı Chı

Pho Sul_i Corros

> chlos Pa Ne

Br Gr

Gr Gr Co

Crayon de vi

Sai Cyanid

sium

INDEX OF SUBJECT MATTER.

Dextripe:

Pont, 161 (Appendix).

Di-actinic power:

Miller, xv.

Diaphragms for cameras:

Maugey, 164 (Appendix).

Distorted photographic pictures:

Brooman (Furrenc), 49.

"Double ground," producing photographic portraits in: Crozat, 103.

Drawings (photographic copies

Brooman (Morvan), 43. Fontaine, 44.

Dry collodion process:

Gruner, 54 Sutton, xvii. England, xxiv. Despratz, xxiv.

Electric light (using for photographic purposes):

Henry (Tournachon, called Nadar), 24. Morris, Weare, and Monckton,

Electro-telegraphy (photography applied to):

Clark (De Susini, Tamin, and Bondonneau), 151.

Embossing photographs:

Dixey and Smith, 57. Bentley and Bailey, 109.

Enamelled glass plates used in photography:

Helsby, 108.

Enamelled photographs:

Joubert (Garnier), 2. Joubert, xv. Martius (Obernetter), 194. Grainger and Girdler, 117.

Envelopes for containing photographs:

Schloss (Schlose), 39. Schott, 96.

Extracting the silver from the albumenised coating of an ordinary finished print: Spiller, xxiii.

Fixing agents, testing for them and removing them from photographs:

Reissig (Reissig), 112. Hart, xxiii.

Fluoride of potassium (potassium fluoride);

Palmer, 159 (Appendix).

Fluoride of sodium (sodium fluoride):

Palmer, 159 (Appendix).

Forgery, the prevention of (photography applied to): Seropyan, 162 (Appendix). Brooman (Eidlitz), 2.

Frames or cases for containing photographic pictures:

> Gedge (Pointeau), 161 (Appendix).

Brown, 23. Clark (Julion), 52. Prang, (Roberts), 90. Lane, 98.

Gallic acid (hydric gallate):

Fontaine, 44. Fontainemorean (Truchelut),

Gases (photo-spectra of): Miller, xv.

Gaslight (using for photographic purposes):

Henry (Tournachon, called Nadar), 24. Stewart, xix.

Gelatine:

Palmer, 159 (Appendix). Eidlitz, 8. Beatty and Alexander, 18. Brooman (Fargier and Chiravet), 25. Lewis, 29.
James, Xii.
Fontaine, 44.
Clark (Poitevin), 73.
Swan, 83.
Woodbury, 97
Brooman (Du Motay and Maréchal), 113.
Smith, 116. Lewis, 29

```
_135. Kossuth and Kossuth .
                 135.
Henry (Aret., 136.
Ashton, 139.
Woodbury, 144.
Dallas, 145.
Woodbury, 148.
Courtenay, 155.
Winstanley, 157.
Swan, 158.
        Glycerine:
               Martius (Obernetter), 104.
Grune, 154.
       Glycocine:
              Cherrill, xxi.
      Gold, salts of. See,
         Chloride of gold.
     Grotesque photographs:
            De Briges, 152.
    Gum arabic:
          Pontaine, 44.

Fontaine, 44.

Sutton, xvii.

Brooman (Marquier), 59.

Toorey, 76.

Martius (Obernetter), 104.

Swan, 158.
                                                              Ind
 "Heliautograph:"
                                                            Inke
         Selwyn, zvi.
                                                                ca
 Heliographic printing:
        Beattey and Alexander, 18.
                                                           Inser
Heliography (preparing photographs of the sun):
                                                               alb
       De la Rue vi-
```

Iodide of silver (silver iodide):
Used as a sensitising solution;
Brooman (Morvan), 43.

Iodine:

Smith, 116. Wells, 121.

"Iodites" [iodides?] "of ammonia and potassium": Fontainemoreau(Truchelut),99.

Iron developer:

Lea, xxi. Hughes, xxi. Cherrill, xxi.

Iron (photo-spectrum of):
Miller, xv.

Iron, salts of. See,

"Ammoniacal citrate of
iron."

Citrate of ammonia and iron.
Iron developer.

Oxalate of ammonia and iron. Perchloride of iron. Sulphate of iron.

Tannate of iron.

Tartrate of ammonia and iron.

Lead, salts of. See, Acetate of lead. Nitrate of lead.

Lenses (for use in photographic cameras):

Brooman (Harrison), 15. Knight (Korn), 15. Dallmeyer, 101. Bunger (Steinhoil), 125. Dallmeyer, 134. Newton (Jaubert), 136. Wray, 140. Dallmeyer, 146. Dallmeyer, 150.

Logwood:

Fox, 102.

"Loxodrograph":
Brooman (Corradi), 63.

Lunar photography: De la Bue, xiv. Magnesium light (using for photographic purposes):

Roscoe, xix. Carlevaris, 119. Parker (Carlevaris), 130.

Magnesium (photo - spectrum of):

Miller, xv.

Magnified pictures of microscopic objects: Eden, 65.

Manganese (photo-spectrum of:
Miller, xv.

Maps (photographic copies of):
James, xiv.
Brooman (Morvan), 48.

Margin or border to photographs: Woodbury and Davice, 183. Hedler, 143.

Measuring the chemical action of the sun's rays:

Phipson, xviii.

Measuring the relative sensitiveness of photographic papers: M'Dougall, IX.

Mercury : Wells, 121.

Mercury salts of. See, Corrosive sublimate. Perchloride of mercury.

Metal, photographs on: Wells, 121.

Meteorological registration of the chemical action of total daylight: Roscoe. xx.

Mica used as the basis of collodion negatives:

Davies (Risler), 82.

Micrometers (photographic):
Brewster, xiii.

```
Buss and Lamplough,
                      Heiseh, xvi.
Eden, 65.
                     Ronelli and Cook, 78,
Bonelli, 118,
Newton (Jaub et), 136,
            Microscopes to exhibit
               graphs:
                  Dagron, 7.
Dagron, 31.
Mennons (Bonillette and
lin), 37.
         Microscopic photographs
                Neville, 29.
       Moitessier's method of obt
           ing positives:
               Henry (Tournachon co
     Mounting photographs:
         Johnson (Pinard), 164 (...

Johnson (Pinard), 164 (...

Marrington and Perkins, 48.

Bourquin, 60.

Helsly, 81.

Lee and Thomson (Monat), 82.

Gye (Strelisky), 107.

Smith, 114.

Modd, 152.
Neomonoscope:
         Beau, 8.
Nitrate of lead (lead nitrate):
```

٨.

INDEX OF SUBJECT MATTER.

Panoramic pictures: Phosphates of copper (hydric Johnson and Harrison, 56. Chevallier, 105. copper phosphate): Willis, 102. Prout, 114. Rowland, 115. Phosphates, alkaline: Newton (De Montgolfter), 123. Paper (photographic): Henry (Obert, Vasseur, and Howbigant), 11. Sutton, 61. Phosphites, alkaline: Newton (De Montgolfier), 123. Mennons (Plessy), 62. Brinckerhoff, 123. Newton (De Montgolfier), 123. Newton (Gibson), 124. Phosphoric acid (tri-hydric phosphate): Willis, 102 Skinner, 131. Newton (De Montgolfier), 123. Swan, 15%. Paper photographs: Phosphorous acid (hydric phos-For transference to wood, porce-lain, and other surfaces; phite): Newton (De Montgolfter), 123. Brooman (Dupuy), 53. In general; Mann, 45. Brooman (Dupuy), 53. Clark (Poilevin), 73. Brinckerhoff, 123. Photo-electrotypes: Newton (Leggo and Desbarats). Ashton, 139. Grune, 142. Photogenic pictures: Clark (Teissonière), 69. Perchloride of iron (ferric Photographic transparency: chloride): Miller, xv. Fontaine, 44. Clark (Poitevin), 73. Photo-sculpture: Clark (Willème), 69. Perchloride of mercury (mer-Claudet, xix. curic chloride): Willeme, xix. Claudet, 105. Clark (Poitevin), 78. Gay, 110. Newton (Jaubert), 136. Permanence given to photographs: Photozincography: Pettitt, 110. James, xiv. Toovey, 76. Peroxide of hydrogen (hydric Picric acid (hydric picrate): peroxide): Applied to paper photographs to prevent the reproduction of photographic pictures; Newton (White and Alden), 87. Smith, xxiii. Phenakistoscopes: In general; Shaw, 9. Shaw, xiii. Bonelli and Cook, 78. Plate holder (photographic): Debenham, 38. Pegram, 79. Claudet, xxi. Plateau, xxi. Bonelli, 118. Platinum, salts of. See, Chloride of platinum. Preparation of photographs for; "Polyograph": Du Mont, 27. Bonelli aud Cook, 78. Knight (Korn), 15. Phosphate of soda (rhombic Portraits (photographic); prophosphate of sodium): duced with a frame; Taylor, xxiii. Laroche, 139.

Potassium, salts of.
Acetate of potash.
Acid prussiate of potash.
Acid prussiate of potas
Bi-carbonate of potas
Bi-chromate of potassium
Fluoride of potassium
Fluoride of potassium
I lodites of ammon:
potassium.

Nitrate of potash.
Oxalate of potash.
Prussiate of potash.
Sulphate of potash.
Sulpho-cyanide of potas

Pressure frame :

Ì

•

Preventing the reproductio photographs: Newton (White and Alden

Printing ink used to obt photographic proofs:

Printing (photographic):
Pont, 161 (Appendix).
Flounders, 13.
Hooman and Muliszewski, 27.
Taylor, xxiii.

Registering apparatus, &c. — cont.

Brooke, xvii.
Sabine, xvii.
Stewart, xviii.
Airy, xviii.
Capello, and Stewart, xix.
Stewart, xix.
Sabine, xxii.
Chambers, xxii.
Sabine, xxiii.

Regulating the light used for taking photographic portraits:

McLachlan, 47.

Relievo, surfaces in (produced by the aid of photography):

Woodbury, 97. . Dallas, 144. Courtenay, 155. Winstanley, 157.

Resinised plates:

England, xxiv. Despratz, xxiv.

Rests for use in taking photographic portraits: Sarony, 126.

Rolling presses for paper photographs:

Bourquin, 77. Gittens, 91. Wortley and Vernon (Wothlij), 98. Bentley and Bailey, 109.

" Sal soda":

Newton (Rutherford and Steele), 6.

Sensitising by washing in water:

Petschler and Mann, xii.

Shellac:

Taylor, xxiii.

Siliceous substances, photographic pictures on:

Brooman (Maréchal and Du Motay), 90.

Silver (photo-spectrum of):
Miller, xv.

PH.

Silver, salts of. See, Chloride of silver. Iodide of silver. Nitrate of silver.

Silver, "soaps" of:

Brooman (Du Motay and Maréchal), 113.

Sodium, salts of. See,
Acetate of soda.
Borax.
Carbonate of soda.
Chloride of sodium.
Cyanide of sodium.
Fluoride of sodium.
Hypochlorite of soda.
Hyposulphite of soda.
Oxalate of soda.
Phosphate of soda.
"Sal soda."
Sulphate of soda.

Solar cameras, to produce enlarged pictures from small negatives:

Claudet, xii.
Woodward, xii.
Fontainemoreau (Liébert and
Lafon-Saint-Cyr), 88.
Bonneville (Van Monckhoven),
89.

Solar eclipse (photographs of);

De la Rue, xv.
De la Rue, xx.
Secchi, xx.

Spectra obtained by means of the electric spark (photographic effects of): Miller, xv.

Stands for cameras: Williams, 16.

Stellar photography:
De la Rue. xiv.

Stereo-micro-photographs: Heisch, xvi.

Stereoscopes:

Combined with album; Brooman (Saugrin), 41.



Since the publication of the following erratum has

Page 8, line

EF

Page 72, line 15, for Page 148, line 19, for



PATENT LAW AMENDMENT ACT, 1852.

LIST OF WORKS printed by order of THE COMMISSIONERS OF PATENTS FOR INVENTIONS, and sold at the PATENT OFFICE, 25, Southampton Buildings, Chancery Lane, London.

I.

- SPECIFICATIONS of PATENTS for INVENTIONS, DIS-CLAIMERS, &c., enrolled under the Old Law, from A.D. 1617 to Oct. 1852, comprised in 13,561 Blue Books, or 691 thick vols. imp. 8vo. Total cost price about 600l.
- SPECIFICATIONS of INVENTIONS, DISCLAIMERS, &c., deposited and filed under the Patent Law Amendment Act from Oct. 1, 1852, to Dec. 31, 1870, comprised in 59,025 Blue Books, or 1,842 thick vols. imp. 8vo. Total cost price, about 1,848l.

TT

- CHRONOLOGICAL INDEX of PATENTS of INVENTION from A.D. 1617 to Oct. 1852. 2 vols. (1554 pages). Price 30s. By Post, 33s. 2d.
 - ALPHABETICAL INDEX for the above period. 1 vol. (647 pages). Price 20s. By Post, 21s. 5d.
 - SUBJECT-MATTER INDEX for the above period. 2 vols. (907 pages). Second Edition. 1857. Price 2l. 16s. By Post, 2l. 18s. 8d.
 - REFERENCE INDEX for the above period, pointing out the Office in which each enrolled Specification may be consulted; the Books in which Specifications, Law Proceedings connected with Inventions, &c. have been noticed. 1 vol. (710 pages). Second Edition. 1862. Price 30s. By Post, 31s. 5d.
 - APPENDIX to REFERENCE INDEX, containing abstracts from such of the early Patents and Signet Bills as describe the nature of the Invention. 1 vol. (91 pages). Price 4s. By Post, 4s. 6d. PH.

- 3 CHRONOL, 961 Private and typic ALPMAL, PLOM Price Tolling ros SUBJICT/MATE, Price 168, 647 By
- 4. CHRONOLOGICA Price 6s. 6d. By I ALPHABETICAL Price 7s. 6d. By I SUBJECT-MATTEI Price 17s. By Post
- 5. CHRONOLOGICAL Price 6s. 6d. By Pc ALPHABETICAL 1 Price 8s. By Post. 8 SUBJECT-MATTER Price 18s. 6d. By P 6. CHRONOLOG CAL Price 6s. 6d. By Post
 - A P ABETICAL 1 Price 8s. By Post, 8 SUBJECT-MATTER

Price 9s. 6d. By P.

7. CHRONOLOGICAL Price 6s. By Post, 6 ALPHABETIC VI

- 9. CHRONOLOGICAL INDEX for 1860. 1 vol. (209 pages).
 Price 7s. By Post, 7s. 7d.
 - ALPHABETICAL INDEX for 1860. 1 vol. (203 pages). Price 10s. 6d. By Post, 11s. 1d.
 - SUBJECT-MATTER INDEX for 1860. 1 vol. (405 pages). Price 22s. By Post, 23s.
- CHRONOLOGICAL INDEX for 1861. 1 vol. (215 pages). Price 7s. By Post, 7s. 7d.
 - ALPHABETICAL INDEX for 1861. 1 vol. (222 pages). Price 10s. 6d. By Post, 11s. 2d.
 - SUBJECT-MATTER INDEX for 1861. 1 vol. (442 pages). Price 23s. By Post, 24s. 1d.
- CHRONOLOGICAL INDEX for 1862. 1 vol. (237 pages). Price 7s. 6d. By Post, 8s. 2d.
 - ALPHABETICAL INDEX for 1862. 1 vol. (240 pages). Price 11s. 6d. By Post, 12s. 2d.
 - SUBJECT-MATTER INDEX for 1862. 1 vol. (465 pages). Price 23s. By Post, 24s. 1d.
- CHRONOLOGICAL INDEX for 1863. 1 vol. (220 pages). Price 7s. By Post, 7s. 7d.
 - ALPHABETICAL INDEX for 1863. 1 vol. (218 pages). Price 11s. By Post, 11s. 8d.
 - SUBJECT-MATTER INDEX for 1863. 1 vol. (432 pages). Price 22s. By Post, 23s.
- 12 CHRONOLOGICAL INDEX for 1864. 1 vol. (222 pages).
 Price 7s. By Post, 7s. 7d.
 - ALPHABETICAL INDEX for 1864. 1 vol. (220 pages). Price 11s. By Post, 11s. 8d.
 - SUBJECT-MATTER INDEX for 1864. 1 vol. (446 pages).
- Price 23s. By Post, 24s. 1d.
- 4. CHRONOLOGICAL INDEX for 1865. 1 vol. (230 pages).
 Price 7s. By Post, 7s. 7d.
 - ALPHABETICAL INDEX for 1865. 1 vol. (236 pages). Price 11s. 6d. By Post, 12s. 2d.
 - SUBJECT-MATTER INDEX for 1865. 1 vol. (474 pages). Price 23s. By Post, 24s. 1d.
- CHRONOLOGICAL INDEX for 1866. 1 vol. (239 pages). Price 7s. By Post, 7s. 8d.
 - ALPHABETICAL INDEX for 1866. 1 vol. (243 pages). Price 11s. 6d. By Post, 12s. 2d.
 - SUBJECT-MATTER INDEX for 1866. 1 vol. (465 pages). Price 23s. By Post, 24s. 4d.
- CHRONOLOGICAL INDEX for 1867. 1 vol. (254 pages). Price 7s. 6d. By Post, 8s. 2d.
 - ALPHABETICAL INDEX for 1867. 1 vol. (258 pages). Price 12s. By Post, 12s. 8d.



- SUBJECT-MATTER INDEX for 1867. 1 vol. (508 pages). Price 25s. By Post, 26s. 2d.
- DESCRIPTIVE INDEX (Abridgments of Provisional and Complete Specifications) for 1867.
 - a. Quarter ending 31st March. 1 vol. (228 pages). Price 1s. 8d. By Post, 2s. 1d.
 - Quarter ending 30th June. 1 vol. (224 pages). Price 1s. 8d. By Post, 2s. 1d.
 - c. Quarter ending 30th September. 1 vol. (196 pages). Price 1s. 8d. By Post, 2s.
 - d. Quarter ending 31st December. 1 vol. (232 pages). Price 1s. 8d. By Post, 2s. 1d.
- 17. CHRONOLOGICAL INDEX for 1868. 1 vol. (274 pages).
 Price 8s. By Post, 8s. 8d.
 - ALPHABETICAL INDEX for 1868. 1 vol. (291 pages). Price 13s. By Post, 13s. 10d.
 - SUBJECT MATTER INDEX for 1868. 1 vol. (632 pages). Price 30s. By Post, 31s. 5d.
 - DESCRIPTIVE INDEX (Abridgments of Provisional and Complete Specifications) for 1868.
 - Quarter ending 31st March. 1 vol. (236 pages). Price 1s. 8d. By Post, 2s. 1d.
 - b. Quarter ending 30th June. 1 vol. (218 pages). Price 1s. 8d. By Post, 2s. 1d.
 - c. Quarter ending 30th September. 1 vol. (194 pages). Price 1s. 8d. By Post, 2s.
 - d. Quarter ending 31st December. 1 vol. (224 pages). Price 1s. 8d. By Post, 2s. 1d.
- CHRONOLOGICAL AND DESCRIPTIVE INDEX (containing the Abridgments of Provisional and Complete Specifications) for 1869.
 - a. Quarter ending 31st March. 1 vol. (226 pages). Price 1s. 8d. By Post, 2s. 1d.
 - b. Quarter ending 30th June. 1 vol. (234 pages). Price 1s. 8d. By Post, 2s. 1d.
 - c. Quarter ending 30th September. 1 vol. (200 pages). Price 1s. 8d. By Post, 2s. 1d.
 - d. Quarter ending 31st December. 1 vol. (212 pages). Price 1s. 8d. By Post, 2s. 1d.
 - ALPHABETICAL INDEX for 1869. 1 vol. (272 pages). Price 13s. By Post, 18s. 9d.
 - SUBJECT MATTER INDEX for 1869. 1 vol. (587 pages). Price 28s. By Post, 29s. 2½d.
- CHRONOLOGICAL AND DESCRIPTIVE INDEX (containing the Abridgments of Provisional and Complete Specifications) for 1870.
 - Quarter ending 31st March. 1 vol. (222 pages). Price 1s. 8d. By Post, 2s. 1d.

- d. Quarter ending 30th June. 1 vol. (218 pages). Price 1s. 8d. By Post, 2s. 1d.
- c. Quarter ending 30th September. 1 vol. (168 pages). Price 1s. 8d. By Post, 2s.
- d. Quarter ending 31st December. 1 vol. (182 pages). Price 1s. 8d. By Post, 2s.
- ALPHABETICAL INDEX for 1870. 1 vol. (242 pages). Price 12s. By Post, 12s. 8d.
- 20. CHRONOLOGICAL AND DESCRIPTIVE INDEX (containing the Abridgments of Provisional and Complete Specifications) for 1871, with Indexes of Names and Subject Matter. Published in weekly numbers, price 4d. each.*

III.

- ABRIDGMENTS (in Classes and Chronologically arranged) of SPECIFICATIONS of PATENTED INVENTIONS, from the earliest enrolled to those published under the Act of 1852.
- These books are of 12mo. size, and each is limited to inventions of one class only. They are so arranged as to form at once a Chronological, Alphabetical, Subject-matter, and Reference Index to the class to which they relate. Inventors are strongly recommended, before applying for Letters Patent, to consult the classes of Abridgments of Specifications which relate to the subjects of their inventions, and by the aid of these works to select the Specifications they may consider it necessary to examine in order to ascertain if their inventions are new.
- The following series of Abridgments do not extend beyond the end of the year 1866. From that date the Abridgments have not been published in classes, but will be found in chronological order in the "Chronological and Descriptive Index" (see Section II. of this List of Works). It is intended, however, to publish these Abridgments in classes as soon as the Abridgments of all the Specifications from the earliest period to the end of 1866 have appeared in a classified form. Until that takes place the Inventor (by the aid of the Subject Matter Index for each year) can continue his examination of the Abridgments relating to the subject of his invention in the Chronological and Descriptive Index.

The classes already published are,—

- 1. DRAIN TILES AND PIPES, price 4d., by post 5d.
- 2 SEWING AND EMBROIDERING (2nd edition), price 1s. 6d., by post 1s. 9d.
- 3. MANURE, price 4d., by post 5d.
- 4. PRESERVATION OF FOOD, Part I., A.D. 1691-1855, price 4d., by post 5d.—Part II., A.D. 1856-1866, price 6d., by post 7d.
- 5. MARINE PROPULSION, price 1s. 10d., by post 2s. 2d.
- MANUFACTURE OF IRON AND STEEL, Parts I., II., & III., A.D. 1621-1857, price 1s. 6d., by post 1s. 9d.—Part IV., A.D. 1837-1865 price 2s. 6d., by post 2s. 8d.
- 7. AIDS TO LOCOMOTION, price 6d., by post 7d.
- 8. STEAM CULTURE, price 8d., by post 10d.
- 9. WATCHES, CLOCKS, AND OTHER TIMEREPERS. Part I., A.D. 1661-1856, price 8d., by post 10d.—Part II., A.D. 1857-1866, price 8d., by post 9\d.



~~ LECTRICITY Part I. A.D. price 9s. 4d.,

16. MANUFACTURE &c. ; INCLUD:

17. PRODUCTION AN 2s. 4d., by post

18. METALS AND ALL

19. PHOTOGRAPHY, 1 A.D. 1860-1866,

20. WEAVING, Part I., 1868, price 2s. 8d.

21. SHIP BUILDING, I 1618-1860, price : by Post Se.

22. BRICES AND TILES. A.D. 1861-1866, pri

23. PLATING OR COATI

24. POTTERY, Part I., A. 1862-1866, price 6d.,

25. MEDICINE, SURGERY,

26. MUSICAND MUSICAL I: 27. OILS-ANIMAL, VEGET

28. SPINNING: INCLUDING
THE DOUBLING OF Y
24s., by Post 25s. 5d.—

29. LACE AND OTHER LOOPE

30. PREPARATION AND COM

51. RAISING, LOWERING, AND Post 11s. 8d.—Part II., 32. HYDRAULICS, price 15s., by

33. RAILWAYS, Price &, by Dos.

- 44. LAMPS, CANDLESTICKS, CHANDELIESS, AND OTHER ILLUMINATING APPA-RATUS, price 2s. 6d., by post 3s.
- 45. NEEDLES AND PINS, price 6d., by post 7d.
- 46. CARRIAGES AND OTHER VEHICLES FOR RAILWAYS, price 5s. 6d., by post 6s. 5d.
- 47. Umbrellas, Parasols, and Walking Sticks, price 10d., by post 111d.
- 48. SUGAR, price 1s. 10d., by post 2s. 11d.
- STEAM ENGINE, Part I. (in two volumes), A.D. 1618-1859, price 9s. 4d., by post 10s. 10d.—Part II. (in two volumes), A.D. 1860-1866, price 4s. 10d., by post 5s. 7d.
- 50. PAINTS, COLOURS, AND VARNISHES, price 1s. 10d., by post 2s. 11d.
- 51. TOYS, GAMES, AND EXERCISES, price 1s., by post 1s. 2d.
- 52. VENTILATION, price 1s. 10d., by post 2s. 01d.
- 53. FARRIERY; INCLUDING THE MEDICAL AND SURGICAL TREATMENT OF ANIMALS, price 1s., by post 1s. 2d.

IV.

COMMISSIONERS of PATENTS' JOURNAL, published on the evenings of Tuesday and Friday in each week. Price 2d. By Post, 3d. Annual Subscription, including postage, 23s. 6d., which may be remitted by Post Office Order, made payable at the Post Office, Holborn, to Mr. Bennet Woodcroft, Clerk to the Commissioners, Patent Office.

CONTENTS OF JOURNAL.

- 1. Applications for Letters Patent.
 2. Grants of Provisional Protection for six months.
- 8. Inventions protected for six months by the deposit of a Complete
- Specification.

 4. Notices to proceed.

 5. Patents sealed.

 6. Patents extended.

- Patents cancelled. 8. Patents on which the third year's
- stamp duty of 50% has been paid.

 9. Patents which have become void by non-payment of the stamp duty of 50l. before the expiration of the third year.
- 10. Patents on which the seventh year's stamp duty of 100%, has been paid.
- 11. Patents which have become void by non-payment of the stamp duty of 100*l*. before the expira-tion of the seventh year.
- 12. Colonial Patents and Patent Law.
- 13. Foreign Patents and Patent Law.
- 14. Weekly price lists of printed Specifications, &c.
- 15. Official advertisements and notices of interest to Patentees and Inventors generally.

V.

INDEX to FOREIGN SCIENTIFIC PERIODICALS contained in the Free Public Library of the Patent Office, published on every alternate Friday evening. Price 2d. By Post, 2½d. Annual subscription, including postage, 5s. 5d., which may be remitted by Post Office Order, made payable at the Post Office, Holborn, to Mr. Bennet Woodcroft, Clerk to the Commissioners, Patent Office.

 PATENT LAW AMENDMENT ACTS (15 & 16 Vict. cap. 83, A.D. 1852; 16 Vict. cap. 5, A.D. 1853; and 16 & 17 Vict. cap. 115, A.D. 1853); together with the RULES and REGULATIONS issued by the Commissioners of Patents for Inventions, and by the Lord Chancellor and the Master of the Rolls, under the Acts 15 & 16 Vict. c. 83, and 16 & 17 Vict. c. 115. Price 6d. By Post, 7d.

- 2. APPENDIX to the SPECIFICATIONS of ENGLISH PATENTS for REAPING MACHINES. By B. WOODCROFT, F.R.S. Price 6s. 6d. By Post, 6s. 11d.
- 3. INDEX to ALL INVENTIONS PATENTED in ENGLAND from 1617 to 1854 inclusive, arranged under the greatest number of heads, with parallel references to INVENTIONS and DISCOVERIES described in the scientific works of VARIOUS NATIONS, as classified by Professor Schubarth. By B. Wood-CROFT, F.R.S. Price 1s. By Post, 1s. 1d.
 - The foreign works thus indexed form a portion of the Library of the Commissioners of Patents, where they may be consulted.
- EXTENSION of PATENTS to the COLONIES.—Abstract of Replies to the Secretary of State's Circular Despatch of January 2, 1853, on the subject of the Extension of Patents for Inventions to the Colonies. Second Edition, with Revised Table. 1861. Price 2s. By Post, 2s. 2d.
- 5. SUPPLEMENT to the SERIES of LETTERS PATENT and SPECIFICATIONS, from A.D. 1617 to Oct. 1852; consisting for the most part of Reprints of scarce Pamphlets, descriptive of the early patented Inventions comprised in that Series.

CONTENTS.

- Metallica: or the Treatise of Metallica, briefly comprehending the doctrine
 of diverse new metallical inventions, &c. By SIMON STURTEVANT. (Letters Patent, dated 29th February 1611.) Price 1s. 4d.; by post, 1s. 5d.
- 2. A Treatise of Metallica, but not that which was published by Mr. Simon Sturtevant, upon his Patent, &c. By JOHN ROVENZON. (Letters Patent granted A.D. 1612.) Price 4d; by post, 4\(\frac{1}{2}\)d.
- 3. A Commission directed to Sir Richard Wynne and others to inquire upon oath whether NICHOLAS PAGE OF Sir NICHOLAS HALSE was the first inventor of certaine kilnes for the drying of malt, &c. &c. (Lettere Patent, Nos. 33 and 85, respectively dated 8th April 1626, and 23rd July 1635.) Price 2d.; by post, 24d.
- DUD DUDLEY'S Metallum Martis; or iron made with pit-coale, sea-coale, &c. (Letters Patent, Nos. 18 and 117, respectively dated 22nd February 1620, and 2nd May 1638.) Price 8d.; by post, 9d.
- 5. Description of the nature and working of the Patent Waterscoop Wheels invented by William Wheles, as compared with the raising wheels now in common use. By J. W. B. Translated from the Dutch by Dr. Tolhausen. (Letters Patent, No. 127, dated 24th June 1642.) Price 2s.; by post, 2s. 14d.
- An exact and true definition of the stupendous Water-commanding Engine invented by the Right Honourable (and deservedly to be praised and admired) Edward Someser, Lord Marquis of Wordenserre, &c. &c. (Stat. 15 Car. II. c. 12. A.D. 1663.) Price 4d.; by post, 44d.
- Navigation improved; or the art of rowing ships of all rates in calms with a more easy, swift, and steady motion than oars can. By THOMAS SAVERY. (Letters Patent, No. 347, dated 10th January 1696.) Price 1s.; by post, 1s. 2d.
- 8. The Miner's Friend; or an engine to raise water by fire, described, &c By THOMAS SAVERY. (Letters Patent, No. 356, dated 25th July 1698, and Stat. 10 & 11 Will. III. c. 31, A.D. 1699.) Price 1s.; by post, 1s. 1d.
- 9. Specimina Ichnographica; or a brief narrative of several new inventions and experiments, particularly the navigating a ship in a calm, &c. By JOHN ALLE, M.D. (Letters Patent, No. 513, dated 7th August 1729.) Price 8d.; by post, 84d.

8

- A description and draught of a new-invented Machine for carrying vessels
 or ships out of or into any harbour, port, or river against wind and tide, or
 in a caim, &c. By JOHATHUHLS. (Letters Patent, No. 556, dated Sist
 December 1786.) Price 8d.; by post, 9d.
- 11. An historical account of a new method for extracting the foul air out of ships, &c., with the description and draught of the machines by which it is performed, &c. By SAMUEL SUTTON, the Inventor. To which are annexed two relations given thereof to the Royal Society by Dr. Mead and Mr. Watson. (Lotters Patent, No. 802, dated 16th March 1744.) Price 1s.; by post, 1s. 1d.
- 12. The letter of Master WILLIAM DEUMMOND for the construction of machines, weapons, and engines of war for attack or defence by land or sea, &c, Dated the 29th Septemper 1626. (Scotch Patent, temp. Car. II.) Price 4d.

A FREE LIBRARY and READING ROOMS are open to the Public daily, from 10 till 4 o'clock, in the Office of the Commissioners of Patents, 25, Southampton Buildings, Chancery Lane. In addition to the printed Specifications, Indexes, and other publications of the Commissioners, the Library includes a Collection of the leading British and Foreign Scientific Journals, and text-books in the various departments of science and art.

Complete sets of the Commissioners of Patents' publications (each set including more than 2,700 volumes and costing for printing and paper nearly £2,600) have been presented to the authorities of the most important towns in the kingdom, on condition that the works shall be rendered daily accessible to the public, for reference or for copying, free of all charge. The following list gives the names of the towns, and shows the place of deposit, so far as ascertained, of each set of the works thus presented:

Aberdeen (Mechanics' Institution).

Aberdeen (Mechanics Belfinst (Queen's College).
Beverley (Guildhall).
Birmingham (Central Free Library—
Department, Ratcliff

Place).

Blackburn (Free Library and Museum, Town Hall Street).

Bolton-le-Moors (Public Library, Exchange Buildings).

Bradford, Yorkshire (Borough Accountant's Office, Corporation Buildings, Swain Street).

Bristol (City Library, King Street).

Burnley (Office of the Burnley Improvement Commissioners).

Bury.

Bury. Carliale (Public Free Library, Police

Office).
Chester (Town Hall, Northgate St.) Chester (Town Hall, Northgate St.)
Oork (Boyal Cork Inst., Nelson Place).
Orewe (Ballway Station).
Darlington (Mechanics' Institute,
Skinnergate).
Derby (Free Public Library).
Dorchester.
Drogheda.
Dublin (Royal Dublin Sov, Kildare St.)
Dundalk (Free Library).

Falmouth (Public Libs, Church St.)
Gateshead (Mechanics' Institute).
Gorton (Railway Station).
Glasgow (Stirling's Libs, Miller St.)
Grimsby, Great (Mechanics' Institution, Viotoria Street).
Hallfax.
Hallon Street.

Hanley, Staffordshire Potteries (Town Hall). Hertford (Free Public Library, Town

Huddersfield (Improvement Commis-

sioners' Offices, South Parade). Hull (Mechanics' Inst., George St.)

Ipswich (Museum Library, Museum Keighley (Mechanics' Inst., North St.)

Kidderminster (Public Free Library, Public Buildings, Vicar Street).

King's Lynn, Norfolk (Stanley Library, Athenaum).
Lancaster (Mechanics' Institute, Market Street).
Leamington Priors (Public Library, Theon Hall)

Town Hall).
Leeds (Public Library, Infirmary
Buildings).
Leicester (Free Library, Wellington Street).

Limerick (Town Hall). Liverpool (Free Public Library, William Brown Street). London (British Museum - (Society of Arts, John Street, Adelphi) Macclesfield (Useful Knowledge Society). ctery.
Maidstone (Free Library)
Manchester (Free Liby, Camp Field).
Montrose (Free Library). Mourts, (Mechanics' Institute, Middle Gate).

Newestle-upon-Tyne (Literary and Philosophical Society).

Monmouth (Commercial Newport, Monmout Room, Town Hall). Northampton. Norwich (Free Library, St. John's, Maddermarket). Nottingham (Free Library). Oldham (School of Arts and Sciences, Lyceum Oxford (Public Free Library Town Hall). Paisley (Government School of De-sign, Gilmour Street).
Plymouth (Mechanics' Institute, Princess Square). Preston, Lancashire (Dr. Shepherd's Library, the Institution, Avenham).

Reading (Literary, Scientific, Mechanics' Institution, Londo Bochdale (Commissioners' B Smith Street). Rotherham (Board of Health Office, MOUNTH (DOSTS OF Health Office, Howard Street). Salford (Royal Museum and Library, Peel Park). Shedled (Free Public Library, Sur-rey Street). Shrewsbury (Public Museum, College Southampton (Hartley Institution). Stirling (Burgh Library, Tours Southampton (Hartley Institution).
Stirling (Burgh Library, Town
House, Broad Street).
Stockport (Museum, Vermon Park).
Sunderland (Corporation Museum
Athenaum, Fawcett Street).
Wakefield (Machamics' Institution,
Barston Square).
Warrington (The Museum and Library). brory).
Waterford (Town Hall, The Mall)
Wexford (Mechanics' Institution (Crescent Quay). Institute. Wigan.
Wolverhampton (School of Practical
Art, Darlington Street).
Wolverton (Eaileas Station).
York (Losser Council Chamber, Guild-hall).

The Commissioners' publications have also been presented to the following Public Offices, Seats of Learning, Societies, British Colonies, and Foreign States :-

the section of the section is

Public Offices, &c. Admiralty-Director of Works' Depart-Chief Constructor's Depart-Chatham Dockyard. Sheerness ditte Portsmouth ditto. Devonport ditto. Pembroke ditto Artillery Institute, Woolwich. Board of Trade, Whitehall.

Ordnance Office-Pall Mall. Small Arms Factory Buffeld.

War Office, Pall Mall. Royal School of Mines, &c., Jermyn Street, Piccadilly.
Dublin Castle, Dublin.
Record and Writ Office, Chancery.
Dublin. India Office. Office of Chancery, Edinburgh.

Seats of Learning and Societies.

Cambridge University. Trinity College, Dublin.

Queen's College, Galway. Incorporated Law Society, Chancery Lane, London.

Antigua. Barbados. British Guiana. Canada—Library of Par-liament, Ottawa. Bureau of Agri-culture, Toronto. Board of Arts New Brunswick.
and Manufactures, Newfoundland.
Montreal. Cape of Good Hope. Ceylon.

British Colonies. India-Bengal. Bombay. Madras N.-W. Provinces. Jamaica. Malta Mauritius. New Zealand. Nova Scotia.

Prince Edward Island. South Australia—Colonial Institute, Adelside. Tasmania. Trinidad. Victoria—Parliament Library, Melbourne. Patent Office, Melbourne. Public Library Melbeurne.

Poreign States.

Argentine Republic—Buenos Ayres.

Austria—Handels Ministerium, Vienna.
Belgium—Ministere de l'Intérieur, Brussels.

Musée de l'Industrie, Brussels.

France—Bibliothèque Nationale,
Conservatoire des Arts et Métiers,
Hôtel de Ville,
Germany—Alsace—Société Industrielle, Mulhouse.
Bavaria—Königliche Bibliothek, Munich
Gotha—Ducal Friedenstein Collection.
Prussia—Gewerbe-Akademie, Berlin.
Königliche Bibliothek, Berlin.
Königliche Bibliothek, Berlin.
Königliche Bibliothek, Berlin.
Königliche Polytechnische Schule, Hanover.
Bazony—Polytechnische Schule, Dresden.
Wurtembers—Bibliothek des Musterlagers, Stuttgart,
Italy—Ufficio delle Privative, Florence.
Netherlauds—Harlem.
Runssia—Bibliothèque Impériale, St. Petersburg.
Spain—Madrid.
Sweden—Teknologiska Institutet, Stockholm.
United States—Patent Office, Washington.
Astor Library, New York.
State Library, Albany.
Franklin Institute, Philadelphia.
Free Library Company, Philadelphia.
Library Association, Chicago.
Peabody Institute, Baltimore.
Historical Society, Madison, Wisconsin,
Cornell University, Ithaca, N.Y.
Mercantile Library, St. Louis.

Grants of complete series of Abridgments of Specifications have been made to the undermentioned Mechanics' Literary and Scientific Institutions:—

Aberystwith (Literary and Working Men's Reading Room),
Alnwick (Scientific and Mechanical
Institution). Altrincham (Altrincham and Bowdon Literary Institution). Ashby-de-la-Zouch (Mutual Improvement Society). ment Society).
Bacup (Mechanics' Institution).
Ballymoney (Town Hall).
Banbridge (Literary and Mutual Improvement Society).
Banbury (Mechanics' Institution).
Bannstaple (Literary and Scientific Institution).
Bath (Atherica). Bath (Athenœum). Batley (Mechanics' Institution).
Battle (Young Men's Christian Association) Belfast (Athenoum). Berkhampstead, Great (Working Men's College) Birmingham (Birmingham Heath and Smethwick Working Men's Club and Institute).

(Bloomsbury Institution). (Central Lending Library) (Deritend Working Men's Association).
(Graham Street Institution).

Working Men's Club).

Yorkshire (Library and Literary Society). (Mechanics' Institute). Brampton, near Chesterfield (Local Museum and Literary Institute). Breage, Cornwall (BreageInstitution).
Bristol (Athenæum).
(Institution). - (Law Library Society). - (Library). grove (Literary and Mecha-Bromagrove (Lit nics' Institute). tution). Canterbury (Working Men's Club) Cardiff (Free Library and Museum). Cardigan (Mechanics' Institute). Carharrack (Literary Institute). Carmarthen (Literary and Scientific Institution) Cheltenham (Literary and Philoso-phical Society).

Cheltenham (Permanent Library)

(Working Men's Club) Glasgow (Athenoum).
——— (Central Working Men's Club Chertsey and Institute). (Literary and Scientific Institution). (Institution of Engineers in Chester (City Library and Reading Scotland). Room) (Mechanics' Institution, Bell Chesterfield (Mechanics' Institution). Chichester (Literary and Philosophi-Street).

(Philosophical Society).

Grantham (Public Literary Institucal Society).

(Literary

Mechanics Institute Society and tion). Gravesend (Gravesend and Milton Library and Reading Rooms). Greenwich (Working Men's Institute). Mechanics' Institute).
Coalbrookdale (Literary and Scientific Institution). (Mechanics' Institu-Institution Cockermouth tion). Colchester (Literary Institution).

(Young Men's Christian tion). Association) Guildford (Mechanics' Institute) Compstall (Athenaum). Halesworth (Mechanics' Institute). Halifax (Literary and Philosophics) Coventry (Free Library). (Institute). Society).
— (Mechanics' Institute).
— (Working Mon's College).
Haslingdon (Institute). ——— (School of Art).
Crediton (Working Men's Club).
Dartmouth (Mutual Improvement Hastings (Literary and Scientific In-Society).
Deal (Deal and Walmer Institute).
Denton (Denton and Haughton Me-chanics Institution). stitute). stitute).
Hawarden (Literary Institution).
Hebden Bridge, near Todmorden (Mechanics' Institution).
Helston (Reading Room and Library).
Hereford (Natural History, Philosphical, Antiquarian, and Literary Derby (Mechanics' Institution). Devouport (Mechanics' Institute). Dewsbury (Mechanics' Institution). Doncaster (Free Library).

(Great Northern Mechaphicai, American von,
Society,
Hortford (Literary and Scientific
Institution).
Howood (Mechanics' Institute).
Holbeck (Mechanics' Institution).
Hollingwood (Working Men's Club). nics' Institute). Dorchester (County Museum and Library). Dudley (Mechanics' Institution). Holywell Green (Mechanics' Insti-Dukintield (Mechanics' Institute). (Village Library and Reading Room).
Dumbarton (Philosophical and Lite-Huddersfield (Mechanics Institution) Hull (Church Institute).

— (Literary, Scientific and Mechanics Institute). Parimetrion (Princisophical and Ele-rary Society).

Dunfries (Michanics' Institute).

Barley, Bolton-le-Moors (Library and Institute). (Lyceum Library). — (Royal Institution, Albion Street, (Young People's Institute).

Huntingdon (Literary and Scientis Earlestown, Newton-u-wallestown, Newton-u-wallestown, Newton-u-wallestown, tual Improvement Society).

Edinburgh (Mechanica' Liverary).

(Mechanica' Liverary). Institution Kendal (Christian and Literary Inst tute).

(Working Men's Institute).

(Working Men's Institute).

Lancaster (Mechanics' Institute).

School of Science).

Leeds (Church Institute).

(Mechanics' Institution and Literary Society. tion). - (Royal Society of Arts). - (Royal Scottish Society of Arts). - (Subscription Library): - (Watt Institution a School of Art).

(Working Men's Club).

Egham (Literary Institute).

Egremont (Mechanics' Institution) Literary Society).

— (Philosophical and Literary Society). —— (Working Mon's Institute). —— (Young Mon's Christian Asso-Excter (Devon and Exeter Instituciation).
Leighton Buzzard (Working Men's Mutual Improvement Society).
Leith (Mechanics' Subscription Libtion) Faversham (Institute).
Frome (Literary and Scientific Instirary).
Lowes (Mechanics' Institute).
(School of Science and Art).
Lincoln (Vechanics' Institute). Gainsborough (Literary, and Mechanics' Institute). Garforth, near Leeds (Working Men's Club).

12

- 1 (Tuntituda)	Ma
Liverpool (Institute). (Mechanics' Institute). (Medical Institution).	8
(Polytechnic Society). Llanelly (Chamber of Commerce and Reading Room).	Me
London (Athenæum Club, Pall Mall). ——————————————————————————————————	Me
End). (Bedford Working Men's In-	- t
stitute, Spitalfields). (Birkbeck Institution, South- ampton Buildings, Chancery Lane). (Bow Common Working Men's	Mo
Club, New Street, Lark Hall Lane,	Ne
Club. New Street, Lark Hatt Land, Clapham). — (Clerkenwell Club, Lower	-
Rosoman Street). (Holloway Working Men's Club and Institute, Holloway Road).	N
- (Literary and Sciences).	N
tution, Walworth).	N
Men's Club, Rupert Street, Soho).	0
Working Men's Club, Golden Lane). (South London Working	-
(St. James and Soho Working Men's Club, Rupert Street, Soho). (St. Mary Charterhouse Working Men's Club, Golden Lane). (South London Working Men's College, Blackfriars Road). (Southwark Working Men's Club Broadwall, Stamford Street).	0
(Spring Vale Institution,	1
(Working Men's Ciao, Di	j
ton Hill). (Working Men's Club, St Mark's, Victoria Docks). (Working Men's Club and	1
- (Working Men's Club and	1
Owmand Street).	
Loughborough (Working Men's City	
Madeley (Anstice Memorial, Work men's Club and Institute).	- 1
Manchester (Ancoats Branch Fre Library). (Athenæum).	
(Campfield Free Lendin	
Branch Free Library). (Hulme Branch Fr	
Library). (Law Library). (Mechanics' Institution	
(Natural History Museu	m,
Peter Street). (Owen's College). (Portico Library, Mo	se-
ley Street) (Rochdale Road Bras	ich
Free Library). (Royal Exchange L	ib-
18	

```
Mansfield (Co-operative Industrial
             Society).
             Society). (Mechanics', Artizans', and Apprentices' Library). elksham (Mutual Improvement
            Society).
erthyr-Tydfil (South Wales Institute
of Engineers).
iddlesborough (Iron and Steel In-
             stitute).
                                               - (Mechanics' Institu-
            tion).
            odbury (Mechanics' Institution).
ossley (Mechanics' Institute).
ewark (Mechanics' Institute).
ewarkle-upon-Tyne (Mechanics' Institute).
             stitution).
                                                            - (Working Men's
             Club)
             ew Mills, near Stockport (Mechanics'
             Institute).
lewport, Isle of Wight (Young Men's
            Society and Reading Room).
Northampton (Mechanics' Institute).
Nottingham (Free Library).
(Mechanics' Institution).
(Subscription Library,
             Bromley House).
Oldham (Analytic Literary Institu-
               tion).
                                (Mechanics' Institution, Wer-
               neth).
             Ormskirk (Public Library).
            Oswestry (Institute).
Patricroft (Mechanics' Institution).
Pembroke Dock (Mechanics' Institution).
Pendleton (Mechanics' Institution).
            Penryn (Working Men's Club and
Reading Room).
Perth (Mechanics' Library, High
Street).
             Peterborough (Mechanics' Institu-
                  tion).
             Plymouth (Working Men's Institute).
Poole (Literary and Scientific Insti-
                  tution)
                           - (Mechanics' Institute)
              Portsea (Athenœum and Mechanics'
Institution).
Preston (Avenham Institution).
— (Institution for the Diffusion
               of Knowledge).
Rawtenstall (Mechanics' Institution).
Richmond (Working Men's College).
Rotherham (Rotherham and Masbro'
Literary and Mechanics' Institute).
Royston (Institute).
Ryde, Isle of Wight (Philosophical
and Scientific Society).
Saffron Walden (Literary and Scien-
tics Institute).
                and Scientific Society).
Saffron Walden (Literary and Scientific Institution).
St. Just (Institution).
St. Leonard's (Mechanics' Institution).
Salford (Working Men's Club).
Saltaire (Literary Institute).
Selby (Mechanics' Institute).
Sheffield (Branch Free Library).
(Literary and Philosophical Society, School of Arts'.
Skipton, Yorkshire (Mechanics' Institute).
```

tute).

Southampton (Harthortheatheat). To the L. Wells (Mechanics' Institu-- (Polytochair Institu-Course. (Society of Literature) Southport (1th name . a. I Schener Turton mar Bolton (Chapel Town South Shields (Working Mea's Insti-Institute).

Type month (Free Public Library).

Ulverston (Temperance Hall).

Uttoyeter (Mechanics' Literary Institule and Chin. Spalding . Westernical Lastitutes - (Christian Yoch) Mea's Associati in). Staines (Liter repair! Sole at the Instifute' Waketield (Michanics' Institute). lution .. Watterd (Lile cury Institute).
Wells. Somerset (Mechanics' Institution, Grove Lane). (Mechanics Institute and Reading Res. Stamford (Institution). - (Young Men's So-Stourbridge (Cherch of England cirty). Association (Whaleybridge (Mechanics' Institute). - (Low Works Rending Room and Interrupt.

(M. interest post Interest, W. ding, J. J. Taster Whitby (Institute). (Museem). Whitehaven (Wechanics Institute).

(Working Men's Reading futi'i. Stratter by Working Me Cs Hat Room). Sunderland (Werking Mea's Cl. Whitstable (Institute). Wisbench (Mechanics' Institute). Swansea (Royal Institution of South Wales). (Working Man's Institute). Wolverhampton (Library). Wolverton (Institute). Tavistock (Mechanics Institute). Woodbridge (Literary and Mechanics' Institute). (Working Men's Hall) Thornton, year Bredford (Mechanic) Wore ster (Railway Literary Insti-Thornton Heatle, Craydon (Working S. tate: Workington (Mechanics' Institution). Todinorden (Mechanics' Institution). Truro Cover il County Library's. York (Cherch Institute). (Institution), (Royal Institution of Corn-(Institute of Popular Science. dr.) malli. - (Railway Library). Presentations of portions of the Works, published by order of the

Commissioners of Patents, have been made to the following Libraries :-

Kington.

Institute).

Armagh (Torest Clerk's Office). Aylesbary (Medicines I, stitution and Literary Society, Kingsbury). Birmingham (Lastituti or of Mechanical Engineers, Newhall Street). Boston, Lincolnshire (Public Offices, Market Place). Cambridget Free Library, Jesus Lane), Chester (Mechinics Institute, St. John Street. Coalbrookdale (Literary and Scientific Institution). Darwen, Ov refronthers' Association), Darwen, Ov refree Public Librarie, Dublin (Dublin Library, D'Olier Myed), Edinburgh (Horological Society). Jamis (Proble Liberry).
Glotteester (Working Mer's Institute,
Sowthard, Streets,
Ipswich Mechanist Institute, Twern Kew (Library of the Royal Gardens).

Leominster (Literary Institute). Leoninster (Leaving s...)
London (House of Lorsis).
—— (House of Commons).
—— (Hous Soc. of Gray's Inn).
—— (Hon. Soc. of Gray's Inn).
—— (..., Lincoln's Inn).
—— (..., Lincoln's Inn). Middle Temple). — (... . Middle Temple). — (Aeron-tutical Society). — (Bril sh. Horological Institute). (General Post Office). --- (Institution of Civil Engiacers). - (Odontological Society). - (Royal Society). - (United Service Museum). Monchester (Literary and Philoso-phical Society, George Street). - (Mechanics' Institution.

Herefordshire (Reading

David Street).

Specifications


Chargest to

TOGRAPHY

PART BUILDING THE



LONDON AUTORITATION AND SOLD AT CONTRACTOR OF TAXABLE PROPERTY. SAFER STREET, DRAW TATE LANGED



ABRIDGMEN

OF

Specification:

RELATING TO

PHOTOGRAI

PART III.-A.D. 1867-1876.

27.

PRINTED BY ORDER OF THE COMMISSIONERS OF



LONDON:

PUBLISHED AND SOLD AT
THE COMMISSIONERS OF PATENTS' SALE DI
38, CURSITOR STREET, CHANCERY LANE,

1878.

PREFACE.

THE Abridgments of the Specifications of Patented Inventions are prepared and published in classes, each confined to one subject or group of subjects, in order to facilitate the searches of inventors who are desirous of ascertaining whether their inventions are novel. Without the Abridgments an inventor oan, by the aid of the general Subject-matter Indexes of Patents, refer to the Specifications included under any particular subject or head in those Indexes, but this course involves the perusal of the whole of the Specifications so included.

Each volume of the classified Abridgments is furnished with an elaborate subject-matter or analytical index (as well as an alphabetical index of the names of patentees and inventors) to guide the reader to the abstracts of the inventions belonging to any particular section of the class. On reading these, he will be able to determine which Specifications he ought to consult for more minute information.

The Abridgments are arranged in the volume in chronological order, and at the foot of each is stated the price at which the printed copy of the Specification can be purchased at the Commissioners of Patents' Sale Department (38, Cursitor Street, Chancery Lane, E.C.).

This volume forms Part III. of the series of Abridgments relating to "Photography," and embraces the years 1867 to 1876; the first and second parts contain the Abridgments of the Specifications from the earliest date to the year 1866.

The number of Specifications from the earliest period to the end of the year 1876 amounts to 100,042. A large proportion of the Specifications enrolled under the old law, previous to 1852, embrace several distinct inventions, and many of those filed under the new law of 1852 indicate various applications of the single invention to which the Patent is limited. Considering therefore the large number of inventions and appli-

H 153.

cations of inventions to be separately dealt with, it cannot be doubted that several properly belonging to the group which forms the subject of the present series have been overlooked. In the progress of the whole work such omissions will from time to time become apparent, and be supplied in future editions.

To afford a more precise idea of the scope of the present series of Abridgments than can be conveyed by the short title, the following definition is offered of the word Photography,—"the art of copying designs, figures, or images by "the chemical or actinic action of light upon surfaces pre"pared to receive that action."

With respect to the printing of pictures obtained partly or wholly by photographic means, it has been found advisable to include also all successive processes for transferring or copying such pictures, and all subsequent printing of copies of the same in permanent inks or colours.

Optical and philosophical instruments not used directly in the process of photography are excluded from the present series, and should be looked for in that entitled "Optical, "Mathematical, and other Philosophical Instruments."

It should be particularly observed in connection with the preceding paragraph that all stereoscopes are omitted from the present volume.

Improvements in books or albums for containing photographs or pictures should be looked for in the series relating to "Books, Portfolios, Card-cases, &c.," whilst improvements in mounting, holding, and framing photographs, &c. will be found in the series devoted to "Artists' Instruments and "Materials."

Inventions relating to the application of photographic pictures to such ornamental objects as jewellery, or to the embellishment of boxes, furniture, other articles, and surfaces of all kinds are not contained in the present work unless some novelty in producing the picture is described or claimed.

H. READER LACK.

October, 1878.

INDEX OF NAMES.

names printed in *Italia* are those of the persons by whom the inventions have been communicated to the Applicants for Letters Patent.]

n	· •
ey, W. de W68	Clements, J. M
er, E62	Colton, J. D105
makoff, A24	
	Cook, W30
anino, L	Courtenay, R. H30, 64
ЮП, 11. 11, <i>1</i>	Cuitabassa C D 76
ock, G44	Critcherson, G. P78 Crosman, J. C4
:s, J. H76	0108114016, g. 0
es, R. W20, 106	David, J. B97
aud, H79	Davies, G22
et, A22	Debenham, W. E85
J. P82	De Font-Réaulx, H22
er, B24	Denne, T. J32, 44, 51
is, C39	Desbarats, G. E52
ett, J64, 78	Despaquis, P. A70
ıgsley, H32	Despaquis, P. A90
ps, J. E71	Dillon, T. A85, 99
, L18	Disderi, A. A8
ristle, R112	Domenech, J. M16
ley, H75	Donisthorpe, W111
n, A. H. 91	Duhauron, L. D107
, W. A102	
, W. A108	Edwards, B. J41, 49
kes, A. G87, 106	——, E21, 35, 45, 54,
man, C. E	57, 94
n, J48, 81	57, 94 Edwards, E101
-, R106	·
-, W. M92, 93, 107	Farjon, C. E106
ne. A70	, L. A87
)ws, F. T105	Faulkner, R60, 61, 67
	Ferranti, C65
onnier, M107	Fischer, W. H28
, R107	Foley, <u>A</u>
, A. M58, 83, 88, 98,	, H
102	Font-Réaule, H. de22
y, W87	Forsyth, A69

Page	Post
Fournier, O. V	Lake, W. B4, 26, 51, 68, 8
Frèret, L74	Lambert, C. L83, 88, 98
Fruwirth, D23	Langlois and Co
	Laranza, A. G
Gage, F. B11	Lee, E
	מו או
Garey, W59	, E. P
Gedge, W. E13, 110	Leggo, W. A48, 52
Gilbee, W. A52	Lester, T86
Givry, T63	Loewe, J. M1
Godard, P. M74	Long, J
Goodes, E. A51	C ,
Griffiths, J. R69	McCraw, W40
Grubb, H52	McDonald, T
Grüne, F. W31	McLiesh, W108
drune, r. w	Malfroy, A
T-33- T T 101	Mailroy, A
Haddan, H. J	Marion, A
Hardman, J112	Marsden, H. L. D25
Hare, G95	Mewburn, J. C34
Hart, F. W25	Morgan-Brown, W92, 93,
—, H. W6	107
Haseltine, G48, 53, 78	Morvan, A. G2
Hawkins, A 23	Muhé, H80
Holden, H. M53, 93	•
Helsby, W. G1	Nesbitt, G109
Hemery, T. G36	Newton, H. E110
Henderson, A. C19	, W. E3, 4, 9
A T 100	, W. E, 4, 7
, A. L103	Palmer, J. E66
Hentschel, A44, 51	Petrzywalski, J11
Hermagis, J. H92	Diener W
Higginson, G8	Piercy, F
Hill, C. A53, 93	Placet, P. E84
Hodgson, E74	Ponncy, J26
Hommel, A99	Proctor, G. K26
Hopkins, W. J41	
Hughes, E. T99	Raine, J22
	Réaula, H. de F22
Isaac, L29	Reed, D15
158aC, 1120	Robinson, J. V29
	Rochat, H13
Janicot, C39	Ross, T3
Johnson, C96	
, J. H19, 80, 95,	Rousseau, C110
107	Rye, E34
, J. R27, 36	Sabunjie, J. L98
Jonte, F. P16	Serong O 104
	Sarony, O28, 104
77	Sarony, O
Kennett, R80	Sawyer, J. R47, 89
	Sell, E. E. J79

INDEX OF NAMES.

vii

Page	ı
7, C	ı
oson, J10	ı
zenich, E. R15	
er, A60	ļ
zsby, R100, 111	
ih, C62	ļ
, G. R58	l
, J. A	ļ
te Anonyme95	l
ın, E. P62	
lschmidt, J. C. L91	l
1, S. T70	l
theil, A82	l
——, <i>E</i> 82	l
ens, H54	
man, W. J56	l
<i>u</i> , <i>G</i> 3	l
w, G	١
TI . 101	l
or, T. L101	
c, C. L. van76	
ereau, J. A110	
y, W91	l

Tongue, J. G	63
Trevor, D	32
Tucker, J. B	96
Turner, E. J	65
Van dan Wanda U 50	ko.
Van der Weyde, H58 Van der Weyde, H93,	
Van Tenac, C. L	70
Wallace, W. V	46
Webster, W	20
Wenderoth, F. A	55
Weston, E. R	
Weyde, H. van der58	
Weyde, H. van der93,	
White, O. C	14
Wilkinson, J	112
Willis, W	73
Window, F. R33	50
Wirth, F	
Woodbury, W. B7, 37,	
# doddury, # . D 1, 31,	



PHOTOGRAPHY.

1867.

A.D. 1867, January 3.—No. 20.

HELSBY, WILLIAM GEORGE.—A "system of and apparatus "for manufacturing photographic pictures."

A large number of impressions are made closely together on one sheet of sensitised paper. The pictures can be cut out of the sheet and they are produced simultaneously and of uniform depth of shadow all over the sheet.

The apparatus consists of a camera in which there is mounted the same number of lenses as of impressions to be made; these lenses touch or are near to each other, and are fitted either to produce like pictures, or to produce pictures of different sizes and shadows. That an equal quantity of light may pass to every picture, a sliding shutter in the object piece of the camera is fitted so that it can be opened and closed in the same direction. Thus the extra quantity of light allowed to enter through at one side of the object piece aperture, during the opening, is compensated by being shut off earlier in the closing movement. One arrangement of the sliding shutter is to fit it closely on a pin and to operate quickly by a lever or toggle joint.

The operation of focussing may be facilitated by means of a plate with apertures of the shape of the pictures and at the proper distance from each other.

[Printed, 10d. Drawing.]

A.D. 1867, January 7.—No. 45.

ASHTON, Robert Howe.—Provisional protection only.)—" Im" provements in the production of printing and embossing
" surfaces from photographs."

PH. H 158. Wt. B 296

In the first place a mould is obtained by exposing a photograph to light in combination with sensitised gelatine; the gelatine mould is then placed in contact with a slab of soft or fusible metal, and the whole is submitted to pressure. From the metallic mould or impression this formed an electrotype is obtained, which consitutes the printing or embossing surface. Whether or not this electrotype be taken direct will depend upon the photograph having been negative or positive. If it be necessary to form an intermediate mould, a cast is obtained in the following manner:—A sheet of wax is taken and coated with plumbago so that its surface conducts electricity; the fusible metal mould is then pressed upon the conducting surface, and the wax mould resulting from this operation is electrotyped. In a modification of the process, the gelatine mould is pressed upon the slab of wax direct.

Printing surfaces obtained by these means may be used after the manner of copper-plate printing, or may be employed for producing photo-relievo printing.

[Printed, 4d. No Drawings.]

A.D. 1867, January 11.—No. 71.

MORVAN, ARTHUR GUY.—"Improvements in the art of "making photographic trsnsfers adapted to the purpose of engraving or lithography, or of making plates or blocks from which to print the design or other matter transferred."

Paper (albuminised or not), of suitable texture for photographic printing, is dipped into a bath of sour milk, whey, or lactine to enable it to resist the chemical substances afterwards to be applied; it is then dried.

To coat the paper with a material to receive the action of light, and to be soluble in water where it has not been acted upon by light, dissolve French glue in water, and, while it is boiling, add thereto a solution of permanganate of potash this preparation is applied to the surface of the paper and dried in a dark room. The paper may then receive the photographic impression in the ordinary way.

Immediately after the impression is taken, and before it is developed, the paper is thinly and uniformly coated with a composition containing Judea bitumen, white wax and Burgundy pitch dissolved in a sufficient quantity of essence of lavender. This coating is on the sensitised side of the paper and it is allowed to dry in the dark. By this means colour is given to the picture and a medium is formed to transfer the picture to the wood, stone, or metal surface.

The paper is placed, with its black side upwards, in a bath of cold water. The spaces not acted upon by light are thus removed, together with the superincumbent black coating. The proof is cleansed by a sponge, dried, and transferred by contact and pressure to the stone, metal, or wood surface to be printed from if upon stone, or etched or engraved if upon metal or wood.

[Printed, 6d. No Drawings.]

A.D. 1867, January 17.—No. 121.

NEWTON, WILLIAM EDWARD.—(A communication from George Streat.)—(Provisional protection only.)—"Improvements in "tinting or colouring the surface of paper or other materials" or fabrics."

This invention consists in tinting or straining the surface of these materials by submitting them to the action of smoke. The sheets of material are stretched upon tables within a chamber into which smoke is introduced. The smoke may be obtained by the burning of tobacco, hay, &c. The smoke subsides and condenses upon the surface of the material, and produces a permanent tint proportioned to the density of the smoke. By placing upon the surface patterns of any desired configuration, so as to entirely or partially prevent the action of the smoke on the parts covered up by them, figures can be left of the original colour or nearly so of the surface, while the uncovered surface is tinted to any desired depth of colour.

This improvement is adapted to the tinting of paper for photographers, &c.

[Printed, 4d. No Drawings.]

A.D. 1867, January 23.-No. 174.

ROSS, Thomas.—"Improvements in the manufacture of "lenses for photographic cameras and various optical instruments."

This invention consists in the employment of different

descriptions or qualities of flint glass or of crown glass for both the convex and concave glasses of the above lenses, the convex being made of light flint or light crown glass (having a low refractive and dispersive power), and the concave being made of heavy or dense flint, or heavy or dense crown glass, which has a high refractive and dispersive power. The different degrees of refrangibility of the two descriptions or qualities of flint glass counteract or neutralise each other.

[Printed, 4d. No Drawings.]

A.D. 1867, February 13.-No. 407.

NEWTON, WILLIAM EDWARD.—(A communication from Adolphs Guillaume Larauza.)—(Provisional protection only.)—A "mode" of and apparatus for taking photographic portraits, pictures "or representations."

This invention consists in the production of a "photo"graphic statuette," or a portrait showing the back and the
front of the person photographed. The portrait is taken from
two sides, and the pictures produced on paper are to be stuck
together at the edges, but leaving the bottom open.

The person to be photographed is placed on a turntable which has two stops, one exactly opposite the other. The turntable is thus capable of turning exactly through half a circle, so that the person is first seen from the front and afterwards from behind. The corresponding photographic pictures form two exact halves, which may be placed back to back. After the edges of the two portraits have been struck together, the whole is expanded by introducing a piece of wood or other material into the interior.

The photographic statuette is placed in a kiosque, which is composed of four, five or more looking glasses placed in connection with each other, and may be ornamented with gilding, sculpture, or otherwise.

[Printed, 4d. No Drawings.]

A.D. 1867, March 8.—No. 659.

LAKE, WILLIAM ROBERT. — (A communication from John Uushing Crosman.) — A "mode of coating paper and other "materials with fluid substances, solutions, and compounds "for photographic and other purposes."



PHOTOGRAPHY.

The sheet of paper is thoroughly wetted by being immersed in suitable fluid; it is then deposited on a level table, so that its under side comes into contact with the upper surface of the table, by expressing air and any free fluid from between the sheet and the table and by using bibulous paper to remove superfluous fluid from the upper surface of the sheet. When in this condition, the coating fluid or material is applied to the upper surface of the sheet, by pouring the fluid upon the surface near the centre of the sheet. A deckle may be used if a considerable depth of fluid is required to make the coating.

When a solution of gelatine mixed with carbon is used to coat paper for photographic purposes, the mixture is employed at from 100° to 200° Faht. When albumen is used, either alone or in connection with gelatine, the temperature is kept below the point at which albumen coagulates. The coated sheets are not removed from the level table till the coating has sufficiently set.

[Printed, 4d. No Drawings.]

A.D. 1867, March 13.—No. 732.

LEE, EDWARD.—A "mode of and apparatus for producing "pictures, designs, letters, and other characters or figures "upon glass, metal, wood, and other materials."

To transfer photographs from photographic paper to glass, the surface of the photograph is first covered with varnish. Powdered resin or other powder (which, when applied to the surface will render the same waterproof), is placed on the surface and fixed by passing the paper over a wet stone or between a pair of rollers. Other modes of effecting the fixing are by heat, or by allowing the resin to become incorporated with the colour applied to the photograph, so as to form a varnish. Instead of the powdered resin, gold, bronze, or other metallic leaf or powder may be employed, or the latter may be mixed with the resin to spread over the surface. When metallic leaf or powder is employed, the application of the wet stone is not required.

To produce a coloured impression of the photograph, the various colours are applied to the surface of the same instead of the varnish, the said colours being covered with the powdered resin.

In transferring the design to the glass or other surface, if resin alone has been used, the surfaces are immersed in water, and in that condition the design is laid upon the glass, with the coloured or varnished side in contact with the glass. Pressure is then applied to the back of the paper by means of a burnisher or a pair of india-rubber rollers. The photograph being allowed to dry, the paper is wetted at the back and is then removed, leaving the photographic image on the glass.

[Printed, 4d. No Drawings.]

A.D. 1867, March 19.—No. 793.

CLEMENTS, JAMES MOORE. — "Improvements in ironing,

" pressing, finishing, and damping machinery."

Two or more hollow cylindrical rollers are mounted horizontally between standards, and revolve either in the same or contrary directions. They may be capable of moving to and fro by means of levers or screws at equal or unequal speeds, motion being given to them in any suitable manner. The rollers may be heated; pressure is applied to them by means of an adjusting screw and spring, fitted in the framing above the upper roller.

For photographs, publications, or objects of similar nature and large size, rollers are employed having a space between them sufficiently large to admit of the passage of pad blocks together with the article to be pressed.

A board or table is fixed in such a position that a portion of the lower pressing cylinder or roller may pass through it, which table receives the work to be passed through the rollers.

[Printed, 1s. Drawing.]

A.D. 1867, March 21.—No. 825.

HART, HERBERT WILLIAM.—(Provisional protection only.)—A "process for producing indestructible photographic pictures."

According to this invention, pictures are produced on the surface of glass enamel with which a metallic plate is coated. The picture is burnt in by heating the plate until the enamel is softened and partially melted.

The photograph may be taken direct on the enamelled surface; or a collodion film with the photographic image thereon

may be transferred from its glass plate to the enamelled surface; or a negative, taken in the ordinary manner, may be printed on paper, transferred from thence to enamelled surface, and burnt in.

[Printed, 4d. No Drawings.]

A.D. 1867, March 23.—No. 849.

EDWARDS, ERNEST. — (Provisional protection only.)—"Im" provements in photographic pictures and in apparatus for
" producing them."

A lens of very short focus and large aperture is fitted to a camera arranged to produce one or more different photographic pictures successively upon the same sensitive plate. Different parts of the plate are exposed to the action of the light from the lens by means of an instantaneous shutter placed in front of the lens or behind it. For these negatives the sensitising bath is a silver bath of full strength and neutral or slightly acid. The developing solution is sulphate of iron to which is added loaf sugar and alcohol. The fixing solution consists of hyposulphite of soda. After fixing, the pictures are varnished.

To print enlarged copies from the above negatives, the above mentioned camera is attached to the front of another camera. The distance between the negative and the lens and between the lens and the picture to be formed determines the size of the copy. A mixture of collodion with a solution of white wax in ether is poured on to the glass plate and rubbed off again to give place to the film sensitised in an acid bath. The picture is then taken in the second camera and developed with a solution containing excess of acetic acid. The picture is fixed with cyanide of potassium, and toned with a solution of bichloride of mercury containing salts of gold or uranium. The film is washed with hyposulphite of soda solution and then dried. The dried picture is transferred to paper by immersion in water and by pressure.

[Printed, 4d. No Drawings.]

A.D. 1867, March 30.—No. 947.

WOODBURY, WALTER BENTLEY, and ASHTON, ROBERT HOWE.—" Means of producing designs upon paper."

ane relief is first obtained scribed in No. 2338, A.D. 186 plate, and the paper to be through a press in contact the transparent at those parts wh the raised parts of the design. by reflected light. If a positiv be required, a transparent pos ordinary negative, to produce the the above method, a metal im the gelatine may be used with tto produce the water-mark.

The greasy coloured paper use invention may be similar to the copying letters.

[Printed, 4d. No Drawings.]

A.D. 1867, March 30

HIGGINSON, GEORGE. -(Provision " provements in producing opalline porcelain, or any other enamelled By applying certain chemicals, in cording to the nature of the article above description, photographic picta the surface in such a manner graphs m

" Means of producing surfaces in relief or in intaglio for rinting and other purposes."

1st. The transformation of a photographic image into an electrotype mould.

2nd. The production, with this mould, either of impressions with inks of any colour upon paper, textile fabric, glass, ceramic ware, wood, stone, and metal, or of "countertypes" in relief or in intaglio on any metal, or of engraved blocks for printing.

The photograph in relief is obtained by means of an albuminous or gelatinous coating containing nitrates, chlorides, bichromates, prussiates, and the like, double salts of gold, silver, copper, and the like. After being exposed to light, the parts that have not been acted upon by the light are dissolved out by water or other solvent.

The electrotype mould is obtained by varnishing the contour of the glass on which the photograph is made with gutta percha, and depositing a layer of metal upon the photograph.

The mould is covered with ink at the ordinary temperature and applied to the surface to be printed; desiccation then takes place, and, by heating the mould gently, the image is left adhering to the surface.

The matrix or mould may be subjected to a second galvanic operation to obtain relief designs in gold, silver, copper or other metals; these designs may serve for printing purposes.

[Printed, 4d. No Drawings.]

A.D. 1867, May 22.—No. 1526.

NEWTON, WILLIAM EDWARD.—(A communication from Henry Cook.)—(Provisional protection only.)—"Improvements in por"table photographic apparatus."

1st. A cylindrical box, constructed to contain fifty or other convenient number of prepared and sensitised glass plates, which are brought, by means of the simple rotation of the case, one after another, directly over a door, which opens and shuts automatically.

2nd. The photographic apparatus or camera.—This apparatus is like an ordinary opera glass. Its lenses are exactly similar in focus; one projects the image to be photographed on to the focusing glass, which occupies the large part of



-Presentus is turned ups been exposed falls back into The door of the box closes, & or left brings another sensi opening in the camera.

A stand for the camera con provided with a universal join

[Printed, 4d. No Drawin

A.D. 1867, May

SIMPSON, JAMES. — (Provisio " rangement of apparatus to b " tographic pictures."

By means of this invention, e may be obtained from small neg tives positive prints may be prodi than those yielded by the ordinar

An ordinary photographic cam nection with an elongated conics scopically in order that it may be The camera is connected have the lens enclosed and embra the cone, the base of the cone be constructed like the ordinary dark . sensitised paner m

A.D. 1867, May 29.—No. 1593.

GAGE, Franklin Benjamin.—A "means or method of illu-"minating the shadows and harmonising the lights and "shades in photographic impressions."

According to this invention, in developing the photographic image, the inventor employs a partial development in the camera by the aid of diffused light. The development is afterwards completed in the usual way, taking the precaution to reduce the strength of the developing fluid with water.

The photographic impression is taken in the usual way, then some plain dark dead surface is placed in front of the camera, the sensitive surface still remaining in the camera. The covering is removed from the lens tube and the sensitive surface is exposed to the light reflected from the dark surface, while the dark surface is kept in gentle motion. For a dark dead surface, a piece of thick black woollen cloth is attached, by one edge, to a stick. This is held horizontally and gently moved in front of the camera with the left hand, while the lens tube is uncovered with the right hand.

[Printed, 4d. No Drawings.]

A.D. 1867, June 7.—No. 1676.

PETRZYWALSKI, JEAN.—A "camera obscura."

This apparatus consists of a square box formed of two parts one sliding within the other, which facilitates the adjustment of the focus and forms a dark chamber, at one end of which is a sheet of ground glass, whilst the object to be reflected is placed at the opposite extremity. On each side of the object a lamp is placed, a similar one being in front thereof; the rays of the three lights are concentrated on the object by reflectors. An enlarged image is produced on the ground glass by lenses fixed in a sliding panel in front of the lamps and object.

The above described apparatus may be used to reproduce photographic pictures upon a magnified scale, so that a magnified view of the picture may be seen upon the sheet of ground glass. Another use of the arrangement is to enlarge photographs, by making use of the ordinary photographic process; positives or negatives can be equally well taken at day or night. The magnifying power is "from 50 to 500

A.D. 1867, J

LOEWE, JULIUS MARIA.—(P.

" provements in the prepara lar materials for enlarging,

" from negatives or positives " graphy."

Linen, cotton, silk, &c., a aqueous solution of gelatine; t in the manner herein-after desc.

Canvas is prepared in the o. purposes, that is by using oxide ments being employed to spre dissolved in essence of lavende three coatings are given with this is dry, it is rubbed with an aqueo of zinc, potato and pumicestone, a the surface becomes brilliant.

For developing the picture on car solution is used that contains alb chloride of ammonium, tartaric acid of potassium, iodide of ammonium bromide of ammonium indi

A.D. 1867, July 26.—No. 2170.

SILVY, CAMILLE. — "Improvements in photographic apparatus."

By combining this apparatus with a camera, the ordinary frames and dark tents may be dispensed with, and panoramic views may be taken on all points of the horizon. It consists of a metal tube, in the centre of which is a little movable wooden roller, on which the sheet of sensitive paper is wound. One of the ends of this sheet is stuck on to the roller, whilst the other end is fixed on another similar little roller placed out of the tube, and which serves to unwind the sheet through a slot cut in the whole length of the tube. The tube enclosing the sheet of paper is then placed in another tube fixed vertically on the left side of the camera.

In order to operate, the sheet of paper is gradually unwound at the rear part of the camera, which is purposely of a circular form, by means of a second little roller which is put into another tube fixed vertically on the right side of the camera. When a panoramic view has been taken, the paper is wound up anew in the first tube, answering the purpose of a sheath, and contains the latent picture, which may afterwards be developed by the ordinary means.

[Printed, 8d. Drawing.]

A.D. 1867, October 3.— No. 2784.

GEDGE, WILLIAM EDWARD.—(A communication from Hippolyte Rochat.—(Provisional protection only.)—"A portable laboratory "specially intended for photographic excursions."

This apparatus consists of a rectangular wooden case closely joined, the dimensions of which are determined by those of the basins and frame intended for the operations. The larger lid opens from the front backwards, and a smaller lid opens from the back forwards; between these lids there is a middle part which remains fixed. The openings are provided with yellow glass. A movable covering or shade is joined by hinges to the fixed part of the lid. The sides of the shade slide on the exterior of the sides of the case; they are fixed at a certain height by an adjusting screw. The two sides and the front are pierced with a round opening to which is fitted a sleeve which terminates in an elastic wristband. A groove at

the bottom of the case at the end, and at the height of the basins, receives the frame and gives to the frame the necessary inclination to prevent the fall of the glass plates into the interior of the apparatus. A spring keeps the frame in position.

Two basins, of equal dimensions, being placed in the interior of the apparatus, one containing the sensitising bath, the other the developing bath, the collodionised glass plate is placed in the frame. The latter is introduced into the dark chamber by the back opening, which is reclosed, and the glass plate in the frame is taken by the hands in the sleeves and immersed in the silver bath, drained on blotting paper and replaced in the frame; it is brought back into the apparatus after the pose and the development is made in the second basin. The plate is afterwards withdrawn by the large opening in front, and the image is washed, fixed, and strengthened.

[Printed, 6d. Drawing.]

A.D. 1867, October 17.-No. 2915.

WHITE, OTIS CONVERSE.—" Improvements in chairs for the "use of dentists, barbers, photographers, or other persons, such invention also being applicable to other useful pur"poses."

From the lower part of the back of a chair a fixed arm extends which has a socket to receive a pivot on the lower end of a tubular rod. A sliding clamp encompasses the rod, which not only receives the rod but also a curved bail, the two ends of which are hinged to the back of the chair. The clamp has a set screw and a saddle or bearer, which rests against the bail. A similar saddle in the rear of the clamp revolves on a journal; this saddle not only extends into a longitudinal slot in the tubular rod but rests against a solid rod extending into and projecting from the bore of the tubular rod. An arm extending from the head rest is connected to the solid rod by means of ball-and-socket clamp. A set screw in the clamp contracts its jaws upon the ball. The above-mentioned sliding clamp fixes the tubular rod to the bail and the solid rod to the tubular rod.

In another head rest, the upper part of the sliding solid rod is curved, so as to carry the ball very close to the head rest and between a curved plate and a clamp plate; the curved plate is fastened to the back of the head rest.

The head rest is formed or upholstered with a cushion, so raised on one side and two edges as to leave a recess or hollow within the cushion.

[Printed, 8d. Drawing.]

A.D. 1867, October 30.—No. 3057.

PIERCY, FREDERICK.—"Improvements in the method of "tinting or coloring photographs," &c.

An ontline of the photograph is traced on the back thereof or on a sheet of paper. The picture and paper are placed together on a lithographic stone or plate having on its surface the colour which is to be transferred to the picture. The picture is placed face downwards with the sheet of paper between it and the stone, then by rubbing those parts in the tracing that are to be left light in the picture, the colour at those parts on the stone is transferred to the sheet of paper. If the traced outline has been made on the sheet of paper, the rubbing must be applied to it instead of to the back of the picture. More colour may be removed from the stone by means of bread. The picture is then laid face downwards on the stone and passed through the press.

A finely ground or ruled glass plate may be used in the above process instead of the lithographic stone.

This invention also consists in transmitting rays through a lens from the photographic negative on to a tint or on to the paper covering the tint so as to place in proper position the colours or to remove colour as in the above method. Oil colour may be applied to photographs to increase their permanence. A ground may be printed in oil colour on the paper, before or after printing the photograph, which can be worked upon with pencil, chalk, crayons, or oil or water colours. Albumenised paper may be charged with printing ink, and the colour may be transferred to the photograph by pressure.

[Printed, 4d. No Drawings.]

A.D. 1867, December 13.—No. 3542.

SINTZENICH, EDWARD REED.—(A communication from Daniel Reed.)—(Provisional protection only.)—"Improvements in the

" treatment of gutta percha, india rubber, Honduras gua, and the other allied gums for the production of a preparation of preparations applicable as a varnish, cement, paint

" stain, water and air proof material, solid or elastic material,

" and for other purposes."

Any one of these gums is dissolved in benzine, and alcohol is added in sufficient quantity, thereby causing the pure portions of the gum to collect in the form of a card which is redissolved in benzine for the finer uses.

When used as a substitute for collodion for photographic purposes, the treatment consists in the use of the solution of the proper consistency in the manner in which collodion is now employed. For photographic printing purposes, and for the production of sun pictures, the treatment consists in producing a surface of the solution in the finer state on any convenient material, or using sheets of the same on which may be conveniently printed the photograph.

[Printed, 4d. No Drawings.]

1868.

A.D. 1868, February 3.—No. 363.

DOMENECH, Jose Maria, and JONTE, FREDERIC PIERRE.—
"Improvements in combined photographic apparatus for outdoor operations."

This apparatus forms a package which can be carried on the back by straps; it contains the camera with all the requisites for taking a view or portrait, as well as chemicals and materials for preparing, developing, and fixing the plates. A flexible cloth covers the entire apparatus, as well as the operator, and serves the purpose of a tent. Sufficient light is admitted to the interior of the apparatus through glass of a non-actinic character. The box is so constructed that, on fixing it upon the tripod stand, it at once opens out into a large and convenient tent, with the lens and camera attached in front. The operator takes up his position inside the tent, and before him is the camera, which he can open or shut; his stock of glass plates are over the

camera, as well as a water cistern; on his right hand are the shelves containing the chemicals, and at his left the nitrate bath, and before him the tray to receive the waste in washing.

One of the apertures in the cloth is to enclose the operator's waist. A peculiar water supply valve is fitted to the flexible supply tube for washing the plates; it consists of a clip with an elastic spring, which is released by the pressure of the finger and thumb when the flow of water is required.

When the camera is used as a separate apparatus from the dark room, an additional tripod is used, with three sliding pieces.

[Printed, 1s. 2d. Drawings.]

A.D. 1868, April 11.-No. 1206.

BROOMAN, CLINTON EDGCUMBE.—(A communication from Augustin Marion.)—(Provisional protection only.)—"Improve"ments in photography."

The collodion film used in this invention is prepared with collodion and easter oil.

The image from a negative picture on glass is transferred to a collodion film. This is done by spreading the film on the glass, allowing the excess to run off and drying. The film together with the image which it bears is then raised. When the picture is varnished, some time is necessary for the removal of the image and water is used. A positive picture on the collodion film is thus obtained.

Gelatinised paper prepared with carbon is made by spreading upon paper a regular layer of gelatine coloured black. This is sensitised by means of solution of bichromate of potash and the coloured side is applied to the collodion film. When the paper has been exposed to light for the requisite time it is cleansed by means of water; the water also causes the gelatine to swell and the image to appear in relief upon the black layer of gelatine. This image is then transferred to albumenised paper.

The albumenised paper is floated on its back on water, and the layer of black gelatine is placed upon the albumen. The two sheets are then lifted together and pressed between plates of glass for an hour or two. The two papers are hung up to dry and submitted to the action of steam in a closed box. The

A.D. 186 BING, Louis.—A "mod " the actinic power of li For this purpose, a suri falls, so as to produce a g. defined by a graduated graphically sensitive pap lighted for a determinate to

the progressive change of thereby obtained. By this enabled to expose his plat. requisite to produce determi The apparatus consists of a on a vertical axis, a cylinder paper. The paper is secured springs. One side of the bo slit cut in it. In the slit is cross-section, having three s fourth side of transparent gla scale marked thereon. The m the cylinder by springs. The te alide for shutting off or adm admitted to the tube acts on paper which bears against the t The cylinder can be more

Pressions -

PHOTOGRAPHY.

A.D. 1868, May 2.-No. 1443.

JOHNSON, JOHN HENRY.—(A communication from Langlois and Company.)—"Improvements in apparatus for exhibiting "minute photographic pictures, and in pictures or slides to be used therewith."

The apparatus for exhibiting the pictures does not give this invention a title to be included in the present volume, but the improvements in the pictures or slides are stated to be independent novel features.

In one case two or more successive images of the same object in different positions are placed on Stanhope lenses, one image to each lens. In another case microscopic views are placed on movable strips of glass, thereby admitting of the disposal of a considerable number of different subjects on the same strip. By these slides "the production of "apparently animated microscopic photographic pictures" is accomplished.

[Printed, 8d. Drawing.]

A.D. 1868, May 7.—No. 1499.

HENDERSON, ARTHUR CHARLES.—(A communication from Octave Victor Fournier.)—"Improvements in the manufacture "of plates for heliographic engraving."

The object of this invention is to obtain, on the above plates, a grain or hatching capable of retaining the printing ink.

The process which forms this invention consists in first taking a photographic proof on glass of the hatching required to be produced and which has been previously printed or traced on any surface. The hatching may be square, lozenge, dotted, or otherwise. Then a positive photograph is printed on glass of the object to be reproduced. Thirdly, these two photographs are placed one on the other so as to touch, and from them is printed a negative picture. From the latter picture is obtained, by the ordinary means, a heliographic plate.

"A similar but less satisfactory result may be obtained by taking in two different positions the image of the grain or hatching and the object itself on the same plate and vice versa."

[Printed, 4d. No Drawings.]

19

A.D. 1868, May 11.-No. 1532.

WEBSTER, WILLIAM, and BARNES, ROBERT WILLIAM.

(Provisional protection only.)—"Improvements in head sal."

waist rests for the use of photographers."

On a horizontal bed of considerable length is placed a shing block whereto the rising stem is affixed. To traverse the block on the bed, a toothed wheel is mounted on it and gass into a rack formed on the bed; the wheel is provided with an operating handle. Or a screw on the bed may pass through the block. That part of the rising frame which is affixed to the sliding block is formed with a groove, and a bar is fitted so as to be easily moved up and down therein, set screws being employed to secure it at the required height. At or near the top of the bar, the caliber supports are attached, and, to admit of their being moved backwards and forwards at a right angle to the length of the bed, they are borne in a sliding piece; when desired, a hinge or joint is provided, so that they can be moved round sidewards.

The invention also consists "in affixing the rising stem of head and waist rests already in use, or of the ordinary construction to the said sliding block when it is supported on the said bed or carrier, and operated as described."

[Printed, 4d. No Drawings.]

A.D. 1868, July 1.—No. 2104.

SMITH, JAMES ALEXANDER.—(Provisional protection not allowed.)—" Improvements in photographic apparatus."

Inaccuracy is said to occur in photographic images by the sensitised plate "being a flat transverse surface intercepting " a cone of diverging rays at all the inequalities of distance " from the focus of the camera lens as now in use at which " the various parts of the flat base of a cone are unequally " distant from its apex."

To correct this inaccuracy, a lens or lenses is or are inserted between the focus of the camera lens, as now in use, and the sensitised plate, and thereby, " or by other optical means and " appliances suitable for that purpose," redirecting the actinic rays into parallel rays, or into such other direction as after the rays have passed through and diverged from the focus will enable the image to be projected on a flat sensitised surface with its parts in due proportion to each other.

The inventor also proposes to insert into the camera, a diaphragm with a small aperture in it, to intercept those actinic rays which do not converge to or pass through the focus; thereby securing the actinic efficiency and homozegeneous purity of the colours proceeding from the object photographed, with a view of producing a coloured image of the said object.

[Printed, 4d. No Drawings.]

7

A.D. 1868, July 13.-No. 2201.

EDWARDS, ERNEST .- "Improvements in photography."

A coating of bichromatised gelatine colouring matter is applied to a surface of paper, &c. and an image is obtained upon it by means of light under a photographic negative. To the surface bearing the image is applied a paper prepared with gelatine, albumen, &c. which is rendered insoluble. The parts of the sensitised gelatine and pigment not acted on by light and therefore remaining soluble are washed away with warm water, together with the paper that originally carried the sensitive film. The picture is in this case reversed.

When a direct picture is required, the negative is transferred from its glass plate by producing on its surface alternate films of india rubber and collodion till a sufficient strength has been obtained. These films, together with the negative, are then removed and the prepared gelatine is printed upon from their reversed side. Modifications are described in which a mirror, or lenses or direct sun light is used. Or the sensitised gelatine together with the alternate films may be mounted on the insoluble prepared paper.

In enlarging photographs, the position of the negative may be reversed in the above process; the printing may take place through the glass.

In the preparation of the pigmented paper, carbon, earths, and aniline, or other dyes may be used, also finely divided glass of various colours.

Collodio-chloride of silver paper is prepared, by pouring the collodio-chloride on to a glass plate, applying the transfer paper to it, and removing them together from their support.



ана apparatus for " means of photography." The camera is divided i division constructed to p vignetted margin; by this picture taken unites with panoramic view by the ju obtained by moving the cam of space.

The division or divisional p edges and passing over two p at the bottom of the camera adjusted so that when a lens is camera and a sensitive plate is pointed at any uniform body, t (which must be moved by mean axis of one of the pulleys over w the edges of each picture as to p lighting.

To apply this for taking a pano rotate upon a table in such a ma been taken on one portion of the p the camera is rotated a certain preand the second picture is taken. I

pictures form a continuous panoram
When portraits are to he and instant

23

Behind a positive or negative of the object to be reproduced
is placed a sheet of glass marked with a design which gives,
by transmitted light, the appearance of hatching or grains.
A photograph is then taken from this double plate by
transmitted light. Or a photograph of the hatching may be
placed behind the photographic plate to be reproduced.

The photograph with the grain and with the picture on it, obtained as above, is covered with a very thin coating of bichromatised gelatine, then with a second and thicker coating of the same; the thickness of the latter coating is according to the amount of relief to be obtained. After desiccation, it is exposed to light and then immersed in water. The picture is represented by reliefs and depressions. The gelatine is then to be removed and transferred to another flat surface; to facilitate this operation, the gelatinised plate is immersed for some time in tepid water to which glycerine or sugar is added. The gelatinous surface is then metallised and an electrotype obtained therefrom; the electrotype forms the printing surface.

[Printed, 4d. No Drawings.]

A.D. 1868, August 10.-No. 2498.

FRUWIRTH, DANIEL, and HAWKINS, ABDIEL.—A "process "for producing raised printing surfaces."

From a negative, a positive picture is produced on a copper plate, the plate being sensitised by a paste containing bichromate of potash, hyposulphite of soda and chloride of ammonium, together with albumen, gelatine, and Nuremberger or French glue. The unaltered bichromate is dissolved out by a mixture of methylated spirit with acetic acid. A faint reversed impression is left behind, which is capable of being transformed into a surface in relief by means of a process resembling the glyphographic process.

Instead of printing the negative on a copper plate, it may produce a positive on a plate of glass or ebonite. In this case, the sensitising solution contains gum, gelatine, Nuremberger glue, bichromate of potash and oxalic acid. The unaltered bichromate is dissolved out with cold water.

In making a cast from the reversed impression, the high lights may be built up with wax or varnish. The plate is then allowed to swell in water and dry. The surface is

brushed over with a solution of ox gall and coated with a composition containing sulphur and tar to which may be added india-rubber or gutta percha. From the plastic most thus obtained, a stereotype cast in intaglio in metal may be taken. Or a cast may be taken in plaster of Paris.

In obtaining a surface for printing by a letter press machine, the fine work is built up by means of a roller covered with varnish. More varnish may be applied with a brush. An electrotype from the intaglio is thickened with type metal mounted on a wooden block.

[Printed, 4d. No Drawings.]

A.D. 1868, August 11.—No. 2507.

ARGAMAKOFF, ALEXANDER.—(Partly a communication from Basile Bauler.)—"Improvements in the production by means "of photography of printing surfaces adapted to lithography, "typography, and chromotype."

For printing surfaces adapted to typography, the following processes are employed:—Strong ammonia is added to an aqueous solution of gelatine and a thin layer is poured on to glass; the layer is dried at the ordinary temperature and then washed in a bichromate solution containing alum. The dried prepared surface is then exposed to light under the original. A warm solution of gelatine is poured on the prepared surface till it forms a thick layer; this layer can be taken off the prepared layer, when a design is obtained, either in relief or hollow according to which portion of the gelatine has swelled. A compound containing wax, gutta percha, and oil is poured on the glass, and relief is given to the resulting gutta percha plate by hollowing out the large white spaces by hand. The gutta percha plate is then coated with black lead and an electrotype matrix is taken therefrom. matrix is covered with turpentine, which is allowed to evaporate, then with black lead and the electrotype taken therefrom is adapted to typography when the relief is increased by corrosion. The design can be transferred from the copper plate to a lithographic stone.

Application to the chromotype:—An outline relief (one for each colour) is obtained from the coloured original by means of an outline drawing. From the outline relief an impression is taken on paper in blue; originals (consisting of spots) are

PHOTOGRAPHY.

thus obtained, from which clichés are made separately for each simple colour.

A copper plate, prepared from a photographic negative may be treated with collodion and gelatinous ink to produce, by pressure, an image resembling a photograph.

[Printed, 6d. No Drawings.]

A.D. 1868, October 10.—No. 3118.

HART, FREDERIC WILLIAM.—A "material or substance to be used for varnishing or protecting the surfaces of litho- graphs, photo-lithographs, and other like printed surfaces."

The print should be on a well-sized hand paper. When this is not the case the print is laid on a level surface and both sides are sponged with a warm solution of starch; it is then hung up to dry and calendered. Albumen of white of egg, prepared with a whisk, is used to coat the printed surface of the paper. During the operation of whisking, matter of a deliquescent nature, such as chloride of calcium or nitrate of ammonium (in small quantity) is introduced into the albumen, to prevent the albumen on the paper from becoming thoroughly desiccated, as in this state it is conveniently rendered insoluble. The paper having become dry, in the ordinary sense of the term, the surface coating is rendered insoluble by means of steam or boiling water.

[Printed, 4d. No Drawings.]

A.D. 1868, December 4.—No. 3695.

MARSDEN, HENEY LOUIS DELABENE.—(Provisional protection only.)—"Improvements in machinery or apparatus for toning, if fixing, and washing photographic prints, which improvements are also applicable to rocking machinery or apparatus if for other purposes."

One or more vessels, containing the toning, fixing or washing solutions, are so arranged, in connection with machinery, as to receive a rocking motion. The rocking motion is produced by turning on its axis a rod or bar, with or without joints, fitted with one or more bends, pins, or other projections, or with crank or cranks and connecting rod, or rods fixed or movable, which may be turned by hand or other motive power. The intention of the rocking motion is to thoroughly

25

separate the prints and keep them in motion while immersel in the solution.

The vessels may be filled with liquid to the required height, and emptied, either by means of jointed tubes of india-rubbe connected with an aperture or apertures in each receptacle, or by tubes of other material with or without joints.

[Printed, 4d. No Drawings.]

A.D. 1868, December 7.-No. 3722.

LAKE, WILLIAM ROBERT. — (A communication from George Kendall Proctor.)—"Improvements in rooms and apparatus "for photographing by artificial light."

This invention consists chiefly in so constructing these rooms that the rays of light from a lamp placed therein will be reflected and concentrated upon the person or object to be photographed. The interior of the room is curved above and at the front and sides of the point whereon the light is to be concentrated, and a magnesium lamp is arranged in such a position that its light is reflected to the object. An opening is made in the curved end of the room for the camera, and a suitable background is placed at the other end. A kerosene lamp is employed for focussing.

[Printed, 6d. Drawing.]

A.D. 1868, December 17.—No. 3849.

POUNCY, JOHN.—" Improvements in the production of plain " or coloured photographic and other pictures."

1st. To produce a picture on the reverse or obverse side before transferring the same to the surface of the material where it is to remain permanently.—A photograph is produced in carbon, &c. mixed and prepared in oil, spirit or water, and sensitised by methods described in No. 780, A.D. 1858, or in No. 267, A.D. 1863, or by other methods. The colours are laid on the reverse or obverse side of the picture before transferring the same.

The monochrome colour (carbon for instance) is applied all over the surface of the material on which the picture is to be produced and the negative is applied to the prepared or non-prepared surface, when the light hardens the colouring matter, leaving the other parts to be dissolved off by spirit or water.

27

PHOTOGRAPHY.

2nd. To produce a picture in any transparent substance, the transparent substance to be afterwards restored to its original opacity.—The solution for giving transparency to the paper, &c., consists of oils, wax, and glycerine, or like substance. To restore the opacity and develop the picture boiled water is employed; the picture is finished by immersing it in turpentine, naptha or benzol.

[Printed, 4d. No Drawings.]

1869.

A.D. 1869, February 3.—No. 336.

JOHNSON, JOHN ROBERT.—"Improvements in the manufac"ture or production of photographic pictures."

By this invention photographic pictures in carbon or other pigments are obtained. This invention relates to those pictures which are obtained on a film or tissue of sensitised gelatine and retained, in a reverse condition, upon the paper or support upon which they are produced; or transferred, by india-rubber paper to another surface, so as to be in a nonreversed position.

1st improvement.—Instead of using moist pigment preparation, a sheet of prepared pigment is employed, the sheet being dissolved and mixed with a definite quantity of colourless gelatine. The pigment preparation contains the finely ground colour together with gelatine and sugar; the mixture is poured upon a slab to dry.

2nd improvement.—Making tissue in continuous lengths and using the gelatine compound, without forming the ordinary tissue. The support of porous paper is supplied from a roller in a continuous sheet and is brought into contact with the surface of the pigmented gelatine solution. Instead of porous paper a plate of metal is employed together with a film of wax; the developed picture may be transferred to its final support of paper, &c.

3rd improvement.—The use of soluble resins, &c., which become insoluble when dry, for cementing the pigment picture to its permanent support.

4th improvement.—The mounting of the gelatine image upon an impermeable surface without cement, for models for engraved plates. Also transferring the gelatine image from a glass or metal surface to the surface of paper, by means of an intervening film of wax.

5th improvement.—Transferring the picture from its temporary support of wax paper to its permanent support, by means of varnish and pressure.

[Printed, 6d. No Drawings.]

A.D. 1869, February 8.-No. 385.

SARONY, OLIVER.—"Improvements in photographs to give "them artistic effect, and to produce enlarged and permanent pictures from small negatives."

A small negative portrait is taken and enlarged to any suitable extent or variation upon glass, either by sun or artificial light. The enlarged portrait is backed up with rough drawing paper on which has been lithographed hatched shading or free hand lines.

The hatching or toning, instead of being lithographed on paper, may be reprinted on the same glass containing the transparent picture, and in that case the portrait or picture may be backed up with plain paper.

[Printed, 4d. No Drawings.]

A.D. 1869, February 10.—No. 417.

FISCHER, WILLIAM HENRY.—(Provisional protection only.)—A "photographing printing process."

Gelatine and gum arabic are dissolved in water, and lump sugar is added thereto. After filtering this mixture, bichromate of potash or of ammonia in solution is added thereto. The mixture is then ready to pour on the glass, slate, or metal which is to form the positive picture. After drying, the plate so prepared is placed under the negative, so that the film side of the negative shall be in contact with the gelatine film. After a proper exposure, the picture on glass, &c. is ready for the printer, and is printed in an ordinary lithographic press in the usual way employed by lithographic printers, and with their usual inks.

[Printed, 4d. No Drawings.]

A.D. 1869, March 20.—No. 853.

ROBINSON, JOHN VINCENT.—(Provisional protection only.)—
"Improvements in the production of negatives applicable for
hotographic printing, and for obtaining raised printing
surfaces."

1st. The production of negatives for photographic printing.

—A glass plate is coated with silver, metallic alloy, or preparation of aniline. A drawing being made, with pen or pencil, upon this surface, the lines thereof are removed by means of a graver; or the drawing may be at once etched in without the aid of the pen or pencil sketch. The lines thus etched admit light through the plate, and the result is an etched negative.

A print may be obtained from the negative on photographic paper, in the usual manner.

2nd. The production of raised surfaces for printing purposes by means of the above-mentioned etched negative.—A plate of glass, &c., is coated with a layer of gelatine to which has been added an alkaline bichromate. The negative being placed in contact with the prepared surface of gelatine and the combination exposed to light, the parts of the gelatine film acted on by the light are rendered insoluble in water. The gelatine plate is then placed in warm water, and the result is a relief picture corresponding to the lines of the etched negative. From this raised surface a stereotype or electrotype cast may be taken and printed from in the usual manner.

[Printed, 4d. No Drawings.]

A.D. 1869, April 28.—No. 1312.

ISAAC, Lewis. —"Improvements in folding or collapsible tables, stands, and stools."

This invention is designed to enable the above articles to be closed up within a small compass when not in use.

In a tripod stand for a photographic camera, a sliding collar, on a vertical guide bar, carries hinged tie rods, the ends of which are formed with racks that may be placed on pins projecting from the legs, so that the several legs may stand at varying angles and yet be held firmly in their respective positions. The legs are jointed half way by means of hinge joints; and the upper part of each leg has pivoted to it a flat plate or catch, having a slot in its side, which receives a pin fixed to the lower part of the leg, so that the two parts of the leg are held rigidly together, until the plate is drawn back, when the legs can be folded up.

PHOTOGRAPHY.

[Printed, 3s. Drawings.]

A.D. 1869, June 10.-No. 1796.

COOK, WALTER.—"Improvements in apparatus for taking photographic pictures by which the operator can take a number of prepared sensitive plates and expose them successively without the aid of extra changing box or bag."

A box is divided into two compartments. In each compartment a number of plates can be placed with their prepared sides towards the lens. In front of the box (or on the side nearest the lens) there is a shutter, which, on being drawn out, opens one of the compartments to the lens, and the front plate receives the image, being pushed forward in its place by means of a spring from the back. On the shutter being closed, it carries down the front plate (which has just been exposed) with it, leaving the next plate ready for exposure. A slide is then drawn up at the back of the box; this action draws a plate from the bottom compartment to the top, and a spring holds the plate at the top while the slide is pushed down again; thus the plates are kept in rotation till all are exposed.

"In front of the box a camera is attached by hinges or other means and being easily detached allows the operator to focus the picture. The plates are kept from rubbing each other by a covering of paper, cardboard or other sub-

" stance round the edges and at the back or not as may be " thought desirable."

[Printed, 8d. Drawing.]

A.D. 1869, June 30.—No. 1965.

COURTENAY, ROBERT HENELADE.—" Processes for producing "printing surfaces."

1st. A collodion, or other like solution, is prepared with

precipitated silica. A positive picture is taken upon a glass plate covered with the silicated collodion, and is printed on to a film composed of parchment size, sugar candy, gum, and chromic acid, the film being mounted upon glass. The film is freed from sensitive salts by washing, drained, immersed in chloride of gold, and drained again. It is then coated with a solution of nitrate of silver and grape sugar and immersed in a solution containing proto-sulphate of iron and grape sugar, prior to being placed in a bath for electro-depositing copper upon it. The electrotype is removed from the bath, treated with boiling water to remove the matrix therefrom, and burnished at the edges, and at the high lights; it is then fit for printing from in an ordinary printing press.

2nd. Producing raised surfaces for printing from such as type printing from a negative ingrain. The design is printed from the negative direct upon a matrix similar in composition to that set forth in the first improvement, which is similarly treated. An electrotype from this matrix is suitable for printing from.

A positive may be printed by printer's ink from the negative ingrain on to a paper prepared with the substance beforenamed and transferred to stone for photo-lithographic printing.

In heliographic engraving a conducting surface may be produced on the photograph by precipitating silver powder from the nitrate by copper and spreading it over the matrix.

[Printed, 4d. No Drawings.]

A.D. 1869, July 5.—No. 2022.

GRÜNE, FRIEDRICH WILHELM.—(Provisional protection only.)—
"Improvements in transferring photographs to wood, metal,
"ivory, and other surfaces."

A photograph, obtained by the ordinary collodion process, is applied, face downwards, on the surface to which it is to be transferred, and, is fixed thereto by means of gum, albumen, or other adhesive substance. Alcohol is applied on the back of the photograph to remove the water or humidity; then ether is applied, whereby the collodion is removed and the metallic picture alone remains on the surface. Thus the transfer is so made as not to leave any layer or trace of foreign substance on the surface likely to prejudicially affect the



also improvements "in the same."

1st part of the inventic sitter from different positic same sensitised plate, with for holding the sensitised plate sists of a circular disc of we sized hole formed in an outer of easy application to the cappening, which is fitted with a plate therein. The front of the extent of the eccentric space repicture. If the disc be divide taken, the cover is put over the one-sixth of a revolution; anot until the whole series of six is a

2nd part.—In mounting the may be exposed on a revolving wards in succession; or openin part of an additional disc, the counderneath.

3rd part.—The leaves of the prised in this invention are so whole to be seen at once, by tuing the picture so as to hring the picture so as to hold the picture so a

1st. Producing a printing block from a photographic negative.—An ordinary negative on glass is coated with a mixture of gum resin, bichromate of potash and water, and, when dry, is exposed to the action of light so as to print a picture on the coating. The non-solarised portion of the picture is dissolved out by hot water, leaving a raised picture on the glass, from which a mould or electrotype can be taken from which other printing blocks can be produced.

2nd. A mixture, composed of bichromate of potash, gum arabic and distilled water is spread upon paper. The paper is allowed to dry, placed under a negative and printed with a copy. The surface of the picture thus taken is covered with a groundwork of litho-tint produced on a stone; it is then floated on warm water to remove the free gum and ink, and the picture can then be transferred on to a stone for printing from.

3rd. A process for producing negative copies of pictures without the use of a camera and lens.—A sheet of thin paper is coated with chloride of sodium and allowed to dry; it is then floated on a bath of nitrate of silver, dried, and exposed under an original in a frame. This negative picture is fixed by hyposulphite of soda, washed, and dried; it may be used to print positive pictures in the photographic printing frame. Or transfers can be printed to throw down on stone and print from by the above photo-lithographic process.

[Printed, 4d. No Drawings.]

A.D. 1869, October 19.—No. 3049.

WINDOW, FREDERICK RICHARD.—A "process for producing "photographs in pigments."

This invention consists in applying, for the above purposes, the chemical action of chromic salts on soluble organic bodies together with the treatment with powdered pigments of surfaces prepared with hygroscopic compounds combined with a soluble chromate ofter insolation through a cliché.

A sensitive solution is prepared which contains honey, glucose, albumen, dextrine and bichromate of ammonia. This solution is spread upon the surface to be sensitised, or poured upon it, dried, and exposed, under a negative, to light. Powdered pigment is then brushed over the surface until the

H 158.



Lor pigment prints up above sensitive solution n plate is coated with this s and developed with pow poured over the coated s transferred to gelatinised o The developed print may

having a glutinous coati moisture.

The developed print may direct printing therefrom. developed with a powder of developed print is laid upor On damping the back of the I [Printed, 4d. No Drawin

A.D. 1869, Octo

MEWBURN, JOHN CLAYTON.— -A "photographic process " faces."

The object of this invention is to those obtained by lithograp paper with printing black or Li photographic negatives.

A mixture is poured over a vel highly polished or plain

85

PHOTOGRAPHY.

When the negative has been copied on the glass, the latter is washed under strong pressure of water, so as to extract all the chromate. The glass is again dried and is ready for printing.

[Printed, 4d. No Drawings.]

A.D. 1869, December 8.—No. 3543.

EDWARDS, ERREST.—"Improvements in photo-mechanical "printing, and the reproduction of designs."

This invention relates to printing from a surface coated with bichromated gelatine which has been acted upon by light.

The film is hardened by means of alum, sensitised by a chromate, and then acted upon by light. It is washed in water, coated with a second layer of insoluble sensitised gelatine, and the operation is repeated till, after exposure under a negative, all the details appear. The plate is freed from bichromate by washing and is then ready for printing.

In printing, the plate is wetted and placed in an ordinary printing press in which the pressure is vertical. To obtain pressure in the shadows of the gelatine, a mould is made by warming a sheet of gutta percha, placing it on the plate and pulling the press, so that the mould may fall, each time, exactly in its place.

In inking, to avoid tearing up the gelatine film by the adherence of the ink to the plate, rollers or dabbers of indiarubber are used, and the lithographic ink is thinned with tallow and oil. To procure prints of more than one tint from one plate, the inks are prepared of different degrees of stiffness and of different colours, the stiffest ink being first applied, the next stiffest (which adheres only to the half tones) is then rolled in and so on. To obtain prints with margins a mask is employed.

Sheets of transparent material are coated with a substance impermeable to the actinic rays. By the removal, in places, of the non-actinic layer, a design is made upon the sheet or plate. Prints from this plate are obtained by photography or by the above-described greasy ink process.

[Printed, 4d. No Drawings.]



This invention relates from a combination of seve graph two or more sitters,

1st method.—The first fig is photographed and develor tive, with a perfectly tran being covered with an opaqu coated and sensitised and resitter through the front or us leaving a counterpart of the plate, perfect in outline but Lastly the opaque substance is plate and (by exposure to light double negative.

2nd method.—One of two si figure is rendered opaque, and i of a second plate so as to print The second plate and the unuse are combined together to affe negatives than two may be com

3rd method.—The two simila differ by their backgrounds, on opaque. The first is superpos second figure (having rendered transparency is taken of the conwhich the colouring matter is carbon (lampblack) or other pigment.

1st improvement.—The compound spread upon paper, for these purposes, usually contains gelatine (or its congeners) sugar and bichromate of potash, the use of the sugar being to give flexibility to the compound, and to increase its sensitiveness and its solubility. This part of the invention consists in using soft soap (cleate of potash) instead of sugar in the above compound.

2nd improvement.—Instead of using a pigment ground in oil, mixed with bitumen or asphalt and soap, with or without a bichromate, and acting upon the compound with oil of turpentine to dissolve out the portions not acted upon by light, this portion of the invention consists in substituting gelatine or its congeners for bitumen or asphalt, thus enabling warm water to be used to develop the picture.

3rd improvement.—Replacing the gelatine, in the above compounds, wholly or in part by curd or caseine, &c., which is insoluble in warm water but which is rendered soluble by ammonia or other alkali. The caseine is precipitated, with rennet or by an acid, from skimmed milk. The resulting curd is collected on a filter, dried by pressure and dissolved in dilute ammonia. This solution is used instead of a portion of the gelatine solution.

[Printed, 4d. No Drawings.]

A.D. 1870, February 7.-No. 346.

WOODBÜRY, WALTER BENTLEY.—(Provisional projection only.)
—A "method of producing surfaces by the aid of photo"graphy."

1st. A gelatine relief is produced photographically, from a negative, of a design in black and white. From the relief a reverse is obtained in any soft metal, by hydraulic or other pressure. The reverse may be printed from, as an engraved plate, in fatty opaque inks. An electrotype may be made from the soft metal plate, if desired.

2nd. Obtaining a granular surface on the gelatine relief, by substituting for the colour (in the carbon process) in the gelatine and bichromate, a coarse granular powder. This produces, on the relief, an ink-holding ground. In some cases, emery powder is dusted over the partially dry gelatine



-, cue two surfaces } combination is then pla the greatest portion of when passed in a press, w board, &c.

[Printed, 4d. No Dra

A.D. 1870, F

FOLEY, ARTHUR, and FOl " the production of photo

" veneers and solid wood, a

" cabinet work, furniture, " decorative purposes."

To produce the photograph is planed, on both sides, with is left rough, the other is smo with glass paper. The smooth the grain of the wood to rise dry, and the alternate damping the wood grain ceases to rise. with chloride of sodium, dried, silver. Printing is then perfor. from a photographic negative,

To lay the veneer thus printed required, and its rough surface is shape required, by means of a fine saw. The photographed veneer is then allowed to drop into the aperture in the larger veneer, and the combined sheet is ready for decorative purposes.

Solid woods are treated in a similar manner to the above. [Printed, 4d. No Drawings.]

A.D. 1870, February 9.—No. 385.

BAYLIS, CHARLES.—(Provisional protection only.)—A "means" of preventing impersonation."

The object of this invention is to identify the presenter of a ticket as the person to whom that document was issued. For this purpose, the photograph of the real owner of the document is made an integral part of the document itself.

The paper which forms the face of the ticket is made sensitive to light, so that a photographic image may be obtained directly thereon. In railway tickets a portion of the ticket is cut out, and the photograph is inserted between it and the mount; by embossing or printing a fugitive border round the portrait, any attempt to change the picture will be detected. Paper may be prepared with a silk or coloured thread or threads woven into the same, and the photograph may be printed over the threads.

This invention may also be applied to passes for exhibitions, in the preparation of letters of credit, and for documents that will identify annuitants, &c.

[Printed, 4d. No Drawings.]

A.D. 1870, March 18.-No. 802.

JANICOT, CHARLES.—"Improvements in producing photo-"graphic pictures on tissues or fabrics."

1st. The tissue is prepared and sensitised, and the photographic image is produced directly upon it, by the usual processes.

2nd. The photographic picture, on the fabric, is rendered transparent by paraffin or other suitable material.

3rd. The reverse side of the fabric, thus made transparent, is painted, by following with a brush all the lines of the photographic image which is fixed thereon.

4th. When the painting is finished, the fabric is rendered



image, appears on the obvers of the fabric.

[Printed, 4d. No Drawin

A.D. 1870, Mai

Mc CRAW, WILLIAM.—"Imp
" processes which combine

" ferring, for the production o

A positive is produced on gl
The glass is coated with photog
a structureless or transparent fl
picture in light and shade, is p
colours and the painted surface is
final support; the glass is then re
photograph supported by colours
picture may be varnished or v
hand.

Instead of the film being paint may be supported on paper for the picture in its true relative position from a negative be employed.

This invention is applicable to carbon process, enlargements by process, &c., by which a photograhaving a similar appearant

A.D. 1870, May 10.-No. 1333.

EDWARDS, Benjamin Joseph.—"Improvements in apparatus "for photographic printing."

This apparatus relates and is applicable to the production of

prints in which more than one negative is used.

A frame or frames to hold the negative or negatives from which the prints are to be made.—The negatives are held firmly in their places by a grooved sliding bar pressed against the end of the plate by a screw.

A frame or frames to which the sensitive paper for printing is firmly attached.—These frames or boards are made by means of guiding pegs to register exactly to the frames which carry the negatives.

Masks may be used to protect certain portions of the print from the action of light during the printing of other parts of the picture, these masks being cut by means of impressions from negatives. A print having been taken from the negative upon sensitive paper fixed to the frame, this frame is separated from the frame carrying the negative and the mask is adjusted on the print and fixed thereon by india-rubber solution. The frame carrying the print and mask is then brought into contact with the negative from which the next portion of the picture is to be made, and the whole is pressed together. The print is then lifted away and the mask may be removed by means of benzole.

[Printed, 4d. No Drawings.]

A.D. 1870, June 15.—No. 1718.

HOPKINS, WILLIAM JEFFREY.—(Letters Patent void for want of Final Specification.)—"Improvements in the construction "of roofs and sides of houses and other structures."

Photographic operating rooms are included among the structures above referred to.

The object of the invention is to dispense with the use of putty to fasten the glass and to allow of the rain water leaving the roof with freedom. The U or V-shaped plates or bars that form the styles and sash bars are held in position by rivets; these plates form the channel to receive the rain water from the glass and lead it to the rain water pipe. Studs, at various

PHOTOGRAPHY.

portions of the length of the sash bars, hold clips which press upon the glass to keep it in place. The edges of the plates are covered with prepared rubber, &c., for the glass to rest upon.

The glass plates are capable of being removed, in the case

of portable houses.

42

[Printed, 4d. No Drawings.]

A.D. 1870, August 4.—No. 2171.

WOODBURY, WALTER BENTLEY.—A "method of producing "surfaces by the aid of photography."

1st. The preparation of a gelatine relief produced photographically from a negative that has no half tints.—The relief is dried, and a reverse is obtained therefrom in any soft metal, by hydraulic or other pressure. The metal plate is used as an engraved plate for printing from in fatty opaque inks. An electrotype may be made from the soft metal plate, when a number of prints are required.

2nd. A method of obtaining a granular surface to give an ink-holding ground, when the photographic negative possesses gradations of light and shade.—A coarse granular substance is mixed with the bichromated gelatine; when acted upon by light transmitted through the negative, this produces a relief having the required granular surface. In some cases, emery powder is dusted over the partially dried gelatine relief; the powder adheres only to the parts representing the dark portions of the design, thus giving to the soft metal plate produced by pressure therefrom a corresponding granular effect. According to another method, two coatings of the granular gelatine mixture may be given, the first holding a finer and the second a coarser powder.

3rd. A method of producing direct from the gelatine relief, by pressure in contact with cardboard, paper, &c., designs on these materials.—A film of gelatine colour and bichromate is exposed under a photograph; its exposed side is brought into contact with a sheet of metal under water, and the two surfaces are pressed into close contact. The placing of the plate in hot water removes the greater portion of the gelatine, leaving the design in relief on the surface of the plate; it is then dried and passed through a press in contact with the

cardboard, paper, &c. A design similar to a water-mark is the result. \cdot

[Printed, 4d. No Drawings.]

A.D. 1870, August 16.—No. 2266.

WINDOW, FREDERICK RICHARD.—" Improvements in obtain"ing proofs or impressions from printing surfaces produced
by photography, and also in obtaining such printing surfaces."

1st. A mode of obtaining impressions from any surface obtained by photographic agency.— Two or more plates, instead of one, are produced from the same negative, each plate receiving a sufficient degree of exposure. The subject is thus divided into a series of flat tints. If the process be one yielding a surface giving a flat tint, each plate represents a tint and has a register mark obtained directly from the negative. These plates are printed in succession in a more or less transparent ink.

If the process be one yielding surfaces with a certain degree of half tone, a smaller number of plates is necessary.

By stopping out, an analogous process is applicable to the production of proofs in colour.

2nd. A mode of obtaining printing surfaces on stone or zinc.—By means of a negative, a positive image of the subject to be reproduced is obtained in a compound which forms a resist upon the stone and will absorb moisture from the atmosphere, such as a sensitised mixture of albumon and honey. The parts not exposed to light adhere to the stone, and the whole is pressed. Or, a negative image is laid down upon the stone, after wetting it and scraping out the superfluous air and moisture. The non-actinised parts are washed away. The stone is washed in alum, dried, inked up, and the gelatine image sponged out. The remaining fatty image is treated for lithographic printing.

Another way of forming a printing surface upon a metallic surface is by a gelatine film spread upon sugared paper. The gelatine is rendered insoluble by glacial acetic acid, printed, and washed. The film is then mounted upon a well grained copper plate and dried; it is then ready to receive the ink.

[Printed, 4d. No Drawings.]

A.D. 1870, September 13.—No. 2464.

BALDOCK, GEORGE, DENNE, THOMAS JAMES, and HENT-SCHEL, August.—" Improvements in the manufacture of "casting blocks and printing blocks used for heliographic and "other printing."

Preparing caseine or curd of milk for the above purposes.—Milk which has become sour and set by keeping is separated from grease and other extractive matters by skimming it, putting it into a bag, and submitting it to the action of water and pressure. When dried, the substance is suitable for use.

To prepare a plain block for casting and printing.—The foundation is made by dissolving the caseine in slightly ammoniacal water and adding China clay and glycerine; paper or cardboard is coated with this composition. The coating is made insoluble by means of weak acetic acid and allowed to dry.

This block may be sensitised with bichromate of potash, exposed under a negative and washed with soap and soda solution. The result is a relief picture from which a printing or casting block can be made.

To prepare a paper negative for working on a plain block.—A drawing is made on paper in a compound containing caseine and Indian ink or lampblack. The whole surface of the paper is covered with lithographic ink, and the paper is placed in slightly ammoniacal water; the drawing, with its covering of ink, washes away, leaving the undrawn parts black.

A method of making a printing block to print half tone printing, to obtain a stereotype or electrotype directly from a negative.—The block is composed of caseine, soap, and bichromate of potash. The composition is printed through a negative, which is coated with it. The non-actinised portion is removed as above, and from this electrotypes can be taken.

Photolithography.—Paper is coated with a mixture of caseine, soap, and bichromate of potash. The dried paper is printed under a negative and the print is rolled in with lithographic ink. The picture being plunged into slightly ammoniacal water, the non-actinised parts are dissolved away, leaving the picture, in ink, upon the paper; this is

transferred down upon a lithographic stone. A similar process is used in photozincography, or "zinco-photography;" in this case the zinc is coated directly with the composition and the paper is dispensed with.

A method of preparing for printing, the surfaces of wood, metal, paper, &c., which is especially applicable to the preparation of a printing block on wood.—The wood is coated with a composition containing caseine, zinc, white or white lead, and chloride of ammonium. This coating is dried, covered with nitrate of silver, exposed under a negative and fixed with hyposulphite of soda; the block is then ready for the wood engraver. The composition may be modified by substituting for the zinc white or white lead, China clay, pipe clay, flake white, &c.

[Printed, 6d. No Drawings.]

A.D. 1870, September 15.—No. 2485.

EDWARDS, ERNEST.—": Improvements in photo-mechanical "printing."

This invention relates to further improvements upon that set forth in No. 3543, A.D. 1869, to improvements upon other methods of photo-mechanical printing, and to new methods of accomplishing the same operation.

1st. "Methods of removing the printing films from the "surfaces on which they have been prepared to those on "which they are to be placed during printing at the print"ing press."—The level surface to receive the gelatine film is cleaned and rubbed with a solution of wax in ether. Adhesion of the film to the support for printing from is ensured by coating the support with Canada balsam, collodion, india-rubber, or other cement or varnish. The film may be coated with indiarubber and pressed into contact with the support by heavy pressure; it may be made flexible by the addition of glycerine or a non-drying oil.

2nd. When the printing surface is to be level, a plate of soft metal is used as the support, and heavy pressure applied, which imbeds the gelatine film into the metallic surface.

3rd. In printing proofs, great intensity of the shadows is obtained by dusting over them, after printing, powder colours such as are used in lithography. When great intensity is

required, the copper plate method of inking with a dabber's employed and the surplus ink is cleared off the plate with a roller. When prints are required with margins, metal make are used, instead of the paper ones described in No. 3543, A.D. 1869.

4th. To produce reversed or non-reversed pictures from ordinary negatives. - A very deep actinic impression is obtained on the printing film, which is inked on the reverse side to that which has been in contact with the negative. Or, a gelatine print is transferred for development to the surface of a film of insoluble gelatine, the surplus gelatine being washed away with hot water; the plate is dried, damped, and printed. Printing films may be prepared from ordinary negatives; or, the back of the negative may be placed in contact with the printing film and the printing may take place through the glass. Plates may be prepared for printing by rendering a gelatine film insoluble by the addition of a solution of perchloride of iron and tartaric acid; those parts that have been actinised become again absorbent. Transparent positives are necessary for printing by this method.

5th. When lithographic or other stone is used, it is thoroughly dried and immersed in a solution containing gum or gelatine, bichromate of potash, and alum; the stone is dried, actinised, washed, and printed from. A printing block may be made by the admixture of plaster of Paris with sensitised gelatine.

6th. To produce prints in transfer ink on transfer paper from the printing films, these prints are transferred to wood blocks, or to stone or zinc for cutting or engraving. Or, the plates on which the transfers are to be made are placed in contact with the printing film.

[Printed, 6d. No Drawings.]

A.D. 1870, November 9.—No. 2948.

WALLACE, WILLIAM VINCENT.—(Provisional protection only.)
—"Improvements in the preparation of surfaces adapted for
"painting, photographic, and other printing."

The object of this invention is to provide a substitute for paper, &c. used for the above purposes, the surface having great delicacy and evenness.

The invention consists in the preparation of metal or other surface, impervious or nearly so to the mixture herein-after stated, by the application of wax or its compounds. Sun bleached wax is mixed by heat with a white body colour, such as flake white, &c. The mixture is applied to the surface by heat or by other convenient means.

[Printed, 4d. No Drawings.]

A.D. 1870, November 19.—No. 3036.

SAWYER, JOHN ROBERT.—(Provisional protection only.)—"Im"provements in the preparation of printing surfaces in photo"mechanical printing."

A layer of bi-chromated gelatine is placed upon a metal or other hard surface, dried by hot air and exposed under a negative; the plate is then subjected to the action of water and allowed to dry and harden at about 100° Faht. After a lapse of forty-eight hours, the plate is placed on the carriage of a lithographic press and fixed to a piece of soft wood. The plate is then allowed to imbibe as much water as possible and the surface is dried; transfer ink is rolled in and a lithographic impression is taken on transfer paper. If the transfer be perfect, the picture (cut to the required size) is damped and is placed on a polished lithographic stone heated to 100° Faht. The print is covered with soft paper and the stone is passed several times through the press. The back of the print being sponged with water, the stone is turned and passed through the press in the opposite direction. The back of the print is softened with water and gently rubbed until the paper can be easily removed from the stone. The impression is then gummed and inked up like an ordinary lithographic transfer, and any writing is added to the stone. The whole is then printed as a lithograph.

In another method, paper, prepared with gelatine and lampblack, is floated on a solution of bichromate of potash; when dry, it is exposed under a negative, immersed in water, and, when limp, laid face downwards, in the proper position, on a polished lithographic stone, making it adhere firmly by means of a squeegee. The stone is immersed, face downwards, in warm water, which removes the paper and the surplus gelatine and carbon, leaving the picture on the stona;

any writing is added and the whole is rolled in with lithographic printing ink and worked off in an ordinary press. Sometimes the negative is coated with india-rubber solution and transferred to paper, which transfers the picture to the stone.

When only a few copies are required, they may be printed from the original gelatine film. To render the film sufficiently hard for this purpose, it is treated with a spirituous solution of a hard gum or lac.

[Printed, 4d. No Drawings.]

1871.

A.D. 1871, February 16.-No. 401.

BROWN, JOHN.—"Improvements in the manufacture of "collars, cuffs, and shirt fronts."

Printed surfaces, prepared by photolithography or photozincography, or other photographic process, are employed for ornamenting the above articles when they are made of paper and paper cloth.

In the first instance a photographic picture is taken of a piece of lace, for instance. A print from the picture is taken on to a surface of gelatine prepared with bi-chromate of potash. The gelatine surface is coated with lithographic ink, moistened with water and sponged over. Those portions of the surface which have been rendered insoluble are thus removed, together with their coating of lithographic ink, leaving an image, in lithographic ink, of the lace; this image is subsequently transferred by pressure to the surface of a lithographic stone, and the paper from which the articles are to be manufactured is printed therefrom, and is subsequently cut up and manufactured into collars, cuffs, and shirt fronts, in the ordinary manner.

[Printed, 4d. No Drawings.]

A.D. 1871, February 28.-No. 540.

HASELTINE, GEORGE. — (A communication from William Augustus Leggo.)—A "photo-electrotyping process and stop-

: "f ping-out plate to be used therefor, and for other similar = "purposes."

This invention relates to further improvements in "Leggo-

" typing" as set forth in No. 1541, A.D. 1865.

4

The photograph, being varnished and dried, is rubbed carefully with a piece of fine cotton wool, so as to give it a fine polish or gloss. The gelatine is applied cold, the exposure to light is made, and the gelatine coating is washed in hot and then in cold water; it is soaked in hyposulphite of soda solution, washed, soaked in protosulphate of iron solution, and again washed. The plaster cast is now taken and the depth required is obtained by further applications of sensitive jelly with exposures to light and further manipulation.

The further manipulation consists in soaking the plate for a short time in dilute nitric acid, washing and drying, prior to a second application of the bichromated gelatine; the sensitised compound is applied warm. A third application of

jelly may be made in the same manner.

Another part of the invention consists of a stopping-out plate. A collodion negative, taken from the positive photograph to be Leggo-typed, is exposed with a second sensitive collodion film and the latter, which is a soft blurred looking copy of the original, is placed over the jellied positive during exposure to prevent the light from acting too strongly upon the design itself or upon certain portions of it. Other stopping-out plates made by hand may be used.

[Printed, 4d. No Drawings.]

A.D. 1871, March 8.-No. 622.

EDWARDS, Benjamin Joseph.—" Improvements in apparatus " for taking photographic pictures."

This invention relates especially to apparatus for taking photographs upon glass plates by means of collodion sensitised by silver salts, the plates being used in a wet state.

The object of the invention is to prepare the plates and to develop the pictures upon them without the use of a dark chamber.

The dark slide used in this invention, instead of a hinged back, has a shutter sliding in grooves, similar to that in front of the slide. The sensitising dish has grooves upon its upper

edge fitted to those upon the back of the dark slide. When the dish and dark slide are temporarily attached, the collodionised plate having been previously placed in the dish with the collodion side uppermost, the solution of silver is admitted to the dish at a slit formed in one side or end thereof. There is a reservoir outside the dish at the side of the slit; the reservoir may be either closed or open, if open there is a hanging screen for the fluid to flow under into the dish and to exclude the light from the interior of the dish. When the dish is inclined diagonally, the fluid passes through the slit back into the reservoir.

When the sensitising fluid is to remain in the reservoir, so as to be carried about in it, the top of the reservoir is closed and there is a movable partition between it and the dish. The slit is deeper than that described above and there is a movable door and fixings to press the door against the slit.

The plate being sensitised by means of the silver solution, the solution is returned into the trough and the plate is removed from the dish to the interior of the dark slide. For this purpose the dish has a flexible bottom; the shutter having been withdrawn, the plate is pressed into its position by hand. Or the dark slide and dish may be inverted and the plate allowed to fall into its place. In another plan cranked wires or bars may be operated to raise the plate by means of an external knob. In a fourth method a pneumatic plate holder is used for the purpose. After the introduction into the dark slide, the shutter is closed behind the plate and the dark slide may be removed from the dish, and exposed to light in a camera.

To develop the picture, a dish similar to the sensitising dish is employed, but it has its bottom part made of yellow glass, in order to watch the process; the dish also has a plate of yellow glass working in grooves in its upper part, as well as the grooves for the dark slide.

When the picture is sufficiently developed, the developing fluid is poured away, and water is admitted to the dish, so as to wash the plate repeatedly. The plate may then be finished and fixed in the usual way.

[Printed, 1s. 6d. Drawings.]

A.D. 1871, March 18.-No. 730.

DENNE, Thomas James, and HENTSCHEL, August.—" Improvements in the preparation of surfaces for prints, printing, and other purposes."

The naturally made caseine, described in No. 2464, L.D. 1870, may be advantageously used for the purposes of the resent invention.

By means of this invention paper photographs are made ractically permanent, being thereby protected from the ction of damp and having a smooth and glass like surface.

Casein is dissolved in soap and water or in ammonia water, nd the photograph is covered therewith, either by floating, r by brushing on the solution; the paper is then dried. To ender the surface smooth, a sheet of glass is wiped over with all and the paper is softened and prepared by means of an queous solution contianing acetic acid and gall; the casein we is laid downwards on to the glass and the back of the hotograph is wiped over with a "squeezee" in order to press to paper perfectly flat upon the glass. When dry, the paper aves the glass with a polished appearance.

Colouring ingredients may be added to the casein, and exibility may be given to the casein surface by means of lycerine.

[Printed, 4d. No Drawings.]

A.D. 1871, April 20.—No. 1038.

AKE, WILLIAM ROBERT.—(A communication from Ebenezer shton Goodes.)—"Permanent photographs on glass and process for producing the same."

The photograph is taken upon glass, in the usual way by pating the plate with bromo-iodised collodion. The coating then excited in the silver bath and submitted to the action light. The picture is developed by pyrogallic acid or roto-sulphate of iron, fixed by cyanide of potassium or hyposulphate" [hypo-sulphite?] of soda, washed, and dried. To stain the picture permanently on glass, "the glass plate is placed in an air-tight kiln, or otherwise subjected to a strong heat, until every part of the photograph becomes a deep brown, care being taken that every part of the picture is equally heated. It is then gradually cooled, after which

" it may be placed in water, and a dark brown powder formed " on its surface will easily wash off, leaving a perfect copy of

"the photograph permanently produced upon the glass plate

" in tints varying from a pale yellow to a deep red or

" brown."

[Printed, 4d. No Drawings.]

A.D. 1871, May 25.—No. 1409.

GILBEE, WILLIAM ARMAND .- (A communication from William Augustus Leggo, and George E. Desbarats.)—(Provisional protection only.)-" An improvement in photography."

The leggotypes mentioned in this invention are those described in No. 1541, A.D. 1865.

This invention relates to the production of a negative or positive photograph in which the gradations of light and shade are shown in granulations. This style of photograph is employed in the manufacture of leggotypes and of transfers for stone or zinc.

To make a granulated positive, a copy is made of a negative photograph in contact with a granulated plate (of known construction), the two together forming one object. From the positive so made a surface type is produced by leggotyping, " capable of being printed from on any type printing press."

A granulated negative is made by copying the above-mentioned positive, or an ordinary positive in combination with a granulated plate, the two together forming one object. From this negative, the leggotyping process produces integlio plates " capable of being printed from in the ordinary copper plate " printing press." Negatives so made are also employed in the production of transfers.

[Printed, 4d. No Drawings.]

A.D. 1871, July 27.—No. 1968.

GRUBB, Howard.—(Provisional protection only.)—" Improve-" ments in photographic lenses."

Ordinary single landscape combinations or patent aplanatic view lenses are not suitable for architectural views on account of the curvilinear distortion of the image.

This invention consists of a combination of lenses to be applied to the primary lens (this lens being either of the two

forms mentioned above), in the vicinity of its diaphragm, which corrects the distortion while it does not alter the focus.

The combination consists of two simple lenses, which may be of similar or dissimilar glass, one placed a short distance anterior to the diaphragm of the primary and of positive power, the other of negative power and posterior to the diaphragm. The anterior lens is plano-convex with its convex surface to the front; the posterior lens is plano-concave with its concave surface to the front. Their respective powers are such that, when placed in their correct positions, their combined power is about equal to zero. Displacement of the rays is thus produced without such refraction as effects the focus of the primary lens.

The power of this combination in correcting the distortion of the primary may be varied at pleasure by alteration of distances between the various components, thus giving the photographer the power of producing at will perfect correction or a slight amount of either kind of distortion.

[Printed, 4d. No Drawings.]

A.D. 1871, August 17.-No. 2166.

HASELTINE, GEORGE.—(A communication from Horace M. Hedden and Charles A. Hill.)—"Improvements in the manu"facture of plates for sun pictures."

This invention consists chiefly in covering iron and other metal plates with a composition best suited for giving the desired tint to such pictures.

Linseed oil is boiled with "India red," until a paste-like substance is produced. When this is cold, it is applied to the plates with a quantity of spirits of turpentine or naptha. The composition is laid on to the surface of the metallic plates with a brush or other means, and afterwards the plates are baked in a suitable oven.

India red yields a chocolate or reddish brown tint. There are other forms of "oxide of iron" "known in commerce by "a variety of names" that may be used. The inventor sometimes prepares the common black ferrotype plates, and then puts a covering of the aforesaid coloured compound over the black coating and so obtains different shades and surfaces.

[Printed, 4d. No Drawings.]

54

PHOTOGRAPHY.

A.D. 1871, September 30.—No. 2590.

STEVENS, HENRY.—(Provisional protection only.)—"Improve"ments in cataloguing, calendering, or registering the con"tents of libraries and museums, and in the apparatus or
"means employed therein."

This invention is not included in the present series of abridgments on account of the improvements in cataloguing, but solely because it treats of a method of arranging surfaces for producing photographs therefrom.

For instance to collect the titles, sample pages, or illustrations of books, the books are combined behind plate glass frames, and, with fixed camera and frame, fifty or more titles, &c. are photographed at a time on one plate. The frames "consist of plate glass sliding in grooves in the upper and lower sides of a frame left open at the ends." The books when arranged on the glass are pressed down flat by means of padding, &c.

In another method revolving frames are employed; these are "composed of two or more plates (by preference four) and "two or more cameras, according to the amount of work to be performed in a given time."

[Printed, 4d. No Drawings.]

A.D. 1871, October 20.-No. 2799.

EDWARDS, ERNEST.—"Improvements in photo-mechanical printing, and in apparatus to be used in such printing, parts of which apparatus are also applicable to other purposes."

This invention relates to improvements in the methods described in No. 3543, A.D. 1869, and No. 2485, A.D. 1870; also to materials and appliances for carrying out these and other methods, and to methods of photo-mechanical printing in two or more colours.

1st. Rollers for spreading the ink upon the prepared gelatinous surface, or "forme" from which impressions are to be taken.—Oil, or oil combined with an alkali, is added to the composition of treacle and gelatine ordinarily used for making printing rollers. A substance tending to produce insolubility of gelatine, also india-rubber, may be used in the composition.

2nd. The addition of dyes or colours to the water used in damping the prepared gelatinous surfaces.

Srd. One method of obtaining coloured pictures is to make the same number of negatives as of colours. In each negative, all is stopped out except the part to be printed in the given colour. A prepared gelatinous surface is then made from each negative, and each surface is inked of a given colour. Each surface printed in succession produces the picture. Instead of a number of negatives, one negative with a series of masks may be used.

Another method consists in producing a number of prints from a photographic negative and a prepared gelatinous surface therefrom. The actinic effect of each print is the same as that of the paper on which it is printed; for instance light blue upon white paper. The number of prints corresponds to the number of colours, and that portion of each print which is to be of a given colour is worked up in black and white by hand. A negative is obtained from each print, only the parts worked up in black and white being produced. From these negatives separate prepared gelatinous surfaces are obtained, and each surface is used in succession, with a different coloured ink, to obtain the picture.

A third mode consists "in 'masking' out in the gelatine "'forme' all those parts of the picture except those to be printed in the particular coloured ink then being used."

[Printed, 6d. No Drawings.]

A.D. 1871, October 30.—No. 2909.

WENDEROTH, FREDERICK AUGUSTUS.—(Provisional protection only.)—"Improvements in photographic pictures."

Photographic pictures heretofore taken on metallic plates have been negatives, in which the shadows have been produced by the exposed surface of the metal plate.

According to this invention, the shadows are produced by the coating applied to the plate and the lights arise from the light reflected from the metallic surface.

A polished plate composed of Britannia metal plated with silver has its surface rubbed with very fine sand. The rubbing takes place from top to bottom of the picture, so as to cover the surface with a multitude of fine scratches that give brilliancy to the picture in consequence of the light reflected from the surface. Upon the plate thus prepared the picture is

printed from a glass negative in any of the known modes, such, for instance, as the collodion dry or wet process, or the collodion chloride process. Chromatised gelatine with a colouring pigment may be employed, so as to vary the colour of the developed picture. In any case the positive picture printed upon the sensitised surface is intensified in its light by the light reflected from the surface of the metal plate.

When the picture is finished, it is rendered more durable by sealing it to a piece of plate glass the same size as the metal plate, and for this purpose white beeswax or similar

material may be employed.

[Printed, 4d. No Drawings.]

A.D. 1871, November 14.—No. 3069.

STILLMAN, WILLIAM JAMES.—(Provisional protection only.)—
"Improvements in cameras for taking photographic pic"tures."

The base board of the camera is made in three portions, so jointed and binged together that they enclose the works of the camera when closed up, and, when open, they form a base for extending the gussets of the camera, in order to obtain the

proper focus on the sensitive plate.

Two gussets are in connection with a central partition in the camera; the forward gusset is connected with the frame and slide of the lens, and the hinder gusset with the back which carries the dark slide. The sliding board, carrying the lens frame, moves in grooves in the base board and is so jointed, in connection with the joints of the base board, that the whole can be closed together. The slide or sliding board is adjusted by a screw and nut arrangement. The back is also moved in grooves in the base board, and is clamped in a suitable position by screws.

The back of the camera is so constructed that the under side of it forms a longitudinal section of a cylinder and is fitted to a shoe, so that the back and the shoe may be clamped by a screw, and so that the dark slide may be fixed at any angle of inclination to the base board by this form of swing back.

[Printed, 4d. No Drawings.]

1872.

2

1 F

Ξ

Ξ

A.D. 1872, January 9.—No. 73.

EDWARDS, ERNEST. — "Improvements in apparatus for photo-mechanical printing, parts of which apparatus are also applicable to other purposes."

This invention relates to improvements in the apparatus and materials used in carrying out methods described in the following Specifications:—No. 3543, A.D. 1869; No. 2485, A.D. 1870; and No. 2799, A.D. 1871. Also to improvements in carrying out the said methods, part of which are applicable to other processes.

In order to print pictures upon enamelled paper, hard gums or resins are added to the enamel composition with which the surface of the paper is prepared. Oily or waxy substances, or substances tending to make gelatine insoluble, or a combination of two or more of these materials, may be added to the enamel composition.

Machinery for printing from formes, and for damping, inking and masking them.—The prepared gelatinous surface or forme is bent and attached round a portion of the circumference of the main cylinder, the remainder of the circumference forming the inking table. The cylinder by which the paper is pressed upon the forme carries a flexible mask. The forme is damped by a damping roller which revolves in a cistern containing the damping fluid.

To keep the formes saturated with moisture, the water for damping them contains deliquescent salts, or glycerine, treacle, or analogous non-drying substance.

A forme may be prepared by means of a solution of a hard gum in water containing borax or ammonia. Sensitised gelatine may be added to the composition.

Designs may be added to a forme by the application of a solution of alum to the parts where they are required to appear. Indistinct designs may be printed on the back, by a transparent negative, the printing being continued until the light has sufficiently penetrated the forme.

[Printed, 8d. Drawing.]

PHOTOGRAPHY.

A.D. 1872, January 17.—No. 149.

CLARK, ALEXANDER MELVILLE.—(A communication from Henry Vander Weyde.) -- "Improvements in applying colors or tints " to photographs, albumenized and other surfaces."

This invention consists in a method of combining and applying dry colours and crayons with other substances, for the production of mezzotint effects or atmospheric stipples. stippled effects or appearances, in any tint or colour, on albumenised, glutenised, and gelatinised paper surfaces suitable

for photographic prints.

58

The method consists "of rubbing with the aid of a soft pad " dry colors or tints of any kind, condition, or form, and fine " pulverized pumice stone, or its equivalent, using them "together or separate on the albumenized or other surface " until it adheres by penetrating into the grain of the same."

In this invention, the powdered pumice stone is employed in a manner analogous to the oil or water used to thin or dilute the colours in oil or water-colour painting.

"Other materials may be substituted for pumice stone such " as flour of glass, pulverized cuttle fish, and emery powder " when a brown color is required."

[Printed, 4d. No Drawings.]

A.D. 1872, March 1.-No. 641.

SMITH, George Reeves.—(A communication from Henry Vander Weyde and Oliver Sarony.) - (Provisional protection only.) -A "method for applying colour or tints to the surfaces of " photographs or other surfaces."

The purpose of this invention is twofold:—1st. To produce, by a rapid and easy process, stippled tints of any shade or colour over the backgrounds and other parts of photographs.

2nd. To fix dry colours or tints on albumenised surfaces. This method "consists of rubbing with the aid of a soft pad

" dry colours or tints in any kind, condition, or form and fine " pulverized pumice stone or its equivalent, using them "together or separate on the albumenized or other surface

" until it adheres by penetrating into the grain of the same."

[Printed, 4d. No Drawings.]

PHOTOGRAPHY.

59

A.D. 1872, March 19.—No. 826.

◆ REY, WILLIAM.—"Improvements in preparing paper for photographic purposes."

This invention has for its object to obtain improved effects when photographic printing is combined with ordinary

winting.

The border or other device is printed on the paper that is to be subjected to the photographic process, previously to the albumenisation of the paper. The paper is then albumenised that the albumenous coating covers the printed part as well as any imprinted portion. "The photograph is then produced in the usual manner, care being taken to have it arranged as regards position so as to combine and agree in the desired manner with the previously printed device. In this way when the whole is completed the entire surface, both printed and photographed, will have a uniform glaze or finish."

[Printed, 4d. No Drawings.]

A.D. 1872, March 20.—No. 840.

WINDOW, FREDERICK RICHARD.—(Provisional protection only.)
—A "method of taking silhouette or outline pictures."

This invention consists in an application of photography to the above purposes."

This invention consists in an application of photography to the above purposes.

A light coloured background is lighted strongly, either from the back like a transparency or from the front. The subject to be silhouetted is placed in front of the lighted background, in a position where little or no light can fall upon it from the front. A picture is then taken, by photography, of the lighted background and of the unlighted subject intervening. By this means is obtained a negative cliché of the subject in the form of a silhouette or outline. This is printed from on photographic paper, or it may be printed by means of photo-lithography on any suitable material.

[Printed, 4d. No Drawings.]

A.D. 1872, May 7.—No. 1395.

SLATER, ALFRED.—(Provisional protection only.)—"Improve" ments in printing from photography."

This invention relates to reproducing copies of photographs in the printing press from an ordinary lithographic stone.

1st. process.—A picture in gelatine leaf is obtained from a photographic negative. Two inking rollers, with lithographic printing inks of different densities, are passed over the leaf, then an impression is taken, from the leaf, on lithographic transfer paper. The impression is transferred from the transfer paper to a lithographic stone from which prints can be taken.

2nd process.—The picture obtained in leaf is embedded into type metal by pressure, thereby leaving a print. This print is then inked, and an impression is taken on lithographic transfer paper, from which it is transferred to a lithographic stone. Prints are obtained from the stone in the ordinary way.

3rd. process.—An undeveloped picture is obtained on a film of gelatine mixed with alum. The picture is absorbent of greasy ink, and the ground is non-absorbent of greasy ink, but absorbent of water. This film is inked with two rollers having inks of different density, and an impression is taken therefrom on lithographic transfer paper. The impression is transferred to a lithographic stone from which prints can be taken.

[Printed, 4d. No Drawings.]

A.D. 1872, May 30.-No. 1642.

FAULKNER, Robert.—" Improvements in the preparation of photographs and other prints for colouring."

The object of this invention is to obtain roughened or granulated surfaces on the above articles, by indentation. These surfaces enable the paper to take colour or shading readily.

According to one method, a sheet of emery, glass, or pumice paper, or of linen is placed in contact with the picture, and the whole is pressed between rollers or otherwise. The print is laid with its back to the roughened surface and blotting paper is placed on the face of the print. The print may

be damped, and only parts of the picture may be submitted to this process.

In another method, the powder is dusted on to the picture and subjected to pressure against paper or cardboard. The powder is then dusted off and the colour applied.

In a third method, the powder, made into a paste, is laid with a brush, over the parts of the picture to be acted upon. When dry, the pressure is applied. Colouring matter may be mixed with the paste. The paste may be made with water or any liquid that is not gummy or otherwise injurious to the photograph. The powder is removed before applying the colour.

For some effects the powder may remain on the surface; the picture is treated with gelatine.

Engraved plates on rollers may be employed to press the picture when a line effect is desired.

[Printed, 4d. No Drawings.]

A.D. 1872, June 5.—No. 1700.

FAULKNER, ROBERT.—(Provisional protection only.)—"Im"provements in the production of photographic pictures
"from negatives, and in the means employed therefor."

The object of this invention is to give the above pictures a lined, dotted, or otherwise varied ground. The ground work may be drawn on paper and a negative prepared from it. A protective film of gum, gelatine, or india rubber is given to the negative by means of a solution. When the negative is dry, transfer collodion is poured over it, this is allowed to dry and the whole is soaked in water. By soaking in water the triple film can be removed from the glass. This film is interposed between the negative of the picture and the surface on which it is to be printed by light.

To present the appearance of a line engraving, the ground-work negative is produced from wire gauze. Instead of wire gauze, natural objects may be employed. A dotted effect may be produced from a pigment held in mechanical suspension in liquid; a negative from this effect may be combined with that taken from gauze. Other effects may be produced on the groundwork by taking various objects and by photographing them more or less out of focus.

These negative films may also be used for superposing objects with more or less faintness over the objects of the principal picture. The superposed objects may be used in combination with the groundwork.

[Printed, 4d. No Drawings.]

A.D. 1872, June 29.—No. 1970.

SPAHN, EMIL PETER. — "An improvement in camera" stands."

This invention consists "in the arrangement of a table"
which supports the camera on suitable guides working in
"the frame of the stand, and connected with a suitable band
"or strap passing over a roller; said band or strap containing
"weights in its other end to counterpoise the weight of the
"table, guides, and camera placed upon the table. And
"further, in the arrangement of a slide working in suitable
"ways in the frame of the stand at right angles to the guides"
supporting the table, and operated by a suitable screw so as
"to act against the surface of said guides to hold the same
"and consequently the table and camera in any position the

[Printed, 6d. Drawing.]

" same may be moved."

A.D. 1872, July 27.—No. 2246.

SMITH, CHARLES.—(A communication from Elijah Alliger.)—A "mode of lettering and ornamenting mirrors for adver-" tising, decorative, and other similar purposes."

The lettering and ornamenting mirrors do not of them—selves entitle this invention to be described in this series o sabridgments.

In the Provisional Specification, the inventor states that he produces "on the glass itself, by photography or other suit"able and efficient means, the pictures, devices, letters, "figures and lines intended to appear or be represented," and silvers the ground or so much of it as may be desired, and then adds "the paint or such other ground as may be "necessary."

[Printed, 4d. No Drawings.]

A.D. 1872, August 24.—No. 2519.

ONGUE, John Garrett.—(A communication from Théodore ivry.)—(Provisional protection only.)—"Improvements in the manufacture of needle and perfumery boxes or cases and other useful or fancy articles."

The application of this invention does not come within the ope of the present series of abridgments, but the process, in high photography is involved, entitles it to a place here.

A photograph is taken on the platinised glass or "glace platinée" which is used in this invention; or the photograph applied thereto. In another method the photographic tage is enclosed between two glasses or is covered with coldion, varnish, or transparent silicate.

When the back of the platinised glass is screened from the pht, it serves as a mirror, but, when placed before the light, is transparent and the photograph thereon is distinctly en.

[Printed, 4d. No Drawings.]

A.D. 1872, September 10.—No. 2684.

AKE, WILLIAM ROBERT.—(A communication from Emile ienzi Weston and Timothy McDonald.)—A "machine for burnishing photographs, cards, and other like articles."

A durable polished surface is given to photographs by the oplication of heat and friction to the article under pressure. The apparatus is attached to a bed piece which can be cured to a bench or table. The photograph is laid face upard upon a convex bed of wood which carries standards aving slots at the top, through which passes a bar; the cast on burnisher is attached to the bar. The lower edge of the urnisher is turned up and concave, hardened and highly clished. Set screws in the top of the standards are used to ree the burnisher down upon its bed. A to-and-fro motion given to the burnisher by a lever attached to the bar and aving its fulcrum in the bed piece. The burnisher is heated y a lamp. One or two strokes of the burnisher impart a rilliant finish to the photograph.

When a stationary burnisher is used, it has a convex roller evolving upon a shaft in standards placed over it. The urnisher is horizontal and a pressure screw is placed under it. A lamp underneath the burnisher supplies heat thereto. The picture being inserted between the roller and burnisher, the former is revolved by a crank, and the picture receives its polish as it passes through the machine.

[Printed, 6d. Drawing.]

A.D. 1872, September 16.—No. 2743.

BECKETT, James. — A "system for 'washing,' 'toning,' 'washing,' 'fixing,' and 'washing' photographic prints, 'and apparatus therefor."

Three small troughs, with circular bottoms are used, in which to place the toning, fixing, and washing fluids. Bearings at the ends of each trough receive the axle of a small cylinder which is capable of rotating in close proximity with the bottom of the trough. On removing the prints from the printing frame, they are cut to size, and spread over the surface of the cylinder (picture surface outside), where they are secured in position by elastic bands. By rotating the cylinder in the washing trough, the nitrate of silver is removed from the prints. After the discharge of the remaining water, the toning solution is introduced into the trough and the cylinder is rotated therein until the prints are toned; the remains of the toning solution are then withdrawn from the trough. Several changes of water are then introduced to remove the toning solution from the surface of the prints, and a similar rotation in the fixing trough and subsequent washing, finishes the prints.

Flat surface plates may be used to carry the prints instead of cylinders.

The surface dipping which forms the principle of this invention is said to be superior to the total immersion and saturation of the print which is usually adopted.

The bearings on which the cylinder rotates are, in some cases, attached to a stand which is arranged to receive a loose trough.

[Printed, 4d. No Drawings.]

A.D. 1872, September 27.—No. 2848.

COURTENAY, ROBERT HENELADE.—A "method of producing "and using surface blocks for line and photographic printing "from nature."

The object of this invention is the preparation of printing urfaces by photography and hydraulic pressure.

To prepare a granular negative, collodion containing cleate f silver and farinaceous powder or powdered glass is used.

A soft metal plate is prepared with a grain, and a relief hotograph is transferred thereto. A gutta percha cast from he plate is electrotyped; the electrotype is ready for the press.

By means of a collodion without the powder, a positive ransparency is taken from the granulated negative. Or a rained plate can be used. Or a smooth plate can be used, with a grain in the composition used for the negative relief. The composition is a mixture of gelatine, sugar, tragacanth, and starch, together with carbon in fine powder. To use the gelatine composition, a paper support is placed on a level lab of glass, and the compound solution is poured on to it. It is then dried, rolled, placed under a photograph, transferred a metal plate, and the soluble parts dissolved out by warm water: When the plate is dried, the relief design is ready to be engraved by pressure, very great hydraulic pressure being used. The photograph for the overlay is printed from a negative.

To reproduce plates from printed matter, a dense negative staken from the subject; from the negative, a transparent but dense positive is taken. After the design is forced into he plate by pressure, the boldest parts of the work are treated with bi-chromate of potash and allowed to dry, then coated with gelatine and silex, and dried in the light, rendering the Di-chromate insoluble. After washing away the upper part of the gelatine, the whole is dried and pressed. The plate is washed in alkaline water to remove the photograph, electrocated with zinc, inked up, and treated with solution of nut condition to be used in the typo-lithographic press, or in the lithographic press, or, when mounted, in the type press.

[Printed, 4d. No Drawings.]

A.D. 1872, October 17.—No. 3069.

FERRANTI, C.ESAR, and TURNER, EDWARD JAMES.—"Im"provements in the artistic treatment of photographic
"portraits."

The object of this invention is to obtain a specially dull appearance in the background of the picture and to throw the portrait in relief therefrom, giving to the figure and face a miniature-like effect of finish.

The albumenised or gelatinised paper bearing the photograph is washed with a mixture of prepared ox gall and water. The background of the picture is then treated with dry colour, pastil or crayons, giving a stippled and aerial effect. Lastly the albumen obtained from crate eggs is applied to the figure and drapery.

[Printed, 4d. No Drawings.]

A.D. 1872, November 13.—No. 3379.

PALMER, JOHN EASTMAN.—"Improvements in the produc-"tion of copies of photographic pictures, and in shading and "colouring the same."

A transparent picture of the negative, on glass, is coated with a matt varnish and is placed against the light with a sheet of tracing paper covering the same; the outlines of the picture are traced on the paper with a lead pencil. The tracing paper is then placed with the pencil marks against the glass, and the pencil marks retraced with the lead pencil on the other side of the paper. Gray crayon is then rubbed on the outlines on the side first traced, and the whole placed on drawing paper, slight pressure being used over the outlines until the whole of the outlines are marked on the paper. The shading and colouring are then commenced; "crayons, oil "or water colours, powder colours, prepared chalk, or other suitable materials being employed on the said paper as se packing, and placed against the photographic transparency

If clear varnish be used instead of the matt varnish, Reigatsilver sand, or similar substance is used to assist in the distribution of the crayon or powder colours.

"thus forming by its combination a fine artistic effect."

The photograph used to back the transparency may be taken from an artistic design, on albumenised paper, leaving a white centre to receive the photographic transparency. The photographic design is blended into the edges of the transparency by means of the aforesaid crayon, or other colours. If albumenised paper be used, it is floated with the mat

varnish; if plain paper be designed to receive oil colour, it is prepared with size.

[Printed, 4d. No Drawings.]

A.D. 1872, November 25.—No. 3531.

FAULKNER, ROBERT.—(Provisional protection only.)—"Im"provements in applying and fixing dry colours on paper,
canvas, and other porous substances, and in the means
"employed for this purpose."

This invention may be employed to produce backgrounds such as are used for photographic purposes.

To carry out this invention, powdered dextrine is mixed with the powdered pigment, and the mixture is applied by rubbing, in the manner usually employed for powdered pigments. The back of the porous surface is moistened with water, which soaking through it, dissolves the dextrine, and thereby fixes the colour.

Instead of applying the pigment in the form of powder, it may be mixed with dextrine, and the mixture made up into crayons, which can be used for drawing on the surface. The surface is moistened before drawing thereon; when dry, the drawing will be fixed.

When large backgrounds for photographic purposes are to be produced, the paper is first treated with a weak solution of dextrine, which is allowed to dry, then the pigments are applied.

Other substances than dextrine, gum, or gelatine may be used, together with a suitable solvent, such as turpentine, benzole, &c.

[Printed, 4d. No Drawings.]

A.D. 1872, December 4.—No. 3654.

WOODBURY, WALTER BENTLEY.—(1'rovisional protection only.)
—"Improvements in photo-mechanical printing, and in appa"ratus and appliances therefor."

1st. A method of obtaining by photography, type printing blocks, either from a subject in line or from a photograph containing only half tones.—When the subject is in line, a photograph of it, that is positive by transmitted light, is made to yield a relief in gelatine by the ordinary method;

block may be electrotyped

2nd. Improvements in W collodion film to hold the latter is dried and ready for exposed for a few seconds to the negative. When the goal tin foil is laid on it and at paper being laid on the bathrough a rolling press. To mounted on a composition of fixing the proofs by alum, varnish.

3rd. Printing Woodburytype hole in a solid block of iron soft metal, which has a centr reliefs, inserted between the soft metal, are impressed on t taper spindle driven into the t spindle are used in the process.

[Printed, 4d. No Drawings

in No. 3543, A.D. 1869, No. 2485, A.D. 1870, and No. 73, A.D. 1872.

An ordinary negative is placed under paper prepared with bi-chromatised gelatine, and the combination is exposed to light. The picture thus printed is washed in cold water containing alum. A good deal of the bichromate which has remained unaltered is washed out; the paper is then placed on a support of zinc, &c., and the moisture is expelled by pressure. A soft roller charged with transfer ink, causes the ink to adhere only in the actinised parts of the picture. The inked up picture may be dried, again actinised, and transferred in the ordinary manner to stone or metal plates.

When a half tone negative is employed, the back as well as the front of the paper is coated with gelatine to cause it to adhere to the support.

A modification of the invention consists in using a sheet of hardened but not sensitised gelatine. Designs are then formed upon the prepared sheet, with a pen carrying an ink composed of a gelatinous solution that has been sensitised. Aniline dye may be added to this ink. When the writing is dry and has been actinised, the sheet is damped and inked up, and the design can then be transferred to stone for printing from in a printing press.

[Printed, 4d. No Drawings.]

A.D. 1873, March 4.—No. 776.

LONG, John, FORSYTH, Alexander, and GRIFFITHS, James Robert.—(Provisional protection only.)—A "method "of obtaining artistic results in finishing photographic "portraits."

1st. A vignette head, or part, or whole figure is photo-

graphically printed on paper.

2nd. A stippled surface is prepared, on a plate of glass, paper, or other transparent medium, in a coloured pigment, and is superposed on the print in the photographic printing frame. By exposing this combination to the action of light, the stippled effect is obtained on the print; the parts that are not to have this effect are shaded. The print is then toned, fixed, and washed. When the print is mounted, the stippled

parts are rubbed over with pumice powder, and the process is finished.

[Printed, 4d. No Drawings.]

A.D. 1873, March 31.—No. 1190.

BROWNE, ALEXANDER.—(A communication from Pierre Auguste Despaquis.)—(Provisional protection only.)—"Improvements in "photography."

This invention relates to touching up enlarged photographs. The image produced by the enlarging apparatus is received on a very finely ground glass plate, and is touched up by brushes, or otherwise, so that, when seen through the glass, the picture stands out well. Against the ground glass is placed a sensitised glass plate or sheet of paper, and the perfected image is photographically printed thereon.

[Printed, 4d. No Drawings.]

A.D. 1873, April 10.-No. 1333.

STEIN, SIGISMUND THEODOR.—"Improvements in the con-"struction of cameras for photographic purposes, and in the "apparatus connected therewith, together with the process "employed therein."

The purpose of this invention is to enable photographs to be taken by the wet process, without the aid of a separate and detached dark room or chamber.

The camera is provided with a recess or space to receive a hollow case, called, by the inventor, a "heliopictor;" the heliopictor is made of glass or bitumenised wood, and is used for sensitising the plate, and (after the picture is taken) for developing and fixing the image.

The focussing glass is inserted into one side of the heliopictor; this side is hermetically closed by a yellow glass frame, when the focussing glass is not there. A yellow glass wall, on the opposite side of the apparatus, extends from the top downwards, about two-thirds of the depth of the heliopictor; the space below forms an enclosed receptacle for containing chemical liquids. The stem of a glass funnel, with a tap, is inserted in the edge of the apparatus, and is capable of being automatically closed.

The glass plate for the photograph is prepared by means

of an aqueous solution containing albumen, glacial acetic acid, and iodide of potassium; it is then substituted for the focussing glass. The funnel is inserted, nitrate of silver solution is poured into the heliopictor and is caused to run over [the surface of the plate by inclining the apparatus, and is then poured away. The picture is taken by transferring the heliopictor to the camera; the apparatus is then detached from the camera and receives the developing solution, which is manipulated in a similar manner to the sensitising solution; the liquor is run out, the plate is frequently washed with water, and the image is fixed by hyposulphite of soda and well washed with water. Previous to fixing, the heliopictor is ready for employment again.

[Printed, 6d. Drawing.]

A.D. 1873, April 12.-No. 1341.

BILLUPS, JONATHAN EDWIN, and LEE, EDWIN PALMER.—
"Permanent coloured and other photographic pictures and
delineations."

These pictures are produced on glass by transference, or by producing a photographic transparency on the surface of the glass. This transparency is rendered permanent by placing the glass, with the photograph thereon, in a furnace or muffle, and firing the same until the photograph is permanently burnt into the substance of the glass.

Colours can be applied to the delineations and coloured photographs in enamel can be obtained, in which the colours are rendered permanent by incorporating them with the substance of the photographs previously burnt into the enamel tablet or glass, and therefore forming a part of the same, by means similar to the above. Vitrifiable colours, mixed with water, are applied by a brush; the glass enamels, so treated, are then placed in a furnace and fired until the colours are thoroughly fused into the material of the glass or tablet.

[Printed, 4d. No Drawings.]

A.D. 1873, April 22.—No. 1449.

BILLUPS, JONATHAN EDWIN, and LEE, EDWIN PALMER.—
"Improvements in producing permanent coloured and othe

" photographic pictures, delineations or devices on porcelain and other fictile ware."

A photographic transparency is transferred to or produced on the surface of the porcelain. The whole is placed in a furnace and fired until the photograph is permanently burns into the substance.

Permanent coloured photographs on porcelain can be produced in a similar manner. Vitrifiable colours are applied with a brush to the porcelain with the photograph thereon. The same is placed in a furnace and fired, until the colours are thoroughly fired into the material.

[Printed, 4d. No Drawings.]

A.D. 1873, May 30.—No. 1954.

WOODBURY, WALTER BENTLEY.—"Improvements in photo-"mechanical printing, and in apparatus and appliances "therefor."

1st. A method of obtaining, by photography, type-printing blocks from subjects in half tones only.— A Woodburytype sheet of bichromatised gelatine is exposed under a photographic positive with a transparency of netting interposed. The transparency may be an impression from a grained stone or from fine ruled lines. This sheet of gelatine, when washed, gives a relief having the positive photograph represented by a number of lines. An impression of this, by hydraulic pressure, in soft metal is used for printing at a type press. An electrotype from this may be employed when a number of copies are required.

Sometimes a negative of the network is copied with the negative to be reproduced yielding a lined positive, from which a relief and blocks are made as above.

2nd. Improvements in Woodburytype.—The side next the glass of a bichromated gelatine film is exposed for a few seconds to daylight before exposing it under a negative. To the edges of the relief thus produced a sheet of tin foil is attached by gum; a sheet of plate paper is laid on the back of the tin foil and the whole is passed through an ordinary rolling press, thus impressing the foil into all the details of the relief. The foil and relief are backed up, by pressure, with a composition containing shellac and asphalt, lac and sulphur, lac and Venice turpentine, lac or rosin and silica.

When the composition has hardened, the tin foil adheres to it. The gelatine relief is then removed from the mould and the mould is printed from.

3rd. A method of printing Woodburytype by machinery.—In a cylindrical hole in a solid block of iron a cylinder of soft metal fits very loosely; the cylinder has a taper hole through it lengthwise. The gelatine reliefs are inserted between the interior of the iron block and the soft metal cylinder. Into the taper hole is driven a taper spindle, which forces the soft metal against the interior of the iron cylinder, thus impressing the reliefs on the outside of the metal cylinder; the taper spindle forms a shaft for the cylinder to be used in printing. The cylinder is mounted in vertical slots in a frame which has a bed of plate glass on which the paper to be printed rests. A fixed roller may be used in place of the glass plate.

4th. A method of preparing blocks by photographic agency to be used in producing the water mark in paper.—A relief from a negative is made and a reverse is obtained from it in soft metal. From this a spongy or porous electrotype is made in the following manner:—The plate to be coated is placed face upwards in the bath in a horizontal position. At short intervals, during the whole process of depositing, fine, and afterwards, coarse granules of asphalte are sifted over the plate. On being removed from the bath, the granular material is dissolved out from the copper by a solvent, thus giving an electrotype which will drain away the water from the pulp of the paper. The electrotype may be so mounted that the air may be exhausted through it to hasten the abstraction of the water from the pulp.

[Printed, 8d. Drawing.]

A.D. 1873, June 5.—No. 2011.

WILLIS, WILLIAM, junior.—"Improvements in photo-chemi" cal printing."

The surface of paper or other material that is to receive the image is coated with a salt of platinum, iridium, or gold, then with a salt of another metal and with a solution containing ferric oxalate or tartrate. The surface thus obtained is exposed to light under a photographic negative and is treated with an oxalate, and washed in a dilute acid and in water.



The following are examples of the operations:-

1st method.—The paper is coated with chloro-platinite of potassium, with nitrate of lead and with ferric oxalate. After exposure, potassic oxalate and weak oxalic acid are used, and the picture is finished by immersion in hyposulphite of soda solution and washing in water.

2nd method.—Nitrate of silver is substituted for nitrate of lead, and the print is finished by immersion in a strong solution of chloride of sodium, or in a weak solution of the same, followed by weak ammonia, and washing in water.

3rd method. — Platinic bromide and ferric tartrate are used to coat the paper; after exposure, potassic oxalate is employed, and the picture is finished by immersion in weak oxalic acid and washing in water.

[Printed, 4d. No Drawings.]

A.D. 1873, June 12.-No. 2079.

FRÈRET, Léon.—(A communication from Paul Marny Godard.)—A "method of producing and reproducing drawings, devices, and designs on porcelain, delph-ware, and such "like materials."

A negative is produced from the design and a print is taken from the negative on to specially prepared paper. The bath for preparing the paper contains glycerine and mineral colour, gelatine, and bichromate of potash. The bath is used at a temperature of 90° to 100° Faht. One surface of a sheet of paper is wetted in this bath and then allowed to dry in a dark room. After the print is taken, by exposure to light, the paper is soaked in cold water, applied on porcelain, &c. and made to adhere thereto by pressure. The whole is placed in warm water and the paper soon detaches itself leaving the gelatine on the object. All the parts of the gelatine that have been exposed to light, and therefore form the picture, will be fixed to the porcelain. The picture is then covered with enamel or vitreous glaze and baked in an oven.

[Printed, 4d. No Drawings.]

A.D. 1873, June 16.—No. 2122.

HODGSON, EDWARD. — (Provisional protection only.) — "A " revolving camera for taking portraits and other pictures."

A hollow drum, or a skeleton frame of the shape of a polygonal prison, has top and bottom discs in which grooves are cut for the insertion therein of any convenient number of prepared glass plates on which pictures are to be photographed. The focussing ground glass plate forms one side of the frame, the other side are occupied with the prepared glass plates, each of which may be brought, in succession, by the turning of the drum, into the exact position previously occupied by the focussing glass. The drum is pivoted in a box, so that it can be freely revolved by a handle outside the box. The box is provided in front with a sliding lens, directly opposite to which is a small strip of yellow glass to focus through.

By means of a circular dial plate on the top of the box, centred on the upper pivot of the drum, and numbered at the proper distances corresponding to the number of plates or sides of the drum, the plates are brought in succession before the lens and thus receive an impression or picture.

When there are to be different views on each plate, the focussing glass is brought behind the lens after each operation, until all the views are taken.

When only one or two plates are required, the drum may be only a quadrant, and the views, as they are taken are turned into an empty space.

For a stereoscopic camera, the drum is made to revolve on a horizontal axis.

[Printed, 4d. No Drawings.]

A.D. 1873, July 4.—No. 2316.

BRADLEY, HENRY.—A "mode of preparing and printing designs or objects on metal or other surfaces by the agency of photography, such designs or objects so produced to be

" made permanent by the subsequent operation of the engra-" ver, for the purpose of copper-plate or letter-press print-

" ing."

This invention is a ready means for transmitting to a copper plate, the design to be engraved on the same.

The plate is electro-coated with silver, with a very thin deposit, which is afterwards oxidised by submerging the plate in an acid. On the front of this plate prepared wax is applied, then a film of collodion, which is afterwards sensitised with a

reversed negative is take, with a sensitive film, preparagrams, and collodio-chlori from the negative, and to engraver.

By a modified process, the surfaces, for engraving, of a 1 [Printed, 4d. No Drawin

A.D. 1873, Ju

VAN TENAC, CHARLES LOU:

—An "optical instrument in
"jection with their natural c
"small size."

Only so far as this instrument "to produce enlarged negative is it entitled to be noticed here.

The light is placed at the for system of reflectors which form The tube containing the optica of the instrument; its axis is possible to be photographed, it n at an angle of 45°.

The white board or cloth on t in the case of the microscotthe service.

upon a glass plate, except that it is developed with bichloride of mercury, when this is washed off the image is treated with iodide of potassium, and lastly the photograph is subjected to the action of hydrosulphuret of ammonia, so as to make all the white parts in the original drawing or photograph as opaque as possible. A second glass plate is coated with a film of gelatine of some thickness, which is dried and covered with a mixture containing a bichromate and hydrate of lime. When the film is dry and hard, the first plate carrying the negative is placed in the pressure frame, and the film side of each glass plate is placed in contact. The whole is pressed tightly together and exposed to light. The white portions of the second plate are soluble and the printed portions insoluble; the soluble parts can be washed away with hot chloride of sodium solution. Acetic acid is used to harden the relief design, and a plaster cast is taken from it; a second plaster cast can be taken from the first.

Instead of using a hot solution of chloride of sodium to wash away the soluble parts of the second plate, a cold solution of iodine or of iodide of potassium may be employed, followed by a very weak ammoniacal solution.

The white portions of the plaster relief may be deepened, by rolling over the raised portions a mixture of printing ink and copal; when dry, the plaster mould is dipped into a weak bath of soap and well brushed and the plaster is hardened with a weak solution of alum and pyrogallic acid. Another way is to cut away, with a gouge, all the whites that are not sufficiently deep. For stereotyping purposes, the plaster is hardened by means of a hot bath containing size, treacle and peroxide of chromium; the plaster is then exposed to light, while wet a frame is laid upon it, and the plaster of Paris is poured in and put under pressure just before it sets. When an electrotype is required, the plaster cast from the gelatine film is soaked in cold water and its face is heated over a gas flame. A frame is put over the face and a preparation of hot wax, resin, and lard is poured on it. The wax impression may be blackleaded or coated with mercury; the latter operation is accomplished by washing the mould with spirits of wine, and, when nearly dry, allowing the fumes of mercury to settle on the face.

To produce a copper engraved plate, the inventor takes a

negative with lights and shades reversed; he adopts the same portion of the process of the first and second glasses which relates to the printed representation on the second glass, and raises the surface with acetic acid only. A plaster mould is taken; the electro-cast from this is the engraved plate required which is printed from by the copper-plate press. The mode may be modified by not taking a negative but by placing the print in contact with the second glass; it acts as the negative, and after it is reproduced on the second glass the process is as above. A plate is produced which can be printed from in the ordinary manner.

[Printed, 6d. No Drawings.]

A.D. 1873, July 31.—No. 2592.

BECKETT, James.—(Provisional protection only.)—A " system " of albumenizing paper."

The object of this invention is to give greater stability to the paper used in photography, thereby rendering it less permeable to the chemicals used in washing, toning, and fixing.

Instead of coating one side of the paper only, it is immersed in the albumen solution, thereby coating the paper on both sides at once. The paper may be coated on both sides by floating, but immersion is a quicker plan.

[Printed, 4d. No Drawings.]

A.D. 1873, September 4.—No. 2911.

HASELTINE, GEORGE.—(A communication from George P. Critcherson.)—(Provisional protection only.)—A "machine for burnishing photographic pictures."

The burnishing is effected by means of a heated steel burnishing bar, and a pressure roller, the photograph being placed between the burnishing bar and the roller, and moved by the latter to and fro over the bar.

A metallic plate is mounted upon a cast-iron frame. The burnishing bar is placed over the plate. The bar and the photograph being burnished are protected by the plate from the smoke or vapour arising from the lamp or heater. The pressure roller is placed above the burnishing bar and is rotated by a handle attached to its axis; its surface is roughened so that it does not slip over the back of the photo-

graph but moves it. Set screws, springs, and adjustable bearings allow the pressure of the roller to be regulated.

[Printed, 4d. No Drawings.]

A.D. 1873, September 22.—No. 3106.

BARRAUD, Henry.—(Provisional protection only.)—"Im" provements in the treatment of photographic surfaces and
" pictures."

The photographic picture is printed from a negative, and a lined, dotted, stippled, or varied ground is applied thereto. By this means some of the effects of a line or stippled en-

graving may be imparted to the picture.

Upon the sensitised or other surface on which the picture is to be produced is obtained an impression on from one or more plates, stones, or other suitable printing surfaces upon which lined, dotted, stippled, or otherwise varied designs have been produced. The character of the ground and the colour of the pigment in which it is printed may be varied to suit the subject of the picture or of the different parts of the picture to be produced.

"Instead of applying the said ground to the surface before "the photograph is printed, it may be applied after the picture is fixed, either by printing as before from a plate,

" stone, or other surface or by transferring (from a sheet of paper or other material upon which the said ground has

"been printed) an impression thereof to such parts of the picture as may require it."

[Printed, 4d. No Drawings.]

A.D. 1873, October 10.—No. 3288.

SELL, EUGEN ERNST JOHANNES.—" Means of and apparatus " for taking photographs at night."

This invention consists in producing a new photographic light by burning bisulphide of carbon with peroxide of nitrogen.

An ordinary petroleum lamp, with a circular wick, contains bisulphide of carbon instead of oil. Water surrounds the chamber that contains the bisulphide, so as to keep it cool. The peroxide is led to the centre of the wick of the lamp, and is uniformly mixed with the bisulphide by impinging against a cone placed with its apex downwards within the circular wick.

The pressure of the peroxide is regulated by a stop cock and means are provided to carry away the products of combustion. A reflector is used, when necessary, to direct and condense the light.

[Printed, 4d. No Drawings.]

A.D. 1873, November 20.—No. 3782.

KENNETT, RICHARD.—A "substance to be used instead of "collodion and other emulsions for photographic purposes."

This substance is produced, for use, in a dry or solid condition and will keep good for any length of time.

The compound essentially consists of an aqueous solution of gelatine together with a bromide chloride or iodide, and nitrate of silver. The compound is cleared of certain salts, which are formed during the mixing, and then dried. These processes must be conducted in non-actinic light.

The bromides chlorides or iodides that may be used are those of potassium, cadmium or ammonium. When the compound is mixed, and thoroughly incorporated, it contains a free bromide, and nitrate of potash; these are removed or eliminated by pouring the compound into a dish, letting it cool and cutting it into small strips which are washed with many changes of water until all the free salts are dissolved out. The subsequent drying process is accomplished by heating the compound in flat dishes, until it is reduced to a thick paste. When cold, it is stripped from the dishes and placed in suitable frames in a drying closet in which a circulation of dry air is maintained.

[Printed, 4d. No Drawings.]

A.D. 1873, December 1.—No. 3938.

JOHNSON, JOHN HENRY.— (A communication from Honoré Muhé.)— (Provisional protection only.)— "Improvements in polishing and glazing photographic proofs and in the sp-" paratus employed therein."

Photographs are submitted to the action of a peculiar press and burnisher; the latter may be heated by a lamp during the polishing process. The press consists of a roller, the surface of which is roughened to ensure the drawing in of the mounted photograph when presented thereto. Beneath this roller is fitted an adjustable table, mounted on hinges at one end, whilst the other end is supported on powerful helical springs mounted on adjusting screws. The table is recessed, immediately beneath the pressing roller, to receive the burnisher.

A slightly projecting collar, on each end of the cylinder, rotates in contact with the surface of the burnisher at each end and thereby prevents the photograph from being unduly pressed upon by the roller, which is rotated by a winch handle on its axis. The surface of the table at the front part, is ribbed to facilitate the removal of the photograph therefrom on its leaving the burnisher.

[Printed, 4d. No Drawings.]

1874.

A.D. 1874, February 27.—No. 731.

BROWN, Joseph.—(Provisional protection only.)—"Improve"ments in the ornamentation of vitreous, ceramic, glazed,
"and metallic surfaces."

This invention consists in reproducing photographs upon these surfaces, by the employment, in conjunction with an oleaginous or fatty substance, of fusible fluxes together with metallic oxides.

A photographic image having been obtained on a film of bichromated gelatine, and the soluble portions having been washed away, the surface is ready to be submitted to the ordinary printing process. For the production of impressions upon paper, the inventor employs a printing or transfer material or medium consisting of the above-named substances, fluxes, and materials, which, when submitted to the action of an elevated temperature, are capable of forming a glaze or fused surface, whereby the image may be burnt in and rendered permanent upon the surface which it is desired to ornament.

The paper suitable for the purposes above-mentioned is make by coating the surface of paper with a solution containings gelatinous and an amylaceous substance.

[Printed, 4d. No Drawings.]

A.D. 1874, March 31.-No. 1124.

WIRTH, FRANK.—(A communication from Adolph Steinheil, and Edward Steinheil.)—"Improvements in photographical portrait "apparatuses and other optical instruments."

These improvements relate especially to photographic lenses or combinations of lenses used for the purpose of taking portraits.

Two compound lenses form the entire combination. Each compound lens consists of two parts cemented together, and is at an adjustable distance from the other compound lens. Of the individual or component lenses, the two exterior lenses are flint and the two interior lenses of crown glass. The interior surfaces of each compound lens, namely those that face each other in the combination, are of equal curvature. The external curves of the crown glass lenses, and therefore the internal curves of the flint lenses, are unequal, the surface next the camera having the shorter radius. The external curves of the flint lenses are unequal, the surface next the camera having the longer radius.

[Printed, 8d. Drawings.]

A.D. 1874, April 28.—No. 1481.

LAKE, WILLIAM ROBERT. — (A communication from Joseph Parker Bass.)—A "machine for burnishing photographs, cards, "and other like articles."

The general principle upon which these burnishing machines operate is described in No. 2684, A.D. 1872; the present invention relates particularly to certain modifications of these machines.

This invention consists "in giving to the feeding roll a "slight endwise vibration over the burnishing tool. The surface of this feeding roll being slightly rough this motion "is communicated to the card or picture, giving to it a "rubbing or to-and-fro motion over the burnishing tool in

" addition to its movement across it." The roller has came or cam surfaces cut at each end, against which bear pins attached to the standards of the machine, so that, as the roller revolves, the pins force it into a vibratory motion in addition to its rotary motion. The same result may be accomplished by a grooved cam cut either in the periphery of the roll or of its arbor, a pin (attached to the stationary part of the machine) working in the groove.

[Printed, 6d. Drawing.]

A.D. 1874, May 8.—No. 1634.

CLARK, ALEXANDER MELVILLE.—(A communication from Claude Léon Lambert.) — A "method of retouching photographic "negatives and positives."

This invention relates to a method of retouching photographic negatives, whether they are taken from nature or are enlarged reproductions, whereby all retouching of the positive proof on paper is rendered unnecessary.

The invention consists in the application of a semi-translucid sheet on each side of a negative or positive, and in a method of quickly and readily retouching by operating on these surfaces.

The large negative, when fixed and finished, is covered, on both sides, with a sheet of thin paraffin paper of the grain known as "papier pelure végétal." The retouching is effected upon these two surfaces, by applying, wherever necessary, an impalpable galvano-plastic powder or other suitable finely-divided substance; a stump is used to apply the powder. The sharpness of the lines may be ensured by means of a black lead pencil. A positive image is then obtained from the negative by means of the printing frame.

If the lines of the primary cliché be too strong, a sheet of very thin glass may be interposed between the negative and the paper during the last part of the time of printing.

The complete or partial transformation of the background, &c. may be effected by placing, on the positive, a sheet of extra thin glass at \$\frac{1}{2}\$th of an inch from it. Another glass is then placed on the mask of yellow paper, at about \$\frac{1}{12}\$th of an inch therefrom.

This process may be applied to transparent positives of all

dimensions, which will then serve for the reproduction of negatives without further retouching.

[Printed, 4d. No Drawings.]

A.D. 1874, May 21.-No. 1807.

PLACET, PAUL EMILE.—" Improvements in engraving."

The processes which are the subject of this invention give engravings with the grain which is necessary for lithographic or typographic printing.

An animal or vegetable substance is dipped into a liquid which has the property of dissolving it, then into a second liquid having a tanning or contracting property, thus covering the surface of the substance with the required grain.

The following are examples of the modes of operating:—

1st. Bichromated gelatine paper is exposed to light under a negative and dipped into a saturated solution of bichromate of potash. The excess of liquid is removed by blotting paper, and the gelatine paper is plunged into an aqueous solution containing sulphate of iron and acetic acid; instantly the design is developed and grained. The dried engraving may be pressed, so as to give, at once, a plate for impression.

2nd. After exposing the gelatine paper under a negative, it is placed on another surface, so as to be able to develop the image on the reverse side. The reversed proof is then developed in a solution of bichromate of pctash, and is plunged into the sulphate of iron solution.

3rd. A carbonised gelatine proof may be developed by means of solutions of ammonia, potash and hypochlorite of kime; it s then plunged into the solutions of bichromate and of sulphate of iron, when the grain appears.

4th. The gelatine may be run over plates of glass or metal

and then sensitised, or it may be dried and sensitised.

5th. The tanning material may be applied in the solid state. Solvents may also be used in the form of powders on the gelatine slightly wetted.

Other examples are given, which are modifications of the above.

To be usefully applied, the design should be reproduced by electrotypy.

[Printed, 4d. No Drawings.]

PHOTOGRAPHY.

A.D. 1874, June 4.-No. 1935.

DILLON, THOMAS ARTHUR.—A "method of and apparatus for indexing, copying, multiplying and securing public and other records and documents."

The object of this invention is to obtain an efficient record system, by means of an adaptation of scientific processes comprised in photography, type printing and stereotype, combined with a method of printing on thin metallic plates.

Only the adaptation of photographic processes and dependent processes can be noticed here.

For a type printer to read from, a photograph of a given document is taken on prepared paper by flattening it down with a clear sheet of glass. A microscopic copy may be taken for subsequent enlargement whenever a fac-simile of the original document is required. The original document in the Becord Office, say, for instance, the Registry of Deeds Office, Ireland, need never be removed from the custody of the Begistrar.

When a metallic fac-simile of the document is required, any photo-mechanical process may be used to impress the photographic copy into the metallic plates.

To impress the metallic plates, a stereotype is taken from the set up type, in the ordinary way. The metallic sheets, or brass plates are impressed in ink and indented by the stereotype by means of a fly press.

Copies are taken from the reversed or embossed side of the plates on white writing paper. The paper is moistened with nitrate of silver, laid on the plate and covered with blotting paper and then with a sheet of india rubber. A moderate pressure blackens the nitrate of silver whenever it comes into contact with the paper.

Type ink may be used to print from the reversed sheets; or manifold paper, or electro-printing on chemically prepared paper may be employed.

[Printed, 6d. No Drawings.]

A.D. 1874, July 16.—No. 2490.

DEBENHAM, WILLIAM ELLIOTT.—" Improvements in fixing "colours on photographs and drawings, and in the method

" of preparing the paper or other material to recess " colour."

To fix the colour on a coloured photograph, it is immersed in a solution of gluten in alcohol, or in an alcoholic solution of gelatine or kindred substance prepared by dissolving the gelatine in water and adding as much alcohol as the solution will bear without precipitating the gelatine. The gelatine coating may be rendered insoluble by treatment with tannin or chrome alum; the chrome alum is afterwards exposed to light. Instead of the above immersion process, the solution may be allowed to flow over the photograph.

To prepare a photograph in order that colour may adhere thereto, either of the above solutions may be applied, or a solution of glycerine or sugar, or a mixture of these. If the work can be coloured before being mounted, as in the case of a photograph to be enamelled, the preparation liquid is applied to the back of the paper. The alcohol makes it penetrate to the front, and the colour is taken in a very even and fine manner. The fixing solution may be used to attach the photograph to the collodionised glass in enamelling.

[Printed, 4d. No Drawings.]

A.D. 1874, July 27.—No. 2617.

LESTER, Thomas.—"Improvements in photographic ap"paratus."

This invention is intended to facilitate the production of photographic negatives in open daylight.

The invention consists in the application to the camera of a box containing three parallel baths, into which the collodionised plate may be successively plunged without exposure to daylight, then transferred to a plate box and finished at leisure. The first bath contains nitrate of silver, the second, acidified protosulphate of iron, and the third a mixture of honey, iodide of potassium, and water for washing the developed picture.

Screws, passing through the sliding top of the bath box and pressing on the bath covers, make the baths watertight.

The collodionised plate is plunged into the baths by means of a dipper, which holds the plate at one edge, and is passed through a slot formed in the upper part of the body of the

camera. The slot is covered by a slide with an aperture for the admission of the dipper.

In the dipper, the glass plate can be held firmly by one edge, by means of a clamp screw pressing against a stay at the lower end of the dipper. A stop on the lower end of the dipper cuts off light.

"The bath box is fitted to the camera by means of a slide, which is screwed on to its lower edges and works in a groove in the top of the bath box."

[Printed, 8d. Drawing.]

A.D. 1874, July 31.—No. 2667.

BROOKES, ALFRED GEORGE.—(A communication from Louis Alexandre Farjon.)—"Improvements in copying presses, a "part of which improvements is also applicable to stamping "and punching machines."

Descriptions and drawings are given of stamping or embossing presses for giving a convex or concave shape to photographic cards.

A pressure bar is united to the base plate of the press by means of screw bolts or pins, which also form guides for the travelling plate. The pressure is applied to the travelling plate by means of a cam lever, which bears against the pressure box and the travelling plate, a sliding piston being placed between the lever and the travelling plate. Helical springs encircling the bolts may be used to raise the travelling plate after the pressure has been applied, or the springs may surround short tubes on the bolts.

A portion of the lower surface of the travelling plate is convex and of an oval form to fit a corresponding oval hole in the base plate. The convex portion of the plate may be rectangular or the press may be made to emboss two or more cards at once, or to emboss two or more parts of the same card at the same time.

[Printed, 10d. Drawing.]

A.D. 1874, October 15.—No. 3541.

CLEARY, WILLIAM.—(Provisional protection only.)—A "press " for glazing or polishing photographs, cards, or other similar " articles."

This invention relates to that kind of press wherein the photograph is passed between a revolving roller and a find burnishing bar.

The invention consists principally in giving to the burnishing bar a to-and-fro motion, in the direction of the axis of the roller, whilst the latter revolves. The roller is draw filed in the direction of its length, so that it may take a firm hold of the back of the photograph. The burnishing bar, underneath the roller, is fitted into slides. On the axis of the roller is a winch handle, and a cam or other equivalent device, to impart the to-and-fro motion to the bar.

The steps in which the axis of the roller revolves are provided with pressure screws, and the machine is kept heated, whilst in operation, by means of a lamp.

[Printed, 4d. No Drawings.]

A.D. 1874, October 21.—No. 3633.

CLARK, ALEXANDER MELVILLE.—(A communication from Claude Léon Lambert.)—"Improvements in producing carbon photographs."

Permanent carbon photographs are produced with salts of chromium, in their true aspect and gelatinised at the same operation.

A glass plate first receives a greasy coating, then a layer of normal collodion, and is immersed in cold water. The pigmented papers are then removed from their printing frames and one is applied on the coated glass plate whilst it is in the bath. Both are removed and subjected to slight pressure. The positive print is developed in warm water, and may either serve as a transparency or as a picture to be seen by reflected light; this point is an important feature in the invention.

The positive print, thus developed, is immersed in gelatine solution and the card mount is applied thereto in the bath. When the picture is dry, it is detached from the glass and is brilliant and glossy.

Portraits face to face, protected by mica, may be obtained by an analogous process to that described above.

The gradual strengthening which is applied to salts of chromium for obtaining cliches consists of an aqueous solution containing ammonia, sugar and permanganate of potash. This

olution may be used to strengthen transparent positives as well as negatives.

Borders to prints in salts of chromium on albumenised paper may be obtained, in a tint different from that of the picture by employing a yellow mask and a negative with an ornamental border; the image is developed by hypo-sulphite and fixed.

At the back of the gelatine picture, tinted powder may be applied by a stump to impart opacity.

[Printed, 4d. No Drawings.]

A.D. 1874, October 29.—No. 3740.

SAWYER, JOHN ROBERT.—"Improvements in the production of photographic prints."

This invention relates to the preparation of a temporary support to serve during the development of the image obtained on a sensitised pellicle of gelatine and carbon.

The invention consists in the preparation of a temporary support or surface which becomes adhesive while moist, and in that state, holds the picture. This surface becomes contractile when dry, and allows the developed print to leave it when mounted upon the final support.

When made of paper, the temporary support is coated with a solution of gelatine containing chrome alum; when dry, it is pressed powerfully by rollers or by hydraulic pressure. The sheets of gelatinised paper are next coated with a solution of lac and borax containing sub-carbonate of soda, dried, and milled by being passed through a rolling press. The surface is then made repellent to water by rubbing over with a solution of resin in turpentine together with white wax.

The employment of the temporary support is as follows:—
The prepared surface of the support is brought into contact with the surface of the print. Both are lifted out together and dried; they are then immersed in warm water and the paper at the back of the picture is skinned off. The print is then developed, rinsed in cold water, placed in a solution of alum, then in cold water, and is transferred to its final support under water, the surface of the final support being prepared with an adhesive preparation. When the surfaces are dry,

the temporary support may be stripped from the finished picture.

Printed, 4d. No Drawings.]

A.D. 1874, November 17.—No. 3947.

DESPAQUIS, PIERRE Auguste.—"Improvements in the preparation of gelatine and albumen photographic plates for
printing from with lithographic inks."

The basis of this invention is:—"That a layer of bichromated gelatine intended to furnish a plate for impressions
with lithographic inks however thin it is may be divided
into three parts or thicknesses."

In the Poitevin process (Albertype) for instance, the total sensitive film consists of sensitised albumen next the glass, covered with sensitised gelatine. The albuminous layer is rendered insoluble, but between it and the exterior of the gelatine layer is a soluble or hygrometric layer which sometimes loses its adherence to the layer of albumen and is dragged off by the inking roller.

According to the present invention, the intermediate and soluble layer is absent, for the two solarizations, one on the back and the other on the face of the compound film, penetrate into the parts of the film which ought to furnish the blacks and deep half tones. In the case of an insoluble support, the solarization of the blacks and deep half tones penetrates up to the support, so as to render them adherent to it.

A cylinder press for taking off proofs consists of two horizontal rollers, at a regulatable distance apart, with an endless cloth stretched so as to encircle them. The cloth carries the proofs, which are damped and inked by upper longitudinal rollers, and pressed against the descending sheet of paper by an endless cloth that passes round a third adjustable roller. In the damping, the water is distributed by a spongy roller and a hard roller. An endless sheet of zinc may be substituted for the cloth that passes round the third roller. The paper may be continuous.

[Printed, 8d. Drawing.]

A.D. 1874, November 21.-No. 4011.

STAHLSCHMIDT, JOHN CHARLES LETT.—(A communication from Adolphe Henry Braun.)—(Provisional protection only.)—
"Improvements in colouring and mounting photographic pictures."

By this method, a photographic picture is made in imitation of an oil painting.

Instead of employing the ordinary transfer paper as the support to a carbon photographic print, a very thin semitransparent paper is made use of; this paper is known as "papier vegetal." The carbon print having been transferred to the paper, the back of the print is coloured with either oil or water colours, or by means of chromo-lithography. By means of glue, or other suitable cement, the coloured picture is then mounted upon canvas or other material upon which oil paintings are painted, after which the front may be retouched and varnished with the usual varnish.

[Printed, 4d. No Drawings.]

1875.

A.D. 1875, February 20.—No. 635.

TILLEY, WILLIAM.—"Improvements in photographic pro"cesses and in apparatus to be used in connection with the
"said improvements."

This invention relates to the production of combination photographs without the rigid line separating the portrait from the background; also to producing photographic enlargements from combined negatives; and to apparatus for working these processes.

The combination photographs are produced by photographing, at one operation, the sitter, suitably illuminated, and in front of a dark background, and upon a dark floor; and, by a second operation, photographing, upon the same sensitive surface, the background and foreground by means of a transparent photograph immediately in front of the sensitive surface, the sitter (still retaining his position) being

thrown into darkness, by curtains, and a white background being employed together with a white fabric on the floor.

The apparatus for producing the combination photograph is constructed as follows:—A light hinged frame (carrying the photographic background) is placed between the sensitive surface and the sliding shutters of the dark slide. The frame is turned aside by a handle, during the photographing of the sitter. When the sitter is in darkness, the frame is turned, so that the background is brought almost into contact with the sensitive surface. When the light is admitted, the photographic background becomes impressed on all parts of the plate not covered by the image of the sitter.

For enlargements, as well as for the above combination photographs, a separate mask and negative may be em-

ployed.

The sitter is thrown into darkness by means of a black curtain in connection with rods, cords and pulleys.

[Printed, 1s. 2d. Drawings.]

A.D. 1875, March 13.-No. 937.

MORGAN-BROWN, WILLIAM.—(A communication from Jules Heavy Hermagis.)—(Provisional protection only.)—"Improve- ments in photographic apparatus."

The object of this invention is to produce a portable apparatus, equally available for photographic operations within doors and in the open air, as well as for making enlargements.

1st improvement.—Forming the two sides of the camera, the top and the bottom, of four pieces of wood jointed together by hinges which exclude the light and extend the entire length of the pieces; the joined edges of each piece are bevilled at an angle of 45°. This camera can be folded flat; on being unfolded it assumes the shape of a rigid square which is maintained by the insertion of the lens board and of the dark slide.

2nd improvement.—In the tripod, the head is fixed on the top of the legs and consists in a metallic disc, the diameter of which does not exceed the diameter of the upper part of the three legs; the disc is joined to the legs by pins and wings and is attached to the camera by means of a screw inserted from the inside. The screw and disc have a small

central hole through which to pass a wire from which a weight is suspended.

3rd improvement.—The outside of the lens tube is shaped as a swift screw and the inner surface of the washer is provided with a similar thread; the rotation of the lens effects the focussing. For enlarging, the negative is fixed in the ground glass slide and exposed to light; the screen to receive the enlargement is placed at the required distance from the lens, which is adjusted as described above.

[Printed, 4d. No Drawings.]

A.D. 1875, March 16.—No. 966.

MORGAN-BROWN, WILLIAM. — (A communication from Horace M. Hedden and Charles A. Hill.)—"Improvements in "the production of white photographic plates or white sur- faces to be used in photographic printing."

The invention consists essentially of two parts, the preparing of the plate with a coat of enamel, and the sizing of the plate so prepared.

The white surface is produced preferably upon ferro-type plates, but other metallic plates, cardboard, leather, wood, &c. may be used for this purpose. A compound or enamel is made containing alcohol, ether, gun cotton and white oxide of zinc; it is poured upon the plate precisely as ordinary collodion is applied by photographers. One minute after the coating has ceased to flow, the plate is placed in soft water for ten minutes, and then in running water for ten minutes.

While still wet, the plate is immersed in a sizing solution for ten minutes; it is then removed and dried ready for use. The aqueous solution for sizing contains gelatine, arrowroot and sugar candy.

[Printed, 4d. No Drawings.]

A.D. 1875, April 7.—No. 1266.

VAN DER WEYDE, HENRY—"Improvements in the con-"struction of photographic studio windows or glass houses."

The object of this invention is to ensure the more efficient lighting of the sitter and the partial or total exclusion from the studio of useless or mischievous light.

This invention consists in such a construction of window

that the rays of light passing to the sitter traverse the glass as nearly as possible at right angles to the plane thereof; the construction of the window is such that it does not encrosed upon the space within the room. The window is of a zig-zag form in horizontal section, two series of vertical panes of glass being disposed alternately, the two series facing points at opposite ends of the studio, while the window, as a whole, is in the same plane as the side of the room.

The series of panes which, for the time being, face the camera, may be obscured by blinds or shutters. If the sitter is to be placed at one end of the studio, and the choice of the end occupied by the sitter is not required, the glass of one set of panes may be permanently darkened or replaced by boards or sheet metal.

"The invention is applicable both to side and top 'light." and might be used on one or both sides, but the north side "and roof will generally be sufficient."

[Printed, 8d. Drawing.]

A.D. 1875, April 15.—No. 1362.

EDWARDS, Ennest. — (Provisional protection only.) — A "method of printing from plates of gelatine or equivalent" material."

The printing from these plates is performed with dyes in contradistinction to printing inks.

One of the methods of preparing the gelatine plate is to use gelatine combined with a bichromate spread upon a surface of slate. When dry, the plate is exposed to light under a photographic positive and is thus impressed with an image which is non-absorbent of water in the parts not required to produce an impression.

To take impressions from the prepared plate, its surface is wetted with a solution in water of the desired colour, and the surplus moisture is removed. The paper is then pressed on to the surface of the plate, so as to receive a portion of the colour. The colour is absorbed by the plate in the portions which are absorbent of water, just in proportion as the absorbent property has been modified by the treatment which the gelatine has received. Mordants may be used, when necessary, to strengthen the colour.

[Printed, 4d. No Drawings.]

A.D. 1875, May 4.—No. 1663.

JOHNSON, JOHN HENRY.—(A communication from La Société Anonyme de Publications Periodiques.)—A "process for printing 'photochromatic images."

By means of this process, there are obtained polychromatic images, visible either as a reflection or as a transparency. These images are produced by the superposition of a series of photographic impressions. The number of negatives by which the total piecture is formed depends upon the number of monochromes in the resulting picture. Each negative is covered with opaque colour, so as only to give one colour in the resulting picture. The negatives are printed from separately upon a mixture of the colour required. The image is developed upon each film as in the carbon process, and the films are superposed by immersion in water, pressure and desiccation being used as each layer is applied. The whole picture is then immersed in an alum bath, and washed with water.

The ordinary mechanical means for printing in colours may be employed; either previously to the photographic impression or subsequently to the same, so as to superpose various tints upon the photographically printed image. According to another plan a photographic impression may be followed by a lithographic impression, and so on alternately until the final picture is produced.

[Printed, 4d. No Drawings.]

A.D. 1875, May 7.—No. 1699.

HARE, GEORGE.—A "photographic changing box and dark " slide."

The chief features of this invention are:-

1st. The inserting, by means of morticing or otherwise, in the body of the lid of the changing box, a metallic shutter with its springs and parallel guide pieces.

2nd. A flexible cover for the changing box.

3rd. The hinging of the back of the dark slide at one end, together with a method of fastening in the photographic plate by means of a spring catch lock, brought into action by pressing forward the back.

By means of the springs and parallel guides, the shutter is

self-acting, being opened only by the attaching of the cames slide to which the plate is to be transferred and closed by the act of removing it.

The flexible cover is used instead of the rigid sliding top peculiar to an ordinary transfer box. The cover is preferably made of a series of wooden laths glued to a band of leather.

In the present invention, the plates are inserted from the bottom.

The dark slide, used in connection with this box, has its end aperture closed, by means of a piece of metal projecting from the back and working on an axis at the further end. To permit of the egress of the plate, a bolt is lifted and the end thrown open.

[Printed, 4d. No Drawings.]

A.D. 1875, May 10.—No. 1734.

TUCKER, John Bone.—(Provisional protection only.)—"Im" provements in mounting papers, either printed, ornamented,
" or plain, on zinc, iron, tin and other metal plates."

Photographs, so mounted, are said to be weatherproof and dirt proof, and to bear washing without injury.

The process of mounting consists in coating both sides of the paper with size and allowing it to dry. The metallic plate is then coated with a mixture of copal varnish and lithographic varnish and the back of the coated paper is placed on the varnished face of the plate. The whole is subjected to pressure, so as to cause the plate and paper to adhere firmly together, and they are dried spontaneously or stoved. Finally the paper is coated with copal varnish and the whole is finished by again stoving.

[Printed, 4d. No Drawings.]

A.D. 1875, May 13.—No. 1777.

JOHNSON, CHARLES.—(Provisional protection only.)—"An "improvement in photographers' head rests, applicable also "to stands used for other purposes."

Usually the upright rod that carries the rest is fixed at the required height by means of a set screw and a socket, a separate joint being provided to adjust the inclination of the rest.

This invention consists in providing for the vertical and lateral adjustment by one and the same means. A ball-and-

socket joint is employed of the following construction:—"The ball through which the upright rod passes is made in two halves, clamping the upright rod between them so as to grip the rod tightly when the socket in which the ball works is . tightened up. This socket is also made in two parts hinged together and provided with a thumbscrew by which the socket may be tightened up or loosened as required. By . loosening this thumbscrew the upright rod may be slid . through the ball, and at the same time inclined by the ball . working in its socket, whereby the rest is adjusted both as " regards height and position at one and the same action, the whole being firmly secured by tightening the screw." [Printed, 4d. No Drawings.]

A.D. 1875, May 14.—No. 1791.

ALFROY, AUGUSTE.—(A communication from Jean Baptiste David.)—A "photographic apparatus with portable camera obscura."

By means of the "portable camera obscura or laboratory" (which is a fixed box placed under the ordinary photographic paratus that contains the lenses and dark slide), the photographic plate is submitted to the developing, fixing, and rinsing solutions necessary to complete the picture without having dark room for the purpose.

In the fixed box is a tin box without a cover, containing three Sotta percha vessels. The first vessel contains the nitrate bath, the second the sulphate of iron bath, and the third the hyposulphite bath; the second and third vessels have a second compartment for rinsing water.

To immerse the photographic plate in succession in these baths, a rack and pinion movement brings an aperture (in the Photographic apparatus beneath the plate) successively over the vessel to be used. The plate is moved up or down by means of nippers.

The gutta percha vessels are filled up by means of receptacles that communicate with them by india-rubber tubes having closing taps. By raising the receptacles by hand, the compartments are filled, the respective taps being open; the taps are then closed. By the lowering of the receptacles (the taps being open) the vessels are emptied.

[Printed, 8d. Drawing.]
H 153.

98

A.D. 1875, May 17.—No. 1825

CLARK, ALEXANDER MELVILLE.—(A communication from Léon Lambert.)—"Improvements in photographic]
"frames, and in other apparatus used in connection
"with."

1st. Printing frames.—These frames are for printing ber of positives at once with borders, and with or devices thereon. A main frame contains a glass plate is obscured or masked, with the exception of any connumber of apertures. The negatives are placed upapertures, and are held securely by a frame hinger main frame of the press. Masks, in connection whinged frame, have apertures rather smaller than those above; the sensitised papers are placed in these apertures flaps are folded down upon them and faste springs.

The frame for printing the border is similar to the described. The picture is protected by a mask fixe glass in the middle of a larger aperture of rectangular to obtain a tinted border with a device thereon, a collodion and gelatine is used.

2nd. Paper cutting apparatus.—Two frames hinged a have between them the sensitised paper to be cut. Or carries a glass plate, the other has a number of ba transverse slits. By this means the paper is cut of the size for the above printing frames.

3rd. A registering photometer.—A rectangular obl has a number of dials provided with ratchet teeth, which are holes that form stops for an index, and thu nite time of exposure is given to the paper. By mer strip of sensitised paper on a roller on the axis of the a record of the printing done each day is obtained.

[Printed, 1s. 4d. Drawings.]

A.D. 1875, May 21.—No. 1863.

SABUNJIE, JOHN LOUIS.—(Provisional protection only "provements in apparatus employed in the 'prin' photographs."

The printing frame consists of a metal frame fitt glass and provided with metal bars or clasps, which ar The clasps are then shut down, and the frame is exposed to be light. This printing frame may also be employed when printing from glass negatives.

In a more simple form of the printing apparatus, metal

frame.

[Printed, 4d. No Drawings.]

A.D. 1875, July 22.—No. 2613.

DILLON, THOMAS ARTHUR.—(Provisional protection only.)—A method of embossing thin metal sheets with copies of manu-

script writings, engravings, printed matter, and pictorial subjects by means of photography."

From the sheets or from moulds or castings taken from the

mbossed surface, copies may be made.

A negative on bichromated gelatine is dried and pressed in Contact with a sheet of thin metal over which is laid a sheet of lead, a rolling press being used for the pressure. A copy of the gelatine surface will be found indented into the brass and lead.

A sheet of prepared paper, according to the method of the Ordnance Survey when adopting photo-zinco-graphic copying may be used. A transfer being made on to the stone or zinc, fine resin is dusted on the greasy ink; biting in with acid allows the letters or lines to stand up in relief. Thin metal covered with lead is then laid upon this relief, and is indented as described above. From the indented metal copies may be taken by the method described in No. 1935, A.D. 1874. Stereotype plates may be cast by covering them with thin paper and a thin coating of stereotype composition such as a preparation of glue paste and whiting on paper.

[Printed, 4d. No Drawings.]

A.D. 1875, August 31.-No. 3059.

HUGHES, EDWARD THOMAS.—(A communication from Adolf Hommel.)—" Improvements in photography."

A clean glass plate is covered, on both sides, with a senitive collodion film. When a copy of the object to be photographed is taken, in the camera, upon this plate, two images are produced, which are developed, fixed, and covered with a preserving varnish.

This double negative, produced at the same time upon both sides of a glass plate, is called a "photo-plasto-graphical" negative; copies from it (positives) are called "photo-plasto-

" graphs."

By this invention, the light that has passed through the front film is utilised to produce a perfect picture. The refraction of the rays of light in traversing the glass plate tends to neutralise the sharp outlines on the front of the plate, and thus to produce very soft copies of perfect images. Photoplastographs are obtained by the action of dispersed and nearly vertical light upon two or more negatives prepared and superposed in the herein-before described manner.

[Printed, 4d. No Drawings.]

A.D. 1875, September 24.—No. 3352.

SLINGSBY, ROBERT.—"Improvements in the construction of photographic studios."

This invention consists "in constructing the 'sky-light' as "well as the 'side light' of a photographic studio with a "double pitch or inclination inwards from the two ends to "the middle of its length, where the two inclined or sloping surfaces meet at an angle of about 120 degrees." Thus advantage is secured at whichever end of the studio the sitter may be placed.

Instead of the sky and side lights meeting at an angle, they may be separated a few feet by an unglazed or darkened portion of straight roof and side, under which the camera may be

placed in comparative obscurity.

Instead of the side light being vertical, it may be sloped outwards from top to bottom, the sky light being at one slope and the side light at another slope. Or, they may both be at the same slope and combined in one in the form of a "Man-" sard" roof, but with the double pitch or inclination inwards at the centre.

The inward pitch or inclination of the sky and side lights

may be adapted, in a single form, to studies in which the sittings are made at one end only.

[Printed, 8d. Drawing.]

A.D. 1875, October 5.—No. 3453.

HADDAN, HERBERT JOHN.—(A communication from Ernest Edwards.)—A "method of printing from plates of gelatine or equivalent material."

This invention is the same as that set forth in the Provisional Specification, No. 1362, A.D. 1875.

[Printed, 4d. No Drawings.]

A.D. 1875, November 3.—No. 3815.

TAYLOR, THOMAS LYON.—(Provisional protection only.)—A "press for burnishing or polishing, photographs, cards, or 'tother similar articles."

This invention relates to that kind of press which has a revolving cylinder or roller and burnishing bar.

The bearings of the cylinder can be raised or lowered by means of set screws; a piece of solid india-rubber is inserted at the back of the bearing pieces. By this arrangement, if the card or mount should be thicker than usual, the cylinder gives way slightly and the work is not injured.

The cylinder is of such a diameter that one turn thereof will take the photograph through, and the burnishing bar is mounted, in a transverse slide, beneath the cylinder, and thus receives an endwise motion during the passage of the photograph through the machine. Lines across the photograph are thus avoided.

A cam on the axis of the cylinder gives the endwise motion to the burnishing bar. By the time that the bar has reached the highest point of the cam, the photograph will have passed completely through the machine; at this moment, when there is no pressure, the highest point of the cam passes, and the burnishing bar is forced back by a spring into its original position against the lowest part of the cam, ready to commence another operation. Thus each turn of the handle carries the photograph through and moves the burnisher once across the surface; the burnisher then returns ready for the next photograph, and so on.

[Printed, 4d. No Drawings.]

A.D. 1875, December 8.—No. 4247.

ARMANINO, Leopoldo.—(Provisional protection only.)—A "process for coloring photographs or photo-prints."

A photograph or photo-print is rendered transparent by varnish or other means, and a sheet, painted or printed in colours prepared according to the effect required to be produced on the photograph or photo-print, is affixed to the back of the print. According to another method, the print is printed directly upon coloured, painted, or printed sheets by means of registering points or marks.

[Printed, 4d. No Drawings.]

1876.

A.D. 1876, March 10.—No. 1050.

CLARK, Alexander Melville. — (A communication from William Alexander Brice.)—" Photographic apparatus."

This apparatus dispenses with the dark room and is able to be folded up when not in use so as to be portable.

"The invention consists of a central casing, with lens and sliding focussing frame, to the larger base part of which are hinged side casings that may be thrown down and suspended in a horizontal position in suitable manner. The central casing is recessed at the lower part, and shorter boxes or covers hinged thereto to be swung down on the outer side parts. Trays for the sensitizing and developing solutions are moved by means of strings from the side cases into the central casing to plunge the glass plate, which is supported on holders of a frame pivoted to the sliding focussing frame, first in the silver bath, and after exposure to light into the developing bath. The water bath is finally introduced through the lower hinged door of the rear part to fix the picture, after which it is removed for printing."

Besides those set forth above, there are the following points which constitute the invention:—The central casing has lower side openings to admit the entrance of the trays into



the central compartment. Hinged covers are fitted opened side cases, so as to enclose the trays and produdark room with the central compartment. The central casing has a detachable rear shutter or wall with a hinged door at the lower part to introduce the water tray.

[Printed, 6d. Drawing.]

A.D. 1876, March 17.—No. 1148.

HENDERSON, ALEXANDER LAMONT.—"Improvements in the "production of ceramic photographs."

The object of this invention is to produce photographs in vitrifiable pigments, which may be burnt in upon enamel tablets, glass, porcelain, or metal.

If the surface upon which the picture is to be placed, termed the enamel, be light in colour, a transparency of the subject is treated with such iodides, bromides or fluorides as will produce a dark image. The iodides, &c., may be combined or not with chlorides and mordants. Subsequently the picture may be submitted to the action of silicates, such as those of sodium or potassium, so as to produce the deposited metal as a silicate, and then transferred to the enamel, which is then fired so as to vitrify the silicate.

The picture may be taken direct upon the enamel and treated with fluoric acid by which an intaglio is produced. This may be used as an engraved plate for printing, or it may be filled up with enamel colour and again fired.

Instead of converting the image into a silicate, it may be fluxed by means of an emulsion containing borate of lead suspended in collodion, oil of spike, fat oil, or similar media.

If the enamel be dark in colour, a negative is employed instead of a transparency, the iodides or bromides of the metals used being such as will produce a light image.

[Printed. 4d. No Drawings.]

A.D. 1876, April 25.—No. 1747.

VANDER WEYDE, HENRY.—"An improvement in photo"graphy and apparatus used therein."

A large lens is provided in the photographer's studio and is placed between the source of light and the object to be photographed. An annular plano-convex Fresnel lens, about five

feet in diameter, is preferred, but a lens of another kind my be used. The source of light may be that from a window, a reflected from a mirror or other reflecting surface illuminated by daylight or artificial light. In one instance, a reflectar placed outside of the studio reflects the vertical rays from the sky, through a window, on to the lens. In another instance, the electric or magnesium light is placed in the focus of a paraboloidal reflector, so as to reflect the rays on to the lens in a parallel direction. A sheet of ground glass may be introduced between the source of light and the lens.

The effect of the converging rays from the lens is an increase in the actinic power of the light, and greater softness in the

effects produced.

The lens may be made "by casting the glass in moulds and "afterwards submitting the angular surface to the direct action of a furnace until the surface runs and becomes smooth "and glossy." Each annulus of which the lens is composed may be east in segments and joined together.

[Printed, 6d. Drawing.]

A.D. 1876, May 11.-No. 1991.

SARONY, OLIVER.— "Improvements in the production of borders, titles, and other devices or ornamentation on photographic pictures, and in means or apparatus employed therefor."

This invention is chiefly designed for use in carbon printing. The border or ornamentation is obtained, by two successive exposures through two different openings on the same negative. By this method a print like a chromotype can be produced, in the ordinary printing frame, at one printing. The two openings may be contained in a sliding frame fitted to the plate holder, or in separate frames pivoted within the camera.

When the openings are used for a single portrait, one opening, in form and size, corresponds exactly to the style and dimensions of the picture, the other is of a size to include both the picture and the border and in it is fixed a plate of colourless glass having a mask corresponding in size, shape, and position to the first opening. The clear portion of the plate bears upon it the device to be produced beneath or around the picture.

The sensitised plate is exposed, to take the portrait, through the first-mentioned opening. Then the lens being capped, and the dark slide closed, the second opening takes the place of the first, and the border is exposed and printed. The second exposure is for a few seconds with the aid of a cap that is covered with tissue paper, ground glass being within the tube.

Modifications of the above described arrangement enable more than one portrait to be taken on one plate.

[Printed, 4d. No Drawings.]

A.D. 1876, May 30.—No. 2274.

BURROWS, FREDERIC THOMAS, and COLTON, JOSEPH DUFAIS.

—"Improvements in desks for use in retouching photographic
"negatives."

1st. A series of screens, of varying degrees of transparency, so as to show the negative more or less in detail.—The screens are glass plates fitted into a disc that is able to rotate on a pivot at the back of the carrier on which the negative is mounted; any one of the screens can thus be brought quickly to coincide with the opening in the carrier over which the negative is fixed.

2nd. The negative is secured by clamps in a circular carrier litted to rotate in the desk, so that the operator can turn the negative round, to suit his convenience, as the work proceeds, without removing the negative.

3rd. A concave reflector is mounted upon adjustable supports behind the desk. For night work, a lamp is combined with the reflector, and a plate of violet glass is fitted in the revolving carrier.

4th. The magnifier is so mounted upon a fixed standard at the left hand that it can be adjusted without interfering with the right arm of the operator.

5th. A pencil sharpener is fitted to slide within the deek. This instrument consists of a block on which a sheet of emery paper is clamped by a metal frame; the block draws out from the case, at one side, and is retained by a spring.

[Printed, 6d. Drawings.]

A.D. 1876, June 6.-No. 2367.

BROWN, RICHARD, and BARNES, ROBERT WILLIAM.—"Improvements in and applicable to photography."

The object of this invention is to produce a mezzotint effect

in photographic vignette portraits.

The stippled granular effect is produced direct, in the process of printing, from a negative from a groundwork of morocco leather or other reticulated surface. The print is treated by the artist, with crayon or pastil, so as to produce an effect according to taste; from the prepared print a second negative is taken which bears the reticulated surface and also the artistic manipulation.

A mask cut from the vignette is placed on the reticulated negative, or on the second negative. Only the lighter and inner outlines of the photograph are fastened down, the outer vignetted portion of the figure being curled or turned over in a graduated manner. This prepared negative and mask is then placed on the vignetted photograph as ordinarily produced, and the whole combination is placed on a revolving table and submitted to the action of daylight until the granular effect, with or without the background, is printed on the vignetted picture. The fixing and completing of the photograph is as usual.

[Printed, 4d. No Drawings.]

A.D. 1876, July 21.—No. 2963.

BROOKES, Alfred George.—(A communication from Charles Eugène Farjon.)—"Improvements in copying presses, which "improvements are also applicable to other presses."

The application of this invention to embossing photographs entitles it to be placed here.

The travelling plate of these presses is adjustable to articles of various thickness by means of screws, sliding tubes and springs. The pressure is exerted by means of levers in connection with screws or cams.

For embossing photographs an oval opening is made in the travelling plate to allow of the bulging of the cardboard, which is placed upon an india-rubber bed on the base plate when the pressure is applied.

[Printed, 6d. Drawing.]

A.D. 1876, July 22.—No. 2973.

MORGAN-BROWN, WILLIAM.—(A communication from Louis Ducos Duhauron.)—"Improvements in photography in colours, "and in the apparatus for that purpose."

Three negatives of the same subject are obtained; one by green light, the second by orange light, the third by violet light. Three positives or monochromes are respectively printed from these negatives; the positives are on gelatinised semitransparent paper prepared with the complementary colours. The three semitransparent monochromes, being superposed, represent, by the blending of the tints, the total colour of the object taken.

The camera used to obtain the negatives may be triple; it contains three lenses. Images are simultaneously directed to the three lenses by reflection and refraction, unsilvered reflecting glasses being used. A correcting lens (concave in form) is used in this camera and is interposed between the object lens and the sensitive surface, very near to the latter.

The coloured glasses to qualify the light to each negative are placed either close to the sensitive plate or immediately outside the object lens. Coloured varnishes are used to tint the glasses.

Arrine or eosine is used in sensitising the negative from green light, and chlorophyll in that from orange light; these adjuncts are only necessary when wet processes are employed; no accelerating substance is used with dry processes.

[Printed, 8d. No Drawings.]

A.D. 1876, August 22.—No. 3298.

JOHNSON, JOHN HENRY.— (A communication from Marcel Charbonnier and Robert Charbonnier.)—A "process and appa" ratus for producing photographic images upon or ornament" ing glass, or glazed, or enamelled articles."

A polished copper plate is uniformly coated with an aqueous mixture containing bichromate of potash and honey; the coating is then dried and exposed under a positive photograph or an engraving. The copper plate is then taken away from the positive, slightly heated, and brushed over with vitrifiable metallic powder. The picture develops during the brushing of the powder, and is treated with collodion. Upon being

washed in water until the coloured bichromate is removed, the picture is formed by the powder which has been deposited.

A small frame or holder is provided. This instrument is made of a flexible material such as cardboard, caoutchouc, &c. The flexible frame is laid upon the washed copper plate, takes up the collodion film carrying the picture, and deposits it on the glass or glazed article which it is required to ornament, care being taken that the metallic powder is not in contact with the glaze of the article. The collodion is then cut out round the frame and the frame removed. The picture, thus fixed, is dried, covered with oil of petroleum and baked.

These pictures may be transferred to ceramic articles in the biscuit state, the article being maintained in the wet condition during the transfer."

[Printed, 4d. No Drawings.]

A.D. 1876, August 28.—No. 3374.

McLIESH, WILLIAM. — (Provisional protection only.)—"Im-" provements in photographic apparatus."

In this invention, by the arrangement of photographic lenses, "pictures in stereoscopic or natural relief are ob-

"This relief is obtained by employing lenses of larger " diameter with a short focus, the margin of the lens forming " a parallax corresponding to the distance between the human " eyes, the diaphragm or stop being so placed as not to cut " off the marginal rays. The diameter of the lenses employed " must not be more than four inches or less than two inches, " and the back focus (not the equivalent focus) must not be " less than one or more than three diameters of the front " lense. Any form of lense or combination of lenses may be " employed for the purposes of this invention as above de-" scribed, except that known as the ordinary portrait lense,

" which from its limited field and want of penetration is quite " unsuitable."

[Printed, 2d. No Drawings.]

A.D. 1876, August 30.—No. 3417.

BRICE, WILLIAM ALEXANDER.—A "photographic test-plate or " actinometer."

PHOTOGRAPHY.

The object of this invention is to furnish a testing plate t, by being applied to the camera, determines the quality the chemicals employed, and the quick or slow working of lens; the testing plate also affords information as to the se of fog in the picture.

he invention consists of "a frame with a sliding glass late to which are applied fixed pieces of transparent naterial superposed in layers of one, two, three and more n regular succession to produce a greater or less obstacle o the passage of the light." The centre part of the glass te is left free; the adjoining parts are covered with one or, the next adjoining parts with two layers, and so on to extremity of the plate.

he testing plate being set up between the lens and the sitised plate, the picture is taken as usual. When developed, whole picture is visible, but is divided into sections of qual intensity. The absence of fog where the light has sed through several layers, indicates that the chemicals pure, that there is no diffused light and that the nitrate h is of the proper acidity. Where the light has passed ough a less number of layers, evidence is given respecting proper time of exposure. The middle or uncovered section icates, by the evident over exposure, that the lens is good rapid, that the chemicals are in good condition, and that actinic power can produce pictures with rapid exposure. [Printed, 4d. Drawing.]

A.D. 1876, Sertember 18.—No. 3644.
SBITT, George.—(Provisional protection only.)—A "photograph tinting apparatus."

The apparatus is made of a frame, with a back of the exact of the photograph to be tinted; the back is hinged, so as pen and shut to receive the picture, and, when the picture in, to shut and press down tightly on the tinting plate. also has a rabbet to receive the tinting plate, or name te, and a groove in front of the rabbet for the introtion of a glass with any size or shape of mask to cover parts of the portrait to be tinted. Thus instead of a arate frame for each size or shape of picture it is only essary to have a separate glass with a different size or pe of mask.

[Printed, 2d. No Drawings.]

A.D. 1876, October 20.-No. 4060.

GEDGE, WILLIAM EDWARD.—(A communication from Jules Alphonse Terpereau.)—"Improvements in portable photo"graphic apparatus."

This invention relates to a portable camera for tourists and

photographers.

This invention consists in the arrangement of the box, which is small, but opens to a size sufficient for forming a dark chamber to take any kind of photograph on plates up to about 10½ inches.

Upon the sides of the box is nailed a curtain, composed of three pieces so as to form a chamber. A window, of glazed linen is in one of the panels or pieces. The curtain is cut of a shape to permit of the immediate closing of the camera and to prevent interference by the wind.

The second part of the invention consists in the curtains being held by an arrangement of rods in two parts.

Instead of a metal bottle to contain water, a pocket, or india-rubber bag is provided, at the top of which is a funnel through which the water is introduced. There is an india-rubber pipe for letting out the water; the end of the pipe has a stopper which is hermetically self-closing. "When operating "this little receiver is hooked on to one of the uprights in such a manner that the water may come directly into the basin placed in the middle of the camera."

The apparatus can be enclosed in a very small space, because the setting up rods separate and the sides fall into the box, which is portable. It rests upon a tripod.

[Printed, 6d. Drawings.]

A.D. 1876, October 24.—No. 4117.

NEWTON, HENRY EDWARD.—(A communication from Cheri Rousseau.)—A "process for obtaining pictures in colors."

A photographic carbon print of the object to be reproduced is mounted on a temporary supporting paper in a reversed position and is tinted with oil colours. When the colours are dry, the whole surface of the picture is coated with an adhesive substance and transferred to the canvas or other permanent backing, being caused to adhere thereto by gentle pressure. The supporting paper which still covers the face of the carbon print is now removed, presenting the coloured

picture to view with the colours blended with the tints shadows of the photographic print.

The coloured pictures may be retouched on the face skilled artist.

· [Printed, 2d. No Drawings.]

A.D. 1876, November 9.—No. 4344.

DONISTHORPE, WORDSWORTH.—(Provisional protection only.)
—"Improvements in apparatus for taking a succession of
photographic pictures and for exhibiting such pictures."

The pictures are taken at equal intervals of time, to record the changes taking place in or the movements of the object being photographed. By a succession of pictures, so taken, of any moving object, the eye may be impressed with a representation of the object in continuous movement as it appeared when being photographed.

The camera is constructed to receive a number of prepared plates, one behind the other. By mechanism, the series of plates moves forward progressively, so that as soon as the foremost plate has been exposed for the required length of time, the whole series moves forward a certain distance; the foremost plate is then dropped into a receiver. The plate which is then foremost is exposed and dropped, and so on in succession, until the requisite number of plates have been exposed.

The admission of light to the lens is controlled by a movable screen, which is only brought in front of the lens during the shifting of the plates. The mechanism for moving the plates and the screen is driven at a uniform rate. After exposure, the plates are developed; prints from these may be obtained in the ordinary manner.

The series of pictures may be used in the phenakistoscope. [Printed, 2d. No Drawings.]

A.D. 1876, November 11.—No. 4385.

SLINGSBY, Robert.—"An improvement in the construction of photographic studies."

This invention relates to an improvement upon the photographic studios described in No. 3352, A.D. 1875.

This improvement consists in the addition to the studio constructed as in the former invention "of a vertical light " having likewise a double inward pitch or inclination at the

" centre corresponding to that of the sky and side lights, this " vertical light meeting the highest part of the skylight and

"rising therefrom to the ridge of the roof of the studio."

'The results of this arrangement are said to be "a still "shorter time of exposure, a softening of the shadows, and greater delicacy of modelling."

[Printed, 4d. Drawing.]

A.D. 1876, December 30.—No. 5065.

WILKINSON, JAMES, HARDMAN, JAMES, and BIRT-WISTLE, RICHARD. — (Provisional protection only.) — "Im" provements in the mode or method of burnishing photo" graphs, and in the machinery or apparatus used therefor."

This invention consists in passing the photograph, when mounted on paper or cardboard, through or between a pair of metal rollers heated by gas or steam.

The rollers are mounted in adjustable bearings, a handle, at one side, gives them motion. At the opposite side to the handle, a gas pipe perforated with a number of holes is passed into each roller. The gas being lighted and the photograph placed between the rollers, the bottom roller is rotated by the handle and gives motion to the upper roller by wheel gearing. Both sides of the photograph come out with a highly glazed surface.

One heated roller suffices when the back part of the card is not required to be glazed.

[Printed, 2d. No Drawings.]

INDEX OF SUBJECT MATTER.

١

The numbers refer to the pages on which the Abridgments commence. The names printed in *Italic* are those of the persons by whom the inventions have been communicated to the Applicants for Letters Patent.]

```
ctinic power, ascertaining:
          Bing, 18.
Clark (Lambert), 98.
Brice, 108.
rtificial light for taking pho-
tographic pictures:
          Lake (Proctor), 26.
          Sell, 79.
Vander, Weyde, 108.
                                        See
ox for sensitised plates.
Cameras.
meras:
    Box for sensitised plates;
Newton (Cook), 9.
          Cook, 80.
          Hodgson, 74.
Hare, 95.
Donisthorpe, 111.
    Folding;
Isaac, 29.
          Stillman, 56.
Morgan-Brown (Hermagis),
          Clark (Brice), 102.
     Lenses, arrangement of;
         Bees, 3.
Smith, 20.
Grubb, 52.
Wirth (Steinhell and Steinhell), 82.
McLieah, 108.
     Many lenses to give a number
of pictures at once;
Helsby, 1.
     Stands;
Spahn, 62.
     Stereoscopic ;
Hodgson, 74.
anvas, prepared for photo-
 graphy:
          Loewe, 12.
```

```
Collodion and castor oil as a
   photographic film:
            Brooman (Marios), 17.
Combination photographs:
            Tilley, 91.
   opying photographs
means of tracing paper:
Copying
            Palmer, 66.
"Developing" photographs,
by means of "diffused
   light":
            Gage, 11.
Enamel
              photographs,
                                          by
   means of:
       Collodion paper;
Hart, 6.
       Uranium salts;
Higginson, 8.
Enlarged photographs:
            Edwards, 7.
            Edwards, 7. Simpson, 10.
Petraywalski, 11.
Loowe, 13.
Bdwards, 51.
Browne, (Despaquis), 70.
Van Tenne, 76.
Clark, (Lambers), 83.
Tilley, 91.
Worzen, Brown (Hamman)
            Morgan-Brown (Hermagie),
Fabrics or tissues, producing
   photographs on:
```

Loswe, 12 Janicot, 3 114 mishing photographs, by means of: Finishing Albumen; Hart, 25. Ferranti and Turner, 65. Pressure rollers; Salte rollers;
Clements, 6.
Lake (Weston and Mc
Donald), 53.
Haseltine (Critcherson), 78.
Johnson (Mukd), 80.
Lake (Bass), 82. Cleary, 87.
Taylor, 101.
Wilkinson, Hardman, and
Birtwistle, 112. Stamping pressure; Brookes (Farjon), 37. Brookes (Farjon), 106. Folding See cameras. Cameras. Frames for photographic printing: Clark (Lambert), 98. Sabunjie, 98.

Gelatine (dry), used for photographic purposes: Kennett. 80.

Gelatine (insoluble) to fix colours on photographs: Debenham, 85.

Gelatinous paper, See Paper, photographic.

Grain obtained upon photographs:

Henderson (Fournier), 19. Davies (Réaulx and Bar-ret), 23. Favi, 22.
Sarony, 28.
Woodbury, 87.
Woodbury, 88.
Gilbee (Leggo and Desbarats), 52.
Faulkner, 61.
Contians, 64. Courtenay, 64 Woodbury, 67. Long, Forsyth, and Grif-fiths, 69. Moodbury, 72.
Barraud, 79.
Placet, 84.
Brown and Barnes, 106.

Gums dissolved in benzine, for photographic purposes: Sintzenic h (Reed), 15.

Impersonation prevented by means of photography: Baylis, 39.

Lenses and reflectors for conveying light on to the sitter:

Vander Weyde, 103.

Lenses, arrangement of. See Cameras.

Light. See Artificial light: Rooms, photographic operating

Lights and shades, "harmo-"nizing" by moving a dark object in front of the camera: Gage. ..

Metallic plates, preparing to receive photographs:

> Hazeltine (Hedden and Hill), 53. Wenderoth, 55. Bradley, 75. Morgan-Brown (Hedden and Hill), 93,

Micro-photographs: Johnson (Langlois . Co.), 19. and

Multiple photographic pictures. See also Cameras: Edwards, 7. Trever, 82.

Negatives for photographic printing, production of:

Robinson, 29. Denne and Billingsley, 32. Hemery, 33, Edwards, 41. Hughes (Hommel), 99. Burrows and Colton, 105.

Painting on the reversed side of photo-printed fabrics: Janicot, 39.

Panoramic photography: Silvy, 13. Raine, 22.

```
aper, photographic:
                                                        Photo-lithography, by means
       Albuminous;
Lake (Crosman), 4
                                                           of-cont.
                                                               Gelatine:
Woodbury and Ashton, 7.
Argamakoff (Bauler), 24.
Fischer, 28.
Mewburn (Eye), 24.
Edwards, 38.
Woodbury, 37.
Woodbury, 42.
            Garey, 59.
Beckett, 78.
      Collodionised;
Edwards, 21.
      Gelatinous;
Lake (Crosman), 4.
Edwards, 21.
                                                                     Woodbury, 42.
Window, 48.
Edwards, 45.
ermanent photographs:
            Pouncy, 26.
Johson, 27.
                                                                     Sawyer, 47.
                                                                     Brown, 48.
            Window, 83.
                                                                     Edwards, 5
            Johnson, 36.
                                                                    Edwards, 57.
Slater, 60.
            Denne and Hentschel, 51.
Lake (Goodes), 51.
Billups and Lee, 71.
                                                                     Abney, 68
                                                                    Dillon, 99
           Brown, 81.
Clark (Lambert), 88.
Stahlschmidt (Braun), 91.
                                                               Gum arabic;
Denne and Billingsley, 32.
            Tucker, 96.
            Henderson, 103.
                                                       Photo-stereotypy:
           Sarony, 104.
Newton (Rousseau), 110.
                                                                    Fruwirth and Hawkins, 23.
                                                                   Robinson, 29.
Banks, 76.
Dillon, 85.
Dillon, 99.
hoto-chromotypy:
           Argamakoff (Bauler), 24.
McCraw, 40.
Edwards, 54.
Johnson (Soc. Anonyme), 95.
                                                      Photo-zincography:
           Armanino, 102.
Morgan-Brown (Duhauron),
                                                                   Window, 48.
Baldock, Denne,
Hentechel, 44.
Edwards, 45.
Gilbee (Leggo stad
barats), 53.
Courtenay, 64.
Dillon, 90.
                                                                                                    and
              107
hoto-electrotypy, by means
of:
                                                                                                  Des-
     Collodion;
           Courtenay, 30.
     Gelatine:
           Ashton, 1.
                                                     Plates,
                                                                      photographic.
                                                                                                   See
          Brooman (Diederi), 8.
Davies (Réaulx and Barret), 22.
                                                         Metallic plates, preparing;
                                                          Printing surfaces (metal-
          Fruwirth and Hawkins, 23.
                                                         lic).
          Robinson, 29.
Haseltine (Leggo), 48.
Banks, 76.
                                                     Platinum salts used in photo-
    Gum resin;
Denne and Billingsley, 32.
                                                         chemical printing:
                                                                   Willis, 78.
    Gutta percha;
          Courtenay, 64.
                                                     Portable apparatus for sensi-
    Porous metal;
Woodbury, 72,
                                                                       developing,
                                                        tising,
                                                         fixing photographs:
toto-lithography, by means
                                                                  Gedge (Rochat), 13.
Domenech and Jonte, 16.
of:
    Bitumen:
                                                                   Edwards, 40.
          Morvan, 2.
                                                                  Stein, 70.
Lester, 88
    Caseine;
Baldock, Denne, and Hent-
                                                                  Malfroy (Devid), 97.
Clark (Brice), 102.
Gedge (Terperson), 110.
         schel, 44.
Denne and Hentschel, 51.
```

Printing surfaces produced by photography. See also Photo-electrotypy; Photo-lithography; Photostereotypy; Photo-zincography: Films, dried or hardened; Woodbury and Ashton, 7. Argamakoff (Bauler), 24. Fischer, 28. Mewburn (Rye), 34. Edwards, 35. Woodbury, 37. Woodbury, 42. Window, 43. Edwards, 45. Sawyer, 47. Edwards, 54. Edwards, 57. Slater, 60. Courtenay, 64. Woodbury, 67. Abney, 68. Woodbury, 72. Banks, 70. Despaquis, 90. Edwards. 94. Dillon, 99. Haddan (Edwards), 101. Hydraulic pressure used to produce the surfaces : Courtenay, 64. Woodbury, 67. Woodbury, 72. Metallic; Morvan, 2. Woodbury and Ashton, 7. Argamakoff (Bauler), 24. Fischer, 28. Denne and Billingsley, 32. Woodbury, 37. Woodbury, 43 Window, 43. Denne, Baldock, Den Hentschel, 44. and Edwards, 45. Sawyer, 47. Gilbee (Leggo and Des-barats), 52. Slater, 60. Courtensy, 64. Woodbury, 67. Abney, 63.
Woodbury, 72.
Bradley, 75.
Morgan-Brown
and Hill), 93. (Hedden Dillon, 99.

Rests for use in taking photographic portraits:

White, 14. Webster and Barnes, 20. Johnson, 96.

Re-touching negatives:

Clark (Lambert), 83. Burrows and Colton, 16.

į

Rocking machinery for photographic solutions: Marsden, 25.

Rooms, photographic operating:

Daylight: Hopkins, 41. Vander Weyde, 93. Slingsby, 100. Vander Weyde, 103. Slingsby, 111. Lamp or artificial light: Lake (Proctor), 26. Vander Weyde, 103.

Semi-transparent or opaline pictures;

Higginson, 8. Edwards, 35. Edwards, 35.

Hemery, 36.

Janicot, 39.

McCraw, 40.

Edwards, 45.

Edwards, 57.

Tongue (Givry), 63.

Palmer, 66.

Billups and Lee, 71.

Woodbury, 72.

Clark (Lambert), 83.

Clark (Lambert), 84.

Huches (Hommel), 94. Hughes (Hommel), 19. Armanino, 102, Henderson, 108 Morgan-Brown ron), 107. (Duhau-

Sensitising, special compounds for:

Albumen, glacial acetic acid, and iodide of potassium; Stein, 70.

Bichromate of potash, hypo-sulphite of soda, and chloride of ammonium; together with albumen, gelatine and glue; Fruwirth and Hawkins, 23.

Gelatine, soft soap, and bichro-mate of potash;

Johnson, 37.

Gelatine solution, together with bromides, chlorides, or iodides of potassium, cadmium or ammonium : Kennett, 80.

Gelatine, together with a bi-chromate and hydrate of lime; Banks, 76.

INDEX OF SUBJECT MATTER.

Sensitising, special compounds for-cont.

Glue, together with perman-ganate of potash; Morvan, 2.

Oleate of silver and farinaceous powder; Courtenay, 64.

Platinum, iridium, or gold salts, together with the salt of another metal and ferric oxalate or tartrate; Willis, 73.

Size, sugar candy, gum, and chromic acid; Courtenay, 30.

Wax and collodio-chloride of silver; Bradley, 75.

Silhouette pictures taken by photography:

Window, 59.

Stands for cameras. See Cameras.

Stereoscopic. cameras. See Cameras.

Studios. See Rooms.

Surface dipping used in washtoning and fixing photographic prints:

Beckett, 64.

Surfaces to be photographed, adjusted arrangement of:

Stevens, 54

Textile fabrics. See Fabrics or tissues.

Tinting photographs, by means of:

> Dry colours Clark, (Weyde), 58. Smith, (Weyde and Sarony),

Faulkner, 60. Ferranti and Turner, 65. Palmer, 66. Faulkner, 67.

Frame, tinting plate, and mask, adjustable; Nesbitt, 109. Lithography; Piercy, 15.

Smoke; Newton (Streat), 8.

Transferring photographs to:

Enamel; Hart, 6. Billups and Lee, 71. Henderson, 103. Johnson (Charbonnier and Charbonnier), 107.

Glass; Lee, Lee, 5.
Smith (Alliger), 62.
Tongue (Giery), 63.
Billups and Lee, 71.
Henderson, 103.
Johnson (Charbonnier and
Charbonnier), 107.

Porcelain;
Billups and Lee, 71.
Frèret (Godard), 74.
Brown, 81.
Henderson, 108.

Wood; Grdne, 31. Foley and Foley, 38. Baldock, Denne, and Hent-schel, 44.

Turntable for taking back and front portraits at one sitting:

Newton (Larausa), 4.

Wax surfaces for photography:

Wallace, 46. Bradley, 75.



•



•

·

LONDON:

Printed by GEORGE E. RYRE and WILLIAM SPOTTISWOODS,
Printers to the Queen's most Excellent Majesty.
For Her Majesty's Stationery Office.
[B 286.—1000.—12/78.]



PATENT OFFICE.

All communications relating to the Patent Office, Portrait allery, Museum, Registry of Designs, or Registry of Trade arks, to be addressed to Mr. H. READER LACK, Clerk of Commissioners of Patents, Superintendent of the Patent Tice Museum, Registrar of Designs, and Registrar of rade Marks, at the Office of the Commissioners of Patents, Southampton Buildings, Chancery Lane, London, W.C.

ST OF WORKS printed by order of THE COMMISSIONERS OF PATENTS FOR INVENTIONS, and sold at their Sale Department, 38, Cursitor Street, Chancery Lane, London, E.C.

I.

SPECIFICATIONS of PATENTS for INVENTIONS, DIS-CLAIMERS, &c., enrolled under the Old I.aw, from A.D. 1617 to Oct. 1852, comprised in 13,561 Blue Books, or 690 thick vols. imp. 8vo. Total cost price about 600l.

SPECIFICATIONS of INVENTIONS. DISCLAIMERS, &c., deposited and filed under the Patent Law Amendment Act from Oct. 1, 1852, to December 31, 1877, comprised in 91,430 Blue Books, or 2,661 thick vols. imp. 8vo. Total cost price, about 2.8257.

11.

e prices of the Indexes of Patents, Old and New Law for the years 1617 to 1870, have been reduced to the following uniform rates.

DEXES to PATENTS of INVENTION under the Old Law, from A.D. 1617 to October 1852:—

IRONOLOGICAL INDEX. 2 vols. (1554 pages.) Price 10s.; by post, 13s. 2d.

H 165.

- ALPHABETICAL INDEX. 1 vol. (647 pages.) Price 5s.; by post, 6s. 5d.
- SUBJECT-MATTER INDEX. 2 vols. (970 pages.) Second Edition. 1857. Price 10s.; by post, 12s. 8d.
- REFERENCE INDEX of PATENTS of INVENTION, pointing out the Office in which each enrolled Specification may be consulted and the Books in which Specifications, Law Proceedings connected with Inventions, &c. have been noticed. 1 vol. (710 pages.) Second Edition. 1862. Price 5s.; by post, 6s. 5d.
- APPENDIX to the REFERENCE INDEX, containing abstracts from such of the early Patents and Signet Bills as describe the nature of the Invention. 1 vol. (91 pages.) Price 1s.; by post, 1s. 6d.
- INDEXES of APPLICATIONS for PATENTS and PATENTS GRANTED under the Patent Law Amendment Act, 1852.

CHRONOLOGICAL INDEXES: -

. .

For 1852 (Oct. 1—Dec. 31) and 1853. (258 pages.) Price 2s.; by post, 3s.

```
d.
                                          s. d.
1854 (167 pages), price 2
                            0; by post 2
                                             9
1855 (188
                         2
                             0
                                              8
1856 (189
                             0
                                              8
             "
                      ,,
1857 (196
                             0
                                              8
             ,,
                     ,,
1858 (188
                         2
                             0
                                          2
                                              8
             ,,
                      ,,
                                   22
1859 (196
                         2
                             0
                                          2
                                              7
             ,,
                      ,,
1860 (209
                         2
                                          2
                                              7
                             0
             ,,
                      "
                                   ,,
1861 (215
                         2
                             0
                                          2
                                              7
1862 (237
                         2
                             0
                                          2
                                              8
                 )
             ,,
                      ,,
                                    .
1863 (220
                         2
                                              7
                 )
                                    ,,
1864 (222
                         2
                             O
                                              7
                 )
                                          3
             ,,
                      "
1865 (230
                         2
                             0
                                          2
                                              7
                                   ,,
1866 (239
                         2
                             0
                                          2
                                              8
             99
                      99
                                   22
1867 (254
                         2
                             0
                                          2
                                              8
                      ,,
1868 (274
                         2
                                          2
                                              8
                             0
            "
```

ALPHABETICAL INDEXES :-

For 1852 (Oct. 1—Dec. 31) and 1853. (181 pages.) Price 2s. 6d.; by post, 3s. 2d.

	•					s.	d.		s.	d.
	1854	(119	pag	es),	price	2	6;	by post	3	1
	1855	(129	")	**	2	6	**	3	1
	1856	(143	**)	99	2	6	22	3	1
	1857	(153	,,)	,, .	2	6	,,	8	2
	1858	(148	,,)	,,	2	6	"	3	1
	1859	(188	,,)	,,	2	6	22	3	1
•	1860	(203	,,,)	,,,	2	6	,,	3	1
	1861	(222	22)	22	2	6	"	3	2
	1862	(240	,)	,,	2	6	**	3	2
	1863	(218	••)	•	2	6	••	3	2

```
ALPHABETICAL INDEXES—cont.
                                   s. d.
                                                    d.
           1864 (220 pages), price 2
                                      6; by post 8
                                                     2
           1865 (236
                                   2
                                                  8
                                                     2
                       "
                          )
                                      6
                               ,,
                                            "
           1866 (248
                          )
                                   2
                                                  8
                                                    2
                       "
                                            ,,
           1867 (258
                                   2
                                                  8
                                                    2
                                      6
                       ,,
                               ,,
                                            22
                                   2
                                                  3
                                                     4
           1868 (291
                                      6
                       ,,
           1869 (272
                                  2
                                                  3
                                                     3
                                      6
                                            ,,
                       "
                               ,,
           1870 (242
                          )
                                   2
                                      6
                                                  8
                                                     2
                       ,,
                               ,,
                                            "
           1871 ( 52
                                  2
                                      0
                                                  2
                                                     1
                       "
                               ,,
                                            "
           1872 ( 61
                          )
                                  2
                                      0
                                                  2
                                                     11
                       ,,
                               99
                                            ,,
                                  2
                                                 2
                                                     2
           1873 ( 62
                                      0
                       ,,
           1874 ( 54
                                  2
                                                 2
                                                     1
                          )
                                      0
                       99
                               "
                                            99
           1875 ( 64
                          )
                                  2
                                      0
                                                  2
                                                     2
           1876 (135
                                  2
                                      0
                                                 2
                                                     8
                      ,,
                               29
                                            ,,
           1877 (137
                          )
                                  2
                                                     31
                                            "
UBJECT-MATTER INDEXES:-
 For 1852 (Oct. 1-Dec. 81). (182 pages.) Price 5s; by post,
    58.7d.
                                       d.
                                                     d.
                                       0; by post
           1853 (291 pages), price 5
                                                  5 11
           1854 (311
                                   5
                                       0
                                                   6
                                                      0
                          )
           1855 (311
                                    5
                                       0
                                                   5 11
                          )
                       99
                                             99
                               ,,
           1856 (835
                          )
                                    5
                                       0
                                                   6
                                                      1
                       "
           1857 (367
                                   5
                                       0
                                                      2
                                                   6
                          )
                      ,,
                               ,,
                                             99
           1858 (360
                          )
                                   5
                                       0
                                                   6
                                                      U
                      ,,
                               ,,
                                             ,,
                                   5
                                       0
                                                   5 11
           1859 (381
                          )
                      "
                               ,,
                                             ,,
           1860 (405
                          )
                                    5
                                       0
                                                   6
                                                      0
                      "
                               ,,
                                             "
                                    5
                                       0
                                                      1
           1861 (442
                          )
                                                   6
                      ,,
                               "
                                             "
           1862 (465
                          )
                                   5
                                       0
                                                   6
                                                      1
                      ,,
                               ,,
                                             "
                                    5
                                       0
                                                      0
           1863 (432
                          )
                                                   6
                      "
                               99
                                             ,,
                                   5
           1864 (446
                          )
                                       0
                                                   6
                                                      1
                       ,,
                               ,,
                                             99
           1865 (474
                          )
                                    5
                                       0
                                                   6
                                                      1
                      ,,
                          )
                                   5
                                       0
                                                   6
                                                      0
           1866 (465
                       "
                               "
                                             ••
           1867 (508
                          )
                                   5
                                       0
                                                   6
                                                      2
                       "
                                             ,,
                                                      5
                          )
                                   5
                                       0
                                                   6
           1868 (632
                       "
                               "
                                             99
           1869 (587
                                   5
                                       0
                                                   6
                                                      21
                                             "
                                    5
                                       0
                                                   6
                                                      2
           1870 (509
                          )
                       "
                                             "
                               "
           1871 ( 54
                                   2
                                       0
                                                   2
                                                      11
                          )
                                             "
                               ,,
           1872 ( 68
                                   2
                                       0
                                                   2
                                                      2
                          )
                                             "
                      "
                               22
                                   2
                                       0
                                                   2
                                                      2
           1873 (74
                          )
                      "
                               ,,
                                             "
                                    2
                                       0
                                                   2
                                                      2
           1874 (103
                          )
                               "
                                             ,,
                                    2
                                       0
                                                      21
           1875 (108
                                                   2
                          )
                       "
                               ,,
                                             "
                                    2
           1876 (138
                                       0
                                                   2
                                                      81
```

8

- ABRIDGMENTS (in Classes and Chronologically arranged) of SPECIFICATIONS of PATENTED INVENTIONS, from the carliest enrolled to those published under the Act of 1852.
- These books are of 12mo, size, and each is limited to inventions of one class only. They are so arranged as to form at once a Chrosological, Alphabetical, and Subject-matter, Index to the class to which they relate. Inventors are strongly recommended, before applying for Letters Patent, to consult the classes of Abridgments of Specifications which relate to the subjects of their inventions, and by the aid of these works to select the Specifications they may consider necessary to examine in order to ascertain if their inventions are new. The preface of each volume explains (in most cases) the scope of the series of Abridgments which it contains.
- The following series of Abridgments (except Nos. 14, 19, 81, and 90), do not extend beyond the end of the year 1866. It is intended, however, to continue them to the end of the year 1876 as soon as the Abridgments of all the Specifications from the earliest period to the end of 1866 have appeared in a classified form. Until that takes place the Inventor can continue his examination of the Specifications relating to the subject of his invention by the aid of the Subject Matter Index tor each year.

The classes already published are,—

- 1. Drains and Sewers; including the Manufacture of Drain Tiles and Pites, price is, by post is, 2d.
- 2. SEWING OND EMBROIDERING (2nd edition), price 1s. 6d., by post 1s. 6d.
- MANTERT, Part I., A.D. 1721 1855, price 4d., by post 5d.—Part II., A.D. 1956-1866, price 4s. 2d., by post 1s. 34d.
- PRUSERVATION OF FOOD, Part I., A.D. 1691-1855, price 4d., by post 5d.— Part 11., A.D. 1856-1866, price 6d., by post 7d.
- MARINE PROPULSION, Parts L. H., & HL, A.D. 1618-1857, price 1s. 10d., by post 2s. 1d. - Part IV., A.D. 1857-1866, price 1s. 10d., by post 2s. 2d.
- MANUFACTURE OF IRON AND STREE, Parts I., 11., and III., A.D. 1621-1857, price 1s. 6I., by post 1s. 8/I.—Part IV., A.D. 1857-185, price 2s. 6I., by post 2s. 8I.
- 7. AIDS TO LOCOMOTION, price 6d., by post 7d.
- 8. STEAM CULTURE, price 8d., by post 9ld.
- 9. WATCHES, CLOCKS, AND OTHER TIMEKERPERS, Part I., A.D. 1661-1856, price 8d., by post 9\d.-Part II., A.D. 1857-1866, price 8d., by post 9\d.
- FIGE-ARMS AND OTHER WEAPONS, AMMUNITION, AND ACCOUTEMBRIS. Part I., A.D. 1588-1888, price 1s. 4d., by post 1s. 74d.—Part II., A.D. 1888-1866, price 2s. 2d., by post 2s. 6d.
- PAPER. MANUFACTURE OF PAPER, PASTEBOARD, AND PAPER-MACHS. Part L. A.D. 1665-1857, price 10d., by post 1s.—Part II., A.D. 1838-1866 (2nd cdition), price 1s. 4d., by post 1s. 64d.
- CUITING, FOLDING, AND OBNAMENTING PAPER; INCLUDING ENVELOPS. CARDS, PAPER-HANGINGS, &c., price 8d., by post 10d.
- Letterpress and Similar Printing. Part I., A.D. 1617-1857, price 2s. 8d., by post 3s. 3d.—Part II., (2nd edition), A.D. 1858-1866, price 2s. 6d., by post 2s. 9d.

- 14. Bleaching, Dyeing, and Printing Calico and other Fabrics and Yarns Part I., A.D. 1617-1857, price 3s. 4d., by post 4s. 1d.—Part II., A.D. 1858-1868 (2nd edition), price 3s. 6d., by post 3s. 10d.—Part III., A.D. 1867-1876, price 1s. 6d., by post 1s. 9d.
- BLECTRICITY AND MAGNETISM, THEIR GENERATION AND APPLICATIONS, Part I., A.D. 1766-1857, price 3s. 2d., by post 3s. 11d.—Part II., A.D. 1858-1866 (2nd edition), price 2s. 8d., by post 3s. 2d.
- PREPARATION OF INDIA-RUBBER AND GUTTA-PERCHA (2nd edition), price 1s.2d., by post 1s. 4\(\frac{1}{2}\)d.
- 17. PRODUCTION AND APPLICATIONS OF GAS, Part I., A.D. 1881-1888, price 2s. 4d., by post 2s. 11d.—Part II., A.D. 1859-1866 (2nd edition), price 2s. 4d., by post 2s. 84d.
- 18. METALS AND ALLOYS, price 1s. 10d., by post 2s. 3id.
- PHOTOGRAPHY, Part I., A.D. 1839-1859, price 8d., by post 10d.—Part II., A.D. 1969-1866 (2nd edition), price 10d., by post 11d.—Part III., A.D. 1807-1876, price 9d., by post 10d.
- WEAVING, Part I., A.D. 1620-1859, price 4s., by post 4s. 11½d.—Part II., A.D. 1860-1866, price 2s. 8d., by post 3s. 1d.
- SHIP BUILDING, REPAIRING, SHEATHING, LAUNCHING, &c., Part I., A.D. 1618-1860, price 2s. 4d., by post 2s. 11d.—Part II., A.D. 1861-1868, price 2s. 6d., by post 2s. 11d.
- BRICKS AND TILES, Part I., A.D. 1619-1860, price 1s., by post 1s. 3\(\frac{1}{2}d.\)—Part II.
 A.D. 1861-1866, price 8d., by post 9\(\frac{1}{2}d.\)
- 23. PLATING OR COATING METALS WITH METALS, Part I., A.D. 1637-1866, price 10d.. by post 1s. 0\(\frac{1}{2}d.\)—Part II., A.D. 1861-1866 (2nd edition), price 6d. by post 7d.
- POTTERY, Part I., A.D. 1626-1861, price 10d., by post 1s.—Part II., A.D. 1832-1866, price 6d., by post 7d.
- 25. MEDICINE, SURGERY, AND DENTISTRY (2nd edition), price 1s. 10d., by post 2s. 11d.
- 26. MUSIC AND MUSICAL INSTRUMENTS (2nd edition), price 1s.10d., by post 2s. 14d.
- 27. UILS, FATS LUBRICANTS, CANDLES, AND SOAP (2nd edition), price 2s. 10d., by post 3s. 4d.
- 28. SPINNING: INCLUDING THE PREPARATION OF PIBEOUS MATERIALS, AND THE DOUBLING OF YARNS AND THERADS, Part I. A.D. 1624-1863, price 24s., by post 25s. 5d.—Part II., A.D. 1864-1866, price 2s. by post 2s. 4d.
- 29. LACE AND OTHER LOOPED AND NETTED FABRICS, price 10s., by post 10s. 8d.
- 30. PREPARATION AND COMBUSTION OF FUEL, price 17s., by post 17s. 9d.
- 31. RAISING, LOWERING, AND WEIGHING (2nd edition), price 3s. 8d., by post 4s. 3\d.
- 32. HYDRAULICS (2nd edition), price 4s. 8d., by post 5s. 5d.
- 33. RAILWAYS (2nd edition), price 2s. 6d., by post 2s. 11d.
- 34. SADDLERY, HARNESS, STABLE FITTINGS, &c., price 1s., by post 1s. 2d.
- 35. ROADS AND WAYS, price 1s., by post 1s. 2d.
- 36. BRIDGES, VIADUCTS, AND AQUEDUCTS, price 10d., by post 1s.
- 87. WRITING INSTRUMENTS AND MATERIALS, price 1s. 4d., by post 1s. 7d.
- 33. RAILWAY SIGNALS AND COMMUNICATING APPARATUS, price 5s. 10d., by post 6s. 14d.
- 39. PURNITURE AND UPHOLSTERY, price 2s., by post 2s. 4d.
- 40. ACIDS, ALKALIES, OXIDES, AND SALTS, price 8s. &d., by post 4s. 3d.
- 41. ARRONAUTICS, price 4d., by post 5d.
- 42. PREPARATION AND USE OF TOBACCO, price 10d., by post 1s.
- 43. BOOKS, PORTFOLIOS, CARD-CASES, &c., price 10d., by post, 1s.
- 44. Lamps, Candlesticks, Chandeliers, and other Illuminating Apparatus, price 2s. 6d., by post 2s. 10[†]d.

111.

- 45. NEEDLES AND PINS, price of
- 46. CARRIAGES AND OTHER VEHICA and Chronologically arranged) of 68.4d. NTED INVENTIONS, from the
- 47. UMBRELLAS, PARASOLS, AND WALKING VIET the Act of 1852.
- 18. SUGAR, price 1s. 10d., by post 2s. 11d. "mited to inventions ci
- STEAM ENGINE, Part I. (in 2 vols.), A.D. 1618-186; . nace a Chrono-post 10st. 10st. Part 11. (in 2 vols.), A.D. 1850-1863, price 46, 166, p. 1865.
- 50. PAINTS, COLOURS, AND VARNISHES, price 1s. 10d., by post 2s. 11d.
- 51. Toys, Games, and Exercises, price 1s., by post 1s. 2d.
- 52. VENTILATION, price 1s. 10d., by post 2s. 04d.
- 53. FARRIERY; INCLUDING THE MEDICAL AND SURGICAL TREATMENT OF ANIMALS, price 1s., by post 1s. 14d.
- 54. ARTISTS' INSTRUMENTS AND MATERIALS, price 10d., by post 1s.
- 55. SKINS, HIDES, AND LEATHER, price 1s. 6d., by post 1s. 81d.
- 56. PREPARING AND CUTTING CORK; BOTTLING LIQUIDS; SECURING AND OPENING BOTTLES, &c., price 1s. 6d. by post 1s. 9d.
- 57. BEUSHING AND SWEEPING, price 1s., by post 1s. 2d.
- NAILS, RIVETS, BOLTS, SCREWS, NUTS, AND WASHERS, price 1s., 8d., by post 1s. 11\(\frac{1}{4}\)d.
- 59. HINGES, HINGE JOINTS, AND DOOR SPRINGS, price 8d., by post 9ld.
- 60. LOCKS, LATCHES, BOLTS, AND SIMILAR FASTERINGS, price 1s. 6d., by post 1s. vd.
- 61. COOKING, BREAD-MAKING, AND THE PEEPARATION OF CONFECTIONERS, price 1s. 10d., by post 2s. 14d.
- 62. AIR, GAS, AND OTHER MOTIVE POWER ENGINES, price 1s. 10d., by post 2s. 1\(\frac{1}{2}d\).
- GS. WATER CLOSETS, EARTH CLOSETS, URINALS, &c., price 10d., by post 1s.
- 64. Safes, Strong Rooms, Tills, and similar Depositories, price 6d... by post 7d.
- C5. WEARING APPAREL. DIVISION I.—HEAD COVERINGS, price 1s. 4d., by post 1s. 6\(\frac{1}{4}\).
- 66. WEARING APPAREL. DIVISION II.—BODY COVERINGS, price 2s. 4d., by post 2s. 84d.
- 67. WEARING APPAREL. DIVISION III.—FOOT COVERINGS, price 1s. 10d., by post 2s. 14d.
- 68. Wearing Apparel. Division IV.—Dress Fastenings and Jewellery, price 2s. 10d., by post 3s. 13d.
- 69. ANCHORS, price 6d. by post 7d.
- 70. METALLIC PIPES AND TUBES, price 1s. Sd., by post 1s. 11d.
- MINING, QUARRYING, TUNNELLING, AND WELL-SINKING, price 1s. 4d., by post 1s. 64d.
- 72. MILKING, CHURNING, AND CHEESE-MAKING, price 6d., by post 7d.
- 73. Masts, Sails, Rigging, &c.; including Apparatus for Raising and Lowebing Ships' Boats, price 1s., by post 1s. 2d.
- 74. CASES AND BARRELS, price 8d., by post 91d.
- 75. STEERING AND MANCEUVRING VESSELS, price 1s., by post 1s. 2d.
- 76. OPTICAL, MATHEMATICAL, AND OTHER PHILOSOPHICAL INSTRUMENTS, INCLUDING NAUTICAL, ASTRONOMICAL, AND METEOROLOGICAL ISSTRUMENTS, price 2s. 10d., by post 3s. 2d.
- 77. HARBOURS, DOCKS, CANALS, &c., price 1s. 2d., by post 1s. 4d.
- 78. GRINDING GRAIN AND DRESSING FLOUR AND MEAL, price 2s. 4d., by post 2s. 6\d.
- 79. PURIFYING AND FILTERING WATER, price 1s. 2d, by post 1s. 2dd.

- 14. BLEACHING, DYEING, AND PRINTING CALOTH, OHLEKIN, AND OTHER YARNS Part 1., A.D. 1617-1887, price poet 2. 01d.
 A.D. 1863-1886 (2nd edition), price poet 2. 01d.
 A.D. 1867-1876, price 1s. 6d., by pc. AMPLEMENTS (including methods of 15. ELECTRICITY AND MAGNETISM. A. A.D. 1618-1868, price 5s. 8d., by post Part 1., A.D. 1766-13 price 2s., by post 2s. 34d.
 1806 (2nd edition mion II.—BARN AND FARMYARD IMPLEMENTS (including methods) and storing of grain) [in course of pre-

- ... AGRICULTURE. DIVISION III.—AGRICULTURAL AND TRACTION ENGINES (in course of preparation.)
- 84. TRUNKS, PORTMANTEAUS, BOXES, AND BAGS, price 1s., by post 1s. 11d.
- 85. ICE-MAKING MACHINES, ICE SAPES, AND ICE HOUSES (including the use of freezing agents for preserving alimentary substances), price 6d., by
- 86. UNFERMENTED BEVERAGES, ABRATED LIQUIDS, MINERAL WATERS, &c., price 1s., by post 1s. 13d.
- 87. Tea, Coffee, Chicory, Chocolate, Cocoa, &c., price 8d., by post 9d.
- FIRE ENGINES, EXTINGUISHEES, ESCAPES, ALARMS, &c. (including fire-proof dresses and fabrics), price 2s., by post 2s. 2½d.
- 89. WASHING AND WRINGING MACHINES, price 1s. 8d., by post 1s. 8d.
- CHAINS, CHAIN CABLES, &c., Part I. A.D. 1634-1866, price 9d., by post 10d. Part II. A.D. 1867-1876, price 6d., by post 7d.
- 91. Dressing and Finishing Woven Fabrics, and Manufacturing Fetted Fabrics (including folding, winding, measuring, and packing), price 3s. 6d., by post 3s. 10\dd.
- A Key to the contents of the above volumes of Abridgments will be found on pages 20 to 30.

received for a shorter period that mence on either of the following c

1st January, 1st April,

Annual subscriptions to date from subscriptions must be paid in advance

CONTENTS OF

 Applications for Letters Patent. Grants of Provisional Protection for six months. 	1
3. Inventions protected for six months by the deposit of a Complete Specification.	1:
4. Notices to proceed.	
5. Patents sealed.	12
6. Patents extended.	13.
7. Patents cancelled.	14.
8. Patents on which the third year's	15.
stamp duty of 50%, has been paid.	16.
9. Patents which have become void	10.
by non-payment of the stamp duty of 501, before the expiration	17.
of the third year.	18

The Patent Laws and Regulations of F Colonies have been published in the f missioners of Patents' Journal:—

missioners of Patents' Journal:—	ine i
Argentine Republic, Nos. 1393, 1394, 1465. Austria, Nos. 291, 1980. Austria-Hungary, No. 2036. Baden, and Petty States of Germany, Nos. 325, 2036. Bavaria, Nos. 282, 2036. Belgium, Nos. 297, 840	Gre Gue Gui Hai Hoi Ind

A Zealand, Nos. 861, 1639, 1940, 197 4. A Zealand, Nos. 861, 1639, 1940
Niearagua, No. 2036.
Norway, No. 865.
Portugal, Nos. 325, 1028, 2036.
Prussia, Nos. 313, 329, 2036.
— (Hanover), No. 231.
Queensland, Nos. 859, 2385.
Boman States, No. 319.
Russia, Nos. 334, 508, 1897, 2038.
— (Poland), No. 335.
Ran Jose. No. 2038. San Jose, No. 2036. San Salvador, No. 2036. Saxony, Nos. 236, 2036. South Australia, Nos. 1442, 2579.

Spain, No. 323.
Straits Settlements, No. 1957.
Swedon, Nos. 327, 354, 2036.
Switzerland, No. 2036.
Tasmanis, No. 860.
Trinidad, Nos. 883, 1698.
United States of America, Nos. 638, 646, 753, 789, 887, 967, 1632, 1747, 1748, 1850, 1912, 1946, 1971, 1989, 2011, 2025, 2048, 2073, 2146, 2233, 2254, 2423, 2512.
Venezuela, No. 2036.
Victoria, Nos. 184, 359, 1622.
Western Australia, No. 2441
Wurtemburg, Nos. 314, 995, 2036. Spain, No. 323.

As to Colonial Patents, see Section V., Nos. 4 and 5.

The Trade Marks Laws and Regulations of Foreign States and of the British Colonies have been published in the following numbers of the Commissioners of Patents' Journal:

Argentine Republic, Nos. 2414, 2415. Austria, No. 1997. Cape of Good Hope, No. 2515. France, Nos. 2355, 2371, 2553. Germany, No. 2265.

Spain, No. 2355. United States of America, Nos. 2371. 2133, 2587 Venezuela, No. 2324.

v.

- PATENT LAW AMENDMENT ACTS (15 & 16 Vict. cap. 83, A.D. 1852; 16 Vict. cap. 5, A.D. 1853; and 16 & 17 Vict. cap. 115, A.D. 1853); together with the RULES and REGULATIONS issued by the Commissioners of Patents for Inventions, and by the Lord Chancellor and the Master of the Rolls, under the Acts 15 & 16 Vict. c. 83, and 16 & 17 Vict. c. 115. Price 6d.; by post, 7d.
- 2. APPENDIX to the SPECIFICATIONS of ENGLISH PA-TENTS for REAPING MACHINES. By B. WOODGROFT, F.R.S. Price 6s. 6d.; by post, 6s. 11d.
- 3. INDEX to ALL INVENTIONS PATENTED in ENGLAND from 1617 to 1854 inclusive, arranged under the greatest number of heads, with parallel references to INVENTIONS and DISCOVERIES described in the scientific works of VARIOUS NATIONS, as classified by Professor Schubarth. By B. Woon-CROFT, F.R.S. Price 1s.; by post, 1s. 1d. The foreign works thus indexed form a portion of the Library of
 - the Commissioners of Patents, where they may be consulted.
- 4. EXTENSION of PATENTS to the COLONIES.—Abstract of Replies to the Secretary of State's Circular Despatch of January 2, 1853, on the subject of the Extension of Patents for Inventions, to the Colonies. Second Edition, with Revised Table. 1861. Price 2s.; by post, 2s. $1\frac{1}{2}d$.
- 5. PATENT RIGHTS in the COLONIES.-Abstract of Replies to the Secretary of State's Circular Despatch of July 11, 1856, calling for Information as to the form of the application to be made by persons desirous of obtaining Patent Rights in the Colonies, and the expenses attendant on the Grant of such Pateut Rights. Price 2s.; by post, 2s. 14d.

me most part of Re the early patented Inven

1. Metalica; or the Treatise of of diverse new metallical investor for the Private for Private for Private for Metallica, but in Stantevant, detailed, but in Stantevant, do his Patent, de Granded A.D. 1812. Price 4d.

3. A Commission directed to Sirio ath whether NICHOLAS PAGI VEILOR of Certaine kilnes for the Nos. 33 and 85, respectively de-

Ventor of certaine kilnes for the Aos. 33 and 85, respectively de Price 2d.; by post, 2dd.
4. Dud Dudler's Patent, Nos. 18 at &c. (Letters Patent, Nos. 18 at 1620, and 2nd May 1638.) Price to invented by William Nillelen, now in common use. By J. B. Dy Post, 22. 14d. (Letters Patent, Cetters) at end.

Dr. Tolliausen. (Letters Patent, 2 by Post, 2s. 13d.
6. An exact and true definition of the enterty of the Right Honourable (A. 15 and 15 and

A FREE LIBRARY and READING ROOMS are open to the Public daily, from 10 till 4 o'clock, in the Office of the Commissioners of Patents, 25, Southampton Buildings, Chancery Lane. In addition to the printed Specifications, Indexes, and other sublications of the Commissioners, the Library includes a Colection of the leading British and Foreign Scientific Journals and text-books in the various departments of science and art.

Complete sets of the Commissioners of Patents' publications each set including more than 3,540 volumes and costing for printng and paper upwards of £3,450) have been presented to the authorities of the most important towns in the kingdom, on condition that the works shall be rendered daily accessible to the public, for reference or for copying, free of all charge. The following ist gives the names of the towns, and shows the place of deposit of each set of the works thus presented:

Abordeen (Mechanics' Institution).

Belfast (Queen's College). Beverley (Guildhall).

Birmingham (Central Free Library— Reference Department, Ratcliff

Place).

Place in Place in Place Library and Museum, Town Hall Street.

Bolton-le-Moore (Public Library, Exchange Buildings).

Bradford, Yorkshire (Public Free Library).

Brighton (Free Library, King Street).

Burnley (Office of the Burnley Improvement Commissioners).

Burn. (Athenanum).

processes Commissioners.
Bury. (Athenoum).
Carlisle (Pub. Free Lib*, Police Office).
Cork (Royal Cork Instr., Nelson Place).
Crewe (Railway Station).
Derby (Free Library and Museum).
Dorchester (County Museum and Library).

brary).
Dublin (National Library of Ireland,

Kildare St.)
Dundalk (Free Library).
Gateshead-on-Tyne (Mechanics' In-

stitute).
Glasgow (Stirling's Libr, Miller St.).
Halifax (Town Hall).
Hudderstield (Improvement Commis-

sioners' Offices, South Parade). Hull (Mechanics' Inst., George St.). Ipswich (Museum Library, Museum Street).

Keighley (Mechanics' Inst., North St.) Kidderminster (Public Free Library, Public Buildings, Vicar Street). amington (Free Public Library,

Bath Street). Leeds (Public Library, Infirmary Buildings).

Leicester (Free Library, Wellington Street). Liverpool (Free Public Library, Wil-

liam Brown Strest).

London (British Museum).

Macclessield (Useful Know. Society).
Maidstone (Museum and Public Library).

Manchester (Pres Liby., Camp Field), Newcastle-upon-Tyne (Literary and Philosophical Society).

Newport, Monmouth (Commercial Room, Town Hall). Northampton (Museum, Guildhall). Nottingham (Free Public Libraries). Oldham (School of Arts and Sciences

Lyceum).

Painley (Government School of Design, Gilmour Street). (Mechanics'

Plymouth (Mecha Princess Square). Preston, Lancashire (Dr. Shepherd's Library, the Institution, Avenham), Reading (Literary, Scientific, and Mechanics' Institution, London St.)

ochdale (Free Public Town Hall). Rochdale Library, Rotherham (Board of Health Offices.

Howard Street) Salford (Royal Museum and Library, Peel Park).

Sheffield (Free Library, Street).

Southampton (Hartley Institution). Stirling (Burgh Library, Town House, Broad Street). Stockport (Central Free Library).

Sunderland (Corporation Museum, Athenœum, Fawcett Street).

Athenaum, Romansa (Free Library).
Wakefield (Mechanics'
Barstow Square).
Warrington (The Me Institution,

Museum and Library).

'exford (Mochanics' Crescent Quay). Wexford Institute. Wigan (Corporation Library)

Wolverhampton (Free Library). Wolverton (Railway Station).

York (Lower Council Chamber, Guildhall).

The Commissioners' publications have also been presented to the following Public Offices, Seats of Learning, Societies, British Colosies, and Foreign States :-

Public Offices, &c.

Admiralty-Chatham Dockyard. India Office. Royal School of Mines, &c., Jermya Street, Piccadilly. Dubin Castle, Dublin. Record and Writ Office, Chancey. Sheerness ditto. Portsmouth ditto. Devouport ditto. Pembroke ditto. Dublin. Royal Artillery Institution, Woolwich. Office of Chancery, Edinburgh, Museum of Science and Art, Edin-War Office, Pall Mall. Small Arms Factory, Enfield. burgh.

Seats of Learning and Societies.

Cambridge University. Trinity College, Dublin. Queen's College, Galway. Incorporated Law Society, Chancery Lane, London.

British Colonies.

British Guiana. Canada—Library of Par-	Bombay.	Prince Edward Island. South Australia—Colonial Institute, Adelside. Tasmania.
liament, Ottawa. Bureau of Agri-	Jamaica. Malta.	Trinidad. Victoria—Parliamentary
culture, Toronto. Board of Arts	Mauritius.	Library, Mel-
and Manufactures, Montreal.	New Brunswick. Newfoundland.	bourne. Patent Office.
Cape of Good Hope.	New South Wales. New Zealand.	Melbourne. Public Library.
Ceylon.	Nova Scotia.	Melbourne.

Foreign States.

Foreign States.

Argentine Republic—Buenos Ayres.

Austria—Polytechnie University, Prague.
Polytechnie University, Vienna.

Belgium—Ministère de l'Interieur, Brussels.

Musée de l'Industrie, Brussels.

France—Bibliothèque Nationale, Paris.
Conservatoire des Arts et Métiers, Paris.

Germany—Kaiserliches Patentamt, Berlin.
Alsace—Société Industrielle Mulhouse.
Bavaria—Königliche Bibliothek, Munich.
Gotha—Ducal Friedenstein Collection.
Prussia—Königliche Polytechnische Schule, Aix-la-Chapelle.
Königliche Bibliothek, Berlin.
Königliche Polytechnische Schule, Harover. Konigliche Polytechnische Schule, Harover. Sazony-Polytechnische Schule, Dresden. Wurtemberz-Bibliothek des Musterlagers, Stutteart. Italy-Ufficio delle Privative, Rome. Notherlands—Harlem.
Russia—Bibliothèque Impériale, St. Petersburg.
Spain—Ma-Irid.
Sweden—Teknologiska Institutet, Steckholm.
United States—Patent Office, Washington.
Astor Library, New York.
State Library, Albany.
Franklin Institute, Philadelphis.
Seen Public Library. Boston. Notherlands-Harlem.

Frankin Institute, Philadelphia.
Free Public Library, Roston.
Library Company, Philadelphia.
Free Public Library, Chicago.
Peabody Institute, Baltimore.
Historical Society, Madison, Wisconsin.
Cornell University, Ithica, N.Y.
Wassentill Library, 25, Louis, 25, Lou Mercantile Library, St. Louis. Mechanics' Institute, San Francisco.

Grants of complete series of Abridgments of Specifications have been made to the undermentioned Mechanics' Literary and Scientific

Institutions: -Aberystwith (Literary and Working Men's Reading Room).

Alnwick (Scientific and Mechanical Institution). Alton (Mechanics' Institution) Altrincham (Altrincham and Bowdon Literary Institution). Ashburton (Ashburton Library, Bast Street).
Ashby-de-la-Zouch (Mutual Improvement Society).
Ashton-under-Lyne, (Mechanics' Institution) Aston, near Birmingham (Aston Manor Public Library).
Aylesbury (Kingsbury Mechanics' Institute) stitute).
Bacup (Mechanics' Institution).
Ballymoney (Town Hall).
Banbridge (Literary and Mutual Improvement Society).
Banbury (Mechanics' Institution).
Barnstaple (Literary and Scientific Basingstoke and Club).

Bath (Athenaum).

— (City Free Library).

— (Royal Literary and Scientific Institution). Batley (Mechanics' Institution).
Battle (Young Men's Christian Association). Belfast (Athenoum).

(Northern Law Club). — (People's Literary Institute). Berkhampstead, Great (Mechanics' Institute). - (Working Men's College). Birkenhead (Literary and Scientific Society). Birmingham (Bloomsbury Institution). - (Contral Londing Library). (Free Library and News Room. Gosta Green.)
(Graham Street Institution). Room). Bradford, Yorkshire (Church Institute) (Library and Literary Society). (Mechanics'

Bristol (Athenœum). ------ (Institution). – (Law Library Society). – (Museum and Library, Queen's Road).
Browsgrove (Literary and Mechanics' Institute). Burnley (Literary Institution).
——— (Mechanics' Institution). Burslem (Wedgwood Institute).
Bury (Athenœum).
Bury St. Edmund's (Athenæum).

(Mechanice Institution). Calne (Literary Institution). Canterbury (Museum). Carharrack (Literary Institute). Carmarthen (Literary and Scientific Institution). Cheddar (Literary Institution). Cheltenham (Permanent Library).
Chertsey (Literary and Scientific
Institution). Chester (City Library and Reading · Room). Chesterfield (Mechanics' Institution). Chichester (Literary Society and Mechanics Institute). Chippenham (Literary and Scientific Institution) Christchurch (Working Man's Institute). Cockermouth (Mechanics' Institution). Association) Deal (Deal and Walmer Institute). Derby (Mechanics' Institution). Devouport (Mechanics' Institute) Dewsbury (Mechanics' Institution). Diss (Reading Room and Library). Doncaster (Free Library). (Great Northern Mechanics' Institute). (Young Men's Christian Association) Dorchester (County Museum and Library).

(Working Men's Institute).

Dudley (Mechanics' Institution). Braintree (Braintree and Bocking Literary and Mechanics Institu-Dukinfield Willage Library and Reading Room).
Dumbarton (Philosophical and Lite-Brampton, near Chesterfield (Local Museum and Literary Institute). Breage, Cornwall (Institution). rary Society).
Dumfries (Mechanics' Institution).

Institute)

tion).

Dundee (Young Men's Christian As-sociation and Literary Institution). Durham (Mechanics' Institute). Eagley, Bolton le-Moors (Library and Institute). Ealing (Mechanics' Institute). East Retford (Literary and Mutual Improvement Society). Ebbw Vale (Literary and Scientific Institute) Edinburgh (Association of Science and Art). (Philosophical Institution). - (Royal Scottish Society of (Watt Institution and School of Art). · (Working Men's Club). Egham (Literary Institute).
Egramont (Mechanics Institute).
(Workmen's Institute).

Exeter (Decon and Exeter Albert
Memorial Museum, School of Science and Art, and Free Library). - (Devonand Exeter Institution). Exmouth (Reading Room).

Farnham (Young Men's Association).

Faversham (Institute).

Flowey (Working Men's Reading Rooms). Frome (Literary and Scientific Institution).
—— (Mechanics' Institution). Gainsborough (Literary, Scientific and Mechanics' Institute). Garforth, near Leeds (Working Men's Club). Glasgow (Athenaum). (Central Working Men's Club and Institute).

(City Industrial Museum,
Kelvinggrove Park).

(Institution of Engineers in (Mechanics' Institution, Bath Street) (Philosophical Society). Glastonbury (Literary Institute) Godmanchester (Working B Men's Reading Room). Gosport (Gosport and Alverstoke Literary and Scientific Institution). Grantham (Public Literary Institution). Gravesend (Gravesend and Milton Library and Reading Rooms). Guernsey (Working Men's Association1. Guildford (Working Ven's Institution). Hadleigh (The Reading Room). Halesworth (Mechanics' Institute). Halifax (Literary and Philosophical Society). (Mechanice' Institute). Halstend (Literary and Mechanics' Hastend (Literary and Moonance Institute).
Hastings (Literary and Scientific Institute). stitute) (Mechanics' Institution). Hawarden (Literary Institution).

chanics Institution). Helston (Reading Room and Library). Hemel Hempsted (Mechanics' Institute). Hereford (Natural History, Philos-phical, Antiquarian, and Literary Society). Hertford (Literary and Scientist Storeng, ...

Rertford (Literary and Scientife Institution).

Hitchin (Mechanics' Institute).

Hitchin (Mechanics' Institute).

Hollowk (Mechanics' Institution). Hollingwood (Working Mon's Club). Holt, Norfolk (Literary Society). Holywell Green (Mochanics' Institution) THEORY.

Horncastle (Mechanics' Institution).

Huddersfield (Mechanics Institution).

Hull (Church Institute).

— (Literary, Scientific, and Mechanics Institute). nics' Institute). — (Lycoum Library). (Royal Institution, Albion Street).
(Young Poople's Institute).
Huntingdon (Literary and Scientific Institution). Ipswich (Working Mon's College). Kendal (Christian and Literary Insti-(Highgats Mechanics' Insti-(Working Men's Institute). Kidderminster (Mechanics Institute). Lee, Kent (Working Men's Institution) tion).
Leeds (Chapeltown Branch Library).
(Church Institute).
(Holbeck Branch Library).
(Hunslet Branch Library).
(Leeds Library).
(Mechanics' Institution and Literary Society).

—— (Philosophical and Literary Society).

(Working Men's Institute).

(Young Men's Christian Association). ciation).

Leek, Staffordshire (Literary and Mechanics Institution).

Leicester (Law Society).

(Young Men's Christian Association). Leighton Buzzard (Working Men's Mutual Improvement Society). Leith (Mechanics' Subscription Library).
Lowe (Fitzroy Memorial Library).
(Mechanics' Institute).
(School of Science and Art).
Lincoln (Mechanics' Institute). Reading Boom).
Lockwood (Mechanics' Institution).
London Albert Working Men's Club,

١

Hebden Bridge, near Todmorden (Me-

London (Beaumont Institute, Mile End). (Bedford Working Men's Institute, Spitalfolds).

(Birkbeck Institution, Southampton Buildings, Chancery Lane).

———— (Bow and Bromley Institute, Bow Road).

Bow Road).

(Bow Common Working Men's
Club, Devon's Road, Bow Common).

(Christchurch Working Men's
Club, New Street Lark Hall Lane, Clapham).
—— (Free Public Library, Great Smith Street, Westminster). Club and Institute, Holloway Road). (King's College).

(King's College).

(Literary and Scientific Instisution, Walworth).

(London Association of Foremen Engineers and Draughtsmen) (London Institution, Finsbury Circus.)

(London Library, St. James').

(Royal Architectural Museum and School of Art, Tufton Street, Westminster).

(Royal Institute of British Architects, Conduit Street, Hanover Square.) - (St. James and Soho Working Men's Club, Rupert Street, Soho).

(South London Working Men's College, Blackfriars Road).

(Working Men's Club, Brixton Hill).
(Working Men's Club, St. Mark's, Victoria Docks).
Mark's Club and Mark's, Victoria Docks).
——— (Working Men's Club and Institute, Battersea).

(Working Men's Club and Institute Union, Strand). - (Working Men's Club, Tri-angle, Hackney). -(Working Men's College, Great Ormond Street).
Longwood (Mechanics' Institution).
Lowestoft (Library and Reading Room).
ye (Institution). Lye (Institution).

Lymington (Literary Institute).

Madeley, Shropshire (Austice Memorial, Workmen's Club and Institute).

Maidstone (St. Paul's Literary Institute). stitute). (Working Men's Club and Institute. Manchester (Ancoats Branch Free Library). (Campfield Free Lending Library). (Cheetham Branch Library). Branch Free Library).

(Hulme Branch Free

Manchester (Owen's College). (Portico Library Mosley Street). (Rochdale Road Branch Free Library).
(Royal Exchange Library). · (Scientific and Mechanical Society).
Manningtree (Manningtree and Mistley Literary and Scientific Institution).
Mansfield (Co-operative Industrial Society).

——— (Mechanics', Artizans', and Apprentices' Library).
——— (Mechanics' Institute). Marlborough (Reading and Mutual Improvement Society).
— (Working Men's Hall).
Melksham (Mutual Improvement Society).
Melton Mowbray (Literary Institute).
Mere, near Bath (Literary Association). Middlesborough (Iron and Steel Institute). - (Mechanics' Institution). Middlewich (Literary and Scientific Institution).
Modbury (Mechanics' Institution). Newark (Mechanics' Institute). Newbury (Literary and Scientific Institution). Newcastle-upon-Tyne (Mechanics' Institution). — (Working **Mon's** Club). New Mills, near Stockport (Mechanics' Institute). Newport, Isle of Wight (Young Men's Society and Reading Room).
Northampton (Mechanics' Institute). North Shields (Free Library). Nottingham (Mechanics' Institution). (Subscription Library Bromley House). Oldham (Mechanics' Institution, Wernoth) Old Kilpatrick, near Glasgow (Public Library).
Ormskirk (Public Library).
Oswestry (Institute).
Over, Cheshire (Working Men's Institute).
Oxford (North Oxford Working Men's Patricroft (Mechanics' Institution). Pembroke Dock (Mechanics' Institute). Pendleton (Mechanics' Institution). Penzance (Institute).
———— (Penzance Library). -(Working Men's Association). Library, Hiah Perth (Mechanics' Street). Peterborough (Mechanics Institution). Plymouth (Working Men's Institute).
Pontypool (Literary Institute).
Poole (Literary and Scientific Institution).

(Law Library). (Mechanics' Institution). (Natural History Museum.

Library).

V.

Poole (Mechanics' Institute) Port Glascow (Public Library). Portsea Island (Young Men's Christian Association). Preston (Institution for the Diffusion of Knowledge) Redruth (Redruth Institution). Reigate (Mechanics' Institution). Richmond (Working Men's College). Rotherham (Rotherham and Mashro' Literary and Mechanics' Institute). Royston (Institute) Rusholme (Public Hall and Library). Ryde, Isle of Wight (Philosophical and Scientific Society). Christian Assiciation and Literary Institute) Saffron Walden (Literary and Scientific Institution). St. Just (Lost tution). Salisbury (Literary and Scientific Institution). Saltaire (Literary Institute). Scarboroughi Mech mics and Literary Institute, Vernon Place). Selby (Mechanics' Institute) Sevenesis (Lacra, J Institution), Shaftesbury (Literary Institution), Shermess (Literary Institute), Sheffield (Beanch Free Library), (Brightside Branch Library) Sevenoulis (Literary and Scientific · (Literary and Philosophical Society, School of Arts). Shepton Mallet (Reading and Mutual Improvement Society). Sidmouth (Mechanics Hall). Skipton, Yorkshire (Mechanics' Institute). Slough (Mechanics' Institute) Bmethwick. Staffordshire (Library, Reading Room, and Literary Institute). Southampton (Po'ytechnic Institu-- (Workmen's Hall). Southport (Athenaum). South Shields (Public Free Library). Southwell (Literary Institution) Spalding (Christian Loung Men's Asnociation) Stafford (Mechanics' Institute), Staines (Mechanics' Institution), Stalybridge, Cheshire (Mechanics' Institution). Stamford (Institution). Stockton-on-Tees (Young Men's Christian .1880ci.tion) Stourbridge (Church of England Association.) (Iron Works Reading Room and Library.) - (Mechanics' Institution). (Working Men's Institute..

Stowmarket (Literary Institution). Stratford (Working Men's Hall). Nudbury, Suffolk (Literary and In-chanics' Institute). Surbition (Reading Room and Literary Latitute). Institute). Swannen (Royal Institution of Such li'ales) (South Wales Institute of Engineers).
(Working Man's Institute). Tavistock (Mechanics' Institute). (Public Library). Thornton, near Bradford (Mechanica Institute). Todmorden (Nechanics' Institution). Truro (Cornecall County Library).
—— (Institution). Tunbridge (Literary and Scientific Institute) Tunbridge Welia (Mechanics' Institute). tion). - (Society of **Literature** and Science) Turton, near Bolton (Chapel Tres Institute). Tynemouth (Proc Public Library). Ulverston (Temperance Hall). Uttoxeter (Mechanics' Literary Insti-Uxbridge (Uxbridge and Hillingdon Reading and Necession Institute). Wakefield (Mechanics' Institute). Wallingford (Pree Library and Wallingford AFree Literary Institute).
Walsall (Free Library). Walsham-le-Willows, Saffolk (Institute). Ware (Institute) Cinh). Wellington (Young Men's Christian Association). Wells, Somerset (Young Men's So-West Bromwich (Free Library), Whaleybridge (Mechanics Institute). Whitby (Institute). (Museum). Whitehaven (Mechanica Institute) (Working Men's Reading Room). Whitstable (Institute) Wilton (Literary Institute).
Winchester (Mechanice Institution).

(Training College).
Winsford (Town Hall Reading Room). Wirksworth (Mechanics Institution). Wisheach (Mechanics Institution). Witham (Literary Institution). Witney (Athenaum). Witney (Atnonwum;. Wolverhampton (Law Library). (Library). Wolverton (Institute).

Woodbridge (Literary and Mechants'

Institute).

College.

Young Men's Chris-

tian Association, Scranton Pennsyl-

Victoria-School of Mines, Ballarat.

Crawfordsville, Indiana

Turkey-Literar tute, Smyrna.

School, Zurich. urkey—Literary and Scientific Insti-

United States-American Academy of Arts and Sciences, Boeton.

Poole (Mechanics' Institute)
Port Glasgow (Public Library).
Portsen Island (Foung Men's Christian Association). Preston (Institution for the Diffusion of Knowledge). Redruth (Redruth Institution). Reignte (Mechanics' Institution). Richmond (Working Men's College). Rotherham (Rotherham and Masbro Literary and Mechanics' Institute). Boyston (Institute) Rusholme (Public Hall and Library). Ryde, Isle of Wight (Philesophical and Scientific Society).

Christian Association and Literary Institute).
Saffron Walden (Literary and Scientific Institution). St. Just (Institution). St. Leonards (Mechanics' Institution). Salford (Working Men's Club). Salisbury (Literary and Scientific Institution). Saltaire (Literary Institute) Salvanie (Literary Institute).
Scarborough (Mechanics' and Literary
Institute, Vernon Place).
Selby (Mechanics' Institute). Sevenoaks (Literary and Scientific Shepton Mullet (Reading and Mulual Improvement Society).
Sidmouth (Mechanics' Hall). Skipton, Yorkshire (Mechanics' Insti-Blough (Mechanics' Institute Smethwick, Staffordshire (Library, Reading Room, and Literary Institute). Southampton (Polytechnic Institution). (Workmen's Hall). Southport (Athenaum) South Shields (Public Free Library). South well (Library Institution). Spalding (Christian Young Men's Association) Stafford (Mechanics' Institute). Stafford (Mechanics' Institution). Staines (Mechanics' Institute). Stalybridge, Institution). Cheshire (Mechanics' Stamford (Institution) Stockton-on-Tees (You Christian Association). (Young Men's tourbridge (Church of England Association.) Stourbridge Room and Library.) (Mechanics Institution). (Working Men's Institute).

Stowmarket (Lilerary Institution). Stratford (Working Men's Hall). Nudbury, Suffolk (Lilerary and Me-chanics Institute). Surbiton (Reading Room and Literary Institute Swansea (Koyal Institution of South Wales). (South Wales Institute of Engineers eers). - (Working Man's Institute). Tavistock (Mechanics' Institute).

(Public Library).

Thornton, near Bradford (Mechanics' Institute). Todmorden (Mechanics' Institution). Truro (Cornwall County Library).
——— (Institution). (Royal Institution of Cornwell).
Tunbridge (Literary and Scientific Institute). Mochanics' Institute). Tunbridge Welis (Mochanics' Institution). · (Society of Literature and Science) Turton, near Bolton (Chapel Town Institute).
Tynemouth (Free Public Library).
Ulverston (Temperance Hall).
Uttoxeter (Mechanics' Literary Insti. Uxbridge (Uxbridge and Hillingdon Reading and Newsroom Institute). Wakefield (Mechanics' Institute). Wallingford (Free Library Literary Institute). Walsall (Free Library). Walsham-le-Willows, Suffolk (Institute) Ware (Institute). Warminster (Athonæum) Club). Wellington (Young Men's Christian Association). Wells, Somerset (Young Men's Society).
West Bromwich (Free Library).
Whaleybridge (Mechanics' Institute). Whithy (Institute).
———— (Musoum). Whitehaven (Mechanics' Institute).

(Working Men's Reading Whitstable (Institute) Whitstable (Institute).
Wilton (Literary Institute).
Winchester (Mechanics Institution).
— (Training College).
Winsford (Town Hall Reading Room).
Wirksworth (Mechanics' Institution).
Wisheach (Mechanics' Institute).
Withom (Literary Institution). Witney (Athenœum). Wolverhampton (Law Library). (Library). Wolverton (Institute). Woodbridge (Literary and Mechanics'

Institute).

Yeovil (Mutual Improvement So-ciety). York (Institute of Popular Science, Worcester (Railway Literary Insti-Workington (Mechanics' Institute).
Yarmouth, Great (Parochial Library æc.). (North Eastern Railway Library and Reading Room). and Museum). Presentations of portions of the Works, published by order of the Commissioners of Patents, have been made to the following Libraries:-London (Hon. Soc. of Lincoln's Inn).

Middle Temple).

Aeronautical Society).

(British Horological Insti-Armagh (Town Clerk's Office).
Ayleabury (Mechanics' Institution and Literary Society, Kingsbury).
Birmingham (Institution of Mechanical Engineers, Newhall Street).
Boston, Lincolnshire (Public Offices, tute). (General Post Office). (Guildhall Library). (Inst. of Civil Engineers). Market Place). Cambridge (Free Library, Jesus Lane). Cambridge (Free Library, Jesus Lane).
Cardiff (Free Library and Museum).
Chester (Mechanics' Institute, St.
John Street).
Coalbrookule (Literary and Scientific Institution).
Coventry (Watchmakere' Association).
Dublin (Public Library Prolies Odontological Society). (Royal Society). (Society of Arts). (Society of Telegraph Engineers. - (United Service Museum). Manchester (Literary and Philoso-phical Society, George Street).

(Mechanics' Institution, (Dublin Library, D'Olier Dublin Street). Dundee (Association of Watchmakers David Street.

Newcastle-upon-Tyne (North of England Institute of Mining Engiand Jewellers).
Ennis (Public Library).
Gloucester (Working Men's Institute, neers). Southgate Street) Guernsey (Public Record Office). Guildford (Mechanics' Institute). Ipswich (Mechanics' Institute, Tavern Over Darwen (Free Public Library). Oxford (Bodleian Library).

Stretford, near Manchester (Mechanics' Institute).

Swindon. New (Mechanics' Insti-Street) Kew (Library of the Royal Gardens). Leominster (Literary Institute). London (House of Lords). (House of Commons). tution). Tamworth (Library and Reading Room, George Street). Yarmouth, Norfolk (Public Library, - (Hon. Soc. of Gray's Inn) Inner Temple). South Quay). British Colonies and Foreign States. Bri. tish Columbia—Mechanics' Insti- | United States—American Institute, ta. te. Victoria. New York. ta, te, Victoria. - Public Library, American Society of Now Westminster.

Prance A Carlemy of Science. Paris.

Germany — Imperial and Provincial

Library of the University, Stras-Civil Engineers, New York -Industrial University. Champaign, Illinois. Librar burg. Mechanics' Institute. San Francisco.

Mercantile Library AsPanneyl vania. Imperial Statistical Office, Berli n. sociation, Pittsburgh, Pennsylvania.

Minnesota Historical
Society, Saint Paul, Minnesota. Polytechnic School, Carlse, Baden. ruh Italy —Communal Library, Palermo, Royal Institution for the En-uragement of Science, Naples New York Academy of the Useful Arts, New York. herlands — Library of the Poly-chnic School, Delft. v Zealand—Athensum and Mc-Net Association, San Francisco. Patent Office Bar Ask Zealand—Athenæum and Me-hanics' Institute, Dunedin. ssia—Imperial Technological Insti-tute, St. Petersburg. vitzerland — Federal Polytechnic School, Zurich. arkey—Literary and Scientific Insti-tute. Smyrna. nited States—American Academy of Arts and Sciences Recton. sociation, Washington. - Smithsonian Institute, Washington. Wabash College. Crawfordsville, Indiana.

Young Men's Christian Association, Scranton Pennsyl-

Victoria-School of Mines, Ballarat.

Arts and Sciences, Boston.

U,

NOTICE RELATIVE TO NEW EDITIONS OF PRINTED SPECIFICATIONS OF EXPIRED PATENTS.

Office of the Commissioners of Patents,
25, Southampton Buildings, Chancery Lane.
In every case where the Specification of an expired Patent is out print, the Commissioners of Patents will be willing to reprint the same and supply copies thereof at cost price, on the prepayment of a sum from money sufficient to cover the cost of reprinting by the person requiring them.

By Order, H. READER LACK, Clerk of the Commissioners of Patents, &c.

23rd November, 1876.

NOTICE RELATIVE TO FULL-SIZE COPIES OF DRAWINGS BELONGING TO THE SPECIFICATIONS OF PATENTS.

> Office of the Commissioners of Patents, 25, Southampton Buildings, Chancery Lane.

For legal or other purposes the Commissioners of Patents are willing to supply, at the undermentioned rates, full-size copies of Drawings belonging to Specifications printed under the new system by the process of Photo-lithography—

No.	of Cop	ies.				sheets erial.	Half-s Imp	heets erial.	
Single Copies Not exceeding 6	copies	:	:		25 28 30	₫. ∪ 0	8. 15 18 20	<i>d</i> . 0 0	
" 25		:	:	-	32	ő	22	ŏ	

In cases where from the use of color or other causes a satisfactor Photograph cannot be obtained from the original Drawing, an existing charge will be made to cover the expense of taking a tracing.

There will also be a small additional charge for coloring th

of colored original Drawings.

Applications stating the number of copies required and accomment by a remittance sufficient to cover the cost should be addressed Clerk of the Commissioners.

By Order, H. READER LACE, ute)
Clerk of the Commission of Patents, &c.

24th April, 1877.

TRADE MARKS JOURNAL; INDEXES TO APPLICATION NO. (1981).

The Trade Marks Journal is issued by the Registrar of Trade Mark in parts of 24 pp., royal 4to., price One Shilling. This publicatid contains illustrations of all the trade marks applied for under the Trade Marks Registration Acts, as well as the name and calling a each applicant, the description of goods, and the length of time figures which such mark has been used, thus affording all persons interests.

the use of trade marks authentic information as to the nature of the marks applied for in their respective trades. The first number was published on Wednesday the 3rd of May 1876. The Journal is sold by Knight & Co., 90, Fleet Street, E.C.; Stevens & Sons, 119, Chancery Lane, W.C.; E. Stanford, 55, Charing Cross, S.W.; Shaw & Sons, Fetter Lane, E.C.; Waterlow & Sons, "Limited," 24 and 25, Birchin Lane, E.C., 60, 61, and 65, London Wall, E.C., and 49, Parliament Street, S.W.; Butterworths, 7, Fleet Street, E.C.; George Downing, 8, Quality Court, Chancery Lane, E.C.; Trübner & Co., 57 and 59, Ludgate Hill, E.C., J. M. Johnson & Sons, Limited, 3, Castle Street, Holborn, E.C., and 56, Hatton Garden, E.C.; Palmer & Howe, 1, 3, and 5, Bond Street, Manchester; Alex. Thom, 87 and 88, Abbey Street, Dublin; and Adam & Charles Black, Edinburgh. Copies will be sent by post by any of the above firms on receipt of an application, giving the name and address of the sender, and accompanied by a Post Office Order for the amount due in respect of the copies required.

Indexes to the Applications for the Registration of Trade Marks advertised in the Trade Marks Journal during the year 1876, and the half years ending June 1877, December 1877, and June 1878 have been published, price Three Shillings each.

A pamphlet containing the Rules under the Trade Marks Registration Acts, 1875-7, together with the Acts and the Registrat's Instructions to Applicants, has also been published, price One Shilling. Copies of this pamphlet and of the Indexes can be obtained of the firms who sell the Trade Marks Journal.

PATENT OFFICE MUSEUM, SOUTH KENSINGTON.

This Museum is open to the public daily, free of charge. The hours of admission are as follow:—

Mondays, Tuesdays, and Saturdays, 10 A.M. till 10 P.M.

Wednesdays, Thursdays, and Fridays, from 10 A.M. till 4, 5, or 6 P.M., according to the season.

If any Patentee should be desirous of exhibiting a model of his invention in London, he may avail himself of this Museum, which has been viewited since its opening on the 22nd June 1857 by more than 4.400,0000 persons. The model will be received either as a gift or loan; if the stited as a loan, it will be returned on demand. Before sending a model, it is requested that the size and description of it shall first be given to the Superintendent of the Patent Office Museum. No charge is a dade for the exhibition of models.

GALLERY OF PORTRAITS OF INVENTORS, DISCO-VERERS, AND INTRODUCERS OF USEFUL ARTS.

Presentations or loans of Portraits, Medallions, Busts, and Statues, augmentation of the Collection, are solicited. They will be duly knowledged in the Commissioners of Patents' Journal, and included the next edition of the Catalogue.

Abridgments of Specifications.

The following is a KEY to the classes already published. The numbers refer to the list of Abridgments on pages 4, 5, 6, and 7, where the full titles, prices, &c., are given:—

A.

Accordions. See Music, &c., 26. Accoutrements. See Fire-arms, &c., 10. Acetic acid. See Acids, 40. Acids, &c., 40. Aerated liquids. See U Aerated liquids. See Unfermented beverages, &c., 86. Aerating water. See Purifying, &c., water, 79. Aeronautics, 41. Ageing fabrics. See Bleaching, &c.,14. Agricultural engines. See Steam engine, 49. Agriculture-field implements and processes, 81. Agriculture, steam. See Steam culture, 8. Air, &c., engines, 62. Air guns. See Fire-arms, &c., 10. Air pumps of steam engines. Steam engine, 49, larum clocks. See Watches, &c., 9. Alarum clocks. Alarums, electric. See Electricity, 15.
Alarums, fire. See Fire engines, &c., 88 Alarums, gas. See Gas, 17. Albums. See Photography, 19; Books, 43. Alkalies. See Acids, &c., 40. Alloys. See Metals, &c., 18. Alum. See Acids, &c., 40. Alumina. See Acids, &c., 40. Aluminium. See Metals, &c., 18; Acids, &c., 40. Amalgamating metals. See Metals, &c., 18. Ambulances. See Medicine, &c Ammonia. See Acids, &c., 40. Ammonium. See Acids, &c., 40. See Medicine, &c., 25. Ammunition. See Fire-arms, &c., 10. Anchors, 69. Anchors for steam ploughing. See Agriculture, 81. See Optical, &c., 76. Anemometers. Ancienometers. See Openin, &C., 76.
Anilino. See Bleaching, &C., 14.
Animal charcoal. See Sugar, 48.
Annealing furnaces. See Fuel, &c., 30.
Anthracite furnaces. See Fuel, &c., 30. Antimony. See Metals, &c., 18; Acids, &c., 40.

Aqueducts. See Bridges, &c., 36.
Arches. See Bridges, &c., 36.
Armour plates, rolling. See Iron and
Steel, 6.
Armour plates, shaping. See Ship
building, 21.
Arsenic. See Metals, &c., 18; Acids,
&c., 40.
Arsenic acid and arsenious acid. &e
Acids, 40.
Artificial leather, 80.
Artists' instruments, &c., 54.
Asphalte. See Roads, &c., 35.
Astronomical instruments. See Optical, &c., 76.
Axles, axletrees, and axle-boxes, for
railway carriages, &c.. See Carriage
for railways, 40; Steam engine, &c.

B.

Bagatelle tables. See Toys, &c., 51, Bags. See Trunks, &c., 81. Bags, paper. See Cutting, &c., 12 Balances. See Raising, &c., 31. Balancing, &c. millstones. See ing grain, 78. Balloons, toy. See Toys, 51 Balloons, toy. See Toys, 51 Balloons, toy. See Toys, 51 Balls. See Toys, 51. Band boxes. See Trunks, &c. Bands and belts. See Wearin rel, 66. Barium. See Acids, &c., 40. Barley mills. See Grinding gr. Barroneters. See Optical, &c., 70 Barrels, 74. Baryta. See Acids, &c., 40. Baskets. See Trunks, &c., 84. Baths for medical use. See Medic &c., 25. Bayonets. See Fire-arms, &c., 70. Bencons. See Harbours, &c., 71. Beads. See Wearing apparel, 68. Beds and bedsteads for invalids. Medicine, &c., 25; Furniture, Beds and bedsteads for invalids. Medicine, &c., 25; Furniture, See Dressing, &c., 91. Bellows. See Fuel, &c., 91. Bellows. See Fuel, &c., 30.

Iusic. &c., 26. al. See Medicine, &c., 25. nfermented, 86. ce Toys, &c., 51. e Cooking, 61. See Pottery, 21. ce Acids, &c., 40. ddlery, 34. e Skins, &c., 55; Wearing s. See Iron and steel, 6; 30. c., fabrics, 14. ibrous substances. See Spinning, 28. Furniture, 39. dating. SeeVentilation,52. Raising &c., 31. Vearing apparel, 66. g. See Ship-building, 21. ng and lowering. See c., 31: Masts, &c., 73. See Iron and steel, 6. See Metallic pines, 70. cam engines. See Steam

flour. See Grinding grain,

Locks, &c., 60.
Sails, &c., 58.

s. See Trunks, &c., 84.
Id bonnet boxes. See
pparel, 65.
g machines. See Brush-

See Wearing apparel, 67. See Wearing apparel, 67. Wearing apparel, 67. See Acids, 40. See Preparing, &c., cork,

ns, leads, &c. See Wri-

Trunks, &c., \$4.

See Wearing apparel, 68.

Wearing apparel, 66.

Lace, &c., 29.

Carriages for railways,
engine, 49; Muning, 71.

Metals, &c., 18.

Ig. See Cooking, &c., 61.

wders. See Tea, &c., 87.

See Wearing apparel, 68.

See Fire-arms, &c., 10.

lee Wearing apparel, 68.

lies, 22.

lating. See Ventilation,

. ε6.
. Nee Agriculture, \$1.
. Nee Agriculture, \$1.
. kee Wearing apparel, 68.
artists. Nee Artists' in.54: Brushing, 57.
..67.
..
we Wearing apparel, 68.
2 Carriages, &c., for rail-

· Music, &c., 26.

Bullet-making machines. See Fire arms, &c., 10.

Bungs. See Proparing and cutting cork, 56.

Buoys. See Harbours, &c., 77.

Bustles See Wearing apparel, 66.

Buttons. See Wearing apparel, 68.

C.

See Raising, &c., 31. Cable stoppers. See Raising, &c., 31.
Cables, telegraphic. See Electricity, 15.
Caddies. See Trunks, &c., 84.
Cadmium. See Acids, &c., 40.
Cages, miners' safety. See Mining, 71.
Calssons. See Harbours, &c., 77.
Calcining furnaces. See Metals, &c., Cable stoppers. Calcining IUTHENCE.
18; Fuel, &c., 30.
Calcium. See Acids, &c., 40.
Calcium. See Machines. See Optical, Calendering. See Dressing and finishing, &c., 91. Calico, bleaching, dyeing, and printing, 14. Cameras. See Photography, 19: Optical, &c., 76.
Canal navigation. See Marine propulsion, 5. pulsion, 5.
Canals. See Harbours, &c., 77.
Candles. See Oils, &c., 27.
Candlesticks. See Lamps, &c., 44.
Caunon. See Fire-arms, 10.
Canvas. See Weaving, 20.
Capes. See Weaving apparel, 66.
Caps and cap fronts. See Wearing Caps and cap fronts. Caps and capsules. See Preparing and cutting cork, 56. Capstans. See Raising, &c., 31. Carbon. See Acids, &c., 40. Carbon. See Acids, &c., 40.
Carbonic acid. See Acids, 46.
Cardboard. See Paper, 11.
Card cases. See Books, &c., 43.
Carding engines. See Spinning, 28.
Cards. See Cutting, &c., paper, 12;
Letterpress printing, &c., 13.
Cards, playing. See Toys, &c., 51.
Cargoes, ventilating. See Fire engines, &c., 88.
Carpet bags. See Trunks. &c., 84. Carpet bings. See Trunks, &c., 84. Carpets. See Weaving, 20. Carriage laups. See Laups, 44. Carriages for guns. See Fire-arms, &c., 10. Curriages for invalids. See Medicine. &c., 25. acc., 20. Carriages, &c., for railways, 46. Cartridges. See Fire-arms, &c., 10. Cartridges, miner's. See Mining, 71. Cask stands. See Casks, 74. Caskets. See Trunks, &c., 84. Casks, 74. Casting metals. See Metals, &c., 18. Castors. See Furniture, 39. Cattle medicines. See Farriery, &c. Cement, brush maker's. See Brushing,

Centre boards. See Steering, 75. Cesspools. See Waterclosets, &c., 63. Chains, chain cables, &c., 90. Chains, jewellery. See Wearing ap-parel, 68; Chains, &c., 90. Chairs. See Furniture, 39. Chairs, invalid. See Medicine, 25; Furniture, 39. Chalybeate waters. See mented beverages, &c., 86. Chamber utensils. See Waterclosets, &c., 63. Chandeliers. See Lamps, &c., 44. Charcoul, animal. See Sugar, 43. Chevise making. See Milking, &c., 72, Chemises. See Wearing apparel, 66. Chemille. See Lace, &c., 29. Chenille. See Lace, &c., 29. Chess. See Toys, 51. Chests. See Trunks, &c., 84. Chicory, manufacturing and preparing for sale. See Tea, &c., 87. Chimneys and chimney teps. See Fuel, &c., 30. Chimneys sweeping. See Brushing, 57. Chinaware. See Pottery, 24. Chlorine. See Acids, &c., 40. Chlorine. See Acias, &C., \$0.
Chocolate or cocoa, concentrated extracts of. See Tea, &c., 87.
Chocolate or cocoa, manufacturing and preparing for sale. See Tea, &c., 87.
Chocolate, preparing as a drink. See
Unfermented beverages, &c., 88.
Chambium. See Acids &c., \$6. Chromium. See Acids, &c., 40. Chromo-lithography. See Letterpress and similar printing, 13; Ornamenting paper, &c., 12. Churning. See Milking, &c., 72. Cigars, cigarettes, and cigar holders. See Tobacco, 42. See Tobacco, 42.
Cinder sifters. See Fuel, &c., 30.
Cisterns. See Hydraulics, 32.
Citric acid. See Acids, 40.
Clasps and clips. See Writing, &c., 37.
Clinometers. See Optical, &c., 76.
Cloaks. See Wearing apparel, 66.
Clocks. See Watches, &c., 9.
Clod crushers. See Agriculture, 81. Clocks. See wateries, ac., s. Clod crushers. See Agriculture, 81. Clogs. See Wearing apparel, 67. Coal scuttles. See Fuel, &c., 30. Coating metals. See Metals, &c., 18; Plating, &c., metals, 23. Coats. See Wearing apparel, 66. Cobalt. See Wearing apparel, 66. Cobalt. See Metals, 18; Acids, &c., 40. Cocks. See Hydraulics. 39. Cocks. See Hydraulics, 32.
Cocoa or chocolate, concentrated extracts of. See Tea, &c., 87.
Cocoa or chocolate, manufacturing and preparing for sale. See Tea, &c., 87, Cocoa, preparing as a drink. See Unfermented beverages, &c., 86.
Coffee, concentrated extracts of. See Tea, &c., 87. Coffee, manufacturing and preparing for sale. See Tea, &c., 87.
Coffee mills. See Grinding grain, &c., 78. Coffee, preparing as a drink. See Unfermented beverages, &c., 86. Coffer dams. See Bridges, 36: Harbours, &c., 77. Coke ovens. Sec Fuel, &c., 30.

Collars. See Wearing apparel, 68. Collars for horses. See Saddlery, 34. Colours. See Painta, 50. Colours, artista. See Artists instruments, &c., 54.
Combing machines. See Spinning, 25. Commodes. See Furniture, 39; Waterclosets, &c., 63. Compasses, drawing. See Optical, &c., Compasses, magnetic. See Electricity
15; Optical, &c., 76.
Compasses mariners. See Electricity. Compasses, mariners See Electricity. 15; Optical, &c., 76.
Concertinas. See Music, &c., 26.
Condensers of steam engines. Steam engine, 49.
Confectionery. See Cooking, &c., 61.
Confectionrey ices. See Ire-making, &c., 85. ac., 83. Conveying water. See Hydraulics, 32. Cooking, &c., 61. Copper. See Metals, &c., 18. Copper oxides, &c. See Acids, &c., 40. Copying presses. See Writing, &c., 37. Corkcutting, &c., 56. Corkscrews. See Preparing and cut-ting cork, 56. ting cork, 56.
Cornets, See Music, 26.
Cots and cradles. See Furniture, 39.
Cotton gins. See Spinning, 38.
Couches. See Furniture, 39.
Couplings for tubes. See Metallic pipes, &c., 70. See Metallic pipes, &c., 70.
Crab-winches, steam. See Raising, &c., 31; Steam engine, 49.
Cranes. See Raising, &c., 31.
Cranes, hydraulic. See Raising, &c., 31; Hydraulics, 32.
Cranes, steam. See Raising, &c., 31; Steam engine, 49. Crates. See Trunks, &c., 84. Cravats. See Wearing apparel, 66. Crayons. See Artists' instruments, &c., 51. Crayons and crayon holders. See Writing, &c., 37; Artists' instru-ments, &c., 54. Cricket. See Toys, &c., 51. Crinolines. See Wearing apparel, 66. Crochet needles and holders. Needles, 45.
Croquet. See Toys, &c., 51.
Crushing grain, &c. See Grinding grain, 78. gram, 78.
Crushing machinery for iron ores.
See Iron and steel, 6; Metals, &c., 18.
Cuirnsses. See Fire-arms, &c., 10.
Cultivators. See Agriculture, 81.
Currycombs. See Saddlery, 34.
Curtains. See Furniture, 39.
Cyanogen. See Acids, &c., 40.

D.

Dams. See Harbours, &c., 77.

Dash wheels. See Bleaching, &c., 14.

Decections, unconcentrated. See Unfermented beverages, &c., 86.

Decorticating grain and seeds. See Grinding grain, 78. entistry. See Medicine, 25. Dentistry. See Medicine, 2... Derricks. See Raising, &c., 31. See Raising, Derricks, steam. See Raising, &c., 31; Steam engine, 40. Desks. See Writing, 37. Despatch boxes. See Trunks, &c., Detonating signals. See Railway signals, 38.
Dibbles. See Agriculture, 81. Dies. See Ornamenting paper, &c., 12. Diggers and digging machines. See Agriculture, 81. Diving apparatus. See Raising, &c., Docks. See Harbours, &c., 77. Dolls. See Toys, 81. Door-springs. See Hinges, &c., 59. Draining mines. See Mining, 71. Drain pipes, laying. See Agriculture, 81. Drain ploughs. See Agriculture, 81. Drain tiles and pipes. See Drains, &c., 1. Drains and sewers, 1.
Draughts and draughtboards. See
Toys, 51. Drawers. See Wearing apparel, 66.
Drawing instruments. See Writing, &c., 67; Artists', &c., 54; Optical, ac., 67; Artists, ac., mathematical, &c., 76. Dredgers, steam. See Steam engine, 49; Harbours, &c., 77.
Dredging. See Raising, &c., 31; Harbours, &c., 77.
Dress fastenings. See Wearing apparel, 68. Dressing and finishing woven fabrics, &c., 91. Dressing cases. See Trunks, &c., 84. Dressing flour and meal. See Grinding grain, 78. Dressing millstones. See Grinding grain, 78.

Drills, seed and manure. See Agriculture, 81. Drums. See Music, &c., 26. Dry docks. See Harbours, &c., 77. Dyeing. Sce Bleaching, &c., 14. Dynamometers. See Optical, &c., 76.

E.

Earrings. See Wearing apparel, 68.
Earth closets. See Waterclosets, &c., 63.
Earthenware. See Pottery, 24.
Easels. See Artists' instruments, 54.
Effervescing drinks. See Unfermented beverages, &c., 86.
Electricity, &c., 15.
Embankments. See Harbours, &c., 77.
Embossing. See Ornamenting paper, 12; Letterpress printing, 13; Dressing, &c. fabrics, 91.
Embroidering. See Sewing, 2.
Emdless travelling railways. See Aids to locomotion, 7.

Engraving, embossing, and printing rollers. See Ornamenting paper, 12: Bleaching, &c. fabries, 14. Engravings. See Letterpress printing, &c., 13; Artists' instruments, 54. Envelopes. See Cutting, folding, &c. paper, 12. Excavating. See Harbours, &c., 77. Exercises. See Toys, &c., 51. Explosive compounds. See Fire-arms, &c., 10. Explosive compounds for blasting. See Mining, &c., 71. Extracts, unconcentrated. See Unfermented beverages, &c., 86. Eyolets. See Wearing apparel, 03.

F.

1

Fan blowers. See Fuel, &c., 30. Fans, rotary. See Ventilation, 52. Farriery, &c., 53. Fats. See Oils, &c., 27. Reeding bottles. See Medicine, 25. Felting. See Dressing and finishing, &c., 91. Field implements and processes for Agriculture, 81. Agriculture, 31.
Filters, water. See Hydraulics, 32;
Purifying, &c. water, 79.
Filters, sugar. See Sugar, 48.
Finishing fabrics. See Dressing, &c., 91. Fins, steering. S. Fire-arms, &c., 10. See Steering, &c., 75. Fire-arms, toy. See Toys, 51. Fire bars. See Fuel, &c., 30. Fire engines, 88. Fire escapes, 88. Fire extinguishers, 83. Fire-grates. See Fuel, &c., 30. Fire-proof depositories. See Safes, &c., Fire-proof dresses and fabrics. See Fire engines, &c., 83.
Fireworks. See Trys, 51.
Flageolets. See Music, &c., 26.
Flesh brushes. See Brushing, 57.
Floating docks. See Harbours, &c., 77.
Floorcloth, 80. Flues. See Fuel, &c., 30. Fluorine. See Acids, &c., 40. Flutes. See Music, &c., 26. For signals. See Railway signals, 38. Folding fabrics. See Dressing, &c., Folding paper. See Cut Food, preservation of, 4. See Cutting, &c., 12. Footways. See Roads, &c., 35. Fountains. See Hydraulics, 32. Preezing mixtures. See Ice-making, &c., 85. Frills and frillings. See Wearing apparel, 66. Fringe. See Lace, &c., 29. Fruit-cleaning machines. See Brushing, 57.

Fruit, machinery for paring, slicing, &c. See Cooking, &c., 61.
Fuel, 30.
Fulling. See Dressing and finishing, &c., 91.
Furnaces. See Iron and steel, 6; Metals and alloya, 18; Fuel, &c., 30; Steam engine, 49.
Furniture, &c., 59.
Fusees and fusee cases. See Tobacco, 42.
Fuses for firing blasting charges. See Mining, 71.

G.

Gaiter. See Wearing apparel, 66.
Galvanic batteries. See Electricity, 15.
Games. See Toys, 51.
Games. See Toys, 51.
Garters. See Wearing apparel, 66.
Gas, 17.
Gas engines. See Air, &c., engines, 62.
Gas neters. See Gas, 17.
Gas soweters. See Gas, 17.
Gas stoves. See Gas, 17.
Gas towes. See Gas, 17.
Gates, dock. See Harbours, &c., 77.
Gates, dock. See Harbours, &c., 77.
Gates, lock. See Harbours, &c., 77.
Gauges, air. See Ventilation, 52.
Gauges, sien. See Steam engine, 40.
Gauges, steam. See Steam engine, 49.
Gig mills. See Dressing, &c., 91.
Girths. See Saddlery, 34.
Globes for lamps. See Lamps, 44.
Globes for lamps. See Wearing apparel, 68.
Globes See Wearing apparel, 66.
Gold. See Metals, &c., 18; Acids, &c., 40.
Goloshes. See Wearing apparel, 67.
Graphometers. See Optical, &c., 76.
Grates. See Fuel, &c., 30.
Graving docks. See Harbours, &c., 77.
Gridirons for repairing ships. See
Harbours, &c., 77.
Gridirons for repairing ships. See
Brushing, 57.
Grubbers. See Agriculture, 81.
Guitars. See Music, &c., 36.
Gunboats. See Ship-building, 21.
Gunpowder. See Fire-arms, 10.
Gutta-percha. See Harioure, &c., 25;
Toys, 51.

H.

Habits. See Wearing apparel, 66. Hair-brushing machinery. See Brushing, 57. Hair cloth. See Weaving, 20.

Hair pins. See Noedles, &c., 45.
Hammers, steam. See Iron and steel,
6; Steam engine, 49.
Hammocks. See Furniture, 39. Harbours, &c., 77. Harmoniums. See Music. &c., 28. Harness. See Saddlery, 34. Harps and harpsichords. See Music, &c., 26. Harrows. See Agriculture, 81. Harvesters. See Agriculture, 81. Hassocks. See Furniture, 39. Hat boxes. See Trunks, &c., 84. Hats, hat bands, and hat boxes. See Wearing apparel, 65.

Haymakers. See Agriculture, 81.
Hay rakes. See Agriculture, 81.
Head coverings. See Wearing apparel, 65. Heckling machines. See Spinning. Heliography. See Photography, 19. Helmets. See Fire-arms, &c., 10: Wearing apparel, 45.
Hides. See Skins, 55.
Hinges and hinge joints, 59.
Hoos. See Agriculture, 81.
Hoists. See Raising, &c., 31. Hoists, steam. Nee Raising, &c., 31. Steam-engine, 49. Hooks and eyes. See Wearing apparel, 68. Hop cultivation. See Agriculture. 81. Hop cultivation. See Agriculture, 81. Horns. See Music, &c., 26.
Horse modicines. See Farriery, 53.
Horse shoes. See Farriery, 53.
Hose pipes. See Fire engines, &c., 38.
Hoseiry. See Wearing apparel, 66.
Hospitals. See Medicine; &c., 28.
Hot pressing. See Dressing, &c., 91.
Hulling, &c., grain. See Grinding grain, 78. See Hydraulics, 32.
Hydrants. See Hydraulics, 32. Hydraulics, 32. Hydrochloric acid. See Acids, 40. Hydrocyanic acid. See Acids, 40. Hydrogen. See Acids, &c., 40. Hydro-propuision. See Marine propulsion, 5, Hygrometers. See Optical, &c., 76.

I.

Ice creams. See Ice-making, &c., \$5. Ice houses, \$5. Ice houses, \$5. Ice pails. See Ice-making, &c., \$5. Ice pails. See Ice-making, &c., \$5. Ice safes, \$5. Ice wells. See Ice-making, &c., \$5. India-rubber horse-shoes. See Farriery, \$5. India-rubber horse-shoes. See Farriery, \$5. Infusions, unconcentrated. See Unfermented beverages, &c., \$8. Ink and inkstands. See Writing, &c., \$7. Ink, printers'. See Printing, &c., 13. Insulators. See Electricity, 15.

teads, See Medicine, &c., are, 39. Acids, &c., 40. el, 6. kc. See Acids, &c., 40. e Dressing and finishing, nd watering land. See e, 81.

J.

e Wearing apparel, 66. ulic. See Hydraulics, 32. ng. See Cooking, 61.
7. See Raising, &c., 31. achines. See Weaving, 29;
See Wearing apparel, 68.

K.

es. See Optical, &c., 76.
1. See Artificial leather,

g. See Steering, 75.

Asks, 74.
the table. See Unferverages, &c., 86.
Bricks and tiles, 22; Potiuel, &c., 30.
Aeronautics, 41; Toys, 51.
See Fire-arms, &c., 10.
Achines. See Cooking, &c.,

rs. See Brushing, 57. chines. See Lace, 29. Furniture, &c., 39; Locks,

L.

Writing, &c., 37.

See Paints, 50.

44.
king. See Lamps, 44;
l.
king boots and shoes. See
pparel, 67.
'e Locks, &c., 69.
vessels. See Ship-build-

fetals, &c., 18. nts. See Paints, 50. , &c. See Acids, &c., 40. & Skins, &c., 55. h. See Artificial leather,

See Steering, &c., 75. See Wearing apparel, 66. See Unfermented beve-86. Lemon and other fruit squeezers. See Unformented beverages, &c., 96. Lenses. See Optical, &c., 76. Letterpress and similar printing, 13. Levels. See Optical, &c., 76. Lifts. See Raising, 31. Lifts, steam. See Raising, 31; Steam engine, 49. Lighthouse lamps. See Lamps, 44. Lighthouses. See Harbours, &c., 77. Lighting mines. See Mining, 71. Limbs, artificial. See Medicine, &c., 25. Lime. See Acids, &c. 40. Lime light. See Lamps, &c., 44. Links. See Chains, &c. 90. Linoleum. See Artificial leather, &c., See Unfermented beve-Liqueurs. rages, &c., 86. Lithography. See Printing, 13; Ornamenting paper, 12. ockets. See Wearing apparel, 68. ockets. Locks, &c., 60.
Locks, canal, &c. See Harbours, &c., 77.
Locks for guns. See Fire-arms, 10.
Locomotion, aids to, 7. Steam engine, 40.
Logs. See Optical, &c., 76.
Looking-glasses. See Furniture, 39.
Looms. See Weaving, 20.
Lowering apparatus. See Relative Lowering apparatus. See Raising, &c., 81. Lozenges. See Medicine, 25; Cooking, 61. Lubricants. See Oils, &c., 27.

M.

Machine needles. See Needles, 45.
Magic lanterns. See Toys, 51.
Magnesia. See Acids, &c., 40.
Magnesium. See Acids, &c., 40.
Magnesium. See Electricity, 15.
Malt mills. See Grinding grain, 78.
Manganese. See Acids, &c., 40.
Mangers. See Seedlery, &c., 34.
Mangling. See Dressing and finishing, &c., 91.
Manifold writers. See Writing, 37.
Manocuvring ships and vessels. See Steering, &c., 75.
Mantillas and mantles. See Wearing apparel, 66.
Manure, 3.
Manure distributors. See Agriculture, 81.
Marine engines. See Marine propulsion, 5.
Mariners' compasses. See Electricity 15.
Maste, &c., 73.
Mathematical instruments. See Artists' instruments, 54; Optical, &c., 76.
Mattersees. See Furniture, 39.

Meat screens. See Cooking, 61. Medicine, &c., 25. Medicine, horse and cattle. See Farriery, 53. Memorandum books. See Books, 43. Mercury. See Acids, &c., 40. Metals and alloys, 18. Metals, piating, &c., 23. Metals, separating. See Metals, &c., Meteorological instruments. See Optical, &c., 76. Meters, gas. See Gas, 17. Meters, gas. Nee Gas. 17.
Meters, water. See Hydraulics. 32.
Microscopes. See Optical. &c., 76.
Milking, &c., 72.
Millboard. See Paper, 11.
Mills, barley. See Grinding grain, 78.
Mills, coffee. Nee Grinding grain, 78.
Mills, four. See Grinding grain, 78.
Mills, flour. See Grinding grain, 78. Mills, four. See Grinding grain, 78.
Mills, malt. See Grinding grain, 78.
Mills, paint. See Paints, 50.
Mills, sugar. See Sugar, 48.
Mills, water. See Hydraulics, 32; Grinding grain, 78. Millstones. See Grinding grain, 78. Millstones, balancing. See Grinding grain, 78. Millstones, dressing, &c. See Grinding grain, 78.
Mineing machines. See Cooking, 61.
Mineral waters. See Unfermented Mineral waters. See Unfermented beverages, &c., &d. Miners' lamps. See Lamps. 44. Mines, ventilating. See Ventilation, 52 Mining, &c., 71.
Mittens. See Wearing apparel, 66.
Mordants. See Bleaching, &c., 14.
Motive power. See Hydraulics, 32;
Steam engine, 49; Air and gas engines, 62. gines, 52.

Moulds, sugar. See Sugar, 46.

Mowers. See Agriculture, 81.

Mulls. See Wearing apparel, 66.

Mules. See Spinning, 28.

Muriatic acid. See Acids, 40.

Music and musical instruments, 26.

Music and musical instruments, 26. Music stands. See Music, &c., 26.

N.

Nails, &c., 58.

Naila, horse-shoe. See Farriery, 53;

Naila, 58.

Nautical instruments. See Optical, &c., 76.

Necklaces and necklets. See Wearing apparel, 68.

Necklies. See Wearing apparel, 66.

Needle cases. See Sewing, 2.

Needles and pins, 45.

Netting. Net Lace, &c., 29.

Nickel. See Metals, &c., 18; Acids, &c., 40.

Nitre. Net Acids, &c., 40.

Nitre. Acid. See Acids, 40.

Nitrogen. See Acids, &c., 40. Nosebags. See Saddlery, 31. Nuts. See Nails, &c., 58.

O.

Oars. See Marine propulsion, 5.
Octants. See Optical. &c., 75.
Oilcloth, 80.
Oilcloth, 80.
Oils, &c., 27.
Oilskin, 80.
Optical. &c., instruments, 76.
Ordinance. See Fire-arms, 10.
Organs. See Music, &c., 26.
Ovens. See Fuel, &c., 30.
Ovens. See Fuel, &c., 30.
Ovens. Makers'. See Fuel, &c., 30.
Ovens. See Wearing apparel, 61.
Overults. See Wearing apparel, 62.
Overshoes. See Wearing apparel, 63.
Overshoes. See Wearing apparel, 63.
Overshoes. See Wearing apparel, 63.
Oxides. See Acids, &c., 40.
Oxides. See Acids, &c., 40.

P.

See Trunks, &c., 84 Packing cases. Packing fabrics. See Dressing and finishing, 01. Packing for pistons of steam engines.

See Steam engine, 40.

Paddle-wheels. See Marine propulsion, 5. Paints, &c., 50 Paints for artists. See Artists' instruments, &c., 54. untaloons. See Wearing apparel, 66. Puntaloons. Paper, cutting, folding, and ornament-Paper making, 11.
Paperhangings. See Ornamenting paper, 12. Papier maché. See Paper 11. Parachutes. See Aeronautics, 41. Parasols. See Umbrellas, 47. Pasteboard. See Paper making, 11; Cutting, &c., paper, 12.
Pattens. See Wearing apparel, 67.
Paving. See Roads, 35. Paving. See Roads, 35.
Peat. See Fuel, &c., 30.
Pedometers. See Optical, &c., 76.
Pencil cases and holders. See Writing, &c., 37; Artists' instruments, Pencil cases, hoxes to hold leads for. See Writing, &c. 37.
Pens and penholders. See Writing, &c., 37; Artists' instruments, 54.
Pens, boxes for holding. See Writing, &c., 37. Pepper, hulling. See Grinding grain. Perforating paper. See Cutting, &c., paper, 12.

Perpetual motion. See Hydraulics, 32; Air, &c., engines, 62. Petticoats. See Wearing apparel, 66. Phenakistoscopes. See Photography, 19; Optical, &c., 76. Phenic acid. See Acids, 40. Philosophical instruments. See Optical &c. 78. tical, &c., 76. ucal, &c., 76.
Phosphoric acid. See Acids, 40.
Phosphorius. See Acids, &c., 40.
Phosphorius. See Acids, &c., 40.
Photography, 19.
Panofories. See Music, &c., 26.
Patture frames. See Furniture, 39.
Pers. See Harbours, &c., 77.
Pile drivers, steam. See Steam enring, 40: Harbours, &c., 77. ne. 40 ; Harbours, &c., 77. Sine, 49; Harbours, &c., 77.

Pile or nap, raising and cutting. See
Bressing, &c., 91.

Piles, See Harbours, &c., 77.

Piles, See Needles, &c., 45.

Piles, See Tobacco, 42.

Piles, Grain. See Drains, 1.

Piles metallic, 70.

Fistells. See Fire-arms, 10.

Fistells. See Fire-arms, 10. Pipes, metallic, 70. Pistols. See Fire-arms, 10. Pistons of steam engines. See Steam engine, 49.
Pit chains. See Mining, &c., 71.
Plaiting. See Lace, &c., 29.
Plating metals, 23.
See Toys, 51. Playing cards, See Toys, 51. Ploughs and ploughings. See Agricul-Ploughs and ploughings. See Agriculture, 81.
Plumb levels. See Optical, &c., 76.
Pocket books. See Books, 43.
Portcelain. See Pottery, 24.
Portfolios. See Books, 43.
Portfolios for music. See Music, 26.
Portmanteaus. See Trunks, &c., 34.
Pottash. See Acids, &c., 40.
Pottash water. See Unfermented beverages, &c., 86.
Pottashum. See Acids, &c., 40.
Pottatery, 24.
Pouches for tobacco. See Tobacco, 42.
Powder flasks. See Fire-arms, &c., 10.
Power looms. See Weaving, 20.
Precious stones cutting, &c. See Precious stones cutting, &c. See Wearing apparel, 63. Precious stones, setting. See Wearing apparel, 68.
Presses, hydraulic. See Hydraulics, Presses, printing, 13.
Presses, stamping. See Cutting, &c.
paper, 12; Letterpress printing, 13.
Pressing fabrics. See Dressing and
finishing, 91.
Printing fabrics was as Printing fabrics, yarns, &c. Bleaching, &c., 14. Printing, letterpress, &c., 13.
Projectiles. See Fire-arms, &c., 10.
Propellers. See Marine propulsion, 5. Propulsion, marine, 5. Prussic acid. See Acids, 40. Prussic acid. See Acids, 40.
Puddling furnaces. See Iron and
steel. 6; Fuel, &c. 30.
Pug mills. See Bricks and tiles, 21.
Pulleys. See Raising, &c., 31.
Pullerizers. See Agriculture, 81.
Pumps. See Hydraulics, 32.

1

Pumps, steam. See Hydraulies, 32; Steam engine, 49. Punkas. See Ventilation, 52. Purifying and filtering water, 79. Pyrometers. See Optical, &c., 76.

Q.

Quadrants. See Optical, &c., 76. Quarrying. See Mining, &c., 71. Quays. See Harbours, &c., 77. Quinine. See Acids, &c., 40.

R.

Rafts. See Ship-building, 21.
Railway carriages. See Carriages, &c., for railways, 46.
Railways, 38.
Railways, 33.
Raising, &c., 31.
Raising, &c., 31.
Raising, &c., 31.
Raising, &c., 31.
Raising ships for repairing. See Ship-building, &c., 21.
Raising ships for repairing. See Ship-building, &c., 21.
Raising water. See Hydraulics, 32.
Rakes. See Agriculture, 81.
Ranges, cooking, See Fuel, &c., 30; Cooking, 61.
Reaping and mowing machines. See
Agriculture, 81.
Reaping and mowing machines. See
Agriculture, 81.
Reflectors. See Lamps, 44.
Refrigerators. See Harbours, &c., 77.
Reservoirs. See Harbours, &c., 77.
Reservoirs. See Harbours, &c., 77.
Reservoirs. See Harbours, &c., 34.
Retorts for burning animal charcoal. See Sugar, 48.
Retorts for burning animal charcoal. See Sugar, 48.
Retorts, gas. See Gas, 17.
Reverberatory furnaces. See Iron and steel, 6: Fuel, &c., 30.
Ricg, hulling, &c. See Grinding grain, 78.
Rick covers. See Artificial leather, &c., 80.
Rigging. See Masts, &c., 73.
Rings, finger. See Wearing apparel, 68.
Road sweepers. See Brushing, 57.
Roads and ways, 35.
Roasting jacks. See Cooking, 61.
Rockets. See Fire-arms, &c., 10.
Rocking chairs and horses. See Bleaching, &c., 14.
Rollers for roads. See Roads, &c., 35.
Rollers, land. See Agriculture, 81.
Ropes and bands for mines. See
Mining, 71.
Roughing horses. See Farriery, 53.
Rudders. See Steering, 75.

Var.iish, boot and shoe. See Wearing sparel, 67.
Var.iishes. See Paints, &c., 50.
Vehicles, ventilating. See Ventilation, 52.
Vent pegs and spiles. See Preparing and cutting cork, &c., 58.
Ventilating mines. See Ventilation, 52: Mining, 71.
Ventilating railway carriages. See Carriages, &c., for railways, 46; Ventilation, 52.
Ventilation, 52.
Veterinary art. See Farriery, 53.
Viaducts. See Bridges, &c., 36.
Vinegar. See Acids, &c., 36.
Violins. See Music, &c., 26.
Vitriol. See Acids, &c., 40.

w.


Wadding, See Dressing and finishing, &c., 91.
Wafers. See Writing, &c., 87.
Wageon covers. See Artificial leather, &c., 80.
Waggons, railway. See Carriages, &c., for railways, 46.
Waistoosts. See Wearing apparel, 66.
Waiking-sticks. See Umbrellas, &c., 47.
Wallets. See Trunks, &c., 84.
Wardrobes. See Furniture, 39.
Warping land. See Agriculture, 81.
Washing and sifting ores. See Metals, &c., 18.
Washing clothes, &c. See Washing machines, &c., 89.
Watch protectors. See Wearing apparel, 68.
Water acrating. See Purifying, &c., water, 79.
Watcr, chemical treatment of. See Purifying, &c., water, 79.
Watercootes, &c., 48.
Watercootes, &c., 48.
Waterocotes, &c., 63.
Watering land. See Agriculture, 81.
Watering land. See Agriculture, 81.
Watering land. See Agriculture, 81.
Watering roads. See Roads, 35.
Water meters. See Hydraulics, 33.
Waterproof fabrics, 80.

Water, purifying and filtering. See Purifying, &c., water, 79.
Water, purifying and filtering. See Purifying, &c., water, 79.
Wearing apparel,—body coverings, 65.
Wearing apparel,—foot coverings, 67.
Wearing apparel,—head coverings, 67.
Wearing apparel,—head coverings, 68.
Weaving, 20.
Weighing. See Raising, &c., 31.
Well-sinking. See Mining, &c., 71.
Well-sinking. See Mining, &c., 71.
Well-sinking. See Harbours, &c., 77.
Whatels. See Harbours, &c., 77.
Whatels. See Harbours, &c., 77.
Wheels, railway. See Carriages, &c., for railways, 46.
Whips and whip sockets. See Saddlery, &c., 34.
Whistles. See Railway signals, 38.
Wicks. See Iamps, &c., 44.
Winding drums. See Raising, &c., 31; Mining, 71; Agriculture, 81.
Windlasses, steam. See Raising, &c., 31; Steam engine, 49.
Windmills. See Air, &c., engines, &2.
Windmills. See Air, &c., engines, &2.
Windmills used to propel anips. See
Marine Propulsion, 5; Masts, &c., 73.
Wind fastenings. See Locks, &c., 60.
Wine coolers. See Ico-making, &c., 85.
Wire brushes. See Brushing, 57.
Wood paving. See Roads, 35.
Wringing. See Washing, &c., 89.
Wringtons. See Washing, &c., 89.
Wristbands. See Wearing apparel,

Z.

Writing instruments, &c., 37.

Zinc. See Metals, &c., 18. Zinc for paint. See Paints, 50. Zinc oxides, &c. See Acids, &c., 40.



.



LUNDON:
Printed by George E. Eyre and William Spoitiswoods,
Printers to the Queen's most Excellent Majesty.
For Her Majesty's Stationery Office.
[B 280.—1000.—12/78.]

October, 1878.

PATENTS FOR INVENTIONS.

A BRIDGMENTS

Specifications.

ARLEST DE


HOTOGRAPHY.

YEART THE ART DESIGNATION



DOMESTICS AND SHE AT THE PROPERTY OFFICE SALE ORGANISM.





ABRIDGME

OF

Specification 1998

RELATING TO

HOTOGRA

PART IIIa.—A.D. 1877-




LONDON:

PUBLISHED AND SOLD
THE PATENT OFFICE SAL:
38, CURSITOR STREET, CHANCERY

1885.





PREFACE.

·····

This volume forms Part IIIa. of the abridgments relating to "Photography," and embraces the period from A.D. 1877 to 1883, inclusive. Parts I., II., and III. contain the abridgments of this class of inventions from the earliest date (A.D. 1839) to the end of the year 1876.

In addition to those subjects obviously covered by the term photography, this series also includes,—

Photo-mechanical printing, and the obtaining of relief and intaglio surfaces generally by photographic means.

Colouring and mounting photographs.

Transferring photographs.

Enlarging photographs.

The following subjects are excluded:-

Albums or books for containing photographs; for these, see the abridgments, entitled, "Books, Portfolios, Cardcases, &c."

Stereoscopes and other optical apparatus by means of which photographs are viewed; for these, see "Optical, "Mathematical, and other Philosophical Instruments."

Frames, passe-partouts, holders, and arrangements for exhibiting photographs; for these, see "Artists "Instruments and Materials."

Applying photographs to ornament articles of furniture, jewellery, &c., unless the production of the photographs is dealt with.

A detailed list of the various kinds of inventions comprised in the present series of abridgments is furnished by the subject-matter index at the end of this volume.

It should be borne in mind that the abridgments are merely intended to serve as guides to the specifications, which must themselves be consulted for the details of any particular invention.

17639. Wt. 8515.

į٧

At the foot of each abridgment is stated the price at which a printed copy of the specification may be purchased at the Patent Office Sale Branch (38, Cursitor Street, Chancer Lane, E.C.)

By means of the "key" at page 20 of the List of Works of the end of this volume, the reader will be able to find on what series of abridgments contains any other class of investions to which he may desire to refer.

H. READER LACK-

September, 1885.

INDEX OF NAMES.

[In this Index the number and year of each specification are given instead of the page of the volume. The names printed in *Italics* are those of the persons by whom the inventions have been communicated to the Applicants for Letters Patent.]

	•
Abel, C. D1264	77, 775 781,
	1/11 763
Addenbrooke, G. L.	232 3 '88
Addenbrooke, G. L	1621 📽
Alder, G. E	1 44 2 70
Alissoff, M	591 '77
Allgeyer, J	896 ***
Anderson, F	2187 '79
Andreoli, E	3511 '80
Atkinson, J. E	4732 '88
Attout, P. A	101 *88
70 'I T TIT	1004 ***
Barley, J. M	1294 20
Balencie, A	2187 '''
Banzie, E. T. de	5462
Barnes, K. W5080 **	3, 1380 °°,
Bailey, J. W	994678
Daswen, J. D	0040 °
Baum, F Beck, W. H	1000 181 0110
Deck, W. H	2049 '83
Rall G C 999	0540 80 1697 '80
T 5086 '8	1980 '83
Becker	4705 '83
Renecka	3362 '8
Bisson, A	5681 783
Blair, T. H	498 '80
Blamires, J. H	4784 '79
Blin. A. P	3703 77
Boca. P	4822 '81
Bogue, D	3570 781
Bolas, T	4823 '81
Bolhoevener, C	4146 ' ⁷⁸
Bolhoevener, C	896 **3
Bonnaud, J. B. (ler meuil-
•	4023 '78

Bonnaud, J. B.	Cammonil.
Dominana, J. D.	100 000 100
3511	'80, 775 '81
Bonneville, H. A	2381 🙇 .
•	5522 '81
T M A	T Q14 '81
, J. M. A.	11014
Borland, A 2611	7, 5896
Boule, L. A	3703 '77
Boule, L. A Brandon, R. H	1608
Branson, F. W	1650 '88
Describes II	1,040,178
Brassinne, H	1040
Brewer, E. G3703	″, 33 4 6 ″° ,
2271 '7°, 4822 '	81, 4557
2271 '79, 4822 ' Brookes, W826	77, 4320 181
Drown T	5154.788
Drown, J	ULUW **
, R5086	, 1380 ···,
Brown, J	¹⁸³ , 4/705 ¹⁸³
W. Morgan-	1367 '77.
	78 9709 180
D	90 441 4 281
Brydges, E. A.2162	w, 44 14 v.
Cadett, J. W. T.	4367 '77
Cadett, J. W. T.	1 /10/77 78
	1 /10/77 78
	1 /10/77 78
Capron, E	1097 °78 4009 °77 2563 °79
Capron, E	1097 '78 4009 '77 2563 '79 3800 '88
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83
Capron, E	1097 78 4009 777 2563 79 3800 783 1216 780 1054 780 1054 780 5131 782 5131 783
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83 1216 '80 1054 '80 1054 '80 5131 '82 5131 '82
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83 1216 '80 1054 '80 1054 '80 5131 '82 5131 '82
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83 1216 '80 1054 '80 1054 '80 5131 '82 5131 '82
Capron, E	1097 '78 4009 '77 2563 '79 3800 '83 1216 '80 1054 '80 1054 '80 5131 '82 5131 '82
Capron, E	1097 7784009 7772563 7793800 7821054 7891054 7895131 7825131 782519 78110 78110 78110 78110 781
Capron, E	1097 75
Capron, E	1097 75
Capron, E	1097 75

Clarke, J. P5176 '80	Fischer 3362 '*3
Clayton, J 101 *83	Fischer, W. H1570
Coghlan, J. H1096 '81	Flagler, H. K2782 '**
	Then I T 9963 %
Coglievina, D3464 700	Frank, J3362
Collins, J. S3816 779	Frank, R. E5933
Colton, E. G3491 182	
Cooke, W1971 '88	Garside, H 5204 183
Corbassière, L10 261	Garthwaite, W1458 78
Cowan, A2608'78, 4322'81,	Geesbergen, J4557 '83
FAF 189 I	Germeuil - Bonnaud, J. B.
G G 0405 78	
Cros, C	4023 7
Cussons, D. H2608 '78	Germeuil - Bonnaud, J. B.
	3511 *** , 775 ***
Dale, G176 '78	Geruzet Freres, La Société
, H. J 1007 ***	4557 ***
Dawes, A. H1229 '83	Godard, E2277 '82
De Banzie, E. T5462 '81	Goodwin, H3243 '78
De Obaliano, G. 1101 M	Change E 1050 17 1050 17
De Chaligny, S5131 ***	Greaves, E1757 '77, 1758 '77 Grüne, W4360 '80
Decoufié, A. E2249 700	Grune, W4360 'as
De Dutkiewitz, B 2249 ***	Guillebaud, W. H2381 31,
De Pass, E4394 **1	4394 ' ⁶
De Premion, A. M5464'81	Guillot, L2271 '79
Dowé, J 3664 '81	Gurney, J2473 '78
De Zuccato, E.4152 '85, 4153 '85,	Guttenberg, M1502 '78
4154	duscincia, m
	TT-33 TT T 000 277 OF 60 278
Didot, A. Firmin 2187'79	Haddan, H. J. 337'77, 2563'79,
Dillon, TA1073 '79, 1207 '79,	1538 '81, 3628 '81, 2277 '82 Hallett, F. H3355 '80
1347 '79	Hallett, F. H3355
1347 '79 Dredge, J4949 '80	Hare, G3035
Drummond, G. P329 77	, J. H1007 '83
Duplessy, A. A1033 79	Harman, A2174 178
Durand, A5131 '82	Heidenhaus, E4146 278
Dutkiewitz, B. de 2249 ***	Hely, A. A564 79
Duvivier, L4009 777	Hemery, T. G4380 '77
	Hersog, C1407 '78
Eastman, G2967'79, 3006"**	Hoesch, F. C3504 281
Edwards, B. J 1891 '77, 1543 '20	Holroyde, J. B2526
——— Е4922 ° 1517 ° 1.	Hugon, G. R 1909* '50, 266* '51 Humphries, W. F 3301 '78
3889 '82	Hamphries W F 3301 '78
Eledale, H4954 ***	Hurter, F
10	Hutinet, J. J. D
Emery, F. J	Autonet, J. J. D1938
Emmerson, E. E2544 '78	
Enjalbert, E4970 **1	Imray, J2495
Evans, C. P4671 '**	Imray, J2495 10 2495 10
Faure, L1569 '**	Jacobson, E3109 '77
Fickeissen 3948 *83	Janard, J. B
Firmin-Didot, A2187 79	Jannin, L. E2649 '79
I or mount I work, II	· · · · · · · · · · · · · · · · · · ·

vii

INDEX OF NAMES.

Torrord D	9100	, 77
эспаси, г		
Johnson, J. E	12341 77,4632	77
J. R	3109 H2341 '77, 4632 ' 2007 '78, 2631 L1367	78
Johnson T T	1967	,77
T. D. D.		•••
JOINTAN, A.		, OU
Jones, R. A.	3818	79
Instinc P M	3818 3664 **1,2403	182
wate, r. m	0009 -, 2403	_
Kaiser, F		פקי
Komping H	W 3465	78
Toni-	77	•
Kidd, R. L	2780	782
Rugger T A	3465	78
Wasti D	3465 2538	m
7110tt, It	2538	
Mronecker, H.	4414	781
Kravia W	3491	782
7		
LARGE, H. H.	3013 '82, 5131	753
W. R.	1773 77,2967 7	9
101.4 980 1	2014 180 0700 7	'n,
1210 -,	2/02	_,
30005 °™, 1	1305 '80, 2782 " 1061 '83, 3837 "	™,
	5681	783
Jambart H	5681	77
Tainer D 77	1100	181
Lawy, P. E	1538°	-
Lane. J. T		.10
Lawley W.	.5598	8 1
Toformion T	5598 3628	181
Defendenter, J.		
Lefevre, H	H4877	.,,,
Lehmann, C.	H4877	77
Timen T T	. P 5223	79
T. M.	0.000	27
Le Moussu, 1	B. C3570 '	٠,
	5177	, OI
Tashert A	10	181
Tindon W T	0677	83
Trinuity, II. II		
Lascomb, W. E	33837 ′	
Losaegu, A		91
Lombardi A	3196	78
T	0016	182
Lamaere, A	2316	•
MeTallan J.	Y4651 '	82
Manlan F	E04 5	83
MATION, Li	504.	
Marra, F.A.,	3709	-00
Martyn, A	1647	80
Mann E	2563	79
16 × 1 × 1 · · · · ·		78
mayor iage, E.	2/46	
Meihé, J. R		83
Meisemhach O	2156	82
Manham T	C1569	80
Mewburn, J.	O1969	-

Miccivillo, L	5933	182
Michaud, A	1979	78
Mills, B. J. B	2316	183
Molera, E. J.	1216	'80
Morgan	2142	781
Morgan W.T. 5448 '81	2780	182
Morgan, W. T5448 '81, Morgan-Brown, W	1367	77
2746 '78 3465 '78	3702	,3ó
2746 '78, 3465 '78, Moussu, B. C. le,	3570	81
	5177	,8 į
Mucklow. J. D	5368	181
Mumler, W. H	1773	,77
Nawrocki, G. W. von	1560'	77
4032 '78	475R	,78
Newton H R	481	78
4032 '78, Newton, H. R	202	
Parkyns, T. G. A	3222	,77
Pass. E. de	4394	,81
Pass, E. de	iélá	H.
2 0000 00 000, 220 200	4632	777
Percire, C. G. R	2341	,77
Petit. C. G.	4788	•79
Philippi, L. H. 124'83.	4562	783
Pigean A	5464	163
Piquené P	2141	18 1
Pixis, T	5036	78
Pixis, T		780
Plener, J	4896	18 1
Plücker, J. F	3232	782
Ponsolle, N	4009	777
Prager. A	.906	78
Prager, A Premion, A. M. de	5464	'63
Pumphrey, A1559 '81, Puttemaus, G	4967	761
Puttemans, G	.337	777
,		
Reynolds. J. E	1112	780
	1650	183
Richardson, W	4600	777
Ritchie, J. H	2095	779
Robev. G	1960	188
Rogers, J	3366	181
Rogers, J	3889	293
Rouch, S. W.	1448	*78
Rouch, S. W	5947	*83
	~~ ~!	

Sachs, J. J 2724 79, 1419 780,	Thompson
1909 *** 2966 *** 3650 ***	Tiator, J
266 % 3012 % 3657 %	Tilhet, M.
200', 3012', 3007',	Turker, 11.
1909 w 2966 m, 3650 m, 2666 m, 3012 m, 3657 m, 3948 m, 5324 m, 3948 m, 5324 m, 295 m Samuels, T	Tydeman
Salvy, E295	ı
Samuels, T	
Sands U	Van der
Sarony, O 2007 78, 2631 78	Vergerau
Sarony, O 2007 75, 2631 76 Sauvée, A	Vickers,
Schering, E 4771"	Vickers, Vogel, H.
Schlotterhoss, R 1971	Voigtländ
Schneider, G 1560 77	Voigtländ
Schnorrenberg, N4360	Von Naw
Schroer, R395	
Schuhmacher, J748'79	Von Voig
J. C. 1284 77	Von Voig
, J. C1284 77 Scotellari, D3461 77 Scotellari, D337 77, 3130 78,	, , , , , , ,
Scotellari D 337 77 3130 79	Walker,
2752 280 6022 282	Wall D
3753 30, 5933 32 Scott, F., junior3816 379	Wall, R. Warlich,
327 T 42771 778	
—, W. L	Warnerk
Simmonds, R 5181 ***	Warren, Wayte, C
Slack, J4600 77	Wayte, C
Smith, G3014 *81	West, B.
——, J 1758 77	, R.
Snook, W. Wilmot 564 '78	Weyde, I
Spring, R. Y3465 '78	Whitcher
Spurge, J. B1183 '79, 5368 '41	White, J
Stade, G748'79	Wild, A.
Stanford, E. C. C142 ***	Willis, W
Stanley, W. F., 3353 '80, 3268 '83	,
Spring, R. Y	Wilmot-8
Stegemann, A 4032 78	Winter, V
Steinheil, H. A 1602 '81	, N
Stephenson, G3828 '78	Wissh K
Street, G. S2403 '82	Wirth, F.
Swan T W 9089 77 9060 77	Wise, W. Wolff, J.
Swan, J. W2968 79,2969 79, 4607 79	WOIL, J.
4007	Wolff, M.
M-77 101 102	Wolfram
Tailfer	Woodbur
Tattersall, J. W1095	29
Templer, J 4954	l
Testu, E. L3703 "	Zimmern
Thiebaut, A. U. A1608	Zuccato,
Thom, J 3301 '78	1

	2024
Thompson, W. P	.2304
Tiator. J	3184 27
TUIL 4 M	4000 ==
I unce, 11	9544
Thompson, W. P Tiator, J Tilket, M Tydeman, E. M. T	.1493
•	4062
	2002
Van der Weyde, H	446
Varaeraud A	9405
Vickers, T	990755
VICACIS, I	020
Vogel, H. W	.2162
Voigtländer, F. von	.1938
Voigtländer F non	4756'75
Voigtländer, F. von Von Nawrocki, G. W	3500
Von Nawrocki, G. W.	1500 "
4032 78	. 4756
Von Voigtländer, F Von Voigtländer, F	193877
Transfer To Later Jan 17	477E C 775
von voiguanaer, r	.4/00
Walker, J. J	.3129 ***
Wall D T	775 765
Wall, D. 1	/13 =
Wall, R. T	, 2068 🕶
Warnerke, L Warren, W. H Wayte, C	.1436
Warren W H	5015 783
Watton, W. H	1408 80
wayte, C	.1407 7
West, B. C	.1061 🐃
, R. B	1061 788
Weyde, H. van der	446 278
Weyde, II. van der	440
Whitcher, J	.1183 איי
White, J. P Wild, A. J. T Willis, W., junior	77 4196.
Wild A I T	5019 20
777.11. 212	.0010
Willis, W., Junior	2800 7.
	שיי קוון 🗪
Wilmot-Snook W	5.C.A. 778
Winter, W	1004 27
W WILLET, W	1209
, W.M.L. and Co	.1305
Wirth, F2156 '82	. 3362 🕦
Wise W L 1984 7	7 748 270
TIT-100 T	0010 =
WOIT, J	. 3718 74
Wolff, M. G Wolfram, J. H. G	5522 🛰
Wolfram, J. H. G.	847 780
Woodbrew W P	1647777
Woodbury, W. B 2912 '75, 3760 '75,	104/ 1/,
2912 7°, 3760 7°,	4735 783
Zimmerman F A	A7771 177
Zimmerman, F. A Zuccato, E. de. 4152 ***	· #111
Zuccato. E. de.4152 "	415374

PHOTOGRAPHY.

1877.

A.D. 1877, January 11.-No. 142.

LAMBERT, HENRY.—"Production of carbon and other per-"manent photographic pictures."

The commercial tissue is coated, either before or after sensitising it, with a permanent transparent support, a formula for which is given. The coating material consists chiefly of plain collodion. The sensitized and coated tissue is cut into required sizes and printed on from negatives as usual. When removed from the frame the print is immersed in warm water containing (say) 2 drops of ammonia to 20 ounces of water, and developed. It is next washed in weak alam solution, raised from the water by means of a piece of glass or cardboard passed under it, and placed in clean water with its developed side downwards. It is raised from this bath in position on the final mount. For the final mount. White or tinted enamelled cardboard waterproofed on one side (as by varnish or collodion) is preferred, but various other substances may be used as mounts. If an unglazed surface to the print is required, the mount is prepared by coating it with collodion thickened with a white pigment-zinc white or starch.

To facilitate development the tissue may be manipulated on a sheet of glass or cardboard, but such support is not necessary, and is in no respect analogous to the temporary support used in the ordinary process. The coating of collodion which remains on the surface of the print is the only support required.

[Printed, 4d. No Drawings.]

A.D. 1877, January 25.-No. 329.

DRUMMOND, GEORGE PRINCIS.—"Obtaining printing sur"faces for reading matter and the machinery therefor."

This invention refers chiefly to printing machinery, which does not call for description here.

As far as the photographic part is concerned, the subject matter is printed on an elastic or unelastic band in a continuous line of reading matter. This is then photographed piecemeal by a camera of special construction, the sensitive plate receiving the image of a piece suitable for one line at a time, the rest of the plate being protected by a shield. After each line has been photographed, the band is moved on and the sensitive plate shifted ready for the next line, and so on till the page is complete or the sensitive plate full. "The "photographed plate or surface thus produced is then trans" ferred to metal or other printing surfaces or lithographic "stones by any known process of photo-mechanical "printing."

The camera moves along tracks on which are marked the positions at which it will give letters of the usual (or other) sizes, and the tail board of the camera is also marked so that focussing may be rapidly performed; thus the consecutive lines as photographed may be of various sized letters, though the letters on the band are uniform. The apparatus that holds the band is provided with means whereby the band may be stretched a little (so as to "justify" each line), distorted, moved on a horizontal or vertical axis, or twisted, or jerked slightly into a new position during exposure, producing obvious effects on the image as produced on the sensitive plate. This apparatus also carries screens, ornamental designs, figures, &c., &c., which may be photographed as desired and so incorporated with the subject matter on the sensitive plate.

The camera referred to is provided with an "opening "repeating and self adjusting exposure slide," in which the sensitive plate is carried by a frame. The shield in front of the plate has a horizontal opening which is opened and closed by raising or lowering a lever which also simultaneously shifts the plate up a distance equal to the opening made in the shield, while on lowering the lever the opening is closed.

the plate is retained in its position by suitable mechanism. as the exposure is given and the plate moved the needed tance by the one lever. This lever works on a centre at end of the track along which the camera slides that is thest from the elastic band, so that the movement of the sitive plate and the opening in its shield vary according he position of the camera, being greater when the camera learer the elastic band, as is required for the larger letters n produced upon the sensitive plate.

'he sensitive plate may be exchanged for sensitized negative er worked suitably on rollers.

[Printed, 1s. 8d. Drawings.]

A.D. 1877, January 26.—No. 337.

DDON, HEBBERT JOHN.—(A communication from Dominique tellari and Guillaume Puttemaus.)—(Provisional protection y.)—Violet varnish for tinting the material through which at passes in photographic manipulations.

The varnish is compounded of copal gum, oil of lavender, aphor, and essence of turpentine, coloured with dragon's od and prussiate of iron to the shade of violet required. The untities and the manner of mixing are described. "The nixture must be filtered, and when cold is ready for ase."

[Printed 2d. No Drawings.]

A.D. 1877, February 12.—No. 591.

ISSOFF, MICHAEL.—Preparing surfaces or plates for uting music, &c.

The various signs, &c. required are printed some three or r times the actual size on unsized paper which is transvent or translucent, and are cut separate for use. A backbund is used which is preferably of glass with a ruled face behind it to guide the compositor, and on this backbund the staves, notes, signs, &c. are pasted as required, ing a gum that will make the paper on which the notes are inted transparent, if it is not already, so that the staves I show through. This composition is then photographed the size required, and the negative is used to obtain prints

by the ordinary photo-lithographic process, or plates are made from such negatives by photo-relief or photo-engraving processes.

Thus, the compositor's errors may easily be corrected, plates of any size can be produced from the one original plate, and the employment of skilled labour in engraving, the is not necessary.

[Printed, ed. Drawing.]

A.D. 1877, March 1.-No. 826.

BROOK ES, Warwick.—(Provisional protection only.)—Waxing photographs and other articles of paper.

A that, shallow, closed, metallic box, with suitable openings is filled with water and heated by means of a series of gas burners. Thus the that top of the box is regularly heated. On it is placed a sheet of blotting paper and then the photograph. When the photograph is thoroughly heated, it is rubbed all over with white wax. The superfluous wax is wiped off with a suitable cloth, and the photographs, &c., so treated are then placed in a press till cold or set.

[Frinted, 2d. No Drawings.]

A.D. 1877, March 31.-No. 1264.

ABEL, CHARLES DENTON.—(A communication from William Winter.)—Production of enlarged photographic pictures on woven fabrics.

The fabric is impregnated with iodide or "chromide of "silver." For the "chromide" it is freed from chemical impurities and then passed through a solution of "chromide" of potassium and "chromide" of cadmium, then dried and passed through a solution of nitrate of silver containing citric acid. The proportions of these are given for a typical case, but the solutions are stronger and iodides are preferred to "chromides," as the fabric is dense or the temperature low. The magnified picture from the negative is produced as is usual by the use of the solar camera, but the electric light is preferable though solar or other light may be used. The exposure is continued till the positive photograph is distinctly visible, when it is developed by a solution of

pyrogallic acid containing citric acid, then washed, toned, fixed, and washed, as usual in photographic processes.

[Printed, 4d. No Drawings.]

A.D. 1877, April 2.-No. 1284.

WISE, WILLIAM LLOYD.—(A communication from Johannes Carl Schuhmacher.)—Colouring photographic pictures by the application of oil colours to the back of such pictures.

The unmounted photograph is made transparent by treating it with copal varnish on its reverse side; and then, by applying retouch varnish on the same side, it is made capable of taking oil colours. The oil colours are then applied to the back of the photograph. Another layer of copal varnish is applied over the colour, and when dry, the photograph is mounted on cartoon paper or white canvas by means of starch mixed with a little glue and common venetian turpentine. The front of the photograph is then varnished with copal varnish.

[Printed, 4d. No Drawings.]

A.D. 1877, April 7.—No. 1367.

MORGAN-BROWN, WILLIAM.—(A communication from John Robert Johnson.)—"Improvements in photography as applied "to the preparation and treatment of pellicular negatives, "transfer pigment printing, pigments and pigment paper, "and in appliances to be used therefor."

A. Improvements relating to the double transfer autotype Process.

- l. Alisarine is substituted in toto for the fugitive cochineal Pigments hitherto employed, and that the alum or zinc salt weed in preparing the lakes of alizarine shall not make the gelatine of the pigment paper insoluble and so stain the "whites" of the picture, a minimum quantity of these salts is employed, and they are supplemented by a lime or magnesian salt. Prints produced by such lakes are "toned by a "weak solution of perchloride or persulphate of iron to "which a few drops of hydrochloric acid have been added."
- 2. The preparation of pigment paper, or sensitizing prepared paper (that is by immersion in a solution of a bichromate) is carried out on a level surface at 90° to 100° F. This temperature is maintained for from 15 to 80 minutes, and the paper

when cooled is hung up to dry. Thus the coarser particles of pigment settle to the lowest stratum of the pigment compound, and more delicate half-tones and more vigorous shadows are obtained.

- 3. Waterproof cardboard or sheet metal coated with a "highly glazed impervious paper" is used instead of glass or porcelain as the temporary support during development.
- 4. After developing and fixing in alum, instead of drying and transferring to the second transfer paper, the print is drained and coated with gelatine "rendered opaque" with a white pigment, as zinc white. When this coating has set a bit of thin wet tissue paper is pressed upon it, and when the whole is dry it is removed for mounting. Or the thin paper may be omitted and the card mount applied directly upon the gelatine.
- 5. A solution of gelatine, say 4 per cent., with a small quantity of chrome alum, is used instead of collodion for preparing a temporary support when a polished surface is required.
- B. Improvements relating to the single transfer autotyp process, some of which are applicable to other processes.
- 1. A new method of obtaining reversed negatives. previously prepared double film of gelatine and collodio is applied to the surface of the negative, under water whic is slightly warmed and mixed with enough alcohol to preven the gelatine absorbing water and so swelling and curling up They are lifted simultaneously out of the fluid and presse together, and when cold the pellicular flexible negative lifted from the plate. In the above double film, the collodic may be dispensed with or replaced by transparent pape For very large negatives, a sheet of plate glass has its edge coated with a solution of caoutchouc, and to it is then applie a sheet of thin transparent paper wetted with a solution (bromide of potassium, then a coating of bromide of silve emulsion. After developing and fixing, a sheet of gelatine paper is applied, so that the negative is "imprisoned betwee "two sheets of transparent paper." The pellicle or pape used may be previously printed on (a border for instance) an other combination effects obtained.
- 2. A card or board formed of two or more layers of pape cemented together by a cement insoluble in water is use

instead of the usual transfer paper. Thus prints of enlargements or of a collection of cartes de visites are obtained upon the board without any intermediate mounting being necessary. Any number of negatives may be printed together if properly trimmed and made of equal density. The grain of the paper is hidden by an enamel of kaolin or starch which do not lead to stains like "sinc, lead, or barytes white."

3. An extremely thin single transfer paper, chiefly for use in book illustrations, is prepared by immersing very thin "papier vegetale" in a solution of shellac in aqueous ammonia and albumen. The prints when dry, and "touched" if necessary, are treated with a weak solution of shellac and glycerine, or are enamelled with collodion and glycerine as assal.

[Printed, 6d. No Drawings.]

A.D. 1877, April 21.—No. 1560.

VON NAWROCKI, GERARD WENZESLAUS.—(A communication-from Gustav Schneider.)—(Provisional protection only.)—Colouring photographic pictures by application of oil colours to the back of such pictures.

The paper photograph, prepared as usual but toned to a blue tint, is coated on its back with starch paste, and when dry is fixed with its front side against a glass plate by means of a glue (gelatine) solution. This last solution is then applied to the back, and when dry is washed off with the starch coating by means of a sponge and warm water. The photograph is then rendered transparent by an application of mixed rape seed oil and unsalted lard, and this coating is removed by rubbing with blotting paper. Ordinary oil colours are then "applied in "flat tints," and when dry but still sticky the picture is coated warm with a mixture of wax and turpentine and finally with copal varnish.

[Printed, 2d. No Drawings.]

A.D. 1877, April 27.—No. 1647.

WOODBURY, Walter Bentley. — 1. Photographing by means of a captive balloon, and 2. A new form of camera.

1. In place of the car of the balloon there is a wooden box open below, to one side of which the rope by which the balloon




8

PHOTOGRAPHY.

is held is fastened, and from the opposite side projects a light sail or rudder, which by the action of the wind prevents the balloon turning round. Suspended by a pivot at the top inside the box is the camera which thus hangs vertically. The lens points downwards, and above it are two rollers carrying a strip of flexible sensitive tissue. The lens has a rotary instantaneous shutter working by an indisrubber or other spring, but an oscillating shutter may be used. The apparatus is worked by an electric current for which purpose three wires are entwined with the rope by which the balloon is held—one wire is for the return current; one wire is connected with an electro-magnet and this with clockwork, so that by completing or interrupting the circuit the sensitive tissue is rolled from one roller to the other to expose a fresh surface; a current along the other wire by means of an electro-magnet releases the sbutter and gives the exposure. Thus by alternating the current, a series of photographs may be obtained.

2. The camera when closed and locked appears like an ordinary box with a shallow hinged lid. For use the lid is thrown right back so that it lies in a plane parallel with the bottom of the box. The camera is then exposed to view, the bellows and back lying in the box, and the front of the camers projecting from it. The front corner of the back part of the camera is hinged on to a piece which slides in the body of the box. The camera is turned on this hinge into an upright position, and the front carrying the lens is moved forward on the lid and fixed at a position suitable for the focus of the lens used according to a scale marked upon the lid. Final adjustment of focus is made by means of a screw that moves the frame in the box to which the back part of the camera is attached. The front of the camera may be turned on a vertical pin, and the back part may be inclined more or less from the perpendicular by means of an adjustable screw, so that the parallelism between the front and back may be varied in different ways to different extents.

The slide for dry plates is a thin wooden frame joined at the corners, with an opening at one end where the two plates, separated by thin metal of a bent or wavey form to press them against the frame, are introduced. Instead of the wooden slide usually used for giving exposure to the plate a



PHOTOGRAPHY.

t of thin metal is used which may be bent over as drawn or of thicker metal that part only which bends when it rned back being of thin flexible metal.

[Printed, 6d. Drawing.]

A.D. 1877, May 5.—No. 1757.

AVES, Ezra.—Vignetting, and tinting the margins of m prints.

e printing frame is arranged as usual, and a board, holes of suitable size and number for the pictures to be ed, rests on a sheet of glass in the frame. This board vered with a sheet of ground glass, and the holes in it evilled outwards, i.e. towards the edges of the pictures. It mineral or tissue paper may be used instead of the nd glass. By this means the vignetting is accomplished. It tinting the margins, the vignetting board is replaced to which fits exactly into the same place in the printing e, but which has secured to the ground glass dies or so which exactly correspond to the holes in the first. The edges of the blocks are bevilled inwards towards entre of the picture. Thus the shades produced by the perations blend into each other. Instead of blocks, the glass may be painted, or otherwise masked.

for the first operation, "dark papier mineral or glass in bare or light places thereon," and for the second tion, "light shaded papier mineral with dark or opaque ces thereon" may be used; in both cases the borders of and dark places are softened down. "Artistic effects y be produced in this part of the process, landscape as may be superimposed," "or any desirable design."

Printed, 6d. Drawing.]

A.D. 1877, May 5.—No. 1758.

AVES, EZRA, and SMITH, JOHN. — (Provisional proonly.)—Photographic printing frames.

frame holds several negatives, all of which are printed at once. It is "glazed with stout plate glass and has a or door hinged to the top edge." It accommodates inner s, which may be varied in size as required, and are interchangeable. "These inner frames have stretched over "the face of them parchment, parchment paper, or vellum, "through which apertures or openings are made in number "and size as may be required, the parchment frames answer" ing the double purpose of securing the negatives and "carrying the various shaped masks." The sensitized paper or tissue exactly fits within the inner frames, the separate pieces being pressed close to the different negatives by a pad or air cushion, or a separate pad with a spring behind it may be used for each negative. The margins of the prints are tinted by putting them in another frame fitted with framed glasses with suitable masks which correspond exactly to the openings in the parchment frames.

[Printed, 2d. No Drawings.]

A.D. 1877, May 7.-No. 1773.

LAKE, WILLIAM ROBERT.—(A communication from Williams Howard Mumler.)—Production of photo-electrotypes.

A plate of chromated gelatine is exposed under photographic negative or positive and then secured to a suitable base with the printed side uppermost. The surface is then made level and true by grinding, as with emery paper; and to prevent scratching by the grinding, the abrading surface is rubbed with tallow till the interstices are filled. The grinding may also take place before printing. To dissolve away the unacted on gelatine, the plate is treated with cold acetic acid instead of warm water, thereby avoiding distortion of the lines of the picture. When the acid has dissolved to as great a depth as is safe, it is washed away, and the parts eaten away are coated with an opaque or semitransparent substance or paste. The plate, which till now has been operated upon in a dark room, is then "exposed to "the actinic light without the negative" for an indefinite The paste is then removed and the treatment with acetic acid repeated. It is then dried in the light and electrotyped as a wood cut is electrotyped. The opaque or semitransparent paste of mucilage and bone black is removed by means of cold water; if the coloring matter is held in a varnish, alcohol is used as the solvent.

[Printed, 4d. No Drawings.]

A.D. 1877, May 15.-No. 1891.

EDWARDS, Benjamin Joseph.—Apparatus to be used with photographic cameras for copying or reproducing pictures, drawings, photographs, or designs.

It consists of a frame (which may be tilted) to support the camera, arranged to support another frame which slides on or under it and is worked by an extending screw fixed to the principal frame. The sliding frame carries an upright adjustable piece to support the picture or transparency to be copied, and behind it a reflector is fixed at a suitable angle. For transparencies a hood is used to exclude light from between the transparency and camera lens.

For making reversed negatives the sliding board that carries the transparency or drawing works vertically up and down by means of suitable mechanical arrangements, so that the drawing is at right angles with the camera, and a reversing prism or mirror is employed.

[Printed, 6d. Drawing.]

A.D. 1877, May 17.—No. 1938.

VON VOIGTLÄNDER, FREDERICK. — Symmetrical photographic lenses.

This invention consists in making one of the components of each lens of a symmetrical double combination of flint glass of very great specific gravity and great refracting power, such as has never been used before for photographic lenses, whereby the lenses are over corrected for the visual picture which suffers accordingly, but the picture formed by the chemically active rays is thereby perfected. By the same means the focal length is shortened to only six times the diameter of the aperture, so that the illuminating power is augmented.

The lens consists of two double achromatic combinations exactly identical, so placed that the concave sides face each other.

[Printed, 6d. Drawing.]

A.D. 1877, June 15 .- No. 2341.

CENSON. JOHN HENRY.—(A communication from Charles Gustave Resiringues Percire.)—(Provisional protection only.)— Creating by photography gelatine reliefs for the production of relief surfaces generally.

indian ink, or other colour, is intimately mixed with the gelatine in water kept warm. A sheet of paper supported on glass is scaked in warm water, drained, and then carefully stressi on the glass plate by means of dry paper and a printing roller. The edges of the paper are then raised, and the warm gelatine and indian ink solution is run thereunder. and then dried horizontally in a stove. For thicker gelatine places, the paper is supported on metal places having rims or figures, and the drying is accelerated by quick lime or chloride of calcium in the stove. Thus gelatine plates are produced of greater thickness than usual, they dry rapidly with a fine grained surface, and the carbon of the indian ink acts as an antiseptic. These plates are sensitized by a bichromate. printed as usual, then secured face downwards to a glass plate, and by means of warm water the paper and unacted on gelatine are washed away. The dried plate receives a thin coating of india-rubber varnish, and from it plaster casts are taken, from which the desired articles are obtained by known processes (casting, electrotype, &c.)

[Printed, 2d. No Drawings.]

A.D. 1877, August 15.-No. 3109.

JENSEN, PETER.—(A communication from Emil Jacobsen.)—(Provisional protection only.)—Polishing machine suitable for polishing photographs among other things.

A spindle is supported on a table, and revolves by means of a treadle and fly wheel below, or by a strap from any suitable shafting. This spindle is continued by an india-rubber cylinder; to the cylinder a flat iron blade is attached, so that the blade revolves when the machine is worked, and by the flexibility of the india-rubber may be varied in its direction. The polishing brush or wheel fits loosely on the iron blade, and may thus be brought to bear upon the object to be polished.

[Printed, 2d. No Drawings.]

A.D. 1877, August 24.—No. 3222.

PARKYNS, Sir Thomas George Augustus.—Tinting autotype or chromotype double transfer prints by the application of a film of coloured collodion during the process of printing.

The collodion has a pigment mixed with it, and this coloured collodion is caused to flow over the gelatine alum-fixed print before the final transfer. Or the coloured collodion may be used instead of the plain collodion for applying to the waxed glass previous to applying the pigmented tissue of the Autotype Company.

Dry permanent pigments only are used, and though collodion is preferred other coloured media may be employed. "In "the mixing of some colours" "large quantities of white "(principally sinc)," are used "thereby producing a body "colour."

Body colours must not be used when the tinted collodion is spplied to the waxed plate.

[Printed, 4d. No Drawings.]

A.D. 1877, September 14.—No. 3461.

SCOTELLARI, DOMINIQUE.—(Provisional protection only.)—Lens-attachment for shortening the time of exposure in taking photographs.

This is a cap which is to be placed over the lens of the camera, so that the light has to pass through it on its way to the lens. At or about the centre of the cap there is an aperture "wherein some transparent substance is placed, but "rendered opaque, and colored either violet, indigo, purple "or blue, so as to allow a certain quantity of photogenic "light to pass through." The aperture is furnished with a cover.

[Printed, 2d. No Drawings.]

A.D. 1877, October 4.—No. 3703.

BREWER, EDWARD GRIFFITH.—(A communication from Louis Auguste Boule, Auguste Pierre Blin, and Edouard Leon Tostu.)—(Provisional protection only.)—Production of reliefs in celluloid by photography.

A photograph is taken according to the heliotype process of "Messrs. Edwards, Marion, and Fleury Hermagis, as "described in the work of Mr. Davanne, intituled 'The "progress of photography,'" or by any other suitable process. A mould of this is made in plaster, and from this mould a second is made in plaster or metal, &c. The hot celluloid is moulded in this second mould by a press, and when cold it is removed, trimmed and polished.

[Printed, 2d. No Drawings.]

A.D. 1877, October 29.-No. 4009.

CAPRON, EDMOND, DUVIVIER, LEON, and PONSOLLE, NOEL, junior.—(Provisional protection only.)—Production of typographical etched plates by means of photography.

A mixture of gelatine, isinglass, sugar, bichromate of potash, and distilled water, prepared as described, "is poured" over an unpolished plate of copper, zinc, or plate glass. It is maintained at about 40° Centigrade for about 3 hours, and when cooled is printed on under a negative as usual.

"The process is then continued as for ordinary printing "with fatty ink upon gelatine, employing transfer ink "and transfer paper. The image obtained is then to be

"transferred to a plate of zinc, for example, and bitten in."

"The grain obtained by means of this process enables a." plate to be produced suitable for typographic printing."

[Printed, 2d. No Drawings.]

A.D. 1877, November 9.—No. 4196.

WHITE, JAMES PATRESON. — (Provisional protection only.)—
"Photographers' head rests or supports."

A horizontal bar is fixed near the floor. Projecting at right angles from this is a telescopic bar or arm, which slides along the horizontal bar, may be turned round on it, and is secured in any position by pinching screws or similar appliances. The free end of this arm is fitted as a head rest. There may be another support working on the arm, and two or more arms may be employed (for photographing a group) if required.

[Printed, 2d. No Drawings.]

A.D. 1877, November 21.—No. 4367.

WARLICH, FERDINAND HENRY, and CADETT, JAMES WILLIAM THOMAS.—Apparatus for producing enlarged photographs principally by the agency of the electric light.

The apparatus may be used with sun light or an artificial light. If the latter, it is similar to an ordinary magic lantern, but the condenser is kept cool by a flow of water (or other liquid). For this purpose the condenser may be made hollow, water circulating through it, water thus being the chief refracting medium; or water may circulate between two condensers, or between and around two condensers, or more than two condensers may be used, or a glass trough may be used to hold the circulating liquid. Where the heat is excessive, the picture to be taken may be immersed in a transparent trough through which the liquid circulates.

The invention includes also a method of keeping the electric light central with regard to the condenser, "by means of the heat evolved from the light." A lens is placed in the path of the rays, by which the heat is focussed to a point; and two "springs or means" are placed one just below the focus. As the light falls or ises so the focus rises or falls and impinges upon one or the other of the "springs or means," heating it and making contact in an electric circuit, thus causing a magnet to act a detent and so free clockwork which raises or lowers the light as the case may be.

[Printed, 6d. Drawing.]

A.D. 1877, November 21.—No. 4380.

HEMERY, THOMAS GEORGE.—Photographic printing frames for ensuring accurate register in combination printing.

The accurate register is ensured by two pins at one end of each printing frame used, on to which pins the mask and the sensitive paper are adjusted. For printing a subject with a border including signature, &c. the operation is as follows. The "tinting frame" carrying the plate with the border signature, &c. upon it, and its centre suitably masked, has the mask for printing the subject laid upon it accurately and then secured by an adhesive substance to the "register" plate," which is a strip of metal fitting on the two pins at

the end of the frame. The "register plate" with its attached mask is then removed to the "printing frame" and put on its two pins, which in this case project from the lid or cover of the frame. The lid is shut down and the "register " plate" is caught by two spring catches, so that it remains down when the lid is opened for introducing the sensitive sheet. The sensitive paper or tissue is then laid on the printing frame and is large enough to extend over the holes in the "register plate." On shutting down the lid its pins, which have square sharp ends for the purpose, punch two holes in the sensitive paper. When the sensitive paper is put with these holes on the pins of the "tinting frame" the register is secured. The pins on the "printing frame" may be fastened to a spring so that they need to be pushed down by hand to punch the holes and do not remain down. For multiple combinations any number of register plates may be used in a similar way. For vignetting, suitable slides fit in grooves in the printing and tinting frames so that the graduated printings overlap, no join being perceptible.

[Printed, 6d. Drawings.]

A.D. 1877, December 5.—No. 4600.

RICHARDSON, WILLIAM, and SLACK, JOHN.—Producing by photography drafts of designs for lace, woven, looped, and other fabrics.

The design is placed opposite a camera so that a suitable enlargement of it may be produced, and immediately in front of the design two frames are fixed, one carrying horizontal and the other vertical wires. Thus the photograph shows the design and the cross wires as superimposed; the wires represent the threads of the fabric.

Or the design may be photographed with the wires, and this photograph may be used in an optical lantern so that an enlarged picture is thrown upon a sensitive surface. Immediately in front of this sensitive surface the two frames with their wires are placed, so that the wires shield the sensitive surface from the light, and white lines (representing the threads of the fabric) are produced.

The construction of the frames is described, and also methods of adding to the pattern produced, as by stensilling, &c.

[Printed, 6d. Drawing.]



17

PHOTOGRAPHY.

A.D. 1877. December 6.—No. 4632.

)HNSON, John Henry.—(A communication from La Société Senri Pellet et Compagnie.)—Reproduction by the agency of ght of drawings, patterns, devices, or designs upon paper, 'ood, fabrics, metal, porcelain, and other materials.

A solution of perchloride or citrate of iron mixed with valic, citric or tartaric acid, or an alkaline citrate, together with a gummy or mucilaginous substance is used to impregate the surface of the article. It is then placed in an Italine bath, to deposit peroxide of iron, and next rendered ensitive by a thickened solution of citric or oxalic acid. It s then exposed to light under, say, a tracing, and placed in a ath of yellow prussiate; the parts exposed to light remain thite, and the parts protected from light become blue. The urface is then well washed with dilute acids and water. aper previously coloured may be used. For taking out false nes a solution of acid oxalate of potash is used. If a colour mixed with this solution, the original blue colour gives lace to the colour employed.

The proportions of five typical solutions are given in the Pecification.

[Printed, 4d. No Drawings.]

A.D. 1877, December 15.—No. 4771.

IMMERMANN, FERDINAND AUGUST. - (A communication om Ernst Schering.)—Freeing pyroxylin for photographic ad other purposes from acid.

The acids which remain in the pyroxylin as ordinarily lanufactured, are removed by treating it for some time with warm dilute solution of potassium permanganate, then ith a very dilute solution of sulphurous acid, and lastly, toroughly washing it with distilled water. For photography, Modion prepared from pyroxylin so treated may be iodized afore exportation, as it is permanent in the iodized condi-

[Printed, 4d. No Drawings.]

A.D. 1877, December 22.—No. 4877.

EHMANN, CARL HEINRICH .- "An improved method of taking binocular or space photographs." 17639.

B

The objective is covered with an opaque medium, with the exception of two spaces opposite each other near its edge. The spaces left uncovered may be of convenient shape, as circular, or like the cross section of a convex or plano-convex lens. The objective thus treated may be of any size, but it is best to use one more than 2½ inches in diameter, as that is the average distance apart of the pupils of the human cyathe picture produced by this means is similar to the appearance of the subject when viewed with both eyes.

[Printed, 6d. Drawing.]

1878.

A.D. 1878, January 14.—No. 176.

DALE, GERTRUDE. — (Provisional protection only.) — Oil-colouring photographs at the back, and mounting them between glass.

The print is mounted face downwards on a convex glass by means of starch or its equivalent, made transparent with castor or linseed oil, and the finer part is painted on the back of the print with oil colour. The painted side is then covered with a second convex glass, upon the back of which the "heavier masses of colour necessary" are painted, and the two glasses are sealed at their edges by fusion or an impervious cement. The arrangement is backed with a white or tinted card.

The glasses may be flat instead of convex.

[Printed, 2d. No Drawings.]

A.D. 1878, February 2.--No. 446.

VAN DER WEYDE, HERRY.—(Letters patent void for want of Final Specification.) — "Illuminating objects to be photo"graphed, and the interior of public and other buildings."

The electric or other powerful artificial light is used, and instead of a lens to collect the rays, a parabolic or other concave mirror of large size is employed, and on the opposite side of the light a screen of opaque or semi-translucent

PHOTOGRAPHY.

naterial is fixed, thus the illumination is wholly or almost wholly obtained by reflected light. The screen is to reflect the light towards the reflector; it may be polished, flat or concave, and must be small and must be placed near the light so as to intercept as little as possible of the reflected light.

In illuminating public buildings, the reflector would be formed of the dome-shaped roof or light curtains suitably arranged.

[Printed, 2d. No Drawings.]

A.D. 1878, February 5.-No. 481.

NEWTON, HARRY ROBERT.—Rendering photographs transparent, colouring them, and mounting them on coloured or plain materials; and preparing paper for photographic prints.

The photographs and the materials used are rendered transparent or translucent (after chemically cleaning them ifnecessary) by immersing them in a bath of warm Canada balsam, and when saturated drawing them out between rollers or plates to remove excess of liquid. They are then coloured or not, as required. The prepared photograph is then mounted on the prepared material. Several layers of various materials are used if required to give depths of int. For instance, one may mount on paper with Canada blam a flesh tinted silk gauze, then on that linen or lawn, ech in one or more layers, then paper or silk cut as required, hen a layer of white linen; lastly, the photograph ("the "small parts being coloured out") is mounted on such a compound base. Or the photograph may be mounted between wo pieces of excessively thin patent plate glass so that the edges of details, outlines, &c. need not correspond so exactly with the parts of the coloured compound base. The materials wed may have a polished or ground surface. Photographs mounted may be viewed as transparencies. Variations in the materials and methods are given very fully in the Specification.

A very much thinner paper than usual may be used for photographic prints if it is mounted on vulcanite or such frames before coating or sensitizing it, and the ordinary operations are facilitated by such mounting. Methods of preserving and exhibiting photographs in albums, lockets, &c. are also described.

[Printed, 4d. No Drawings.]

A.D. 1878, March 6.-No. 906.

PRAGER, ADOLF.—"Transforming paper photographs into oil paintings upon canvas, wood, metal, or other materials."

The albuminous coat of the photographic paper, upon which is the picture, is detached and while wet transferred to a glass table. When dry, oil colours (mixed with about one-tenth of tears of mastic, finely powdered) are applied to the side of the pellicle that was adherent to the paper. When perfectly dry it is transferred to an ordinary picture canvas, a wood panel, metallic plate, &c. which has been varnished with mastic varnish and completely dried. The mounting and the picture are then placed between two metal plates "moderately heated," and placed in a powerful press till the plates are cold.

The details of this combined treatment may be varied. [Printed, 4d. No Drawings.]

A.D. 1878, March 19.- No. 1097.

CADETT, JAMES WILLIAM THOMAS.—A pneumatic exposure shutter.

The cap of the lens is attached by its edge on one side to two arms which are fixed to a spindle, so that as this spindle is turned through say 90° the cap is raised to a position at right angles to its original position, and the lens is thereby uncovered. The bearers of this spindle with the parts connected with it are contained in a box fixed to the apparatus holding the lens, and the cap is kept down over the lens by means of a spring attached to the spindle, though this spring and the case are not essential. An arm is connected with the spindle in such manner that when the arm is raised the spindle is turned, and this arm is raised when a small bellows contained in the case is inflated. A hollow elastic ball is connected with the bellows by a flexible tube, so that when the ball is squeezed the cap of the lens is raised. There is a locking arrangement to hold the cap up or open for focussing. The arrangement may be fitted inside the camera.

[Printed, 6d. Drawing.]



PHOTOGRAPHY.

A.D. 1878, April 9.—No. 1407.

CHARLES, and HERZOG, CONRAD. — (Provisional only.) — Producing and correcting negatives by s.

er types are transparent designs surrounded by an ound. They are mounted on glass (or other transdium) so as to produce a negative, and the spaces hem are rendered opaque.

per types may be used in correcting ordinary

ted, 2d. No Drawings.]

A.D. 1878, April 11.—No. 1442.

GEORGE EDWARD, and CLARKE, John Archer.—ent of artificial light for photography.

werful artificial light is placed in the focus of a preferably four or five feet in diameter; and in front it a screen (or more than one) of semi-transparent s arranged, so that all the light shall pass through it by get diffused.

lectors are made of small pieces of silvered glass n a suitable frame.

ted, 4d. No Drawings.]

A.D. 1878, April 11.—No. 1448.

SAMUEL WHITE. -- Portable camera.

sts of a bellows body camera with a folding base ch serves also to protect the ground glass. The the back part of the camera is bevilled so as to or a vertical swing, and it is fixed by a pinching king in a slot. The front of the camera is carried al piece that slides in a narrow frame (preferably and pinion) the back end of which frame may be it more places than one to the base board, to suit various focal length. By making this attachment ching screw, one has the power to give the front a ing—equivalent to a lateral swing of the back.

ted, 2d. No Drawings.]

A.D. 1878, April 12.-No. 1458.

GARTHWAITE, WILLIAM. — (Provisional protection set allowed.)—Reproducing by photography designs for lace, net, or other woven fabric, together with guide lines.

The design may be printed direct from the original, and the guide lines may be produced at the same time on the print, by threads or wires (on a frame or woven) placed on or under the original design. The design may be enlarged or reduced as usual, the threads or wires being placed between the negative and sensitive surface during printing. Or the guide lines may be produced by contact printing on the negative after its exposure for the design.

[Printed, 2d. No Drawings.]

A.D. 1878, April 15.—No. 1493.

TYDEMAN, EDMUND MANASSEH TOMLINSON. — (Provisional protection only.) — Achromatic lenses of only one sort of glass.

To more completely eliminate the outstanding spectrum of achromatic lenses, the elements of the combination are made of only one sort of glass (e.g. flint) but of different densities and refractive indices. Such lenses are suitable for cameras, among other optical instruments.

[Printed, 2d. No Drawings.]

A.D. 1878, April 15.—No. 1502.

GUTTENBERG, MARCUS. — Producing stipple effects and backgrounds in photographs by litho or plate printing.

A uniform or graduated stipple tint, a vignette, landscape, interior or other background is printed from an engraved plate or litho-stone, either before or after the paper is albumenized or gelatinized. The background may be of various tints, and combinations may be produced. The carbon print is transferred on to such printed paper, or if for silver printing, it is sensitised and so on as usual. Care must be taken that the background of the subject, when the negative is taken, is light, or it may be blocked out on the negative.

[Printed, 4d. No Drawings.]

A.D. 1878, April 24.—No. 1646.

BRASSINNE, HENRI.—(Provisional protection not allowed.)— Fixing hair or other suitable material upon photographic and other portraits.

The hair of the head and beard in the picture is represented by hair or an equivalent material fastened to the picture. If the picture is mounted on a fabric, the hair may be worked upon it—as in embroidery.

[Printed, 2d. No Drawings.]

新田田田田田田田田田田田田田

A.D. 1878, May 17.—No. 1979.

MICHAUD, ALFRED.—Production of metallic intaglios or reliefs from chromated gelatine or bitumen.

To produce a grain on proofs from a chromated gelatine Plate taken from a negative, a sheet of sensitized carbon tissue exposed under a glass plate on which is uniformly dusted opaque powder. The negative is coated with gum containing a trace of chromate, and the sheet of carbon tissue applied to it under water, and developed by warm water.

To obtain a cast from a gelatine relief, it is after development dried in the open air, then supported on glass rods over moist blotting paper in a case till slightly swollen, and lightly coated with fine plumbago by a fine brush. For tasting from it is mounted on a metal plate, and pressed face downwards on to melted fusible alloy (of composition given) till the alloy has solidified. This cast will furnish proofs in transfer ink for litho-printing, or may be used as a block in typographic printing, or for the production of a galvanic mould in relief, which will furnish, galvanically, sunk moulds for jewellery, or copper plate printing.

To obtain sign boards, door plates, &c., a brass plate is coated with bitumen, exposed, developed, &c., as usual, then immersed in a galvanic bath made as required. The solarized bitumen is cleaned off, and the plate immersed in a solution of ammoniscal carbonate of copper; or if required to deepen the inscription it is first "placed for a few minutes in an "acidulated solution of a copper salt."

[Printed, 4d. No Drawings.]

PHOTOGRAPHY.

24

A.D. 1878, May 18.—No. 2007.

SARONY, OLIVER, and JOHNSON, JOHN ROBERT.—paper to make carbon tissue or pigment paper.

The machinery employed is simpler and less cumbro that ordinarily used, and may even be portable. Th to be coated is carried on a stock roller, from whi drawn by a pair of feeding rollers, actuated eithe tangent screw worked by hand, by power, or by a weight, and regulated by a fly wheel, or by a fly as striking mechanism of clocks. From the feeding rol paper passes under the dipping roller, by means of v passes through the melted coating material in a ves warm by a hot water jacket. This dipping rolle: always vertically from two swinging arms (the well arrangement), and these arms and roller are counterpo a weight so that the roller floats on the gelatinous adjusting itself to the surface; or the dipping roller frame may be lowered mechanically and retained by to allow of its instant removal from the coating n The apparatus above mentioned may be made to pac the box in which it works.

The end of the paper from the dipping roller is fast a lath and by it led by cords over the upper feeding then over a hot plate (some three feet long) to lique coating, and then on to a carefully levelled surface cords pass round the upper feeding roller and over attached to the opposite wall of the room, so the movement is at the same rate as the feeding motion, the coated paper has reached the far end of the level or table, it is cut between the table and the ho allowed a few minutes to set, and then hung up to dry

If tissue of only ordinary quality is required, the and levelling of the coating is omitted. The arran of rollers and pulleys by which the coated paper is su may be varied for convenience.

By small consumers of pigment paper, the coating formed by cylinders of oiled or varnished paper with cork or light wood to carry the pivots. The bath con the coating material has a plate at each end of it wi for the pivots of the rollers to turn in. A length paper is rolled upon a roller and has a lath at its free end, so that when placed in the bath, it may be drawn off by the lath till the roller is itself raised out of the bath: the paper is then hung up to dry.

[Printed, 6d. Drawings.]

A.D. 1878, May 30.-No. 2174.

HARMAN, ALFRED.—(Provisional protection only.)—Producing stipple effects on enlarged photographs.

The transparency from which the enlarged negative is made is retouched on the back to modify the lights and shades.

The sensitive sheet is exposed under a stipple negative (or more than one as in combination printing) either before or after printing the picture.

[Printed, 2d. No Drawings.]

A.D. 1878, June 21.-No. 2473.

GURNEY, JEREMIAH.—Rendering photographs, &c. transparent, and facilitating their colouring.

The photograph, or other print, is saturated with melted paraffin, by means of hot plates (as in ordinary waxing), or preferably by rubbing paraffin over the back of the stretched and heated print. It is next moistened on both sides with rectified petroleum, "slightly wiped," and immersed in a tepid solution of gelatine, and at once placed face downwards on a glass plate coated with collodion. It is pressed, dried, detached as usual and varnished on both sides with a mixture of equal parts of plain collodion and a saturated alcoholic solution of shellac.

The prints for treatment may be already coloured, or are preferably coloured on the back just before removal from the glass plate.

[Printed, 4d. No Drawings.]

A.D. 1878, June 25.—No. 2544.

EMMERSON, ELI ELLIS.—Photographers' head and body rests.

Within the base there is a plate which carries casters and may be caused to project from the base, below, by mean of a rectical rod and lever. When so projecting, the rest may be causly wheeled about. When in use the plate with its casters is raised within the base and secured by a catch. The top of this stand has a clamp to carry a vertical rod or support for the rests proper. This clamp has a sort of cup and ball arrangement so that the rod or support may be inclined, and is so made that by turning one screw the rod is secured in the clamp and the cup and ball arrangement is tightened. The clamps which carry the head and body rests respectively, slide on the rod or support, that is vertically, and allow the usual horisontal rods of the rests to slide in them. The clamps have each a screw which when tightened causes it to grip both rods simultaneously.

The forked or curved piece for the head is preferably made adjustable by having one of the legs hinged and fixable as required by a screw.

The arrangements may be applied to other purposes than photographers' head and body rests.

[Printed, 6d. Drawing.]

A.D. 1878, June 29.—No. 2608.

CUSSONS, DAVID HOYLES, and COWAN, ALEXANDER.—
(Provisional protection only.) — Electro-magnetic exposure shutter.

The shutter is preferably inside the camera, and the moving piece is attached by a lever so that an electro-magnet shall open or close it as required by making or breaking the current. The operator holds the contact breaker in his hand, and it is attached to the camera by the double insulated wire which is well known.

[Printed, 2d. No Drawings.]

A.D. 1878, July 1.—No. 2631.

SARONY, OLIVER, and JOHNSON, JOHN ROBERT.—Preparation of pigment compound for pigment paper.

To obtain this of uniform quality, a concentrated solution of gelatine is obtained from the maker, before it has been "slabbed" and dried. This is tested by drying a known quantity in a water bath to ascertain the total solid matter, and allowing another small part to "set" on a glass plate, then well washing it with cold water, and weighing the insoluble, dried film. Sugar is added to the main solution in such quantity that its weight, plus that of the part soluble in cold water, shall equal one half that of the insoluble (in cold water) gelatine. More sugar may be required, as for single transfer paper.

This jelly is then coloured with Indian ink and alizarine lake (prepared as described in No. 1367, A.D. 1877) in quantities stated, to imitate silver prints; or by other pigments. One Lhousandth part of carbolic acid is added—it is then "slabbed," Cried and cut up as usual with gelatine. It may for use be cliluted with uncoloured pigment compound if necessary, and

it may be used without drying, &c.

[Printed, 4d. No Drawings.]

A.D. 1878, July 9.—No. 2746.

MORGAN - BROWN, WILLIAM. — (A communication from Edward Maybridge).—Instantaneous photography of moving Objects, especially of running horses.

In front of the lens of the camera, there is an exposure whutter consisting of two slides with an open space in each. When closed the opening of each is opposite the solid part of the other, and when the catches are withdrawn they slide rapidly (by springs) in opposite directions, the openings coinciding as they pass. The two catches are withdrawn simultaneously by an electro-magnet the electric circuit of which is completed by a contact-maker actuated by a thread stretched across the horse's path for a running horse, or by a connection over which a wheel of the vehicle passes for a trotting horse.

A background is used which is preferably white, and has numbered vertical lines drawn on it, and near the bottom a few horizontal lines, which indicate on the photograph the position of the horse, the distance of his feet from the ground, &c.

To make successive photographs of the same horse, a series of cameras is employed, each having its shutter and separate



improvement consists in the addiridium, or mercury, preferably chato the oxalate solution used for de

Formulæ and methods for cos which vary from those in the pre in using stronger solutions, and in a mixed solution rather than conse drying of the paper.

[Printed, 4d. No Drawings.]

A.D. 1878, July 22.-

WOODBURY, WALTER BENTLEY. paper, cloth, &c. by means of p gelatine reliefs.

A piece of sensitized pigment penegative or positive according to the fixed by its film surface to a metal water. The metal plate is preferably and coated with collodion before the developed as usual with warm water by immersion in alcohol. In lieu (sheet of gelatine rendered insolul other substance)

of the paper, &c. is thus proportional to the relief of the prepared plate, and the effect of the compression is to render the paper more transparent, but darker by reflected light. Hence the employment originally of a negative or positive according to the way in which the finished picture is to be viewed.

[Printed, 4d. No Drawings.]

A.D. 1878, August 12.-No. 3184.

TIATOR, JOSEPH.—"Portable photographic apparatus."

This apparatus is especially for the landscape photographer. When packed it is outwardly a hand trunk about 21" × 12" × 12", with an extra leather case for the lens and a reservoir for water holding about 2 gallons carried knapsack fashion when full (when empty, in the above box), besides three legs which pack to resemble a walking stick. The bottles have each an elastic band which passes round them vertically, and is divided at the top so that half goes on each side of the neck: when not in use the divided band passes over the stopper, to keep it in, instead of over the shoulder of the bottle. The front part of the case or box constitutes the camera. For use it is mounted on the legs, the bottles, &c. are removed from the back part, and this is then opened out, expanding by the unfolding of certain flaps to a size suitable for performing such operations as developing, intensifying, &c. within it, under the protection of a cloth which is fixed to it and has an elastic-bound opening for the head and right arm. and a smaller one for the left arm. When the operator's head is in this dark chamber he sees before him the back end of the camera. For focussing, the front of the camera moves by a screw from behind, the edges of the front and the surfaces of the camera (or box) between which it moves to and fro being covered with plush to make it light-tight. An india-rubber tube leads from the water vessel and has at its end a pinchcock which is described. The arrangement for carrying the sensitive plate or focussing glass is fixed, and has a double sliding door behind which opens from the middle sliding right and left. This is closed when the sensitive plate is in, lest any light gets into the dark-room while the operator withdraws himself.



the plates are kept apart by frar woollen material at each corner.

[Printed, 6d. Drawings.]

A.D. 1878, August

LOMBARDI, ANTONIO.—Colouristextile fabrics, by rendering then colours to the back of them.

The fabric is rendered translucoil (as castor oil in methyl alcohdissolved. It is next treated wit containing chrome alum mixed wior zinc oxide) to fill up the meshes graph is produced on the prepared a process, as the "dusting on" proplatinotype, &c., or by means of a squent conversion of the silver impermanent substance, so that the injure the picture. Or the pictar asphaltum by the usual process; or a mechanically or otherwise, and ther a photographic carbon print.

[Printed, 4d. No Drawings.]

required to represent musical staves. The notes, signs, words, &c., are cast, or stamped, or cut out of metal or wood, painted a dead black on their fronts, and have each two flanges at back to fix them on the wires by.

If required, the black and white may be reversed, the background black, and the type white, in which case the staves are painted on (in white) or are made by letting in strips of whitened material. The notes, signs, &c., in this case have only one flange, which fits into grooves cut in the background.

A form, prepared by either process, is photographed the size required, and a metal plate coated with gelatine and sensitized with a chromate is exposed under the negative. After exposure the plate is covered with a fatty ink, developed with hot water, and "bitten in" with acids as usual. The plate may then be used for printing, or an electrotype copy may be obtained from it. By varying the "form" as above shown, the subject matter may be either in relief or etched as on an engraved copper plate.

[Printed, 4d. No Drawings.]

A.D. 1878, August 21.—No. 3301.

HUMPHRIES, WILLIAM FRANCIS.—(A communication from James Thom.)—" Camera for taking and enlarging pictures "from a photograph or any opaque object, and may be used "by portrait painters for making their drawings."

It has adjustable mirrors for reflecting light into the apparatus. The apparatus itself has a lens which slides for focussing, a mirror (which turns on a centre by means of a stud outside the apparatus) opposite the lens, and a mirror on each side of the central one. The picture is secured to one of the side mirrors, illuminated by the outside mirrors, reflected by the central mirrors towards the lens, which gives an enlarged image on any desired surface in a darkened room. For a reversed picture, the original is secured to the central mirror. "A glass is sometimes used to retain the moisture "in a picture, for some photographs reflect, when dry, a "multitude of minute little brilliant specks." When in use the apparatus is secured to a window sill, and the window is sovered with an opaque screen; or artificial light may be used.

[Printed, 6d. Drawings.]

A.D. 1878, August 24.-No. 3346.

BREWER, EDWARD GRIFFITH.—(A communication from Jess Baptiste Bastien.)—" Improvements in furniture and gym"nastic and exercising apparatus or appliances, also
"applicable to surgical, medical, and other purposes."

The appliances are described as physiological ladders and harness, but these words are "employed figuratively only." "This system of ladder and harness is indispensible every." where;" it assists the body in its different movements as in the ordinary operations of labourers, gymnastic exercises, &c.; it affords support and facilitates movements in surgical cases, and enables the maimed or lame to bring the other parts of their bodies to the assistance of the deficient part. The "ladders" are of a great variety of patterns, but always correspond to the human frame or a part of it in the distances, positions, &c., of their parts.

There is mentioned a "ladder for pose-plastique (patho" logical or others) for artists, painters, photographers, and "the like;" also a "ladder garment or harness garment for general uses, pose plastiques," &c. A "ladder support for "resting or 'poses plastiques'" is figured among the drawings. These apparatuses are not specially described.

[Printed, 1s. 10d. Drawings.]

A.D. 1878, September 2.—No. 3465.

MORGAN-BROWN, WILLIAM.—(A communication from John Augustus Knapp, Frederick William Kamping, and Robert Young Spring.)—The portrait combination with an additional lens, and a method of focussing.

An achromatic plano-concave (or concave meniscus or biconcave) lens is added in front of (or may be behind) the ordinary portrait combination to obtain a flat field, to cure spherical aberration and distortion, and to make a smaller lens do the work of a larger.

For focussing, a curved slot (screw shape) is out, say, a third of the way round the outer tube in which the lens tube slides, and this latter has a pin passing through the slot. By moving this pin in the slot the lens is moved to and fro. Or the part of the outer tube in which the slot is cut may turn in a collar by means of a handle fixed to it, and so move the lens, the pin that works in the slot being in this latter case cut off short.

[Printed. 8d. Drawings.]

A.D. 1878, September 28.—No. 3828.

STEPHENSON, GEORGE.—Producing models, designs, or Patterns for photographers and others.

The design is made upon a thick card, or any soft metal, by cutting partially through it with a specially made knife, the cuts being oblique, and the edge of the material being raised by the cutting operation. A negative is taken of the prepared plate: the prints from the negative have the effect of a design in light and shade.

[Printed, 2d. No Drawings.]

A.D. 1878, October 7.—No. 3941.

LANE, JOHN TALBOT .- (Provisional protection only.)-Printing frames for combination printing.

The printing frame has a raised ledge along the end and side at one corner, against which the sensitive paper, masks. mounted discs, &c. are placed to secure correct register. At the other end of the frame there is a long flat spring, or other device, to hold the masks, &c. down. The masks, &c. are fastened together like leaves in a book, when they are going to be used. Each frame has an actinometer attached.

[Printed, 4d. Drawing.]


A.D. 1878, October 11.—No. 4023.

GERMEUIL-BONNAUD, JEAN BAPTISTE .- Colouring photo-

graphs, with subsequent photographic printing.

The paper is sensitized with silver nitrate solution mixed with glycerine, and is printed on just far enough to give the outlines, developed, dried, and then coloured in flat level tints. The colours are preferably mixed with water containing one per cent. each gum Arabic and glycerine, avoiding colours that "contain white or vermillion." The coloured proof is then albumenized and sensitized (formulæ for which are given)

A.D. 1878, Octol



A.D. 1878, Octobe
TYDEMAN, EDMUND MANASSI
protection only.) — Achromatic
glass.
To more completely eliminate

To more completely eliminate achromatic lenses, the elements of only one sort of glass (e.g. fli and refractive indices. Such len among other optical instruments [Printed, 2d. No Drawings.

A.D. 1878, October
BOLHOEVENER, CARL, and
(Provisional protection only.)—Pri
A solution of Cologne solution

A.D. 1878, November 18.-No. 4671.

SCOTT, WENTWORTH LASCELLES .- Electric light.

The arc is produced against a block of lime, magnesia, or such substance, which may be coated or impregnated with a better conductor of electricity, and hardened by silica or silicates. The light has its tint altered, as for photographic purposes, by adding to the electrode as described a compound (with or without an oxidizing substance) that shall give the required colour, as, lithium or strontium compounds for red, thallium compounds for green, &c.

Many details of the lamp and its accessories are given, the lamp being for general use.

[Printed, 6d. Drawing.]

A.D. 1878, November 22.—No. 4756.

VON NAWROCKI, GERARD WENZESLAUS.—(A communication from Friedrick von Voigtländer).—Improvements in the Petzval portrait lens.

The front combination remains in general appearance as before but is of slightly longer focal length. The back combination differs altogether; it has a focal length equal to the front combination, and consists of a plano-convex crown glass lens cemented to a concave meniscus of flint glass, and is set with the plane face towards the front combination. The outside surfaces of both combinations are of equal curvature. The curves, foci, densities and indices of refraction are given. The objects of the new form, are to lessen internal reflection, avoid distortion, reduce the focal length (when the back combination of an ordinary lens is exchanged for the new combination) and to increase depth of focus.

[Printed, 6d. Drawings.]

A.D. 1878, December 9.—No. 5036.

PIXIS, THEODOR. — Transferring pictures produced from phototype plates on to metal, wood, porcelain, glass, textile fabrics, &c. (except printing paper).

The ink must be mixed with a siccative, Japanese gold size or its equivalent being preferred. The picture is transferred

directly or by transfer paper. For "porcelain, clay, or glass" enamel colours are used; and if it is required to improve the tone of the picture, the "phototype plate, the transfer, or the "material is powdered over with dry colours of the required "tint before the enamelling takes place," and while the enamel colours are still damp. Or the material "may be prepared in "the desired colour" before transferring. Wood on which pictures have been transferred may be oiled, polished, &c., without injury when dry. The pictures are fixed on textile fabrics, by drying, rinsing in a solution of glair, and subsequent heating to 110-120° C.

The paper on which the picture has been printed may be used at once (transferring the picture as required) or it may be "hermetically packed up" between wet blotting paper for future use. Some details of manipulation are given in the provisional specification.

[Printed, 4d. No Drawings.]

1879.

A.D. 1879, January 24.—No. 295.

SALVY, EMILE.—"The vitrification of gelatinous impression—"obtained either by photography, or from copper and steel—"plates;" applicable to crystal, glass, stoneware, porcelain—and enamel, avoiding blistering, &c., of the gelatine.

The gelatine is coloured with a vitrifiable oxide to which is added "a quantity of flux." The picture is produced as above either directly or by transfer, and when perfectly dry is immersed for a quarter of an hour in a four per cent. solution of permanganate of potash, or a four per cent. solution of nitrate of potash containing sulphate of alumina, tannin, gallic acid, chrome alum, or such substance which makes gelatine insoluble (quantities are given). It is then carefully washed, dried spontaneously, covered with a thin layer of flux, and baked.

[Printed, 4d. No Drawings.]

A.D. 1879, February 12.-No. 564.

HELY, ALFRED AUGUSTUS, and WILMOT-SNOOK, WILLIAM. Producing designs on glass, iron, wood, stone, &c. and varnishing the same.

The operation consists in "stencilling, brushing out, and transferring"—the machinery used is described and formulæ are given for the varnish or "enamel." The only reference to photography is contained in the provisional specification and is as follows:—

- "the production of coloured and metallic designs and devices by the aid of the photographic process. As, for example, having first obtained a photographed negative of the subject we desire to produce, we gild or silver a plate of
- glass upon one of its surfaces, and having rendered that
 surface sensitive in the usual way, we take upon the same
- an impression of the said negative, which appear upon the
- glass in bright gold or silver lines or characters as soon as
 the superfluous gold or silver leaf is washed out."

[Printed, 6d. Drawings.]

A.D. 1879, February 24.—No. 748.

WISE, WILLIAM LLOYD.—(A communication from Johannes Echuhmacher and Gustav Stade.)—(Provisional protection only.)
—Transferring photographs that have been coloured to canvas, metal, wood, stone, glass, &c.

The photograph is obtained on chalked paper which is coated with gelatine and "with a further layer of solution of collodion " of silver," and fixed as usual. The surface is then coloured (preferably with oil colours), when dry coated with retouch yarnish, and then stuck with its face to the canvas, &c., by means of "curds and lime" or retouch varnish. The paper is removed by luke warm water, and the picture is varnished with West Indian copal varnish. If the material to receive the picture is dark coloured, the coloured side of the photograph is coated with a white colour before the retouch varnish is applied, so that the white colour forms a ground to the finished picture. If baking is required, these pictures will stand a temperature of 150° Réaumur.

[Printed, 2d. No Drawings.]




wissolved in ether. One or the mixed with bitumen, a spirit pitch, Canada balsam, or such and bisulphide of carbon accord surface is coated with this pri negative, developed by rubbing lard, petroleum or benzene, one according to the materials previous ment, exposure to light for five n it is then washed and dried. Etch acids diluted (hydrofluoric acid is ing "with ether instead of petro " copper plate ('tailledouce') will " nary cliché, because the ethe " bitumen, while the petroleum "the india-rubber." Thus may development, a plate for copper ; printing. Plates may be used w lating with gallic and nitric acids inking. Paper or cardboard may tive mixtures by first coating it wit

[Printed, 4d. No Drawings.]

A.D. 1879, March 18.

DILLON, THOMAS ARTHUR. — "]



camera has a long frame which holds a number of dry plates, and the plates as well as the roll of supported documents are moved by clockwork as required, pausing for each exposure, till the work is done. When an electric light is used it is arranged (in a way not described) to work automatically, only when required. Crumpled parchments are moistened with spirits of wine and flattened under glass for photographing, except when aniline ink has been used when they are hung up in a damp room till limp.

PHOTOGRAPHY.

The abstracts are preferably written on thin transparent paper, and copied by exposing under them paper sensitized with an alkaline bichromate and sulphate of copper. In the winter or at night, dry plates are used instead of the sensitized paper.

[Printed, 8d. Drawing.]

A.D. 1879, March 25.-No. 1183.

SPURGE, JAMES BLEWITT, and WHITCHER, JOHN. — An exposure shutter.

The apparatus is attached to the sliding front inside the camera, and consists of a disc which covers the lens and may be turned partially round (so as to expose the latter) on a pivot parallel to the principal axis of the lens. The disc is kept over the lens by a spring, and is turned away by a cranked arm or toothed segment, the rod or toothed rack of which moves by a "piston like action" by means of a band wheel and cam. The band or cord is secured at one part to the periphery of the wheel, and the free end is drawn or released by the operator.

Or, the disc covering the lens may be in two parts—"crab"claw" shape, the pivot of one working within the hollow
pivot of the other by a similar motion.

Also, the band wheel and cam may be replaced by an expansible chamber for air or water, the fluid being forced into it by a tube and compressible ball (which may have a valve to retain the pressure.) The tube connection passes through the front of the camera by means of a screw union.

Or the shutter may consist of two parts sliding vertically in a frame by means of levers connected by a link and actuated by the expanding chamber. The ends of the two



into reservoirs, conveying such using it to turn dynamos. An is used in combination with " magnesium dust" or other fitted with an electric lamp of tains in its hollow base "an elec is actuated by compressed air tube. The compressed air st flame, with coal gas and Fletch piece of lime to incandescence. the air is divided and one cu benzolizer (or such apparatus) t for the blowpipe. Suitable refle air may be utilized to blow the flame. These secondary lights thrown by the electric light. I be used to stop the supply of air have finished, so that the lamp guished.

[Printed, 4d. No Drawings.]

A.D. 1879, April DILLON, THOMAS ARTHUR.—Tra: &c., by electric telegraph.

For secret messages and other obvious purposes, the sender writes on a thin metallic sheet, or its equivalent, with a style so that the letters are indented. This is then sponged over with a solution of india rubber so that it shall remain in the indentations only, or pressed upon such a preparation so that the surface shall be coated and the writing remain clean. To enlarge, the writing or printing may be done on an india rubber sheet with an elastic ink, and the sheet then uniformly stretched.

Thus, however produced, the writing or design is obtained (generally enlarged) so that the writing or design conducts electricity while the ground on which it is does not, or vice vered. It is then transferred to a metal wheel or cylinder which revolves regularly beneath a style, so that the current flows or ceases to flow according to whether the conducting part or otherwise passes beneath the style. A surface and style move synchronously at the other end of the telegraph line, the surface there being coated with paper, so prepared that its colour changes when the current passes. Or, for secret messages, the action of the current may be invisible but able to be made visible by development or a secret ink process, &c., by the person for whom the message is sent. This large reproduction is reduced photographically, a surface of chromated gelatine is printed on through the reduced negative, and from the print, by means of a plaster cast, stereotype plates are produced as usual.

When a reflecting galvanometer is used at the receiving end, an electric lamp is used, and the needle is arranged so that at each oscillation it cuts off the ray of light by covering the slit it passes through. The light impinges on a dry plate suitably moved, and this may be coated with ruby varnish or otherwise protected for transmission to a distance, there to be developed. Or the film alone may be sent after removal from the glass.

[Printed, 6d. No Drawings.]

A.D. 1879, April 5.—No. 1371.

LEFEVRE, HENRI.—Magic lanterns, also suitable as dark chambers.

The apparatus consists of an opaque box of any desired dimensions, constructed of pasteboard, wood, metal or other-

wise. It accommodates two lamps with reflectors and lesses by which images of opaque or transparent objects may be produced. "When the apparatus" "is closed it may in "the day time be utilized as a dark chamber suitable for "photographic purposes."

[Printed, 6d. Drawing.]

A.D. 1879, May 26.—No. 2095.

RITCHIE, JOSEPH HORATIO.—Using gum in which to prepare the emulsion for gelatino-bromide plates.

It is preferred to use arabin, prepared by adding alcohol to an aqueous solution of gum arabic, rather than gum arabic itself. The arabin is dissolved in water, and, in a non-actinic light, weighted quantities of bromide of potassium and nitrate of silver are added alternately as described. The mixture is then put into a dialyser whereby the soluble salts are removed, and after treatment with a little alcohol and water, it is stored ready for use. It is preferred generally to dialyse before adding the last quantities of salts, to avoid so great an accumulation of soluble salts.

For use, the gelatine is swelled in water, and then dissolved (by heating in a water bath) in the emulsion prepared as described. The glass plates are coated, developed, &c., as usual.

The quantities are given, and operations are described in detail.

[Printed 4d. No Drawings.]

A.D. 1879, June 3.—No. 2187.

ANDERSON, FRANCIS.—(A communication from Alfred Firmin-Didot and A. Balencie.)—(Provisional protection only.)—Enamel photographs.

The vitreous surface is first made non-transparent or nearly so by any known process, as by the use of hydrofluoric acid, sand, oxide of iron, or enamelling. It is next warmed and coated with an aqueous solution of grape sugar (or similar substance) containing bichromate of ammonia (quantities given) and is exposed under a positive, "after which vitrifiable "oxide is brought on prepared surface and caused to run "over the same with the least possible friction until the

friction has been developed to the required intensity.
Finally, the surface is vitrified in a temperature of about 700°."

[Printed, 2d. No Drawings.]

A.D. 1879, June 9.—No. 2271.

REWER, EDWARD GRIFFITH.—(A communication from Jean Paptiste Janard and Louis Guillot.)—(Provisional protection rely.)—"Machinery for printing designs photographically on continuous textile and other materials."

A table has grooved edges into which the frames of the lichés fit. The sensitized material is drawn under the lichés by passing it from one roller to another: a curtain overs the arrangement, and the exposure of each length is nade as required. The apparatus may be varied in detail.

[Printed, 2d. No Drawings.]

A.D. 1879, June 26.-No. 2563.

HADDAN, HERBERT JOHN.—(A communication from David Nunes Carvalho and Ernest Marx.)—Shortening exposure by colouring the studio walls green and the collodion or other ilm violet.

The complementary colour to violet, described as "orangee pea-green" is obtained by mixing "Prussian blue and
deep chrome." It is a non-actinic colour and is used for
colouring the walls, &c. of the studio. This procedure
reduces the exposure necessary, and it is further reduced by
colouring the collodion and silver bath violet, that is an
actinic colour. The negative retains its violet colour after
development, &c., and so, the inventor states, prints more
quickly.

[Printed, 4d. No Drawings.]

A.D. 1879, June 28.—No. 2611.

BOBLAND, ALEXANDER. — (Provisional protection only.) — Photo-lithography: drawing with lithographic chalk on a hromated starch print.

A smooth surfaced paper is coated with a solution of starch, nated again with a mixture of starch, gum-tragacanth, and property, dried, sensitized by an alkaline chromate, dried,

A.D. 1879, July

SAUVEE, Albert.—A comm Janua.)—A material for photot

This is a plastic cement maclead (massicot) and glycerine in purpose to which it is to be appli be added to colcur it, &c. By minutes and then resists both specially adapted for "photog things, because of the "delicacy

[Printed, 2d. No Drawings.]

A.D. 1879, July 4

SACHS, JOSEPH JULIUS.—Prepar textile fabrics for printing on ter surfaces.

This relates to the specification refers chiefly to the preparation of the woven patterns upon them for the specific patterns upon the specific patterns.

Any suitable fabric or materia "gelatine, albumen, asphalte, o" which is sensitive" to light; it required pattern, and the unexpos are dissolved away. The surfac described, or used with the surface described.

A trough of silver (or other metal silver plated) is heated by a hot water jacket, and contains the gelatinous mixture. A roller of india-rubber, glass, or hard-wood is supported lengthways along the trough so that its lower third is immersed in the gelatinous mixture. The roller revolves in fixed bearings, and the plate to be coated is drawn across it in an opposite direction to that in which the revolving roller has a tendency to move the plate. Thus the emulsion is put upon the plate after it has passed over the roller. The plate is then turned over and dried on a level surface. Other surfaces than glass may be coated, and with other mixtures—as, gelatine plates for collotype printing—and the details of apparatus may be varied accordingly.

[Printed, 6d. Drawing.]

A.D. 1879, July 22.-No. 2968.

SWAN, Joseph Wilson. — Printing by development on surfaces coated with bromide emulsion.

For gelatino-bromide, an emulsion is prepared as usual (according to a formula given, heating to produce sensitiveness), washed, redissolved, and mixed with small quantities of alum and carbolic acid to make the emulsion less soluble in water.

For albumino-bromide, a gelatine emulsion is prepared (using only one fifth of the gelatine specified for gelatino-bromide), precipitated with methylated spirit, washed, added to previously whipped and filtered egg albumen, and then filtered.

The surfaces are coated with one or other of the above preparations. If with the latter, after drying they are subjected to the heat of a steam bath to render the coating insoluble.

These surfaces are printed on, either in the camera or by contact, developed with ferrous exalate, and fixed with hyposulphite of sods. Artificial light is preferred for printing. The preparation of the emulsions and manipulation of the coated material must be carried on in a suitable non-actinic light.

[Printed, 4d. No Drawings.]

A.D. 1879, July 22.-No. 2969.

SWAN. Joseph Wilson.—Producing photo-relief plates, and producing stipple effects for photo-typography, photo-litho-

graphy and photo-engraving.

For relief plates, a gelatino-bromide emulsion is prepared as described and plates coated with it are printed as usual and developed (preferably) by means of pyrogallic acid, bromide of ammonium and ammonia (formula given). The developed plate is made moist and warm, as by putting it into warm water, when the parts unacted on by light swell up: the swelling may be modified by adding alum, tanning or such substances to the emulsion. Or, where there are no half tones, the relief may be obtained, after drying the developed plate, by alternately applying strong acctic acid to it and drying it. From these relief plates, casts may be taken which will in turn furnish stereotype or electrotype plates, or in some cases an electrotype plate may be taken direct. Impressions of the relief produced by acetic acid may be obtained by pressing a soft metal upon the dry plate.

To obtain stipple effects for pictures possessing half tones, screens are used which consist of transparent fine lines, about 100 to the inch, on an opeque ground. Such a screen may be placed before the sensitive plate in the camera while the negative is being taken, or it may be in contact with the transparency being copied, or in printing by super-position. the screen (consisting of a thin film) is placed between the transparency and sensitive surface. In either case it is moved periodically at different intervals during the exposure. so that a stronger impression of the lines and a greater number of crossings is obtained in the shadows than in the lights, or vice versá if a transparent positive is used. Different sorts of screens may be used even on the same picture. Such photographs may be used as negatives by transmitted light, or positives by reflected light, for producing reliefs by the process described in the first part of this specification, or by the chromated gelatine method. Or such "linear photo-" graphs" may be used in photo-etching processes. If employed as positives, such photographs must have a dark ground, or may be on ferrotype plates, and may be whitener by means of bichloride of mercury.

[Printed, 4d. No Drawings.]

A.D. 1879, September 19.—No. 3760.

WOODBURY, WALTER BESTLEY. — Producing designs in relief on thin sheets of tin foil, soft brass, lead or such metal.

This is an extension of No. 2912, A.D. 1878. The gelatinorelief surfaces are preferably prepared as therein described, but instead of simply compressing a material such as paper, the thin metal sheet is supported on a yielding material (blotting paper, india-rubber, &c.), so that by pressure with the gelatine relief a metal relief is obtained. A brilliant or a mat surface to the metal may be obtained by using respectively a gelatine or a paper support in preparing the gelatine relief—these may be combined in the same design.

[Printed, 4d. No Drawings.]

A.D. 1879, September 22.—No. 3816.

SCOTT, FRAME, junior, and COLLINS, JAMES STRAFFORD.—
(Provisional protection only.) — Reproducing designs, &c.;
producing electrotypes and typographic blocks.

This refers chiefly to the production of a gelatinous surface for use instead of stones in lithography. One of the ways of using such surfaces is thus described. "—— we take inks "having photographic properties, which can be printed from a negative or positive, thereby producing designs or writing "by the ordinary action of light, from which duplicate copies can be produced."

"Or we take such photographic or other inks and produce photographically or by hand, drawing, writing," "or photographs of natural objects, which have been produced on the surface" mentioned above, "and having given to them suitable conducting surfaces, take electrotypes from the same."

Or said surfaces may be treated with water to obtain reliefs from which moulds can be obtained "to be used as "ordinary printing blocks or cylinders."

[Printed, 2d. No Drawings.]

A.D. 1879, September 23.—No. 3818.

JONES, BALPH AUGUSTINE.—A hand roller for applying pressure in mounting photographs and for other purposes.

PHOTOGRAPHY.

Two or more rollers made of suitable material ar in a frame so that they may easily revolve. The r ject below. To use the machine it is simply passe surface, while the hands of the operator press upon

[Printed, 6d. Drawing.]

A.D. 1879, November 12.-No. 4607.

SWAN, JOSEPH WILSON.—"Coating glass and othe "with gelatinous or viscous photographic corespecially gelatine emulsions.

An endless band of india-rubber or other suitable which is as wide as the plates to be coated, is stretwo rollers, one of which dips it into the emulsic other brings it into contact with the plates to be collower part of the band passes over a third roller the clear the edge of the emulsion trough. This troug of earthenware or any suitable metal plated with sidipping roller is of wood or metal silver-plated coating roller of india-rubber or such elastic mate plates travel in a continuous train upon a travel beneath, and in an opposite direction to the coating band. The trough is heated by hot water, and with a reservoir of emulsion so that the level me constant.

[Printed, 8d. Drawings.]

A.D. 1879, November 21.—No. 4738.

PETIT, CHARLES GUILLAUME.—Producing typograplates from half shade negatives.

A layer of chromated gelatine is exposed beneath tive or positive, and from this print a relief is of the action of water; either cold water which swell water which dissolves the gelatine according to t tion of protection from the light that it has rec mould of this is taken in a white substance, as wa mould is blackened superficially with black lead. of a V shaped tool worked mechanically, parallel g cut over the whole surface of the mould. The dep of the tool is arranged so that the highest reliefs

48

whole of the black lead removed from them, while the lowest depressions are untouched and so retain the whole of the black lead that is upon them. This mould is then photographed and yields the picture in pure white and black.

Or the wax surface may be grooved before moulding it, the gelatine plate superficially blacked, and the two pressed together.

[Printed, 4d. No Drawings.]

į.

Ē

Ė

•

r

ŧ

A.D. 1879, November 24.—No. 4784.

BLAMIRES, JOSEPH HOWARD.—(Provisional protection only.)
—Substitute for focussing cloth.

A dark chamber is used. The lens (P focussing lens) is attached to a sliding plate.

[Printed, 2d. No Drawings.]

A.D. 1879, December 20.-No. 5223.

CLARK, ALEXANDER MELVILLE.—(A communication from Jean Etienne Paul Lémary.)—"Production of coloured photographs upon porcelain and earthenware."

A cleaned glass plate is coated with a solution containing manna, dextrine, and bichromate of potash (formula given), then dried, exposed under a positive, and developed with oxides of cobalt and iron ("mixed with a little yellow for porcelain") without fluxes. The plate is then coated with a normal collodion, with which is mixed the required flux after grinding it with glycerine. The plate is next immersed in water, in Clution of carbonate of soda, and lastly in water again to eparate the film from the glass. The film is transferred to a xed paper (prepared as described) collodion side uppermost, Pressed with blotting paper, coated with turpentine, and ied. It is next coloured by any suitable process, and when transferred to the surface of porcelain or earthenware hich is prepared by warming it and coating it with "fat spirit of turpentine." The paper is peeled off, and the ticle is dried and fired in a muffle. The photograph is thus Over the colours, and modulates them.

Or the flux may be omitted where described above, and ter the final transfer, before firing, the photograph may be

coated with collodion containing a little glycerine and the fix ground with turpentine.

Grisailles and cameos may be produced by either proces, omitting the first transfer, and first coating the surface of the article lightly with gelatine. The process may be applied to gold, platinum and silver.

[Printed, 4d. No Drawings.]

1880.

A.D. 1880, January 19.-No. 232.

BELL, George Charles. — Producing photo-reliefs with a grain.

A surface of hard paper or other suitable material which has raised points, dots or projections, is sensitized, care being taken that the sensitizing material does not reach the depressed parts. This may be done by rubbing the surface with crystals of nitrate of silver. The subject is photographed on such a surface, and a positive is obtained from which a negative is produced "ready for use in the ordinary" process of photo-relief engraving," or for photo-lithography, &c.

[Printed, 4d. No Drawings.]

A.D. 1880, February 4.—No. 498.

BLAIR, THOMAS HENRY.—Camera with changing box, viewmeter, &c. attached.

The front of the camera draws forward, and is kept in position by brackets, while the back part is large enough to hold the changing box with its twelve plates when not in use. When required, a sliding cover is removed from the top of the back part of the camera, the changing box is lifted out and pushed into the grooves from which the cover was withdrawn, and the bottom of the plate box is drawn out, so that it is like a box without a bottom supported over an opening in the top of the back part of the camera. Each plate is supported by a spring satch, and may be released from outside so

hat it falls into the plate carrier which is previously brought inder the required plate. The carrier is then moved by rack and pinion into the position already determined by focussing, and marked on a bar which is secured to the carrier and rojects outside the camera. This bar has numbers on it which indicate when the carrier is under any given plate. After exposure, the plate is brought under its place in the interest, and the camera is inverted so that it falls back again. It is allowed a grain agreement of the lates without admitting light.

The view meter is a rectangular frame in front of a sight tole and is used separately to determine the position from which to take the view, it is then fitted into its place on the op of the changing box, where it acts as a finder.

[Printed, 6d. Drawing.]

A.D. 1880, February 26.-No. 847.

VOLFRAM, JULIUS HERMANN GUIDO. — Preparation of maitive collodio-bromide emulsion by means of ammonia.

The nitrate of silver is dissolved in aqueous ammonia tixed with absolute alcohol; more dilute alcohol is added, ten the collodion, and lastly the alkaline bromide dissolved aqueous ammonia and alcohol. After mixing, the emulon is precipitated by much water, washed, and dissolved in ther alcohol with a little glycerine or other preservative, he quantities are given.

Plates are coated with the emulsion as usual: a substratum caoutchouc may be used. The sensitiveness of the plates comparable with that of gelatine emulsion plates.

[Printed, 4d. No Drawings.]

A.D. 1880, March 11.-No. 1054.

HADWICK, JOHN, and CHADWICK, WILLIAM ISAAC.—A Mary exposure shutter.

A circular frame fits on to the lens hood so that its centre below the lens. At its centre is a pivot on which revolves symmetrically shaped plate consisting of two segments of be circle, either of which is large enough to cover the lens.

When about to be used, one of these is in front of the less and the plate revolves till the other is in front of the less, the space between gives the exposure. Joined to the centre of the revolving piece is a spring which extends radially and reacts upon a screw fixed to the edge of the frame. This screw may be moved along a slot so as to bend the spring more or less, and so the revolving piece is driven round with greater or less velocity when released. It is held by a catch that is withdrawn pneumatically by means of a tube and reservoir, and there is another spring catch to prevent the revolving piece from going too far or recoiling. It has springs to hold masks for giving different exposures to different parts of the lens aperture. By means of a stop the shutter can be fixed open for focussing.

[Printed, 6d. Drawing.]

A.D. 1880, March 15.-No. 1112.

REYNOLDS, JAMES EMERSON.—Coating with galena.

Surfaces in general may be coated with galena by the application of an alkaline solution of lead mixed with sulphourea (or similar substance). Formulæ are given. "Photo-" graphic films or collodion on glass or paper" may be so coated.

[Printed, 4d. No Drawings.]

A.D. 1880, March 15.-No. 1117.

WILLIS, WILLIAM, junior.—Platinotype printing.

See Specifications No. 2011, A.D. 1873, and No. 2800, A.D. 1878. Better results are obtained by the use of a larger quantity of the platinous salt in coating the surface, and this change makes it unnecessary to use the lead or silver salt in the coating solution and the platinum salt in the developer. The print is developed with oxalate as before described; or other developing solutions may be prepared with an alkaline tartrate or citrate or a mixture of them, an alkaline accetate or a phosphate of ammonia, or a mixture of any such salts, citrate of soda being preferred. Platinum or iridium salts may be added. Formulæ are given.

[Printed, 4d. No Drawings.]

A.D. 1889, March 20.-No. 1216.

LAKE, WILLIAM ROBERT.—(A communication from Eusebius J. Molera and John C. Cebrian.)—Producing microscopic photographs of anything that can be photographed, especially for the preservation of copies.

The matter to be reduced is arranged in columns on a band that passes from one roller to another. The movement of these rollers would be continuous but for a detent which is withdrawn by an electro-magnet only for the time that movement is required. The other parts of the whole apparatus that move intermittently are regulated in a like manner.

The camera has an adjustable plate holder which allows of the required movement of the plate for each new exposure. The cap of the lens is replaced by a disc which is raised in front of the lens by a lever actuated by an electro-magnet. Behind the plate carrier is a microscope fixed for focusing by. The camera works automatically in harmony with the rollers that arrange the matter to be photographed.

For automatically producing many positives from a negative, the positive is suitably illuminated from either behind or before, and a camera with lens and focusing arrangements as above described is employed. Two plate holders are arranged, one above and one below the camera, and these move horizontally as required. The upper holder delivers its plates one at a time as needed into the plate carrier of the camera, and the lower plate holder receives the exposed plates.

The movements of the various parts of the apparatuses are controlled by electro-magnets, and these are brought into action when desired by a contact maker which is preferably worked by clockwork. It consists of a horizontal non-conducting plate, from the vertical axle of which, arms extend horizontally, each carrying at its end a roller that rolls over the surface of the plate. These rollers and arms conduct the current and make and unmake connections, as they turn round, by passing over pins that are pushed up through holes in the non-conducting plate.

[Printed, 8d. Drawing.]

A.D. 1880, March 30.-No. 1294.

BAILEY, JOHN WILLIAM.—(Provisional protection only.)— Enamel photographs by transfer. A glass plate coated with a mixture of "bichromate of "potash, borax, honey, sugar, and gum" is exposed under a transparency, the colour is then "worked into" it, it is coated with collodion, fixed with hyposulphite of soda, and then transferred to the prepared surface. It is burnt in or varnished.

[Printed, 2d. No Drawings.]

A.D. 1880, March 30.-No. 1305.

LAKE, WILLIAM ROBERT.—(A communication from Whilhelm M. L. Winter and Company.)—Waxing the face and varnishing the back of photographic pictures on fabric.

The object is to protect the fabric from the air, and to make the surface suitable for receiving oil colour.

[Printed, 2d. No Drawings.]

A.D. 1880, April 7.-No. 1419.

SACHS, Joseph Julius.—Preparing printing and embossing surfaces by casting in Spence's metal.

A relief is obtained, as by exposing a chromated gelatine surface and washing with warm water or soaking in cold (the one giving the design and the other the ground in relief), and a cast is taken in Spence's metal or a similar substance. This cast may be printed from direct or may furnish electrotypes. The original surface may be brought into greater relief after treatment with water by "passing over it" "any powder "or fibrous material." The casts, &c. may be used for embossing.

[Printed, 2d. No Drawings.]

A.D. 1880, April 15.—No. 1543.

EDWARDS, BENJAMIN JOSEPH.—Packing dry plates.

The boxes used are of cardboard or other suitable material, and are provided at two opposite sides with vertical grooves made of folded or corrugated paper or such material. The grooves may be of double width, each to receive two plates, back to back. The lid slides on, or may be attached by hinges.

[Printed, 2d. No Drawings.]

A.D. 1880, April 16.—No. 1569.

MEWBURN, JOHN CLAYTON. — (A communication from Lion Favre.) — (Provisional protection only.) — Colouring carbon prints after transferring to glass.

After transferring, the back of the bichromated sheet is coloured at certain parts, it is then coated with gelatine, collodion, or varnish, and then the body colours are applied. The colours are preferably "made with essence of spirit" so as to dry more quickly, but other colours may be used.

[Printed, 2d. No Drawings.]

A.D. 1880, April 16.-No. 1570.

FISCHER, WILLIAM HENRY.—Producing dies or mills for calico printers' engraved printing rollers.

For ordinary work the "mill" is made direct, that is, not by means of a "die." A steel roller or mill blank is coated with asphalte by means of a benzol solution, and then receives the required design from transfer paper. It is exposed to light, the transferred pattern is washed off, and the development is done as usual, with turpentine alone or mixed with petroleum. After washing, the design is hardened by exposure, cleaned with dilute sulphuric acid, and the metal surface where laid bare receives "an electro-" type deposit of steel" till a suitable depth is obtained. The roller may be tempered.

To make a "die" proper, a steel plate is treated as above, the exposure being beneath a negative.

Or, the galvanotype in steel is obtained from a cast of a gelatine plate which has been exposed under a negative and developed.

[Printed, 4d. No Drawings.]

A.D. 1880, April 21.—No. 1637.

BELL, George Charles. — (Provisional protection only.) — Obtaining lined or dotted pictures for photo-printing processes.

A screen, preferably of wire gauze, is placed in front (or may be at back) of the negative, and a print is obtained on a sensitized wood, metal, or stone surface for engraving, or on sensitized gelatine for photo-relief or other such process.

Or the screen may be applied to improve ordinary photographic prints.

[Printed, 2d. No Drawings.]

A.D. 1880, April 21.—No. 1647.

MARTYN, ARTHUR.—(Provisional protection only.)—Forming letters, designs, &c., on glass or other surfaces.

Chromated gelatine (or any sensitive substance) is used to coat the glass, which is exposed under the transparent design, and developed with warm water till the unexposed parts are cleaned away. The film may be coloured previous to exposure, or after development; or the glass may be gilt or silvered before being coated and the exposed parts of the metal dissolved away after development. The design is backed with a suitable ground, and should be viewed from the uncoated glass side. Metal surfaces may be used instead of glass.

[Printed, 2d. No Drawings.]

A.D. 1880, May 6.—No. 1856.

BAUM, FRANZ. — (Provisional protection only.) — Obtaining etched copper plates by means of chromated gelatine.

A film of chromated gelatine is exposed under a negative or positive of the required size, transferred to the flexible support and developed, and thence transferred to the copper and hardened with alum, tannin, or such substance. The plate is then etched. Instead of the negative, any transparent design or such substance may be used.

[Printed, 2d. No Drawings.]

A.D. 1880, May 10.—No. 1909.

SACHS, Joseph Julius.—" Production of roller surfaces for "printing, stamping, or embossing."

The roller is coated with chromated gelatine, and is exposed under the required pattern to the electric or other light while the roller revolves. It is then, either with or without previous washing to remove the unchanged gelatine, treated with a solution of perchloride of iron or similar substance, by which the roller is etched.

Or the chromated gelatine pattern may be produced first and transferred to the roller; and, after washing if required, the "entire surface of the roller" is covered with a solution of bitumen or such substance before placing it in the etching solution, where it is preferably in connection with a battery, and is kept revolving. The chromated gelatine altered by the action of the light must first be "caused to loosen its hold "upon the metallic surface with its covering of asphalte, "thereby exposing those parts of the roller surface to the "influence" of the etching solution. This is done by an acid, as hydrochloric acid.

A.D. 1880 No. 1909.*

Disclaimer and memorandum of alteration to the Specification of the preceding invention filed A.D. 1883, December 22, by Joseph Julius Sachs and Gabriel Raphael Hugon, whereby they disclaim as of no practical utility the first process described in the invention, that is, where the roller is coated with chromated gelatine, exposed, and then etched.

[Specification printed, 4d. No Drawings.]
[Disclaimer, 4d. No Drawings.]

A.D. 1880, May 21.—No. 2068.

WARLICH, FERDINAND HENRY.—(Provisional protection only.)
—Production of enlargements by artificial light.

The electric or other light is used in conjunction with say three independent condensers. These may be hollow and filled with a liquid, as water, and are kept cool by blasts of cold air constantly passing over them. Positives or negatives are used, and the enlargements are produced as usual. The apparatuses are fitted on travelling tables with racks and pinions for focussing. Vignettes are produced by interposing masks between the lenses and sensitive surfaces.

[Printed, 2d. No Drawings.]

A.D. 1880, May 27.-No. 2162.

BRYDGES, EDWIN AMBROSS.—(A communication from Hermann Wilhelm Vogel.)—Preparation of gelatine emulsions containing pyroxylin.

Such emulsions obviate certain evils incident on the use of aqueous gelatine emulsions, and are prepared by using as

solvents the lower members of the series of fatty acids (acetic acid, &c.), their derivatives, or mixtures of them, alone or with alcohol. Such solvents take up both gelatine and pyroxylin, and do not photographically injure the silver compounds.

There are three ways of preparing such emulsions. 1. A gelatine emulsion is prepared as usual and dried, then dissolved as above. This solution alone may be used or pyroxylin dissolved as above may be added to it. 2. A collodion emulsion may be prepared as usual, washed and dried and dissolved in the acidulous solvent and the gelatine alone or dissolved added to it. 3. The gelatine and pyroxylin may be dissolved and the emulsion produced in the mixed solution. Formulæ are given.

[Printed, 4d. No Drawings.]

A.D. 1880, June 2.—No. 2249.

DE DUTKIEWICZ, BOLESLAS, and DECOUFLÉ, ANATOLE EDWARD.—Colouring and mounting photographs.

A piece of fine cloth is pressed or rolled, and after the photograph is mounted upon it, it is stretched on a frame and varnished with a mixture of copal varnish and turpentine, which imparts transparency and solidity. After drying, the cloth side is coloured in oils, and the picture is subsequently mounted on another thickness of cloth by means of copal varnish and heavy pressure for say twelve hours. The picture is finally touched up.

[Printed, 4d. No Drawings.]

A.D. 1880, June 8.—No. 2304.

THOMPSON, WILLIAM PHILLIPS.—(A communication from Adolphe Joltrain.)—Cyanotype for copying designs in black and white.

The surface (which may be of any kind) is coated with a sensitive solution containing gum, perchloride and persulphate of iron, tartaric or acetic soid, and common salt which merely facilitates development and may be omitted. The developer is a solution of red or yellow prussiate of potash which may be acid or alkaline. After printing and developing, the print is washed, immersed in an acid bath,

and finally washed. Thus an indigo black shade is obtained on a white ground.

The patentee among his claims enumerates also: The use of a developing solution of red or yellow prussiate of potash, of salts of silver, zinc or such metallic solutions, for producing a dark lined print from a dark lined original or negative, and the production of such a result photographically without the intervention of a negative.

[Printed, 4d. No Drawings.]

A.D. 1880, June 22.-No. 2538,

KNOTT, ROBERT.—(Provisional protection only.)—A mixing bottle, for preparing emulsions.

This is a double bottle, the two parts of which communicate by a perforated stopper. The perforation may be reduced by the introduction of a silver wire. The mixing is effected by thaking, and is made more certain by "making one side of the stopper convex."

[Printed, 2d. No Drawings.]

A.D. 1880, July 7.—No. 2782.

LAKE, WILLIAM ROBERT.—(A communication from Harvey lapp Flayler.)—Producing by transfer flat or cylindrical Printing surfaces for various printing processes.

To produce an etched or sunk design on a metallic or other urface, the design is photographed on paper and transferred to the surface by any photo-mechanical process, or transferred from a print or impression otherwise produced in suitable transfer ink. The surface is then treated with a dilute alcoholic solution of shellac which does not remain on the surface of the ink. This coating forms the "etching ground." The ink is then removed with turpentine or benzene neither of which affects the etching ground. The etching can be carried out as usual. This method may be applied to copper cylinders, stone or glass surfaces, &c.

To transfer a design to a curved metallic or other surface, an outline tracing of the design is photographed by the camera upon sensitive paper prepared according to a given formula so that it will stand wetting without distortion or other injury. The cylindrical surface is thinly varnished, the engraved, if a metal plate; otherwiused on the pentagraph table.

[Printed, 4d. No Drawings.]

A.D. 1880, July 19.-

SACHS, JOSEPH JULIUS.—" Production stamping, or embossing," as appli

A facsimile of the open work m design is obtained by the action of lig coated with chromated gelatine, as sensitive substance: (presumably the direct superposition and exposure as in This facsimile is then attached by i pressure, and the parts not acted on suitable solvents, so that at those p roller is exposed. The roller is the deposited upon it electrolytically.

In the provisional specification a coating the roller with the sensitive light beneath the pattern, and continu

Other methods are given which do graphic action.

[Printed, 4d. No Drawings.]

e coated, and has a slot along its upper part which is proided with a slide to close it from one end and so reduce the mgth of the slot that is used as occasion requires. The cating liquid issues from this slot when the valve is open, nd the plate to be coated is drawn across it and then turned ver to dry. There are several small conveniences to the pparatus, such as, a hot water jacket, levelling screws, a nen bag in the reservoir to filter the emulsion; and the lotted tube may be on a separate stand, connected with the servoir by an india rubber tube, a spring clip on which splaces the valve.

[Printed, 2d. No Drawings.]

A.D. 1880, July 29.—No. 3130,

LARK, ALEXANDER MELVILLE. — (A communication from ominique Scotellari.) — (Provisional protection only.) — Proceing partly clear and partly mat designs and coloured signs on glass, porcelain, and such surfaces.

The surface to be ornamented is first coated "with what is called enamel collodion." For this coating is employed preference an aqueous solution of honey, glucose, gelate and alkaline bichromate (according to formula), which applied in the dark room. This is then printed on by a sitive either by contact or in a camera, developed by dusting enamel or glass powder, and fired.

With large plates, instead of applying the powdered colours the abrush, the plate "is made to form one of the sides of a box in which the enamel powder is placed." The box is ansparent. When sufficiently developed (the operation is t described) it remains three days, is then soaked in water wash out the chromate, and the flux so removed is comnsated for when the surface is dry, by a solution of borax, by applying with a badger hair brush over the whole surface a coat of a solution of 4 parts of spirit of turpentine and 1 part of fat spirit." The plate is then coloured ith colours "employed in painting on glass, which are applied by means of spirit on the right side, or preferably with gum on the back surface of the plate. Water or gum colours are employed to heighten the effect, and the whole is fixed by firing at a high temperature."

[Printed, 2d. No Drawings.]

A.D. 1880, August 18.—No. 3353.

STANLEY, WILLIAM FORD.—Telescopic cameras, dark slides, and arrangements for lenses.

The parts of the telescopic camera increase in size backward, that is the front draw is the smallest and innermost. Each sliding part is secured by a spring at its lower part, and is made dust tight by a cord laid in a groove round the join.

The dark slide has several separate "inner adapters" each of which fits in the dark slide and carries two plates. The dark slide is fixed to the camera by sliding it in a groove, or preferably by pressing it on to a "projecting tongue."

The lenses are in metal cells, so that more than one may be used to vary the focus, the diaphragms have an exterior turned out rim, and they push in from the front; the ordinary cap is replaced by a plug, and the fine adjustment is obtained by screwing the lens tube into or out of a collar fixed to the camera front. The camera front may be drawn out of the vertical position by a screw to get the effect of a swing back.

[Printed, 6d. Drawings.]

A.D. 1880, August 18.—No. 3355.

HALLETT, Francis Hughes.—(Letters Patent void for wast of Final Specification.)—Colouring photographic prints and afterwards albumenising and completing the printing.

The paper is salted, sensitized, and exposed under the negative till the outlines are visible. After fixing and washing it is immersed in alcohol, dried, rolled, and coloured lightly and flatly with vegetable colours mixed with an albuminous liquor of which the formula is given. It is then rolled, immersed in alcohol, albumenized (formula given), sensitized, has detail &c. printed in, and is toned, fixed, and enamelled if required, as usual.

[Printed, 2d. No Drawings.]

A.D. 1880, August 26.—No. 3464.

COGLIEVINA, Domesico. — A photometer, applicable to daylight as well as artificial lights.

To get the standard unit, a certain flame (? a gas flame) is regulated by a cock, until a pencil of rays from it, after passing through a lens and suffering repeated reflexions till its path is equal to eight meters, "only touches" a certain ball. This standard flame is now caused to illuminate one side of a sphere which is only half a meter distant, while the light to be compared with it illuminates the other half of the same sphere. A reflexion of the sphere is observed in a plane mirror, and any inequality in the illumination of the two sides of the sphere is at once apparent. The dark chambers which contain the lights are movable as is also the sphere, and by a combination of these movements one may compare lights that vary greatly in intensity. For daylight, there is an opening in front of the chamber that may be regulated by a slide.

[Printed, 6d. Drawing.]

A.D. 1880, August 30.—No. 3511.

ANDREOLI, EMILE.—(A communication from Jean Baptiste Germeuil-Bonnaud.)—Transferring photographs that have been coloured to china, faience, glass, metal, &c., and vitrifying them.

A transparent positive print is obtained and laid over a piece of tracing paper, then the outlines are gone over with an electric pen so that the tracing paper is perforated. This outline is reproduced on the surface to be ornamented, by means of a black powder applied by a pad through the perforations. The surface is then coloured in flat tints and fired, though this firing may be dispensed with. This flat tinting increases the brilliancy of the coloured film which is

afterwards applied over it.

A film is then prepared by coating cleaned glass with a hygrometric mixture (syrup, gum, glycerine and bichromate of potash, quantities given). The coated glass is exposed when dry to light under a transparent photographic print. After exposure the colours are dusted on as required with a fine brush. The print is next coated with normal collodion (containing a little glycerine if necessary), soaked in water to separate the film from the glass, and the film soaked in caustic potach solution. After careful washing this film is put into a bath containing fluxes dissolved, and floated on to the required surface, then retouched if necessary, and baked. At the retouching stage, any part may be reinforced by pro-



rugs, for cement, &c.

Sulphur is melted with some (which are not metals or meta silicates, metallic salts in gen marine, powdered minerals, woo The product is applicable to an Spence's metal may be used.

When the powders are very fin delicate castings of gelatine rel allowed to cool in a vacuum.

[Printed, 4d. No Drawings.]

A.D. 1880, September

MORGAN-BROWN, WILLIAM. -Theodor Pixis.) - Colouring photo ferring them to cloth, wood, leathe

The surface of the material is photograph is transferred upon it "thin photoprint may give th colouring.

Or the print may be transferre coloured, and then transferred to t

"It may also be made or "

The surface is coated by means of an aqueous solution of honey, glucose, gelatine, and an alkaline bichromate (quantities given), then exposed under a positive or in a camera. The image is developed by dusting on enamel or glass powder with a brush, and the plate is fired.

If the plate is large, the powder is not applied by a brush, but the plate is made to form one side of a transparent "box in which the enamel powder is placed." "When "sufficiently charged" with the powder (the operation is not described) it remains three days, is then soaked for twelve hours in water to remove the bichromate, and the flux so removed is restored "by a solution of borax at 10 per cent., "by applying with a badger hair brush over the whole "surface a coat of a solution of 4 parts of spirits of turpentine, and 1 part of fat spirit." The front is then coloured by enamels applied with spirit, or preferably the colours are applied with gum, on the back. The plate is then fired.

[Printed, 2d. No Drawings.]

A.D. 1880, October 26.—No. 4360.

SCHNORBENBERG, NICHOLAS.— (A communication from William Grüne.)—(Provisional protection only.)—Producing and colouring photographs on glass to imitate oil or water colour paintings.


A print is produced from a negative, on pigment paper, transferred to a glass plate, and developed as usual. When dry it is thinly varnished, preferably by means of a small glue roller, and powdered pigments are applied as desired to the varnished surface. When dry it is coated with gelatine, and wholly or partially with a black or other paint or varnish.

[Printed, 2d. No Drawings.]

A.D. 1880, November 26.—No. 4922.

EDWARDS, EDMUND. — (A communication from Maurice Tillet.)—Copying drawings, engravings, &c.

Sensitive paper is prepared by passing paper through a bath containing soap, alum, glue, &c., and then through another bath containing burnt umber, black pigment, glue, and bichromate of potash. Formulæ for these baths are given. Paper so prepared is exposed in a printing frame



A.D. 1880, Nov.

DREDGE, JAMES.—Producin printing surfaces from photo-

The relief plates may be promised the relief plate is coated with the paraffin is preferably made the relief plate is level with the cutting tool is then passed on taking care that it exactly for plate and therefore cuts groove as the hollows of the plate are reproduced, may be used for press.

Or, a rigid relief plate or its an elastic surface (pad, roller, p lines, dots, &c., and impression an impression may be obtained printing; or an impression m plate to be treated by the "Gil printing block. Or the relief p of elastic substance as well as the made on a film of

Or, instead of using lines, dots, &c., pictures may be produced by printing successively with a series of relief plates (due care being paid to accurate register), all produced from the same mould, but each having its surface removed to a different extent, so that on the first, only the deepest depressions remain, while the last has its surface untouched. Thus the ink accumulates where required by the successive printings.

Any of these methods may be varied.

[Printed, 4d. No Drawinge.]

A.D. 1880, December 2.—No. 5013.

WILD, ALBERT JULES THEODORE.—Copying drawings, &c.

Paper is sponged or otherwise treated with an aqueous solution of chromate of potash and sulphuric acid, and dried. It is then exposed to light under the drawing, next placed in a vaporising box containing aniline oil (pure or mixed with ammonia), then washed and dried. The reproduction is finally sponged with an alkaline solution to fix the design.

Paper prepared as above may be used for other methods of copying, and the solution may be applied to other photographic uses.

[Printed, 2d. No Drawings.]

A.D. 1880, December 10.—No. 5176.

CLARKE, JOHN PALMER.—A turn-table support for models in portrait work.

A circular table, working on a pivot and supported by friction rollers, supports the posed model, and is provided with catches so that the operator may turn it by a long rod without leaving the camera. Other means for turning the table may be employed.

[Printed, 4d, Drawing.]



printing from negatives, and p without negatives.

The paper is prepared by mi compound with the pulp, or by finished paper a bromide of silv as described. The chief pecu is that it contains a small q " fermented for 3 days" "in posed under the negative to a preferably with ferrous oxalate, develop the image. To produc tints, the picture is next blesbichloride of mercury, "bichlo acid, (protochloride of tin, sulpl mented albumen, and sulphuric according to the provisional spec in a bath consisting of "an aque with a little ammonia, borax, golother salt according to the colour

A picture so produced (though a tion is not clearly stated) will give action of light, by pressing upon moistened with nitric acid, then with protochloride of tin or suclementing these sheets "together in the state of the stat

Such paper is exposed (moist or dry), developed, and fixed as usual, washed, and immersed in an acidulated solution of corrosive sublimate to whiten the image. Such a picture is reversed; "to set it right the mode of double transfer may "be adopted." The picture is "sized with paste slightly "acidulated with hydrochloric acid," and is then varnished or enamelled.

[Printed, 4d. No Drawings.]

A.D. 1881, January 12.—No. 142.

STANFORD, Edward Charles Cortis. — Manufacture of "algin" from seaweed, and its use as a film in photography, &c.

The seaweed (preferably Laminaria) is pulped, extracted with water, and the solution worked for salts. The residue is treated with an alkali, or its equivalent, in a boiler under pressure, when a gelatinous solution results. This solution may be bleached, and when dried is "algin." By adding a suitable acid or salt to the solution, "algic acid" is precipitated as a jelly.

The methods given may be modified.

Algin and algic acid are applicable to a great variety of purposes amongst which are enumerated, as a gum or glue, for varnishing prints, and as a film for photographic purposes. It may sometimes be advantageously mixed with other substances.

[Printed, 4d. No Drawings.]

A.D. 1881, January 21.—No. 266.

SACHS, JOSEPH JULIUS.—Production of surfaces for printing, stamping or embossing.

A suitable flexible material (as paper) is coated with a sensitive layer such as chromated gelatine, then coated with asphaltum, and exposed either under the pattern or in a camera (for enlarging or reducing). The sensitive surface is then coated with a substance that will adhere to metal surfaces and resist etching liquids, for example, wax and asphaltum, and socked in a bath (preferably containing a little alkali) till the parts unaffected by light have swelled up when the resisting substance is removed from the raised

portions by means of a sponge. After partial drying, the prepared design is caused to adhere to the surface to be etched by simple pressure or otherwise, and the etching is caused to take place, preferably through the paper or substance that has supported the sensitive film. For etching, a bath containing perchloride of iron, used with or without an electric current, is preferred. For surfaces other than such as these, a suitable etching fluid must be used, and so any surface that can be etched may be employed in this process. Variations of the above method are described but the principle remains the same. One may get either a raised or sunk design by reversing the character of the object started with, as for instance using lace as a transparency, or as a white object on a black background.

"To obtain a pin engraving," the sensitive surface has a preliminary exposure under a negative consisting of dark dots on a transparent ground.

The provisional specification includes also the following:—
The use of asphaltum alone for the sensitive layer; this requires the use of a cement to attach the layer to the surface to be etched, or that the surface be warmed.

For pin engravings from half shade subjects, the exposed sensitive surface is covered with a resist, soaked to raise the design in proportion to its protection from light, and laid on a flat surface and pricked all over with a bundle of taper pin points, so that the highest parts are pricked with the largest holes. The prepared film is then attached to the surface and the etching is done. Or, a resist in the form of powder may be added to the gelatine (or other) layer.

For printing in many colours, a plate is prepared for each colour, the part not wanted for the particular colour being painted over with a resist, before attaching the film to the surface to be etched. Or, the parts may be blocked out on the transparency as required.

Also one may draw the patterns required, by hand, using the resist as an ink.

Disclaimer and Memorandum of Alteration to the Specification of the preceding invention filed A.D. 1883, December 22, by Joseph Julius Sachs and Gabriel Raphael Hugon whereby they disclaim that part of the invention described in the third paragraph of the above abridgment, namely:—"'To '' 'obtain a pin engraving,' the sensitive surface has a pre- liminary exposure under a negative consisting of dark dots "on a transparent ground."

[Specification printed, 6d. No Drawings.]
[Disclaimer, 4d. No Drawings.]

A.D. 1881, February 10.-No. 579.

CHAMEROY, HIPPOLYTS. —"Electro-photographical receivers "for telegraphs."

The oscillating bar or needle of the galvanometer arrangement has a cone open at both ends attached to it laterally and so arranged that the small end of the cone is opposite an orifice behind which a strip of sensitive paper is drawn by clockwork. Light shines down the cone, and the oscillations of the needle with the cone are registered on the sensitive surface. Instead of the wavy line so produced, one may get the signs as dots and dashes by having two openings at the narrow end of the truncated cone, so that, when the needle is deflected to either side, the light passes. Or, instead of the cone arrangement, a mirror may be attached to the needle so that the instrument resembles a reflecting galvanometer, and the beam of light from the mirror affects the sensitive surface and leaves a record of its movements. Modifications of these methods are described.

The sensitive strip may be coated with gelatino-bromide emulsion, in which case the clockwork draws it by means of rollers through a developing and fixing bath after it has passed the opening. Or "the signs may be made to appear "in blue if the paper is prepared with silicone, or they will appear phosphorescent in the dark if the preparation is "made with metallic sulphurets, fluor of calcium, &c." The sensitive surface is passed through a warm chamber after exposure, when such is of advantage.

[Printed, 6d. Drawings.]

A.D. 1881, February 23.—No. 775.

ABEL, CHARLES DERTON.—(A communication from Alphonse Loiseau and Jean Baptists Germeuil-Bonnaud.)—Opera and field glasses that may be used also for photographing.

1: !!

ġ

7.0

Methods of construction are described whereby the eyepiece of an opera- &c. glass may be replaced by a photographic objective, and the objective of the glass by a focussing screen or sensitive plate holder. If both barrels are fitted in this way, stereoscopic views may be taken. Or the sensitive plate holder may fit on one barrel of the glass and the focussing screen on the other, so that one may see the view that is being taken while the exposure is given. Or a small bellows arrangement fitted like an ordinary camera may be attached to the barrel of the glass, and the ordinary objective of the glass may be used in photographing. The photographic objective may be fixed in the eye piece of the opera glass, and a cap carrying a double concave lens may be slipped over it when it is required for use as an opera or field glass. For instantaneous views the instrument may be held in the hand especially when one barrel is fitted for focussing only, but a light tripod with claws may be used as a support.

For instantaneous work, a drop shutter is described which is released by blowing a vane which turns a spindle and so removes the catch that supports the dropping piece.

[Printed, 6d. Drawing.]

A.D. 1881, February 25.—No. 814.

BONNEVILLE, JEAN MARIE AUGUSTE LOUIS.—(Provisional protection only.)—Acting on sugar with nitric acid, and using the product as a varnish or for sensitive films.

These "nitro" derivatives are prepared like other "nitro" derivatives—by the action of nitric acid and by washing. The product is insoluble in water, but soluble in hot acetic acid or methylated spirit. It "forms an excellent varnish and can "replace collodion and gelatine in photography." Various other uses are described for the substance.

[Printed, 2d. No Drawings.]

A.D. 1881, March 14.—No. 1096.

COGHLAN, JAMES HAMOASE.—(Provisional protection only.)
—Making casts in Spence's metal from integlic or engraved
surfaces photographically or otherwise produced, and using
such casts to print from.

The Spence's metal is toughened by melting it and adding to it marine glue or other such substance. The cast is printed from "by the ordinary process of mechanical printing," the ink being preferably similar to that used in the Woodbury process but with less grease.

[Printed, 2d. No Drawings.]

A.D. 1881, April 1.-No. 1436.

WARNERKE, LEON.—The production of negatives and transparencies where the parts unacted on by light and development are dissolved away.

For producing the film, a colloidal substance such as gelatine, dextrine, &c. is used; it is supported on paper or such suitable material; and the sensitive salt may be produced by the emulsion or by the bath process. A formula for preparing a suitable gelatine-bromide emulsion is given. Exposure may be in the camera or otherwise. A formula for a developing solution is given, — pyrogallol, ammonium bromide, and ammonia, with citric acid, water, glycerine, and alcohol. The image may be fixed or not. Care must be taken in the whole treatment to avoid the use of substances, such as alum, that would produce general insolubility of the film.

When dry, the picture is placed in contact with glass or any suitable surface and plunged into warm water. The picture adheres to the surface, and that part of the film which does not hold any part of the image is dissolved away. The image is reversed, but this may be remedied by using transfer paper, or by similar methods.

Enlargements, &c. may be produced on paper, canvas, &c., and insoluble pigments may be added to the emulsion if desired.

For relief clichés, to be used in preparing printing surfaces, the sensitive film must be sufficiently thick. A grain may be produced by adding an inert powder to the emulsion.

For ceramic photographs, vitrifiable colour is added to the emulsion.

Other applications of the process are described in more or less detail—use for phototype printing, transparencies, &c.

[Printed, 4d. No Drawings.]



is counterpoised by a weight the column. From the head a horisontal bar preferably a carries another vertical bar height, &c., and may be bala the principal vertical bar. vertical bar another bar exte head-rest proper. This head stiffly that when its fixing screed betails of the various joints, &c.

[Printed, 6d. Drawing.]

A.D. 1881, April

HADDAN, HERERT JOHN. — (
Joseph Désiré Hutinet and Pier:
paper for printing by develops
results than usual.

The paper is coated with a gralso with another substance to g

The paper may be first coated stance which contains a white sulphate) or such equivalent a and polished. For this prelin instead, a resinous substantial collection.

Glycerine or sugar is added to the resincus solution used to obviate the brittleness of the layer.

The developing solution acts either from the back or from the front (or from both) according to the method of preparation.

[Printed, 4d. No Drawings.]

A.D. 1881, April 9.-No. 1559.

PUMPHREY, ALFRED.—Films that may be stripped from the glass before or after exposure, and cameras for exposing such films.

A glass plate or a similar surface is coated with plain collodion and the marginal quarter inch or so of layer is removed.

For a wet plate, the surface is coated with gelatine containing a little chrome alum (or other substance to prevent swelling of the gelatine) and when dry it is coated with iodised collodion, &c., &c., as in wet plate work. When the negative is finished, the film is cut round and stripped from the glass.

For a dry plate, the surface is coated with collodion then gelatine exactly as above; then the collodion or gelatine emulsion is applied. Or the gelatine emulsion may be applied directly on the collodion film. These dry films may be stripped from the glass before exposure or before development, in which case they are mounted, for working with, on paper, by a solution of india-rubber in mineral naphtha. Such films must be stretched as they dry, for which purpose they may be pinned down to a board using a row of pins soldered to a strip of metal for each edge of the film.

The camera which is especially of use in exposing such films, consists of a rectangular box of which only one half of the upper two fifths, or thereabouts, is used as the camera proper; the rest of the space is used to contain the films and manipulate them in. Each film is held by a frame, and each frame is fixed by one of its edges to an endless band that passes over two rollers. This band occupies the middle of the box, and as it is turned by the rollers, each film in succession rises (stands on end) behind the lens. The correct position of the frame carrying the film is ensured by stops



- - weing exposed. [Printed, 6d. Drawing

A.D. 1881, A

STEINHEIL, Hugo Adolfi These lenses are construc definition towards the edges with those giving a flat field.

They consist of two combin shorter focal length than tha back combination a long negr bination exhibits chromatic an extent but in an opposite sense

correct each other.

In the view lens, both combin are placed quite close to each o has a positive focal length, and a concave crown lens, while the and consists of a concave flint an

In the portrait lens the front positive, and consists of a conv lens; the back combination is ne and consists of a acaratus must be so carefully made that dark heat has it upon the index. When exposed to light the red sorbs especially the photographic rays, and the heat-ti is taken as the measure of the light. The apparatus sed in a box with a thick glass front, and each tube parabolic reflector behind it so that its focus falls upon the wool.

modifications are mentioned. For ordinary photospecially as applied to daylight) black and white are d to red and white.

nay use in the apparatus, either in addition to or of parts mentioned above, ordinary thermometers, I paper inside or outside the bulbs, coloured gases in 28, and coloured condensers and reflectors. The light is through a cell, containing water or a solution of a cut off non-luminous heat. A thermopile may be tead of the differential thermometer.

inted, 6d. Drawing.]

A.D. 1881, May 17.—No. 2142.

WILLIAM HENEY.—(A communication from Paul Piquepé 16 Morgan.) — (Provisional protection only.) — Using 3 paper in rolls, and a frame for the purpose.

In the operation is termed "printing" it appears to the getting of pictures in the camera, presumably not chiefly, negatives. The "frame" has two rollers, the roll of paper is stored and the other receives it printed" on (?exposed).

etching board between the rollers serves to keep the even. A perforating apparatus may be used to e the after separation of the prints. The frame is ack and front by sliding shutters.

inted, 2d. No Drawings.]

A.D. 1881, May 31.—No. 2381.

EVILLE, HENEI ADRIEN. — (A communication from Henry Guilleband.)—(Provisional protection only.)—ag embossed photographs.

ine moulds are obtained by transferring the picture ad glass, exposing a layer of sensitized gelatine or equivalent medium under it (or "at a suitable distance from" it) and developing with water or a suitable liquid. The sensitized medium may be liquid or semi-liquid and held vertically in a suitable frame during exposure. Or a preliminary mould may be made by a similar method, and a plaster cast taken from it and afterwards modelled. By such method, if desired, the principal figure may be produced in rounded relief, by making an electrotype and counter die from the cast, and embossing the print therewith.

[Printed, 2d. No Drawings.]

A.D. 1881, June 10.-No. 2526.

HOLBOYDE, JOHN BAILEY.—(Provisional protection only.)—Paper negatives.

The sensitized gelatine or similar film is supported on paper that is more or less transparent.

[Printed, 2d. No Drawings.]

A.D. 1881, June 25.—No. 2783.

SANDS, CHARLES.—Additions to instantaneous shutters for regulating exposure and using them instead of diaphragms.

These additions refer more particularly to the shutter described by the late Michael Noton in the British Journal of Photography dated 21st. November, 1879. It consists essentially of two plates, each with a diamond shaped hole in it, which by passing in front of or behind the lens, or in the place of the diaphragm, give the exposure.

The spring which actuates the slides, is coiled in a drum, and may be wound to different degrees of tension, an index indicating the resulting speed.

For slow exposures, the spring may be loosened or prevented from acting, and the crank plate (which is connected with the slides) turned by hand till the desired opening is obtained. The area of the aperture is shown by an index the scale for which has marked upon it its positions for successively halving the aperture, or for other proportions if desired.

The details of the apparatus are given.

[Printed, 6d. Drawing.]

A.D. 1881, July 8.—No. 3012.

SACHS, JOSEPH JULIUS.—Sulphur mixtures for castings.

Sulphur is melted and mixed with finely powdered slate dust. Some other substance may be added, such as coal, lamp black, venetian red, emery, &c. A list of uses for such mixtures is given.

The inventor says,—"For taking cast of chrome gelatine "photograph I take about fifty per cent. of sulphur, forty "per cent. of slate dust, ten per cent. of emery or any other "hard or silicious powder, and to this I add about three "parts of the plumbago or one of the substitutes mentioned"—("lamp-black or mineral black, or other mineral substances, according to the color of material that I require to "obtain.") The casts are preferably cooled in a partial vacuum.

[Printed, 4d. No Drawings.]

A.D. 1881, July 8.—No. 3014.

SMITH, George.—A swing back for cameras, and a tripod stand.

The back frame of the camera has its lower edge rounded, and is secured to the base board by a single screw. The vertical swing is obtained by a horizontal pin connected with the apper part of the screw, on which the back moves as if on a hinge. The horizontal swing is obtained by using the screw as a pivot and the hole in the base board as its bearing. Tightening this one screw fixes the camera back in whatever position it may be placed. Two or three arrangements for getting the universal motion by means of a ball and socket, are described.

Each leg of the tripod is made of three rods, the two outer ones forming the extension above the other one. They are joined by a pin so that they may fold together, and a crosswise stop keeps them straight when opened out. The inner sides of the upper ends of the two upper rods are provided with holes or pins which correspond with pins or holes in the top piece of the stand. To fit the legs on to the top piece, these ends are strained apart, and they retain their grip merely by the spring of the rods. A sliding extension leg

may be used. Such legs may be used on other stands than those for cameras.

[Printed, 6d. Drawing.]

A.D. 1881, July 18.-No. 3129.

WALKER, JAMES JOHN. — (Provisional protection only.)—Reproduction of sound.

A perforated band passes in front of an air (or other) blast to produce the sound. The perforated band is produced from the sounds that it reproduces, for instance by changing the indentations on the metal sheets produced in the phonograph into perforations. Or, "the perforated band may be pro"duced from the photograph taken upon a moving surface,
"of an edge caused to vibrate by the voice or other sound."
From the negative a positive is obtained on the band in a protective substance, and the band is etched.

[Printed, 2d. No Drawings.]

A.D. 1881, August 3.—No. 3366.

ROGERS, JOHN.—(Provisional protection only.)—Registering car passengers, workmen, &c. by photography.

A sheet or band of sensitized paper moves by clockwork or otherwise suitably behind a lens. Each passenger "must "come within the field of the lens" on entering or leaving or both, and so produces upon the sensitive paper a picture or mark. The paper may require development. The passenger may by his entering actuate a shutter and cause the exposure to be made. Other surfaces than paper may be used.

[Printed, 2d. No Drawings.]

A.D. 1881, August 12.—No. 3504.

MEIHÉ, JOHN RUDOLPH.—(A communication from Friedrick Carl Hossek.)—Producing surfaces for printing in combined colours, also applicable to printing on glass and porcelain, &c.

A surface is divided into squares, and the divisions are tinted with graduated shades of grey in an irregular manner. This is photographed, and a relief plate obtained from the negative. This relief plate is rolled with, say blue ink, and an impression taken. The relief plate is cleaned and used to give to the same surface an impression in, say red, this impression being shifted one square with regard to the first. This is repeated with yellow, or other colours are used that may be considered "primary." The method by which each square has been tinted is carefully noted, and the whole forms a scale of combined and graduated tints.

The coloured object to be reproduced has drawings made from it shaded in grey only, each drawing representing one colour only. The reproduction of intensity and tint is done by finding the required tint on the scale described above, and arranging that that particular part of the picture shall be treated exactly as the determined square of the scale was treated so as to reproduce the tint in its proper intensity. Such shaded drawings may be three only, one for each of the "primary" colours, but an extra one may be required for a neutral tint, and another extra one to represent "local colour" to heighten the effect;" or more than five may be used if required. From each of these shaded drawings a relief plate is made as described above, and these relief plates are printed from in their proper order, using the colours as for making the scale, to produce the picture.

As any colour may be used, the method is applicable for Producing pictures on glass, porcelain, enamel, &c. to be Afterwards burnt in.

[Printed, 4d. No Drawings.]

A.D. 1881, August 17.—No. 3570.

BOGUE, DAVID, and LE MOUSSU, BENJAMIN CONSTANT.—

"" Preparing drawing or transfer paper with a tinted and

" embossed surface for use in lithography, photolithography,

" photography, and zincography."

The paper is coated with a composition that may be readily acraped, and is then printed with a ruled or dotted tint, and finished "by pressing across this tint a relief block." The ink is pressed in where the relief block comes in contact with it. "On these relief lines, points, or dots, divided tints of graduated intensity, up to perfect black, may be produced

" by means of a pencil chalk or brush." Gradation is obtained by scraping off the printed tint, leaving the lines of dots, and these also can be removed for the high lights. The drawing is then ready for the usual processes of photolithography or typography.

The relief pressure blocks may have their lines "more or less conical, round, undulated, or curved (in vertical cross

" section), or of other suitable form."

Other kinds of blocks for pressing and plates for printing may be used "stippled, grained, or lined, or any combina-"tions thereof;" and other surfaces, as silk, parchment, &cmay be treated, and other variations may be made.

[Printed, 4d. No Drawings.]

A.D. 1881, August 20.—No. 3628.

HADDAN, HERBERT JOHN.—(A communication from Joseph Lefeuvrier.) — (Provisional protection only.) — Travelling apparatus for wet-plate work.

The camera is continued and enlarged behind the plate holder, and in the extra space the necessary operations are carried on, the operator observing their progress through yellow glass panes in the top and back of the camera. The plate holder is pivoted horizontally at its lower edge so that it can be turned down backwards (by buttons outside the camera) to immerse the plate in the necessary baths. The baths are successively introduced through the back of the camera.

[Printed, 2d. No Drawings.]

A.D. 1881, August 22.—No. 3657.

SACHS, JOSEPH JULIUS.—Gettings relief casts of designs; also electrotypes from the casts.

A sensitive layer is prepared, as, for example, chromated gelatine, preferably supported on paper. It is varnished, as with asphalte dissolved in turpentine. This is exposed to light so as to get an image of the design upon it, either by direct super-position or by the use of lenses. The exposed sheet is scaked in water containing say, ammonia or acctic acid to swell the layer (chromated gelatine), and the varnish

is gently rubbed off the parts that swell up. The varnish remaining in the sunk parts protects the fine edges in the after work. A casting is taken from this surface using an easily fusible substance, as Sach's cement (No. 3650, A.D. 1880, and No. 3012, A.D. 1881) or Spence's metal; and the operation is best done in a vacuum.

Instead of merely swelling up, as above, the parts of the sensitive layer not acted on by light, they may be washed entirely away before casting.

Impressions may be taken from the cast for electrotyping, or the cast may be electrotyped upon direct.

One may photograph each side of, say, a house, produce from each photograph a relief cast as above, and by putting the casts, or electrotypes from them, together, obtain a model in relief.

For deeper relief, the chromated gelatine or equivalent is cast in a thick layer direct on the object (negative, &c.), or with only a thin film (as of tracing paper) between. The outer curface of the chromated gelatine is made opaque, the exposure is given, and it is treated as above.

Also one may draw by hand on a film of plain gelatine or its equivalent with an "ink" containing a substance that will make the gelatine insoluble either with or without exposure to light; or a mixture of such substances may be used.

[Printed, 4d. No Drawings.]

A.D. 1881, August 23.—No. 3664.

JUSTICE, PHILIP MIDDLETON.—(A communication from John Dewé.)—Tinting and producing coloured effects on photographs by reflection.

The picture is made translucent, tinted back or front, placed between two panes of glass and mounted for viewing as a transparency. Behind the picture, coloured media are placed through which the light is transmitted, and a coloured and highly reflecting surface reflects light upon the back of the picture. The surfaces of the glasses between which the picture is mounted may be coloured, as to put in skies, &c. Instead of reflecting light by a detached reflector, the picture may be mounted on silvered glass, or an equivalent bright surface, so that light passes through from the front only.

A frame is described, with reflectors, shades, &c., which allows of producing these effects and modulating them.

[Printed. 6d. Drawing.]

A.D. 1881, August 25.-No. 3718.

WOLFF, Justus.—Using chromated gelatine as a size and mordant for textile and other materials, and getting patterns by its means.

The material is impregnated with chromated gelatine or such equivalent material, exposed to light, and washed. Colours or dyes may be used in conjunction with the sensitive compound.

To produce patterns, the coloured sensitive mixture is printed on, exposed to light, and washed. Or the sensitive mixture may be printed on, &c., and the dye applied afterwards. Or, the material may be impregnated with the coloured or plain sensitive mixture, exposed to light coming through the pattern desired (as a transparency), and then washed, &c. By obvious combinations of such methods with or without the ordinary methods of dyeing, one may produce patterns in many colours, or a coloured pattern on a coloured ground.

For printing from a pattern or transparency, it may be fixed on the outside of a revolving transparent cylinder. The light used is within the cylinder, and the material "is caused "to pass round the cylinder, and with the same velocity as "the cylinder." The velocity is according to the intensity of the light. More rollers than one may be used, and the transparency may be arranged over them as an endless band. Or, the revolving cylinder that carries the transparency may be behind a screen which has a slit in it to allow only a portion of the revolving surface (parallel with its axis) to appear at a time. This exposed part is focussed on the material by a camera arrangement, and during exposure the material and the transparency move at the same rate.

[Printed, 4d. No Drawings.]

A.D. 1881, August 26.-No. 3732.

CLARK, ALEXANDER MEIVILLE.—(Provisional protestion only.)
—Producing printing surfaces by casting and by etching, intaglic or relief ornaments, &c.

The metal plates used are prepared by electro-deposition

on a silvered glass surface, or alloy against a glass surface. I others are prepared for use apparatus and battery used are

"To produce an engraved of "a bichromated gelatine pri" of the subject" is applied as first described. Or the with gum varnish then with and developed. The relief is some hours, blackleaded, and be melted fusible alloy. The fusible as in are described. The intaglio casting and and an are described.

be printed from or used to give transfer prints for assumption graphy, or may furnish typographical blocks or other intaglio plates (for printing from, or for ornaments, &c.).

To produce a grain, when required, a glass plate is gummed, placed in the bottom of a box containing an opaque powder, and shaken. A pigmented gelatine print is taken from the plate and transferred to the negative. The grain may be produced by means of wire cloth, or by other means, and may vary in fineness.

To reproduce lines in intaglio or relief, a polished metal plate as above is coated with bitumen, exposed, developed with turpentine, treated momentarily to nitric acid in gum solution, washed, immersed in mercurous nitrate, and silvered (electrolytically) for a few minutes. The exposed bitumen is then removed, and the plate is immersed in a bath of ammonio-mercuric sulphate for a few minutes, once or twice, heating each time to rid the reduced mercury.

The design may be produced by pen or crayon in greasy material and transferred to the plate instead of the plate being exposed to light under a negative.

Or a silvered plate is treated with iodine as if for a daguerrectype, exposed under the negative, and fixed with hyposulphite of soda. It is then varnished, and the outline is traced with points of suitable sizes, thus removing the varnish. After being placed in the ammonio-mercuric bath for a few minutes, the plate is ready for printing. Or the artist may himself draw on such a plate instead of photographically printing the design.

thich slides in

Uy when the

in each

in the two

of the country

of the coun



A frame isame plates, after silvering and removing the allows of patead of biting in with mercury salt as above, the [Primmersed in a bath of ammonio-carbonate of copper

olackens the inscription.

hief plates for typographic printing are obtained by Wetro-deposition from the intaglio plates produced as above.

[Printed, 6d. Drawings.]

A.D. 1881, October 4.—No. 4320.

BROOKES, WARWICK.—(Provisional protection only.)—Pocket camera for instantaneous views.

An extra lens is secured to the acting lens for focussing, so that the moment the picture is obtained on the ground glass, the exposure shutter may be released. The exposure shutter used is a rotary one (see No. 1054, A.D. 1880, for its description). The camera has a changing box which works by inverting the camera, and a screw clip to hold the plate in position during exposure.

[Printed, 2d. No Drawings.]

A.D. 1881, October 5.—No. 4322.

COWAN, ALEXANDER.—(Provisional protection only.)—Apparatus for cutting glass, for photographers.

The glass rests on a bed to the edge of which a hinged flap is attached that serves as a straight edge when brought over the glass. A parallelogram frame with pivotted corners (like a parallel ruler) is pivotted to the bed by the centres of two sides, so that the other two sides may be caused to approach or recede but are always parallel to and equi-distant from the straight edge. Thus the cutter will truly bisect any sheet of glass that is gripped between the sides of the frame.

Gauges are used for cutting to fixed or odd sizes.

[Printed, 2d. No Drawings.]

A.D. 1881, October 5.—No. 4323.

SANDS, CHARLES.—(Provisional protection only.)—Changing box and dark slide.

The openings in both are covered by a strip which slides in grooves, and these covers are unlocked automatically when the dark slide is fitted on to the changing box, by a pin in each which fits into a hole in the other. The changing box has two openings, one for withdrawing and one for returning the plate. Plates may be changed either with or without their carriers, and the carriers are so constructed that one or more plates can be inserted or removed at the same time.

. [Printed, 2d. No Drawings.]

A.D. 1881, October 10.—No. 4394.

DE PASS, ERNEST.—(A communication from William Henry Guillebaud.)—Obtaining rounded reliefs in gelatine or similar substances, and moulds from them for divers uses.

The positive or negative is generally obtained upon glass ground on one or both sides, or an equivalent translucent material, so that light passing through it is diffused. The sensitized gelatine, either solid, liquid or gelatinous, is exposed under the transparency, but at a distance from it of generally $\frac{1}{16}$ inch or less, so that the relief obtained by developing, &c. with water has its edges bevilled or rounded. Metallic moulds are obtained from the reliefs by the ordinary methods, and are used for embossing, stamping, moulding, &c.

For "moulds, dies, or matrices in relief," the transparency must be retouched before the gelatine relief is obtained to secure the relief of all proper parts. A plaster cast is taken of the gelatine relief, and from this a wax cast or a cast in equivalent material about $\frac{1}{16}$ inch thick, allowance being made for the shrinkage of the wax in cooling. This wax cast is supported in a suitable skeleton frame and moulded by the artist, and then backed with plaster. This may furnish by ordinary methods moulds or dies of metal, or serve as a pattern for casting copper, silver, &c. articles. A concave electrotype and a matrix produced from it may be used to produce photographic prints in relief.

Details of the methods, which may be varied, are described at great length, as is also a cell for holding liquid gelatine during its exposure under a transparency.

[Printed, 8d. Drawing.]

A.D. 1881, October 11.-No. 4414.

BRYDGES, EDWIN ANDROSE.—(A communication from Hup Kronecker.)—(Provisional protection only.)—Registering thermometric variations.

The thermometer is fixed radially in an aperture in a clock face, ensuring that no light shall pass through to the back except what passes through the bore of the thermometer not occupied by the mercury. Attached to the hour hand spindle behind the clock face is a frame that carries a sheet of sensitive paper. The sensitive paper is fixed, &c., as may be necessary after exposure, and may be provided with circles to indicate degrees, and radial lines for the hours.

[Printed, 2d. No Drawings.]

A.D. 1881, November 3.—No. 4822.

BREWER, EDWARD GRIFFITH.—(A communication from Paul Boca.)—(Provisional protection only.)—An exposure shutter with chronometer.

The needle of the chronometer dial makes one revolution in three seconds, though it may be made to move at slower rates. The dial face has 150 divisions upon it, indicating therefore fiftieths of a second. By pressing a detent, the opening shutter falls and the chronometer starts; when this later indicates zero, the closing shutter is released and closes the lens. Both shutters are moved by springs. The details of the chronometer are described at length.

[Printed, 2d. No Drawings.]

A.D. 1881, November 3.—No. 4823.

BOLAS, THOMAS.—(Provisional protection only.)—Camera with a revolving inside.

A pair of twin lenses is used, both being actuated by one pinion. Behind one of the lenses at a suitable distance is a reflecting prism and an eye piece for focussing. The side of the prism next the eye piece may be polished or ground. The other lens opens at back into a cylindrical chamber on the opposite side of which the sensitive plate is supported. Within this cylinder is another with openings in opposite sides, so that as it revolves the lens and sensitive plate are both either

exposed or covered. For instantaneous views, this cylinder is quickly turned through a half circle. The plate holder has a aliding shutter to close its mouth, and the movable receptacles for other plates are similarly constructed, and when the mouth of one of the latter is fitted to the mouth of the former, a plate is "easily shifted from one to the other by turning the "apparatus over."

[Printed, 4d. Drawings.]

A.D. 1881, November 8.-No. 4896.

PLENER, JOSEPH.—Centrifugally washing emulsions, and correcting fog or lack of sensitiveness, &c.

The melted emulsion is placed in a vessel which may be shaped like a truncated cone, and is silver plated inside. By rapidly revolving, the silver salt is deposited at the outer edge in about ten minutes. The gelatine is removed and the salt mixed with warm water and again separated, repeating the washing till complete. The silver salt is then mixed with fresh gelatine or other medium. For a collodion emulsion, the washed salt is mixed with glycerine, then with alcohol, allowed to settle, washed again with alcohol, dried, and mixed with plain collodion.

If the emulsion fogs, through over boiling, the coarser Particles only are first separated by a less rapid rotation, and the remaining emulsion is treated as above.

If the sensitiveness has become impaired by faulty preparation, the emulsion is treated with 5 grains of ammonium bromide to each ounce, boiled as usual, then washed as bove.

The washed silver salt may be kept without deterioration.

[Printed, 6d. Drawing.]

A.D. 1881, November 12.—No. 4967.

PUMPHREY, ALFRED.—Camera with chamber for changing films or plates, and dark slide for storing and exposing them.

The camera proper fits on to the front of a rectangular box which is rather larger than the camera. This box has a hole and sleeve at one side (or on each side) through which a hand is introduced to change the films, and non-actinic light is admitted through glassed openings at the top. The focusing screen, and the dark slide in its turn, when in position forms a division between the camera and the changing chamber. This latter has a door at its back through which one looks when focussing.

The dark slide contains a pile of sensitive films all facing one way, and an opaque screen protects the top film. This screen is placed under the film that is about to be exposed; and, to prepare for a second exposure, the first film is removed and placed as the back of the pile through a door at the back of the slide, the screen is placed under the next film, and the dark slide is closed. The front door of the dark slide is a mere run to held the edges of the films down. For these changes the dark slide is laid on the bottom of the changing chamber, the bottom of the camera being utilized as may be convenient.

One may dispense with the camera proper and use the changing chamber also as the camera. The dark slide or "storing box" may have a sliding shutter like ordinary dark slides and be used in ordinary cameras, or it may be used in conjunction with an ordinary dark slide. Plates may be used instead of films. For transport the camera may be packed in the changing chamber.

Frinani, di. Preminge.

A.D. 1881, November 12.—No. 4970.

CLARK, ALEXANDER MELVILLE.—A communication from E. Englishers.—An apparatus, carrying several plates all ready for exposure, which takes the place of the ordinary dark slide.

This plate box slides into a prepared place in the camera sideways or vertically. All the plates face the lens, and each is carried in a separate frame; each frame slides in the box, and the frames collectively fill the box, which is open at one end, so as to exclude light. The plate box with its contents may be drawn out at one side of the camera, though stops prevent its entire removal that way; and at the opposite side of the camera there are screws (or similar appliances) which may be individually screwed into or engaged with the frames carrying the plates (the edges of the frames are entirely ex-

posed at this end of the box), so that a frame so held retains its position at the back of the camera while the plate box, with all the other frames, is drawn out of the way. By this means any plate may be exposed. The focussing screen fits in grooves in the camera, and may be made to correspond in position with any plate; but the back and front of the camera are connected by a graduated slide, so that having focussed for any plate, the lens may be shifted so as to get the image exactly on any other plate.

[Printed, 6d. Drawings.]

A.D. 1881, November 26.—No. 5177.

LE MOUSSU, BENJAMIN CONSTANT.—(Provisional protection only.)—Getting lithographic or typographic printing surfaces by using albumenized paper as a transfer paper.

This relates to specification No. 3570, A.D. 1881. A stipple effect is produced either on the negative or afterwards. The albumenized paper is exposed under the negative, rolled with greasy ink, and is then developed in water, the ink being washed away "at those parts not having been fixed by "the light." This proof is pressed "on a grained surface "(stone, metal, or other)," and a light dry proof is next taken on the prepared surface hereinbefore referred to, and over this is printed "a tint which is pressed across afterwards." The work is continued as in the above-mentioned specification. "The embossed tint surface can also be prepared "like the ordinary transfer paper for direct transfer for "lithography or zincography."

[Printed, 2d. No Drawings.]

A.D. 1881, November 28.—No. 5181.

SIMMONDS, RICHARD. — (Provisional protection only.) — Artificial light for portraiture, giving diffused effects without expensive reflectors.

A lantern, two feet wide and three feet high or larger, has three sides of glass and in it are three cups in which suitable pyrotechnic composition is burned. The cups are at different heights, the highest is next the camera and the lowest is on the far side.

[Printed, 2d. No Drawings.]

A.D. 1881, December 8.—No. 5368.

MUCKLOW, JOHN DAVIES, and SPURGE, JAMES BLEWITT.— (Provisional protection only.)—A photometer, actinometer and sensitometer to mechanically get proportional intensities from any light.

The light passes through tubes; at one end of each is a stencil plate and at the other a diaphragm with the required aperture. The apertures of the diaphragms will vary through the series according to the ratios required. The film or other material to be tested is placed below a stencil plate and covered in to exclude extraneous light. The tubes may be grouped together in an obvious way.

[Printed, 2d. No Drawings.]

A.D. 1881, December 13.-No. 5448.

MORGAN, WILLIAM THOMAS.—(Provisional protection only.)——Preparing paper supports for gelatino-bromide emulsion, and d forming the prepared sheets into blocks.

The paper is preferably first treated with dilute sulphuric acid and washed. It is coated with a mixture of ground asbestos, talc, or such substance, and gelatine, starch, or an equivalent, dried, and pressed between steel or silvered plates. It is then coated again but with a less dilute mixture, dried, damped at back, laid face downwards on a warm polished metal plate, and heavily pressed. It is then polished by rubbing with an alcoholic solution of wax or similar substance, and coated with gelatino-bromide emulsion. Pictures produced on it "may be afterwards transferred to glass," canvas, opal, wood blocks for engraving, or to any other "substance to which it is possible to attach paper."

A block (like a sketching block) may be prepared, into leaved with tinfoil. These blocks may be rounded to folk the concave image produced by the lens. 'The pictures m be transferred from the sheet to a surface prepared w alumed gelatine.

For magic-lantern slides, the curved pictures may transferred to curved glasses (like clock glasses), so definition is improved at the edges of the enlarged picture

[Printed, 2d. No Drawings.]

A.D. 1881, December 14.—No. 5462.

DE BANZIE, EDWARD THOMAS.—(Provisional protection only.)
—Artificial light for portraiture.

A large lantern, glazed front and sides, has its other inner surfaces covered with reflecting material, and its top and bottom diverging towards the front. The bottom swings on centres. Other reflectors are attached to the sides. Inside there are two, three, or more (or may be only one) lamps in which "magnesium or the substance known as heliopyre is burned." The lamps are at different levels, the highest being nearest the sitter's head.

[Printed, 2d. No Drawings.]

A.D. 1881, December 17.—No. 5522.

BONNEVILLE, HENRI ADRIEN.—(A communication from ichel Gabriel Wolff.)—(Provisional protection only.)—Vitrible monochrome or polychrome photographs obtained by transferring a pigmented gelatine print.

The formula for coating and sensitizing the paper used is Siven. The print is developed on a flexible temporary sup-Port, and to remove the remaining chromium compounds, is ipped in alcohol containing a few drops of hydrochloric acid. and washed with weak alkali. The article is coated with a mixture of fish glue, gelatine, flux and water, and dried; the Print is then transferred upon it and burnt in. For poly-Throme subjects, papers of the required sizes and colours nust be placed in position before the final transfer, either on The surface that is to receive the picture, or on the print Leelf which is on the temporary support. The necessary re-Conching is also done at this stage with colours mixed with relatine, using an alum bath to make the gelatine insoluble. Or the colours may be prepared with a liquid like turpentine. and may be coated with gelatine. "The photographs can ** also be touched up in the usual manner."

[Printed, 2d. No Drawings.]

A.D. 1881, December 21.—No. 5598.

LAWLEY, WALTER, and STARNES, HERBERT SAMUEL.—
(Provisional protection only.)—Camera with receptacles for unexposed and exposed plates.

The plate holding frame slides to and fro in the camera, but will generally be about the middle of the body. The extreme back has a door through which one looks in focussing; the focussing screen fits the plate holder, and when not in use is put on one side of the camera. In the bottom of the camera there are two receptacles, one for exposed and one for unexposed plates, which close with spring sliding doors. The plates are placed with paper between them (not in grooves) and are shifted by hand, for which purpose there is an opening and sleeve in the back part of the camera.

[Printed, 2d. No Drawings.]

1882.

A.D. 1882, January 10.—No. 124.

PHILIPPI, LUDWIG HERMANN.—Production of castings in hard-metal from photo-relief or intaglio surfaces from "one coloured" pictures," and filling the depressions of such castings with enamel, or using them to stamp-sheet metal.

The photo-surfaces are made as usual and serve as patterns for the castings in bronze, iron, steel, or other hard metal. The depressions being filled with enamel, niello, &c. will show the picture in enamel, &c. or in metal (with enamel background) according as a negative or positive has been used.

[Printed, 2d. No Drawings.]

A.D. 1882, January 26.—No. 395.

SCHROER, RICHARD.—(Provisional protection only.)—Producing photographs on surfaces in general by means of an emulsion.

The formula for the emulsion is given; it contains chloride, bromide, and iodide of silver, emulsified in glue (or isinglass) that has soaked in an alum solution. Such surfaces as glased porcelain are simply warmed, metallic surfaces are "coated "with a dull white lack or other dull lack" and polished, while such surfaces as wood are coated with a solution of alumed glue before they are coated with the emulsion. The

image is developed with a solution containing pyrogallic acid, citric acid, nitrate of silver, and alum, fixed with hyposulphite of soda (1 to 8), alumed, and washed.

[Printed, 2d. No Drawings.]

A.D. 1882, February 6.—No. 565.

OWAN, ALEXANDER.—(Provisional protection only.)—A box

for packing plates automatically.

The plate is placed on a hinged frame over a hole in the lid, then by means of plungers it is pushed through the hole past sliding pieces, one on each side, which return over the edges of the plate by the action of springs. At the bottom of the box is a platform which rises by a spring and produces a fold all along each edge in strips of paper which are held in position by the hinged frame. The box is then ready for the next plate.

[Printed, 2d. No Drawings.]

A.D. 1882, February 17.-No. 775.

WALL, ROBERT TAVENER.—A sensitive preparation from hite pepper, sensitive films for stripping, and "an elastic medium for printing on uneven surfaces."

The white pepper is extracted with ether, turpentine, chloroform, an oil, acetic acid, a varnish or other such liquid. The eltered extract has either a little mastic varnish, turpentine, or spirit varnish added to it; the surface is coated, exposed as

usual, and developed with powdered pigments.

For stripping films, a substratum of collodion is prepared with a thick collodion and castor oil, or better—as free from yellow colour—by using a thick collodion made of acetic or formic acid, gun cotton, and castor oil, with or without Canada balsam. This is poured upon waxed glass with edges of paper round it to form a dish, and allowed to dry in a box. This layer is coated with an ordinary emulsion, or with a collodion emulsion prepared as described, in either of two formulæ, with the usual precautions. The film is stripped when the negative is finished and varnished. A box with ventilating sides is used for regulating the evaporation (whether of the substratum or emulsion solvents or both is not said).

The "elastic medium for printing on uneven surfaces," contains chiefly glycerine, gelatine, and sugar (its formula is

given). A glass plate is edged with paper to form a dish. The inventor says,—"I pour the mixture into this dish and leave "it to set and then place a negative tissue on it and next "place it on a dried-pepper sensitised surface, print by light "as usual."

The collodion sheet prepared as above for the substratum, may be coated with mat varnish, and drawn upon with pencil, or chalk, &c.; it may afterwards be printed on by the "process" as before; coloured prints may be used."

[Printed, 4d. No Drawings.]

A.D. 1882, February 20.-No. 820.

VICKERS, Tom.—(Provisional protection only.)—Exposure shutter with two slides opening from centre of lens sperture.

The shutter fits on the lens hood, and has two slides which jointly cover the lens and are retained in position by springs. The slides are drawn aside in opposite directions by a cord. and when the cord is released, they spring together again.

The slides may be flexible and rolled upon rollers; they may be worked electrically or pneumatically. There may be only one slide.

[Printed, 2d. No Drawings.]

A.D. 1882, April 4.—No. 1621.

ADDENBROOKE, George Leonard.—(Provisional protection only.)—A clockwork arrangement for regulating exposure shutters.

This clockwork is preferably applied to a shutter made as a closed flat box, with a hole through the lower part for the lens, and containing two slides within, either of which will cover the lens, one being kept at the top of the box and the other at the bottom of the box by springs. To set the shutter, the lower slide is drawn up and the upper slide down, and each is retained by a catch. The clockwork causes a disc to revolve in a specified fixed time, and two projections on this disc liberate the two slides respectively; first the lower one is released, opening the shutter, then the upper one is set free and closes it. The interval between releasing the two slides gives the exposure, and this may be regulated by placing the

projections at the required distance apart. The clockwork is similar to the striking train of a clock. It has a long spring wound up by one turn, the barrel of which is geared on one side to a revolving fan, and on the other by means of a cog wheel and its arbour to the disc mentioned above.

[Printed, 2d. No Drawings.]

A.D. 1882, May 8.—No. 2156.

WIRTH, FRANK.—(A communication from George Meisenbach.)
—Producing hatched printing surfaces from photographs;
moving a lined plate during the photographic production of the required negative, &c.

A transparent plate is hatched or stippled and placed face face against a transparent positive. A negative is produced usual from the combined plates. The hatched plate may be oved one or more times during the taking of the negative to btain cross-hatched or broken shading. "This negative is transferred in the usual manner on to a plate of suitable material, which is graved or etched in the usual manner to form a typographic block. For the engraving plates the negative is transformed into a positive, and the latter is transferred on to the etching plate in the usual manner. The negative produced from the combined plate may also be used for the production of photographs and photo-lithographic plates."

The object and hatching may be photographed on one plate, and this plate used direct for the production of an engraved plate."

[Printed, 4d. No Drawings.]

A.D. 1882, May 15.—No. 2277.

HADDAN, HERBERT JOHN.—(A communication from Edouard Godard.)—Producing vitrifiable pictures on glass, and also on stone, metal, prepared canvas, wood, &c., by the powder process.

For stained glass windows, the pieces of glass are cut as usual, allowing for the lead. The design is well drawn on white or blueish paper, and made transparent with petroleum. The pieces of glass are coated with a solution of glucose containing bichromate of ammonia, using many precautions as to

temperature and drying. The sensitive surface is expeed under the design, in a printing frame, or otherwise suitably, observing stated precautions as to temperature, and developed with vitrifiable colour by means of a brush. The glass is then dipped in a bath consisting of wood spirit and nitric acid to remove the chromate. "The application of variously coloured "enamels, and the heating are then effected as in ordinary glass painting." "The same process may be applied to" the other surfaces mentioned above. "The result is the "same."

E

[Printed, 4d. No Drawings.]

A.D. 1882, May 22.-No. 2403.

JUSTICE, PHILIP MIDDLETON.—(A communication from George Stockton Street.)—"Frames employed for printing photographs especially adapted for direct photography or blue printing."

An air or water cushion is used, and pressure is obtained by a system of levers and a catch, so that it may be instantly applied or released. The cushion and its frame are supported while changing the sensitive sheet, &c., and no part of the apparatus needs to be removed during its use. There is a box at each end of the frame to contain tracings, &c., which being longer than the frame have to be printed in sections.

[Printed, 6d. Drawing.]

A.D. 1882, June 13.-No. 2780.

MORGAN, WILLIAM THOMAS, and KIDD, ROBERT LEAMON.—(Provisional protection only.)—Producing paper supports for gelatino-bromide emulsion, forming the prepared sheets into blocks, and using a gelatine support for film negatives in lieu of glass.

The paper is preferably first treated with dilute sulphuric acid and washed. It is coated with a mixture of ground asbestos, tale, or such substance, and gelatine, starch, or an equivalent, and it is then dried and pressed between steel or silvered plates. It is then coated again but with a less dilute solution, dried, damped at back, laid face downwards on a warm polished metal plate, and heavily pressed. It is then polished by rubbing with an alcoholic solution of wax or similar

substance, and coated with gelatino-bromide emulsion. Pictures taken on it "may be afterwards transferred to glass, "canvas, opal, wood blocks for engraving, or to any other substance to which it is possible to attach paper."

A block (like a sketching block) may be prepared, interleaved with tinfoil. These blocks may be rounded to follow the concave image produced by the lens. The pictures may be transferred from the sheet to a surface prepared with alumed gelatine.

For magic-lantern slides, the curved pictures may be transferred to curved glasses (like clock glasses), so that definition is improved at the edges of the enlarged picture.

Instead of transferring the negative films to glass for printing from, a support of insoluble gelatine is used (pre-pared as described), which is so thin that the negative may be printed from on either side.

[Printed, 4d. No Drawings.]

A.D. 1882, June 26.-No. 3013.

I.AKE, HENRY HARRIS.—(A communication from Emile Joseph Irlands.)—(Provisional protection only.)—Varnishing and heating pigment pictures after transferring them to glass, porcelain, or such surfaces, to secure permanency.

The surface is "gelatinized in a cold bath of 2 or 3 "degrees," and then receives the printed pigmented tissue as usual. After the ordinary development "I spread with a "brush a layer of boiled oil or oil-varnish or alcohol, with a "without the addition of a small quantity of spirits of "turpentine." The article is then heated to "spread and "render regular" and harden the varnish. After heating, the surface is "treated with pumice by the ordinary means." The pictures may be coloured before varnishing.

[Printed, 2d. No Drawings.]

A.D. 1882, June 27.—No. 3035.

HARE, George.—(Provisional protection only.)—A portable camera.

The base board is hinged to the bottom front edge of the back frame, and the front works to and fro on the base board by racks and pinions. The front has pinching guide plates; which work in grooves in the base board, and are tightened by nuts and screws. The bracket at one side which supports the base board, folds against it when the camera is shutup. A swing-back effect is obtained by means of a link pivotted to the base board at one side, and having a pinching screw working in a slot in the back frame. The camera may be mounted either horizontally or vertically.

[Printed, 2d. No Drawings.]

A.D. 1882, July 7.-No. 3232.

PLÜCKER, JEAN FREDERIC.—A telescopic tripod stand.

The legs are made of brass or similar tubing, each in three (more or less) pieces sliding one within the other. The lower end of each section, except the innermost one, is split and has a collar that may be tightened by a screw to retain the tube within. The feet have ears that serve to draw out the tubes. Each leg is pivotted to the top of the stand. The screw to which the camera is fixed projects upward from an inverted cup, which moves on a ball and is kept in position by a hook and eye that may be tightened when necessary; this allows the camera to be tilted in any direction.

[Printed, 6d. Drawings.]

A.D. 1882, July 10.—No. 8268.

STANLEY, WILLIAM FORD.—(Provisional protection only.)—Scale to indicate the required focus when reducing to any known proportion.

The scale is attached to the sliding part of the camera, and indicates the proportional size, when the focus is correct, and also the distance at which the object must be placed. The scale may be arranged on a dial that revolves when focussing. The camera stand is arranged so that the camera may be moved to finally adjust the distance of it from the object.

[Printed, 4d. Drawing.]

A.D. 1882, July 22.—No. 3491.

COLTON, EDWARD GARDHER.—(A communication from William Kurts.)—Modifying the lighting in portraiture by placing the sitter and camera on a platform which is turned partly round during exposure.

By this means the shadows and lights move and are softened. The exposure may be shortened, and less retouching is required. The platform may be moved by hand or otherwise.

[Printed, 6d. Drawing.]

A.D. 1882, August 15.—No. 3889.

EDWARDS, EDMUND.—(A communication from Paul Rouaix.)
—(Provisional protection only.)—Camera with sensitizing and developing baths attached, obviating the need for a dark tent in wet plate work.

The camera is extended behind the place for the focussing screen, and at the back there is a door to be opened for Tocussing, &c., and closed when necessary. Against the under side of the camera top there is a horizontal slide that may be moved backwards and forwards, from which the Tocussing screen and sensitive plate hangin turn. The carrier works between two stops; when against the front one, it is in position for focussing and exposing. The plate is coated with collodion as usual, secured by a groove and spring to the carrier, and pushed into position. The silver bath is then raised through an opening in the bottom of the camera in which it slides up and down so that the plate is immersed. The bath is lowered, the exposure given, the carrier drawn back to the back stop, when the plate is over another vertical bath which contains the developer and is pushed up so as to immerse the plate. The plate is removed from the camera for further operations. The baths may have watertight covers. The openings through which they slide may have light-tight covers so that the baths may be removed for cleaning, &c.

[Printed, 2d. No Drawings.]

A.D. 1882, September 25.—No. 4562.

PHILIPPI, LUDWIG HERMANN. — Producing etched plates "with equally deepened excavations."

A resisting surface is coated equally with "a layer of the "material to be etched;" this is coated with a protecting couch of etching varnish or its equivalent which is removed where required as usual. Instead of the etching varnish, the

prepared plate may be coated with chromated gelatine of asphaltum, "and the photograph produced thereon" and developed as usual. The esching is carried on right through the etchable layer.

[Printed, 2d. No Drawings.]

A.D. 1882, September 30.—No. 4651.

McLELLAN. JOHN YOUNG .- (Provisional protection only.)

Artificial light: magnesium burning in oxygen.

A glass globe is mounted on a cylindrical reservoir, and the two are connected by pipes with stopcocks as obviously necessary for the operation. The globe is filled with oxygen from the reservoir, by filling the globe with water throughan opening in the top, closing the opening, and making connections with the reservoir. A suitable length of magnesium wire is ignited and introduced into the globe through the opening at the top.

[Printed, 2d. No Drawings.]

A.D. 1882, October 2.—No. 4671.

EVANS, CHARLES PICTON.—(Previsional protection only.)— Photographing an "object or person direct on to a bust or " image composed of glass," papier-maché or analogous material.

The "previously prepared" bust or image takes the place of the sensitive plate in such a manner that its position may be adjusted without opening the camera.

[Printed, 2d. No Drawings.]

A.D. 1882, October 5.—No. 4747.

EMERY, Francis Joseph .- (Provisional protection only.)-The use of a fatty image instead of an ordinary transparency in Niépce's heliography.

Any fatty material with a tolerably opaque pigment will do, and the image may be drawn direct on the bitumenized surface or transferred upon it by ordinary methods. The surface is then exposed to light and developed with surpentine or benzol which removes the fatty image and also the underlying (and so protected from light) asphaltum. The chief advantage of the fatty substance is that it softens the asphaltum and makes it more readily soluble. "The practical "result of this is to reduce the exposure required." The etching follows as usual.

[Printed, 2d. No Drawings.]

A.D. 1882, October 18.-No. 4954.

TEMPLER, JAMES.—(A communication from Henry Eledale.)—Use of captive and of free balloons for carrying cameras.

The balloons are small, no attendant going up with them. The exposure is preferably given by an automatic apparatus set to take, or if a captive balloon is used, an electrical shutter may be worked by the operator from the ground. The captive balloon may be able to raise the camera and the cord or cords, or these latter may have other balloons attached to them as may be necessary.

The descent of a free balloon is arranged for by an opening in the balloon, other than the usual opening at its tail, which may be regulated in size for the more or less rapid escape of the gas. It may be prevented from striking heavily on the ground "by means of a long cord, or a plummet, or light "grapnel suspended at a considerable distance below the "camera." When this plummet or grapnel reaches the ground its weight no longer draws the balloon with the camera downwards, so that by arranging the weights suitably, the downwards course may be more or less retarded when relieved of this weight.

Such balloons may be used for signalling.

[Printed, 4d. No Drawings.]

A.D. 1882, October 25.—No. 5086.

BROWN, RICHARD, BARNES, ROBERT WILLIAM, and BELL, JORDEN. — Producing lead plates from gelatine reliefs, for Woodburytype or other printing, by means of a roller press.

A sheet of lead has on each side of it first a sheet of steel and next a sheet of cardboard. This arrangement is passed through a spring roller press adjusted so that its rollers cannot be brought nearer than a certain suitable distance. When the lead plate is as far reduced in thickness as the adjustment of the press will allow, the gelatine relief is placed between the lead plate and one of the steel sheets, and the arrangement is again passed through the press.

三

The lead plate may be printed from with gelatinous introduced with fatty inks, a grained surface must be obtained, to which end a "gauze or perforated sheet" may be placed between the positive and gelatine during exposure so that the gelatine relief has a grained surface. Or, the grained surface may be imparted to the lead relief after it has been prepared as above described, by putting "a sheet of fine wire gauze," muslin soaked in glue and dried, sand paper, or their like" on the lead plate, covering it with a "soft material such as "cloth," adding the steel and cardboard sheets, and passing the arrangement through the roller press, using "a light" pressure."

[Printed, 6d. Drawing.]

A.D. 1882, October 27.-No. 5131.

LAKE, HENRY HARRIS.—(A communication from Joseph Chaine, Arthur Durand, and Sallonier de Chaligny.)—Rendering more permanent photographs that have been coloured at the back with oil colours, by a rapid artificial drying and heating.

A bath, a table, and an oven are used, each of which is heated by a jacket for hot water, steam, or a hot gas, &c. The photograph is first introduced into the bath, which contains the liquid "designed to fix the image upon the " photograph and render the said photograph transparent." The bath has an india-rubber cover, between which and a rounded edge of the bath the photograph is withdrawn to remove as much of the liquid as possible. The photograph is then placed upon the hot table and the liquid is "completely removed "by wiping." After exposure to the air for a few minutes the photograph is ready for the application of the colours. The coloured photograph is then placed in the oven (which is heated and has a current of air passing through it) where the paint is dried in a short time, and, "by a slight fusion, the most " intimate combination of the paint and the material of which "the photograph is composed" is brought about. This combination "produces the permanency and durability of the

"photograph notwithstanding variations of temperature and climate." The photograph is pressed and finished as usual. [Printed, 6d. Drawing.]

A.D. 1882, December 12.—No. 5933.

FRANK, RUDOLF EDWARD.—(A communication from Luigi Micciullo, known as Dominique Scotellari.)—Producing vitrifiable pictures on glass, &c., also producing a frosted appearance on glass, &c.

The surface is coated by means of an aqueous solution prepared from gelatine, gum-tragacanth (or gum-arabic), quince seeds, and a chromate: sugar, glucose, or honey may be used in addition to or instead of the quince seeds. The surface is exposed under the transparency, and the colours or enamels are dusted on by a brush. The surface is then "protected by a " coat of thick turpentine such as is known in France as " 'terebenthine grasse,'" thinned if required with ordinary turpentine, and then immersed for about 24 hours in water scidulated with acetic or hydrochloric acid. The picture is then touched up if required and fired.

Works of art may be copied by preparing two plates as above. "Upon one of these" the colours, &c., "may be "applied, or it may be touched up, after the colours are "fired the second copy is placed over the coloured one" in exact register. The two plates are united by framing, cementing, or by "flux applied at the edges, so that the two being fused together, form a single piece."

A frosted surface on glass or such material is produced by dabbing on with a pad a mixture of asphaltum, turpentine, and ether (or its equivalent), and then treating the surface with aqueous hydrofluoric acid.

[Printed, 4d. No Drawings.]

1883.

A.D. 1883, January 8.—No. 101.

ABEL, CHARLES DEWION. — (A communication from F Alphonse Attout, called Tailfer, and John Clayton.)—Applies of eosine to gelatino-bromide emulsions or coated plates t the relative lights and darks correctly in spite of var colour.

The ecsine is dissolved in ammonia and added to emulsion "at the moment of its formation."

Plates that are already coated and dry, have the ammon solution of eosine to which alcohol has been added po over the film. They are washed, the eosine remaining fi

The term eosine is used inclusively, and other alkalies ammonia may be used.

[Printed. 4d. No Drawings.]

A.D. 1883, January 30.-No. 504.

MARLOW, EDWARD.—(Provisional protection only.)—Fo ing by means of a pin working in a spiral groove.

The groove and pin are respectively in the lens tube the outer sleeve, or vice versa. The outer tube is lined velvet or such material.

[Printed, 2d. No Drawings.]

A.D. 1883, February 15.—No. 843.

SAMUELS, Thomas.—Apparatus, connected to the back of camera, for holding a stock of dry plates or films and expethem automatically one at a time.

A board is fixed to the back of the camera so that it either swing away on hinges, or slide away, for focus This board extends beyond the back part of the camera or side. On the outward side of the board there are two boxes which slide upon the board with their open tops tow it. These boxes contain the plates or films—one before the other after exposure—with their faces towards the ban opening is made in the board so that the front plate o

box is fully exposed to the lens when the slide that covers the box is withdrawn. When this slide is withdrawn, springs behind the false bottom of the box pash the plates forward so that the front plate is in position for exposure; and when the slide is pushed in, it drives the exposed plate before it into the other box, so that the next time the slide is drawn out the next plate comes into position, and so on. The receiving box has also a false bottom and springs; and the false bottom, together with any plates overlying it, assumes a slightly oblique position, so that the edge of the incoming plate may be able to push its way in front. When the receiving box is full, a lid is pushed on to it and it is removed; the empty box that has supplied its plates may be made the receiver, and another box full of plates is attached. The lid of this box is first pushed out of the way, and the operations go on as before.

To stop the light penetrating more than one plate during exposure, and also to preserve the plates from damage when pushed over one another, each plate (or film) has a thin metal back which turns over on to the front at two opposite edges.

The containing and receiving boxes may be made in one as a box with a division, in which case the back of each part will conveniently have a separate door to allow of the removal of the plates it contains. Other modifications of different parts are described.

[Printed, 6d. Drawing.]

Ę

Ē

×

è

Ğ

Ł

Ħ

A.D. 1883, February 19.—No. 896.

MEIHE, JOHN RUDOLPH.—(A communication from Julius Allgeyer and Carl Bolhoevener.)—Typographic blocks of gelatine with a grain, and electrotypes therefrom.

A heliotype plate is prepared as usual, except that chloride of calcium or an equivalent substance is added to the gelatine to get a grain. "The heliotype-plate is exposed to light under a dia-positive, rolled over with greasy ink and the image is either immediately strengthened by strewing graphite powder or some other suitable coating over it, or an impression is made from it on a gelatine foil, which impression or copy may also be strengthened in the manner just described. By either method a 'grained' negative is

" obtained which in one case is right handed and in the " other case left handed."

A film prepared with glue, glycerine, and bichromate of potash is exposed under the above grained negative. The film is then fastened by its back to a wood block of the usual (typs) height, and the relief is produced by moderate damping and friction. Such a relief, or an electrotype made from it, may be printed from in combination with ordinary type.

The films are prepared by casting on a smooth glass plate previously coated with ex gall. When cool, the surface is scraped level; the film is then stripped from the glass, and the surface which was towards the glass is exposed as above.

The films may be exposed under lined negatives.

[Printed, 4d. No Drawings.]

A.D. 1883, February 24.—No. 1007.

HARE, JAMES HENRY, and DALE, HENRY JAMES.—A box to contain and serve for exposing dry plates in the camera.

The plates, each held in a light frame, are contained in a box in two tiers, arranged so that the front one of the lower tier is exposed when the slide that covers it is withdrawn. The box fits on the back of the camera so that the lower tier of plates is opposite the lens. The upper tier of plates has one fewer than the lower, so that by turning the box over in the right direction, the front plate of the lower tier slides on to the front of the upper tier, and the back plate of the upper tier (on turning further) slides on to the back of the lower tier. By this motion, repeated if necessary, any plate may be brought into position for exposure. Behind each row of plates is a screw which may be tightened to keep them steady. The back of the box slides in grooves for convenience in filling. The number on the plate carrier to identify the plate ready for exposure, can be seen through a hole in the front of the box that is covered with a non-actinic glass.

[Printed, 6d. Drawing.]

A.D. 1883, February 27.—No. 1061.

LAKE, WILLIAM ROBERT.—(A communication from Reifield Benjamin West and Benjamin Corey West.)—Mercury printing by development.

omy, rapidity, and an improved surface for the appliof colours, are advantages claimed for this process as ed with silver printing.

paper is sensitized in a bath containing potassium nate, magnesium sulphate and mercuric chloride; exposed under the negative for 3 to 10 minutes in unlight; soaked in water for about 20 minutes (and pure whites are wanted in acid sulphite of sodium); stly developed in a solution containing gallic acid, sulphate, alum, and hyposulphite of sodium. After ment, it is soaked in water acidulated with acetic acid, mounted, &c.

colour from black to brown may be produced, after ; out the developer, by applying the diluted sensitizing For reddish brown, after development a solution of carbonate is applied; to bleach, citrate of ammonia is

paper for sensitizing may be prepared by any known, but a coating of starch, sugar, glycerine and caustic is found good.

rinted, 4d. No Drawings.]

A.D. 1883, February 28.—No. 1095.

ERSALL, James Weaver.—(Provisional protection only.) hing photographs on paper and glass by means of pray.

ss than 30 minutes" suffices as against four hours, the am by any other apparatus.

"spray is brought into either direct or indirect contact the photographs which in one case I place upon trays the outlet for overflow, and in the other somewhat w such overflow."

rinted, 2d. No Drawings.]

A.D. 1883, March 7.—No. 1229.

IS, ALFRED HORACE.—Colouring photographs at the nd mounting them on ordinary card mounts instead of is.

photograph is reduced in thickness if necessary, in "a bath of oil, varnish and spirit," the surplus

liquid is removed and the translucent picture coloured on its back with (preferably) oil colours. The mount is coloured to match, and when both have dried to a certain consistent they are placed together and pressed between pelished surfaces with a gradually increasing pressure till thoroughly united. The surface may afterwards be enamelled or varnished.

è

-

[Printed, 4d. No Drawings.]

A.D. 1883, March 15.—No. 1380.

BROWN, RICHARD, BARNES, ROBERT WILLIAM, and BELL, JOSEPH.—Producing grained and lined printing surfaces, and flattening lead sheets that have got bent by pressure against gelatine reliefs.

This invention is supplementary to No. 5086, A.D. 1882. The half tone picture or photograph has a grained or lined surface given to it by roughening or abrading the surface, or by pressure against a gelatine relief, wire gauze, perforated metal, or against a grained or lined steel plate, stone, or similar surface. The picture is afterwards rubbed with a soft pigment to show up the effect. The graining or lining may be printed on from a copper plate or its equivalent. A picture so prepared "is submitted to artistic manipulation" and can then be used for preparing printing surfaces from by any known process, such processes having been usually confined chiefly "to re-" producing from what are technically known as 'point "pictures.'"

The production of the grained or lined surfaces as above described by pressure, is also applicable for treating "ordi"nary photographs for direct sale, or otherwise."

Or, a finely grained or lined paper or other material or a substance that naturally has a grained or lined surface, as leather or linen, is photographed. The surface to be printed is exposed under this negative, and under the negative of the required subject, either negative being employed first; or the two negatives may be placed together and used simultaneously. Instead of the former negative, fine wire gauze or like perforated material may be used, and it may be used either before or after the negative of the subject.

Or, the sensitive paper may be "printed over" (presumably with printers' ink) with lines or dots, either before or after

s sensitised, and the subject may be printed (by exposure ler the negative) on such paper.

or, a gelatine relief of a grained or lined surface and "a gelatine relief of the negative picture" may be produced. See reliefs are placed one over the other on the metal face, and pressure is applied, as in the Woodbury process its modification described in the specification referred to eve.

in applying these last named processes to a lead plate of ge size, the plate may get bent or uneven. It is made el and true again by placing it on a true surface, "such as a steel face plate," and heating it as by a gas flame or in an in, taking care not to overheat it.

[Printed, 4d. No Drawings.]

A.D. 1883, March 30.-No. 1608.

ANDON, RAPHAEL HUNTER. — (A communication from phones Charles Auguste Thiébaut.)—Gelatino-bromide films paper that may be stripped dry without the assistance of p solvent, &c.

A gelatinized sheet of paper is damped and attached to a set of glass by its edges so that in drying it is stretched i. It is coated, first, with ordinary collodion containing set two per cent. of castor oil, and, when dry, with gelatinomide emulsion. When dry, the film is detached from the ses, and is exposed, developed, and fixed as usual. "The film is peeled off the paper by hand and can be immediately used for producing negatives recto or verso."

[Printed, 2d. No Drawings.]

A.D. 1883, April 2.—No. 1650.

SYNOLDS, RICHARD, and BRANSON, FREDREICK WOOD-BR.—A flap and drop shutter whose flap and drop may be rulated independently of one another.

As soon as the catch of the flap is turned aside, the flap es by means of a spring, coiled in a box, which turns the indle of the flap. The spring may be wound up or alackened turning its box, and the box is fixed by means of a pin ich passes through a suitable perforation at its edge. The drop falls and closes the aperture when the flap has passed through about five sixths of its excursion, being brought down by an elastic band or its equivalent as usual. The elastic band is strengthened for a more rapid motion. The drop piece has a stop covered with india-rubber, and a catch to prevent it from rebounding, and a set-screw to hold it open "when it is not required to be used."

Note.—There does not appear to be any reference to an arrangement for holding up the drop when it is required for use, nor to any means of releasing the drop at the right time.

[Printed, 6d. Drawing.]

A.D. 1883, April 18.- No. 1960.

ROBEY, George.—(Provisional protection only.)—"Ename I 'i ling water colour or oil photographs" with collodion.

A glass plate is prepared with talc, coated with collodions dried, immersed in cold water, and brought into contact wits the face of the print which has previously been saturated with a gelatine and chrome alum solution. The two are allowed to dry, and the paper of the photograph is removed by powdered pumice. The back of the film is then coated with castor oil; and finally with benzol in order to remove the grease; colour is then applied to it. The enamelled film is stripped from the glass and mounted as usual.

[Printed, 2d. No Drawings.]

A.D. 1883, April 18.—No. 1971.

COOKE, WILLIAM.—(A communication from Richard Schlotterhoss.)—"An apparatus for automatically exposing bodies "or articles to the action of the sun's rays or to light "otherwise produced."

A case has an adjustable opening under which the negative or its equivalent is supported. Under this is a table pressed upwards by springs, and the sensitive surface is arranged between the negative and the press table. If the sensitive

surface is flexible it may be used from a roll; arrangements are described for drawing off exactly the proper length each time a change is made. The opening through which

exposure takes place is provided with a suitable cover. The parts of the apparatus are so connected that by turning a handle continuously the effects are,—first, to open the cover (for the exposure), then close it, to lower the press table, move forward the sensitive material, raise the press table, open the cover, and so on. The apparatus may work automatically by means of a revolving shaft actuated and regulated as ordinarily by a weight or spring, &c. The moving part may have two detents, one to hold it when the cover is open and one when it is closed, and these detents being worked by electro-magnets, may be automatically put in or out of operation at any required fixed times; or the currents may be made and broken by hand.

The apparatus may be used in combination with a camera. It has conveniences of a subordinate kind in addition to those partioned above.

[Printed, 6d. Drawings.]

A.D. 1883, May 7.—No. 2316.

MILLS, BENJAMIN JOSEPH BARNARD.—(A communication from antoine Lumière.)—(Provisional protection only.)—Packing dry plates in boxes made of tin-plate or its equivalent.

The plates fit in vertical grooves made of corrugated metal. When the lid is put on, the junction is made tight with cement or a band of cloth or paper.

[Printed, 2d. No Drawings.]

A.D. 1883, May 8.—No. 2323.

ADAMS, JOSIAH, the younger.—(Provisional protection only.)
—Backing photographs with zinc white or its equivalent,
after mounting them on glass and colouring them.

The photograph is mounted on the back of the glass and its back or outer surface is coloured "after warnishing or "otherwise." The entire back is then covered with a mixture of sinc oxide (or sulphide) a suitable gum and balsam or their equivalents. While still wet, a sheet of pure unsized paper or its equivalent is laid on and gently pressed so as to draw the liquids from the surface of the photograph. This paper dries on. A less successful method is to use a "varnish menstruum"

for the zinc white, and before setting, to wash the outer surface with other.

The final effect is similar to that of a picture on opal glass.

[Printed. 2d. No Drawings.]

A.D. 1883, May 18.-No. 2495.

IMRAY, JOHN. -- (A communication from Charles Cros and Auguste Vergeraud.)—(Provisional protection only.)—A sensitive paper for copying tracings, &c., and its development.

The sensitive mixture is either mingled with the pulp or applied to the made paper. It consists of glucose (or dextrine, or sugar, or gelatine, or a mixture of glucose and gelatine) with bichromate of potash in aqueous solution.

For development, an aqueous solution of silver nitrate with acetic acid and alcohol may be used and followed with sulphuretted hydrogen, a reducing salt of copper or iron, such as an oxalate or an ammonio-sulphite, or an alkaline carbonate, to blacken the image. Another developer has acetate of lead instead of the silver salt above, and is followed by sulphuretted hydrogen. Or, an aqueous solution of extract of logwood, carbonate of potash, and alcohol, may be used and followed with oxalic acid to clear the ground. Quantitative formulæ are given. These methods give positives from positives.

[Printed, 2d. No Drawings.]

A.D. 1883, May 30.—No. 2677.

CLARK, ALEXANDER MELVILLE. — (A communication from William Evans Lindop.)—Storing backgrounds in a series of stalls or cases, with a gate or frame upon which any one may be run out for use.

The backgrounds are supported at their backs by rollers which run on rails attached to the stalls or cases. These stalls may be curved to save space, in which case the backgrounds must be flexible. The frame or gate that supports the background in use is hinged at the side furthest from the case of backgrounds, so that its front edge may be brought opposite the opening of any of the stalls, its rails then forming a continuation of the rails of that particular stall so that the background may be run out on to the gate support. The gate is secured in position by a spring that engages with

the post of any stall. The hinge of the gate is cranked and the back part of the gate is kept in position for changing a background by a spring clip on the floor.

[Printed, 6d. Drawing.]

A.D. 1883, July 6.-No. 3362.

WIRTH, FRANK.—(A communication from Benecke and Fischer, and John Frank.)—(Provisional protection only.)—Getting a grain for preparing printing surfaces, by enlarging from a specially prepared collodion positive which is reduced from the negative.

The collodion must be thin and only slightly iodized. The formulæ for this and the sulphate of iron developer are given.

[Printed, 2d. No Drawings.]

A.D. 1883, July 14.—No. 3476.

BROWN, BICHARD, BARNES, ROBERT WILLIAM, and BELL, JOSEPH.—Producing designs by pressure against relief surfaces; namely:—preventing the obliteration of the design by moisture, avoiding the wear of the gelatine relief, and producing a combined mat and bright surface on thin metal.

This invention relates to Woodbury's patents, A.D. 1878, No. 2912, and A.D. 1879, No. 3760. To prevent moisture from obliterating the designs so produced on paper, the surface is coated before or after the impression is made with a water-proofing solution, as shellac dissolved in spirit.

To prevent the wearing of the gelatine relief, metal reliefs are prepared from it, and these only are used. The mould may be made by pressure on soft metal as lead, or by casting in plaster; and from this mould a relief surface is obtained by casting in stereotype metal, or by making an electrotype and backing it with stereotype metal. The relief may be produced on the surface of a cylinder. Instead of using a gelatine relief for this process, one may use ordinary type, wood-blocks, or such relief surfaces. The surface of the working relief may be made more durable by electroplating with steel or other metal; or it may be coated thinly with chromated gelatine, giving a surface easily renewable.

To produce a combined mat and bright design upon such metal as tinfoil, a relief is prepared preferably on a zinc plate, as by coating it with bitumen, exposing, developing as usual



PHOTOGRAPHY.

with benzol, and etching. The plate is cleaned and presed against the tinfoil, but with a layer of paper or fabric between.

The texture of the interposed medium is imparted to the tinfoil only where they are pressed together by the relief surface.

[Printed, 4d. No Drawings.]

116

A.D. 1883, July 30.—No. 3709.

The background is coated with gold-size, carefully following the lines of the picture, and then the "metal in a pull" verized or flocculent state" is sprinkled on, and pressure is applied to get a uniform coating. Gold, silver, bronner, aluminium and other metals may be used; "by the use of "two or more different metals polychromatic effects can be "obtained."

[Printed, 2d. No Drawings.]

A.D. 1883, August 3.—No. 3800.

CASPAR, Alberta Mary Frances.—(Provisional protection only.)—Mounting photographs on canvas and colouring them so as to resemble oil paintings on canvas (also applicable to prints or drawings).

The picture is pinned face downwards on a board, and rubbed thin with glass or sand paper. The photograph is next soaked with water, spread over with "gum or paste or "glue," and covered with coarse canvas; the two are then pressed together till the canvas shows through the picture. When dry it is stretched on a stretcher, painted with transparent albumen colours mixed with water, and subsequently varnished.

[Printed, 2d. No Drawings.]

A.D. 1883, August 4.—No. 3822.

RYDILL, GEORGE.—" Improvements in the treatment of drawings or designs printed upon paper or other suitable material for the purpose of imitating stained, ground, out or embossed glass, or to be employed for other useful and ornamental purposes."

This invention refers chiefly to pictures, &c., and methods that are not photographic.

Concerning photographic prints, they are made translucent by immersion in a warm mixture made as follows. To hot castor oil, "a cement composed of isinglass dissolved in "proof spirit or acetic acid to which I add gum mastic, gum ammoniacum or resin mastic dissolved in alcohol, proof spirit" is added; and then as much methylated spirit as is required. When dry the print is varnished, and may be subsequently coated with collodion. Or, it may be made translucent after varnishing, &c. The print is mounted on translucent paper to form a margin, or the margin may be left in printing by means of a mask. The margin may be printed upon or pierced to form a pattern, and the prepared print is then placed between two sheets of glass which are cemented together at the edges.

[Printed, 6d. No Drawings.]

A.D. 1883, August 7.—No. 3837.

TLAKE, WILLIAM ROBERT.—(A communication from William Shields Liscomb.)—Chair, with back-pad that may be adjusted vertically, horizontally, and angularly.

The pad is pivotted on to the top of a narrow slotted plate so that it may face forwards at any angle, or face upwards and form a seat (as for a child who thus uses the seat of the chair for his feet); or, facing upwards, the chair may be draped and form an arm support for a standing figure. The slotted plate that supports the pad is double, so that it may be lengthened to raise the pad; or, the plate being single, it may be secured to the chair seat at different parts of its length to allow of the vertical motion of the pad. The upright is pivotted to the chair seat to allow of a backward and forward motion of the pad. The bearing surfaces at both pivots are circular and serrated radially, so that the serrations by interlocking give a firm hold when brought together by a thumbscrew. Instead of as above, the upright may be held in position by two pawls which engage in teeth cut in the upright.

[Printed, 6d. Drawing.]

PHOTOGRAPHY.

A.D. 1883, August 14.—No. 3948.

SACHS, Joseph Julius.—(A communication from Fickeisses and Becker.)—Varnished paper (or cloth, &c.) as a flexible support for sensitive films.

The selected paper is extended on a frame, varnished, with Copal varnish, and when dry smoothed with powder pumice stone or by other means. The transparent varnish paper is then coated with gelatine or its equivalent, and desired treated with an extract of oxgall from which the final been removed, or with an equivalent substance. Sums supports may have lines or stipple patterns printed on the before varnishing, &c., for getting printing surfaces from nature or half tone subjects.

The transparent sheets may be used for ornamental auseful purposes other than photographic.

[Printed, 4d. No Drawings.]

A.D. 1883, August 28.-No. 4152.

DE ZUCCATO, Eugenio.—Producing grained, lined, prints (for transfer) from gelatine reliefs by pressure of paper, &c. between the relief or a cast from it and a surfer bearing printers' ink in lines, grains, &c.

By this means the printers' ink sets off more or less according to the pressure, that is according to the height of the relief.

The ink bearing surface may be a lithographers' stone, zinc plate, paper enamelled or plain, &c.

The surface printed on may be paper, tin-foil, gold beaters' skin, silk fabric, &c.

The ink is varied as may be desired.

The picture so obtained may be transferred to metal or stone, or it may be photographed and a transfer made from the photograph.

[Printed, 4d. No Drawings.]

A.D. 1883, August 28.—No. 4153.

DE ZUCCATO, EUGENIO.—Producing stippled or lined print (for transfer) by pressing together the paper, &c., and an inkerpiece of fine network or other textile fabric (or fine wirgauze), by means of a gelatine relief or a cast therefrom.

118

The fabric used is well saturated with the ink, but carefully, that none of the "meshes or ribs" are blocked up. By pressure as described the ink sets off according to the amount of pressure, that is according to the height of the relief.

The relief itself may be inked, and then the paper or its equivalent is always placed between the fabric and the relief.

The picture so obtained is transferred to stone or metal, or photograph of it is transferred.

The stone, zinc, &c. surface may receive the stippled picture direct, by laying on it the inked fabric and pressing by the relief.

The picture may be produced on paper, tin-foil, gold beaters' skin, a collodion pellicle, silk fabric, "or other suitable tissue;" and the ink may be varied.

[Printed, 4d. No Drawings.]

A.D. 1883, August 28.—No. 4154.

DE ZUCCATO, EUGENIO.—Producing stippled or lined prints (for transfer) by pressing the paper or its equivalent against an inked "roughened, grained, stippled or lined plate" by means of a gelatine relief or cast therefrom.

By the pressure the ink sets off, and in proportion to the amount of pressure, that is according to the height of the relief. The print is then transferred to metal or stone, or a photograph of it is transferred.

The surface to receive the picture may be paper, tin-foil, gold beaters' skin, silk fabric, "or other suitable tissue."

The stippled or lined plate may be for instance, a metal plate or wood block that has been grooved or stippled, a cast from such a block or plate in "ebonite, dry gelatine, or celluloid;" or it may be "a sheet of emery cloth, sand paper, or book-"binders' cloth."

An equivalent substance may be used for the ink.

[Printed, 4d. No Drawings.]

A.D. 1883, September 19.—No. 4471.

BROWN, RICHARD, BARNES, ROBERT WILLIAM, and BELL, JOSEPH.—Using a relief in steel or other metal for getting "water mark" pictures on paper, &c. by pressure, or for making reliefs on soft material as tin-foil, leather, &c.

This invention relates to No. 2912. A.D. 1875; No. 336. A.D. 1879; and No. 3476, A.D. 1883. The gelatine relief insit will not last long enough when used directly for these processes, and metal plates produced from them "have necessarily to be made of soft metal and are not suitable."

A steel or other metal plate is coated with bitumen or is equivalent, exposed under the positive or negative as required, developed as usual, etched, and then cleaned. For half tose pictures a grained, lined or hatched surface is obtained as described in No. 1389, A.D. 1883. The material to be pressed in passed with the steel plate between (preferably) hard steel rollers; or the metal sheet may be "affixed upon one of "the rollers so that the paper, leather, metal foil, or the "like may be passed rapidly through, either in single sheets." or from the web, or roll." Or pressure may be otherwise applied.

[Printed, 4d. No Drawings.]

A.D. 1883, September 24.—No. 4557.

BREWER, EDWARD GRIPPITH.—(A communication from J. Geoebergen and La Societe Geruzet Freres.)—(Provisional protection only.) — An electrical retouching apparatus, "also "applicable for engraving purposes."

The pencil is held in a carrier that oscillates by the agency of the electric current, so that when the pencil point is brought lightly upon the part that requires retouching, it gives a dotting effect regularly and rapidly. The pencil may be arranged to give strokes instead of dots.

Printed, 2d. No Drawings.

A.D. 1883, October 3.-No. 4705.

BROWN, RICHARD, BARNES, ROBERT WILLIAM, and BELL, JOSEPH. — Producing by photography grained or stippled printing surfaces for typographic or lithographic printing.

A clean photographic transparency is obtained and placed upon a lined, grained, or hatched background. The background may be varied to suit the subject, part lined and part stippled, for example. This combination is then photographed, and the result used as usual for the production of printing surfaces.

The "divided" photograph may be produced immediately by covering the sensitive plate in the camera by a network or mutable transparency, the exposure taking place through such medium.

A typographic block may be produced by coating a zinc or other metal surface with bitumen or other sensitive substance, and placing a transparency of grains, lines, &c., and a transparency of the picture, over the sensitized zinc, the printing being effected by light in the usual way. The plate the developed and etched as usual.

[Printed, 4d. No Drawings.]

A.D. 1883, October 4.—No. 4732.

TKINSON, JOHN EDWIN.—Envelopes, each carrying precrably one sensitive plate or film, and each having a slide by which the plate or film may be exposed; and a camera back to accommodate such envelopes.

The envelopes consist of a rectangular frame of wood, cardboard, papier-maché or other light and cheap material, into which the plate or film fits. The front has an opening rather maller than the plate it contains, and over this there is a sliding shutter of suitable material, scored or creased so that it may be bent back out of the way when drawn out; the projecting piece or handle part can also be bent back when the shutter is pushed in. Each side of the back of the envelope as light-tight flap, constructed for example of an indiambber coated fabric; and by simply turning these flaps back wer the plate after it has been introduced, it is safely projected from light.

The back of the camera is preferably hinged to the body (it may slide in grooves) so that it may be turned aside to adjust the focussing screen. The outer side of the back has a door through which the envelopes containing their plates are introduced, one at a time, as required. There is a slot or other provision to allow of the drawing out of the slide that protects the face of the plate, in the usual way.

The hinges of the focussing screen slide outwards, so that the screen may lie outside the back when the camera is shut up.

The invention may be applied to existing cameras by obvious modifications.

[Printed, 8d. Drawings.]

A. 1985. Perriber 3 — No. 4785.

Consider the subjects; the subjects of the subjects; the subjects; the subjects of the subjects; the subjects of the subjects; the subjects of the subject of the s

es are recalled of such objects as "fine of grave, buts, or a print from a grained of such of the community of positive of the configuration transfer may be recalled an equation of positive of the configuration transfer may be

region of the solve may be made by expositing a gain of the solve may be made by expositing the solve of the solve solve and technologies of potasized as a solve grant are powder. Or the solve of the

to be said way as the plain glass."

"A control process immy be made from a control prained or lined to the control of the con

The control of the present which or glass may be warmed, our services of against glass or the control of the glass is removed against glass or the control of the glass is removed and a fifther than the control of the

The level (2π) [No. Therefore (3π)]

§ 7. 1886. Percent 30.—No. 113-6.

TWO WAS I some a Promounced governor only — Obtaining and the respect designs on metal surfaces, for general more see.

The hand drawing, print, or engineting is made to are so as originated place by higher ography, or horsporylated. Them this enginered place an impression is

taken in a "bituminous, asphaltum, or resinous" acid resisting warnish, and this print is transferred "by slight pressure" on to the surface upon which the design is required. The necessary parts of the plate (edges, &c.) are protected by wax or its equivalent, and the transferred impression may be "gently sprinkled with bituminous powder" if necessary. The surface is then etched. The design may be produced on cylindrical surfaces, and may be repeated to any extent required.

[Printed, 2d. No Drawings.]

A.D. 1883, November 2.—No. 5204.

GARSIDE, HARRISON.—Producing the grain or line, &c. effects necessary for printing surfaces.

A plate, as of metal, has shallow conical recesses produced close together over its surface. A print from this is taken by the Woodburytype method on glass or thin paper, using enough pigment to get opacity at the centre of each spot. This transparency is copied photographically to the required size, and films or screens are prepared from the copy. Such a film being placed on the face of a negative, a photo-lithographic transfer may be made, from which printing surfaces may be produced by various methods.

For portraits it is better to get an enlargement from the combined negative and film, and after retouching to get the required negative from the enlargement.

Shaded lines, and two or more films of them, may be used instead of the dots.

Or the grain may be obtained as follows:—"An exposed collographic plate is to be inked up with a tint approaching blackness and a grained resist transferred to a metal plate, or a similar transfer may be made by means of the grained paper which is in use by lithographic artists or in other ways—The plate may now have the conical grain produced by repeated etchings as practised in typographic block work."

Or a negative may be obtained with a grain, by putting in front of it during exposure a grained screen, or by exposing the plate under the grained screen before or after the exposure on the subject. Or, a piece of carbon tissue may be exposed under the negative, and after development, supported "on a surface of "soluble gelatine and while still slightly soft" it is presed upon a metal plate with a "vee shaped grain" so that the grain "is entirely filled by the thickest portion of the relief "when dry." The soluble support is dissolved away, and a "printing plate" is produced "by electro-deposition or in any other convenient way." Instead of using the soluble gelatine support, the softened but undeveloped tissue may be pressed on the plates and there developed.

: =

: -

-

٢<u>-</u>

Or a piece of carbon tissue may be exposed, developed, "transferred to a white surface thickly coated with colourless "gelatine" or its equivalent, and while still soft pressed against a "hard grained plate." When dry the picture is removed, a negative is made from it, and this furnishes a

printing surface as usual.

The screen of shaded dots or lines may be replaced by one of transparent dots or lines on an opaque ground, by placing the latter at an appreciable distance from the negative during printing, and arranging the light so that it shall disperse after passing through the screen and before it reaches the negative.

[Printed, 4d. No Drawings.]

A.D. 1883, November 10.—No. 5324.

SACHS, JOSEPH JULIUS.—Use of the sand blast or it—equivalent in producing grained surfaces, and producing perforated design or an imitation of inlaid metal work by etching or electro-deposition.

A hard surface is submitted to the sand blast. A typographical impression on a transparent medium gives a grained screen which is to be used in conjunction with the photograph to be copied while the sensitive surface is exposed beneath it.

The sand-blasted surface may be printed from, either directly or by means of transfer, upon the negative or positive; or it may be printed with directly on the "photo-" graph drawing painting or the like."

The sand blast may be used "to give a colour holding" surface" to the depressions of a photo-etched design, before finally cleaning off the resist.

A metal surface may be roughened by the sand blast, coated with a sensitive layer, exposed under the required design, rolled with a resist or ink which adheres only to the hardened or exposed parts, and then the unexposed parts of the sensitive layer removed by washing or otherwise. Another metal of preferably a different colour is then electro-deposited on the exposed parts; or the metal may be bitten into or through at the exposed parts; giving either imitation inlaid work or a perforated design. Before electro-deposition, the application of a coarser or finer sand blast will give a grain for the design which differs from that of the ground.

[Printed, 4d. No Drawings.]

A.D. 1883, November 20.—No. 5464.

REPLER, ALBERT, DE PREMION, ACHILLE MORIN, and PIGEAU, ALFRED.—(Provisional protection only.)—Rendering prints transparent previous to applying oil colours to their backs.

"Equal parts of clarified resin and essence or spirits of "turpentine" are "melted together," and the prints are kept in the warm liquid for twelve hours (or for three hours, then cold and solid for twelve hours, after which time the mixture is melted and the prints are withdrawn). The prints are drained in a warm trough, and washed with benzene, applied for instance by a sponge. When dry, they are coloured, "cemented or mounted on a suitable surface," and subjected to pressure.

[Printed, 2d. No Drawings.]

A.D. 1883, December 8.—No. 5681.

LAKE, WILLIAM ROBERT.—(A communication from Auguste Bisson.)—Making prints transparent; colouring transparent prints or prints transferred on to glass, tale, &c., lithographically or by hand; and mounting the coloured prints.

The print "obtained upon a translucid support such as "mica, vegetable parchment, dioptric paper, transparent "mineral paper and paper mounted on cloth or the like," is made "perfectly transparent" by a cold solution of resin in benzene and linseed oil.

For colouring: pieces of cardboard or thin metal are cut out from tracings so that each represents one colour or shade. One stone for each colour is coated with a sensitive layer of chromated albumen or gum, exposed under the pattern, and washed "in the ordinary manner." Each stone then prints its colour "directly upon the front or upon the back of the "film as required." Instead of printing, the print may be backed with transparent paper, and the colours applied in flat tints with short brushes by means of the cut out patterns (a stencilling operation). The ground tone is produced by sticking a tinted paper to the back.

The prints are kept under pressure after mounting. Copies of pictures may be mounted on or between cloth, pressed, and varnished to imitate an oil painting on canvas.

[Printed, 4d. No Drawings.]

A.D. 1883, December 28.—No. 5896.

BORLAND, ALEXANDER. — (Provisional protection only.) — Producing a grain for printing surfaces by a screen in from of the sensitive plate while exposing for the negative.

The screen is of wire or hair gauze, perforated metal or paper, net or crape, or such material. Or a negative of such a screen may be used. The screen may be close to the sensitive plate or a little distance away.

[Printed, 2d. No Drawings.]

A.D. 1883, December 29.—No. 5915.

WARREN, WILLIAM HENRY.—Producing etched, painted or gilt, &c. designs on glass by means of an exposed and developed sensitive layer.

The surface to receive the design is coated with a mixture containing asphaltum, bichromate of potash, lamp black, turpentine, alcohol, tartaric acid, and a varnish (as furniture varnish), the preparation of which mixture is fully described. The coated surface is exposed under an etched glass, the etched parts being made opaque, or under any opaque design on a transparent ground. After exposure, the surface remains some half hour in a darkened room, and is then brushed over lightly with "turpentine, bensene, kerosine or coal oil, "together or combined" or its equivalent to remove the

parts not acted on by light. It is next washed clean with soapy water and dried; it is retouched if necessary. It may lastly be painted, silvered, gilt, or etched.

[Printed, 4d. No Drawings.]

A.D. 1883, December 31.—No. 5947.

RYDILL, GEORGE.—"Improvements in the preparation of " photographs and the treatment of drawings or designs printed upon paper or other suitable material, for the purpose of imitating stained, ground, cut or embossed glass, or to be employed for other useful and ornamental

purposes."

This invention contains methods that are not photographic

well as the following.

Printed photographs, &c. are rendered transparent by oils Or fats, &c., by treating them in an apparatus so that they way be subjected to increased or decreased pressure, then Dessing them between india-rubber rollers or subjecting them a hydro-extractor. The prints are then suitably coloured On their backs, as by lithography; two or more prints of the same subject may be used each mounted on glass, and the glasses cemented together. Or the coloured picture may be mounted inside a glass shade or at the back of a looking Rlass.

Or the photographic print may be printed with colours on

its back and finally varnished.

"Having sensitized photographic paper on both sides," it may be printed on both sides by means of two negatives which are "exactly alike." The result may be made transparent and coloured.

Coloured sheets or sheets with designs on may be placed behind a transparent print, and both mounted between glasses cemented together at the edges; or backgrounds may be printed on the faces of photographic prints.

A moistened print may be pressed upon a varnished glass surface that is almost dry, and varnished when dry.

Parts of photographs, a person for instance, may be cut out and mounted on a background.

[Printed, 1s. 2d. Drawings.]

INDEX OF SUBJECT MATTER.

In this Index the number and year of each Specification are given instead of the page of the volume. The names printed in Italics are those of the persons by whom the Inventions have been communicated to the Applicants for Letters Patent.]

Algin, preparation and use | Cameras: of:

Stanford, 142 '81.

Backgroundsornamented with powdered metals: Marra, 3709'88.

Backgrounds printed by lithography or from a plate, &c. :

Guttenberg, 1502'78. Rydill, 5947'88.

Backgrounds, series of, arranged to be run out as required:

Clark (Lindop), 2677 '83.

Balloon photography:

Woodbury, 1647 '77. Templer (Elsdale), 4954 '82.

"Binocular photographs," lens for:

Lehmann, 4877 '77.

Blocks (curved or flat) formed of sheets of paper coated with gelatino - bromide emulsion:

Morgan, 5448 '81. Morgan and Kidd, 2780 '82.

Bright and matt designs on thin metal:

Woodbury, 3760 79. Brown, Barnes, and Bell, 3476 783.

Bust or image, photographing direct on to a: Evans, 4671 '88.

Changing boxes for;
Blair, 498 .
Lake (Molera and Cebriss),
1216 . Brookes, 4320 '81, Sands, 4323 '81, Clark (*Enjalbert*), 4970 '81, Samuels, 843 '82, Hare and Dale, 1007 188. For automatic exposures

copying, preparing printing surfaces, &c.;
Drummond, 329 77.
Lake (Molora and Cobride)
1216 50.

For carrying and exposins series of films or plates;
Pumphrey, 1559 **1.
Pumphrey, 4967 **1.
Lawley and Starnes, 5595

For enlarging; Humphries (Thom), 3301

Graduated arrangement to in reducing to scale; Stanley, 3268 ***.

Portable (dry plate); Woodbury, 1647 77, Rouch, 1448 78, Blair, 498 79, Stanley, 3353 to. Abel (Loiseau and Gemouil-Bonnaud), 775 to. Smith, 3014 tol. Brookes, 4320 '81. Hare, 3635 '68.

Atkinson, 4732 '83.

Portable (wet plate); Tiator, 3184 70. Haddan (Lefourrier), 3828 75. Edwards (Rousier), 3889 75.

Roller slides for;
Beck (Piqueps otherwise Morgan), 2142 m.

With revolving lining; Bolas, 4823 '51.

bon printing. See Pigent printing. irs for models. See Rests. nging boxes. See Caeras. ing plates with gelatine nulsions, &c., apparatus Lake (*Eastman*), 2967 '79. Swan, 4607 '79. Lake (Eastman), 3006'80. ured media, &c., to assist "exposing: Haddan (Scotellari Puttemaus), 337 77. Scotellari, 3461 77. Haddan (Carvalho Haddan (Carve Marx), 2563'79. and ured objects, plates for, epared with eosine: Abel (Attout called Tailfer, and Clayton), 101 23. ured objects, reproduc-g, by a scale of tints: Meihé (Hoesch), 8504'81. puring photographs: Backgrounds of, with powdered metals; Marra, 3709 '88. Backs of, including the making translucent, varnishing, &c.; Wise (Schuhmacher) 1284 '77. Von Nawrocki (Schneider), 1560 '77. Dale, 176 '78 Gurney, 2473 '78, Lombardi, 3196 '78, Mewburn (Farre), 1569 %.
De Dutkiewicz and De couffé, 2249 %.
Morgan - Brown (Pixis)
3702 %. and De-(Pixis), Schnorrenberg (Grüne), 4360 80. Lake (Chaine, Durrand and de Chaligny), 5131 '83. Dawes, 1229 '83. Robey, 1960 '83. Adams, 2323 '83 Kepler, De Premion and Pigeau, 5464 '83. Lake (Bisson), 5681 '83. Rydill, 5947 '83.

129 Colouring photographs—cont. Generally; Newton, 481 78. Lake (Winter and Co.), 1305 790. Morgan - Brown 3702'80. (Pixis). Justice (*Dewé*), 3664 '81. Lake (*Irlande*), 3013 '83. Caspar, 3800 '83. Lake (*Bisson*), 5681 '83. Rydill, 5947 '83. Lithographic printing, by means of: Lake (Bisson), 5681 '88. Rydill, 5947 '88. Printing, in the course of; Germeuil-Bonnaud, 4023 78. Hallett, 3355 '80. Reflected lights, by means of; Justice (Deuce), 3664 '81. Transfer, during; or for subsequent transfer; Prager, 906 '78. Pixis, 5036 '78. Wise (Schuhmacher and Stade), 748 79. Clark (Lemary), 5223 79. Morgan Brown (Pixis). 3702 70. Composing designs for preparing printing surfaces: Drummond, 329 '77.
Alissoff, 591 '77. Goodwin, 3243 '78. Dillon 1073 79.
Lake (Molera and Cebrian),
1216 '80. Copying and indexing documents. See Indexing. Copying, apparatus for: Edwards, 1891 '77. Humphries (*Thom*), 8301 '78. Copying drawings, &c., by direct superposition: Johnson (Pellet and Co.), Dillon, 1073 '79 Edwards (Tilhet), 4922 '80. Edwards (Tilhet), 4922 '80. Wild, 5013 '80. Imray (Cros and Vergeraud), 2495 '83. Cutting glass, apparatus for: Cowan, 4322 's1. Dark chambers: Tiator, 3184 '78 Lefèvre, 1371 '79.

Coloured collodion, by means of, (applicable to carbon prints): Parkyns, 3222'77.

Richardson and Slack, Mice *** Garthwaite, 1458 78. Dyeing and printing fabrics by means of chromated gelatine : Wolff, 3718 71. "Elastic medium for printing on uneven surfaces": Wall, 775 10. Electrical retouching apparatus: Brewer (Geeshergen and Geruzel), 4657 ". Embossed photographs: Bonneville 2381 '11 (Guilleband), Embossing surfaces produced by aid of photography: Woodbury, 2780 79.
Woodbury, 2780 79.
Sacha, 1419 70.
Sacha, 1909 70.
Sacha, 2908 70.
Sacha, 2008 70.
Rannavilla. I Banneyille (Guillebaud), 2381 '*! (Guillebaud), 2381 '*! (Guillebaud), 4894 '*! Brones, and Bell, (Guillebaud), \mathbf{E} Brown, Barnes, and Bell, \mathbf{E}_{2} Emulsions, preparation of

osure shutters-cont. Bolas, 4823 '81. Vickers, 820 '83 Addenbrooke, 1621 '89 Reynolds 1650 '83. and Branson. rics and other surfaces, inting by development Abel (*Winter*) 1284'77. Lombardi, 3196'78. Swan, 2968'79. rics, printing on contious lengths of: Brewer (Janard Guillot), 2271'79. y image used in Niépce's liography: Emery, 4747 '83. rane process: Woodbury, 2912 '78. Brown, Barnes, and Bell, 3476 '83. Brown, Barnes, and Bell, ening lead relief plates: Brown, Barnes and Bell, 1380 '85. ssing cloth, substitute :: Blamires, 4784'79. Lawley and Starnes, 5598 '81. na, coating photographs th: Reynolds, 1112 '80.

n effect, hatching, &c., oduction of:

Johnson (Percire), 2341 77.
Capron, Duvivier, and Ponsolle, 4009 77.
Michaud, 1979 78.
Harman, 2174 78.
Swan, 2969 79.
Petit, 4738 79.
Bell, 232 79.
Bell, 1637 79.
Dredge, 4948 79.
Sachs, 286 78.

Warnerke, 1436 '51.

n effect, &c., many super-

sed impressions as a sub-

Dredge, 4949 '80.

tute for:

Grain effect, &c.—cont.

Bogne and Le Moussu, 2570 %1.

Clark, 3738 %.

Le Moussu, 5177 %1.

Wirth (Meisenbach), 2156 %.

Brown, Barnes, and Bell, 5066 %.

Meihe (Allgeger and Bolhoseener), 896 %.

Brown, Barnes, and Bell, 1380 %.

Wirth (Benecke, Fischer, and Frank), 3368 %3.

Bachs (Fickeissen and Belk, 250 %2.

De Zuccato, 4153 %3.

De Zuccato, 4153 %3.

De Zuccato, 4153 %3.

De Zuccato, 4154 %3.

Brown, Barnes, and Bell, 4705 %3.

Garside, 6204 %3.

Garside, 5304 %3.

Borland, 5384 %3.

Borland, 5396 %3.

Hair worked on to photographs:

Brassinne, 1646 78.

Hatching, production of. See Grain effect, &c.

Horses, instantaneous photography of:

Morgan - Brown
bridge), 2746 78.

(Msy-

Indexing and copying documents:

Dillon, 1073 79.
Lake (Molera and Cebrian),
1216 79.

Instantaneous photography of running horses:

Morgan - Brown (Maybridge), 2746 78.

Intaglio surfaces. See Relief surfaces; Photo-mechanical printing.

Isochromatic emulsion plates:

Abel (Attout, called Tailfer and Clayton), 101

Lenses:

Von Voigtländer, 1988 77. Warlich and Cadett, 4367 77. Lehmann, 4677 77. Tydeman, 1483 78. Latinan -cont.

turgan - Brown (Knapp. Kumping, and Hpring). 545 7. Morgan - Brown Num '".
Tydeman, 4662 'n.
Von Nawrocki (Von Voigt-länder), 4765 'n.
Warlich, 2006 'n.
Abni (Loiseau and Ger-menti-Bonnaud), 775 'ni.
Rieinheil, 1602 'ni.

Lone mounter:

Kamping, and Spring), Morgan - Brown Manley, 2353 'es. Marlow, 504

Light, artificial:

artinicial:
Abal (Winter), 1284 '77.
Warlich and Cadett, 4367 '77.
Van der Weyde, 446 '77.
Alder and Clarke, 1442 '78.
Recett, 4671 '78.
Dillon, 1078 '79.
Dillon, 1207 '79.
Warlich, 2698 '89.
Rimmend, 5181 '21. Minmonds, 5181 'al. De Banzie, 5462 'al. McLellan, 4651 'el.

Magic lantern slides, rounded: Morgan, 5448 '81. Morgan and Kidd, 2780 '82.

Matt and bright designs on thin motal:

Woodbury, 8760 '79. Brown, Barnes and Bell, 3476 '88.

Morcury, printing by means of:

ake (West and West), 1061'5. Lake Microscopic photographs for

preserving copies: Lake (Molera and Cebrian), 1216'00.

Mills and dies for calico printing, photo-mechanical production of. See Roller surfaces.

Model of an object, structed from photographic reliefs of its various sides: Sachs, 3657 '61.

Mordant, chromated gels Wolf, 3715 %.

Mounting photographs:

On glass: Von Nawrocki (Sohns 1509 T. Dale, 176 T. Newton, 461 7. Mewburn (Paere), 13 Schnorrenberg 4300 '0. Justice (Dece), 2004 Adams, 2323 ... Rydill, 3422 ... Lake (Bisson), 5681 ... Rydill, 5047 ... To imitate oil paintings: Schnorrenberg (6 4300 'm, Caspar, 3500 'm, Lake (*Bisson*), 5681 " With ornamental margin Rydill, 3522 ...

Roller for; Jones, 3818 77. Mounts, compound, cole

or plain: Newton, 481 77.
De Dutkiewicz couffé, 2249 '**.
Dawes, 1229 '**.
Rydill, 5947 '**.

Negatives, correcting c touching, by paper ty

Wayte and Herzog, 1

Negatives, production of Film dissolved away in unacted on by exposure Warnerke, 1436 '81.

Paper, on; Morgan-Brown, (Joh 1367'77. Pumphrey, 1559 '81, Holroyde, 2526 '81, Morgan, 5448 '81, Morgan and Kidd, 276 Brandon (Thisbout).

Paper types, by; Wayte and Hersog, 14 Pellicular; Morgan-Brown (Joh 1867 '77. Pumphrey, 1559 '81, Wall, 775 '81. Morgan and Kidd, 278 Brandon (Thiébaut), 1 atives, production of —

Reversed;

Morgan-Brown (Johnson), 1867'77.

Edwards, 1891 '77. Humphries (Thom), 3301 '78.

a - glasses transformed

to cameras:

Abel (Loiseau and Germouil-Bonnaud), 775 '81.

ing dry plates:

Edwards, 1543 '80. Cowan, 565 '88. Mills (*Lumière*), 2316 '83.

r, thin, for prints:

Newton, 481 '78.

per, a sensitive substance

Wall, 775 '83.

nament photographs. See gment printing.

ographs, colouring, punting, and polishing. s Colouring; Mounting; lishing.

o-mechanical printing, cluding the production all relief and intaglio rfaces by means of photoaphy:

Drummond, 329 '7.
Alissoff, 591 '77.
Lake (*Munler*), 1773 '77.
Johnson (*Percire*), 2341 '77.
Capron, Duvivier, and Ponsolle, 4009 '77.
Michaud, 1979 '78.
Woodbury, 2912 '79.
Bolhoovener and Heidenhaus, 4146 '78.
Kaiser and Duplessy, 1033 '79.
Dillon, 1073 '79.
Borland, 2611 '79.
Sauvie (*Jannis*), 2649 '79.
Sachs, 2724 '79.
Swan, 2948 '79.
Sect and Collins, 3816 '79.
Petit, 4738 '79.
Bell, 232 '80.
Sachs, 1419 '80.
Fischer, 1870 '80.
Bell, 1637 '80.
Martyn, 1647 '80.

Photo-mechanical printing, &c.—cont.

Baum, 1856 100.
Sachs, 1909 10.
Sachs, 1908 100.
Sachs, 2066 100.
Dredge, 4949 100.
Bachs, 2066 101.
Coghlan, 1096 181.
Warnerke, 1436 181.
Bonneville (Guillebaud), 2381 181.
Sachs, 3012 181.
Sachs, 3012 181.
Meihé (Hoesch), 3504 181.
Bogue, and Le Moussu 3570 181.
Sachs, 3657 181.
Clark, 3733 181.
Le Moussu, 5177 181.
Philippi, 124 181.
Wirth (Meisenbach), 2186 182.
Philippi, 4563 183.
Brown, Barnes, and Bell, 5066 183.
Wirth (Meisenbach), 286 183.
Wirth (Hoesch, Fischer, and Fehr, 39476 183.
Wirth (Benicke, Fischer, and Bell, 3476 183.
Bachs (Ficheissen and Bell, 3476 183.
De Zuccato, 4153 183.
De Zuccato, 4153 183.
De Zuccato, 4154 183.
Brown, Barnes, and Bell, 4471 183.
Brown, Barnes, and Bell, 4706 183.
Garside, 5294 183.
Borland, 5896 183.
Borland, 5896 183.
Borland, 5896 183.

Photometers, actinometers' and sensitometers:

Coglievina, 3464 '**. Hurter, 1751 '**. Mucklow and Spurge,

Pigment paper, preparation of:

Morgan-Brown (Johnson), 1867 '77. Sarony and Johnson, 2007 '78. Sarony and Johnson, 2681 '79.

Pigment printing:

Lambert, 148 77. Morgan-Brown (Johnson), 1367 77.

Platinum, &c., printing: Reg Willis, 2800 '78. Lombardi, 3196 '78. Willis, 1117 '80. thрb Polishing photographs: Jensen (Jacobses), 3109 '77. Portable photographic apparatus. See Cameras (port-Regi pas by Printing by development. See also Copying drawings. Relief Clark (Corbassière dit Christian and Liebert), 10 'ai, Haddan (Hatinet and ing laddan (Hutinet Lamy), 1538 'si Relief Printing frames: mad Greaves, 1757 '77.
Greaves and Smith, 1758 '77.
Hemery, 4380 '77.
Lane, 3941 '79.
Justice (Street), 2403 '89. Relief, See (Printing in platinum, merprint cury, or pepper. See Platinum; Mercury; Pepper. Printing, machines for continuons:] Brewer (Janard Guillot), 2271 '7. Wolff, 3718 '81 Ē Cooke 1971 '89 (Schlotterhoss), 8

Reats for models:

White, 4196 '7'.
Emmerson, 2544 '75.
Brewer (Bastion), 3346 '75.
Clarke, 5176 '50.
Edwards, 1517 '51.
Colton (Kurtz), 3491 '85.
Lake (Liscomb), 3837 '85.

Retouching apparatus, electrical:

Brewer (Geesbergen and Geruzet), 4557'5.

Retouching, paper types used in:
Wayte and Herzog, 1407'78.

Roller for mounting prints:
Jones, 3818'7.

Roller surfaces for printing produced by means of photography:

Fischer, 1570 '80. Sachs, 1909 '80. Sachs, 2966 '80.

Rounded reliefs:

De Pass (Guillebaud),

Sand blast used to produce grained surfaces: Sachs, 5324'83.

Scale of tints:

Meihé (Hoesch), 3504 '81.

Sensitizing and printing on both sides of paper:

Rydill, 5947 '*.

Sign - boards, name - plates, &c., production of:

Michaud, 1979 '78.

Martyn, 1647 '80.

Clark, 3782 '81.

Sound, reproduction of, by aid of photography:

Walker, 3129 19.

Spray, washing photographs by water: Tattersall, 1095 '53. Stands for cameras:

Tiator, 3184 '78. Smith, 3014 '81. Plücker, 3232 '88.

Stippling, production of. See Grain effect, &c.

Sulphur mixtures for casting:

Sachs, 1419 '80. Sachs, 3650 '80. Coghlan, 1096 '81. Sachs, 3012 '81.

Support for sensitive films, varnished paper as a:

Sachs (Fickeissen and Bocker), 3948 '53.

Surfaces in general, photographs produced on, by means of an emulsion:

Schroer, 395 '92.

Tinting photographs. See Colouring.

Transferring photographs to surfaces in general, excluding the ordinary transfer of pigment (or carbon) prints:

gment (or carbon) prints:

Prager, 906 '79.

Prist, 5036 '79.

Salvy, 295 '79.

Wise (Schukmacher and Stade), 748 '79.

Clark (Lémary), 5223 '79.

Bailey, 1294 '80.

Baum, 1856 '80.

Sachs, 1909 '80.

Lake (Flagler), 2782 '80.

Sachs, 2966 '80.

Andreoli (Germeuil-Bonmac), 3511 '80.

Morgan - Brown (Pixis), 3702 '80.

Schnorrenberg (Grüne), 4360 '80.

Morgan, 5448 '81.

Bonneville (Wolf), 5522 '81.

Morgan and Kidd, 2780 '80.

Lake (Irlande), 3018 '80.

Transmitting messages, &c., by telegraph, employment of photography in: Dillon, 1347 75. Chameroy, 579 'a.

Turntable support for models:
Clarke, 5176 ***.
Colton (Kurtz), 3491 ***.



ERRATUM.

Page 3, line 14 from top, for "HADDO



PATENT OFFICE.

All communications relating to Patents, Designs, and Trade Marks, to be addressed to H. Reader Lack, Esq., Comptroller-General of Patents, Designs, and Trade Marks, at the Patent Office, 25, Southampton Buildings, Chancery Lane, London, W.C.

LIST OF WORKS printed by order of THE PATENT OFFICE, and sold at the Sale Branch, 38, Cursitor Street, Chancery Lane, London, E.C.

I.

- SPECIFICATIONS of PATENTS for INVENTIONS, DIS-CLAIMERS. &c., enrolled under the Old Law, from A.D. 1617 to Oct. 1852, comprised in 13,561 Blue Books, or 690 thick vols. imp. 8vo. Total cost price about 600l.
- SPECIFICATIONS of INVENTIONS, DISCLAIMERS, &c., deposited and filed under the Patent Law Amendment Act, 1852, from Oct. 1, 1852, to December 31, 1883, comprised in 125,613
 Blue Books, or 3,005 thick vols. imp. 8vo. Total cost price about 3,490l.
- SPECIFICATIONS of INVENTIONS, DISCLAIMERS, &c., deposited and filed under the Patents, Designs, and Trade Marks Act, 1883.

17639.

- The prices of the Indexes of Patents, for the years 1617 to 1870, have been reduced to the following uniform rates.
- INDEXES to PATENTS of INVENTION under the Old Law, from A.D. 1617 to October 1852:—
- CHRONOLOGICAL INDEX. 2 vols. (1554 pages.) Price 10s.; by post, 18s. 2d.
- ALPHABETICAL INDEX. 1 vol. (647 pages.) Price 5s.; by post, 6s. 5d.
- SUBJECT-MATTER INDEX. 2 vols. (970 pages.) Second Edition. Price 10s.; by post, 12s. 8d.
- REFERENCE INDEX of PATENTS, pointing out the Office in which each enrolled Specification may be consulted and the Books in which Specifications, Law Proceedings connected with Inventions, &c. have been noticed. 1 vol. (710 pages.) Second Edition. 1862. Price 5s.; by post, 6s. 5d.
- APPENDIX to the REFERENCE INDEX, containing sostracts from such of the early Patents and Signet Bills as describe the nature of the Invention. 1 vol. (91 pages.) Price 1s.; by post, 1s. 6d.
- INDEXES of APPLICATIONS for PATENTS and PATENTS GRANTED under the Patent Law Amendment Act, 1852:—

CHRONOLOGICAL INDEXES :-

For 1852 (Oct. 1—Dec. 31) and 1853. (258 pages.) Price 2s.; by post, 3s.

					s.	d.		8.	d.
[1854,	1855	i, 1	856	, 185	7,	1858	out of p	rin	ŧ.]
1859 (196 p	ug	œв),	pric	e 2	0;	by post	2	7
1860 (209	,,)	>>	2	0	,,	2	7
1861 (215	,,)	,,	2	0	22	2	7
1862 (237	,,)	,,	2	0	"	2	8
1863 (220	")	,,	2	0	"	2	7
1864 (2	222	,,)	,,	2	0	"	2	7
1865 (2	180	,,)	22	2	0	"	2	7
1866 (2	239	,)	22	2	0	,,	2	8
1867 (2	54	99	Ć	"	2	U	"	2	8
1868 (2		••)	••	2	0	••	2	8

· ALPHABETICAL INDEXES :-

2

For 1852 (Oct. 1—Dec. 31) and 1853. (181 pages.) Price 2s. 6d. by post, 3s. 2d.

```
1854 (119 pages), price 2 6; by post 8 1
1855 (129 ", ) ", 2 6 ", 8 1
1856 (143 ", ) ", 2 6 ", 8 1
[1857, 1858, 1859, 1860, 1861, 1862 out of print.]
```

LPHABETICAL INDEXES—cont.

```
s.
                         ď.
                                    s. d.
1863 (218 pages), price 2 6; by post 3
                                       2
1864 (220 ,,
              )
                      3
                         6
                                        2
                               "
1865 (236
              )
1866 (248
              •
                      2
                          6
                                        2
           "
                               ,,
1867 (258 ,,
                   "
                               ,,
1868 (291
                      2
          ,,
                   ,,
                               .,
1869 (272
                                       3
                      2
           ,,
                   .
                               ..
1870 (242 ,,
                                       2
              )
                      2
                                    8
                   ,,
                               ,,
1871 ( 52 ,,
                         0
                      2
                                    9
                                       1 4
              )
                   ,,
                               ,,
1872 (61 ,,
              )
                      2
                         .
                                    2
                                        1
                   ,,
                               "
1873 ( 62 ,,
             )
                     2
                         0
                                    2
                                        2
                               ,,
[1874, 1875 out of print.]
1876 (135 ,, ) ,, $ 0
{1877, 1878, 1879, 1880, 1881, 1882, 1883 ·
  out of print.]
1884 (453 ,, )
                 " 2 0
                                    2
                                        8
                               ,,
                                    0 7
1885 (Jan. 1 to July 31) 0 3
```

BJECT-MATTER INDEXES:-

```
'or 1852 (Oct. 1-Dec. 81). (182 pages.) Price 3s.; by post, 5s. 7d.
```

```
s. d.
                         d.
1853 (291 pages), price 5 0; by post 5 11
                     5 0
1854 (311 ,, ) ,,
                              ,,
                                    6 0
1855 (311 ")
                         0
                                    5 11
                     5
                 "
[1856, 1857, 1858, 1859, 1860, 1861, 1862,
  1863, 1864 out of print.]
1865 (474 ")
                      5 0
                 77
                     5 0
                                    6 0
1866 (465 ,, )
                 **
                              ••
(1867, 1868, 1869, 1870, 1871, 1872, 1873,
  1874, 1875 out of print.]
                      2 0
1876 (143
                                    2 3
   [2nd edition.]
[1877 (2nd edition) out of print.]
[1878, 1879, 1880 out of print.]
1881 (238 ")
                 " 2 0
                                    2 5
                              "
[1882, 1883 (for temporary use) out of print.]
1884 (251 ,, )
                                    3
                               "
   [For temporary use.]
1885 (Jan. 1 to July 31) 0 3
                                     0
                                      6 <u>}</u>
```

X 1



- 1. An Alphabetical Index of the Names of Applicants for Patents is published in monthly numbers, the index of each month including and superseding the preceding index. The December part forming the complete index for the year.
- 2. An Index of the Subject-Matter of Patents applied for (compiled from the "titles" of the specifications only) is published monthly in like manner.

The above indexes are sold either singly or by annual sabscriptions at the under-mentioned rates.

	Price of Si	ngle Copies.	Annual Subscriptions (payable in sdvance).		
Months.	Alpha- betical Index.	Subject- matter Index.	Alpha- betical Index.	Subject- matter index.	
Index for each month from January to November (in-	1	1	Per Annum.	Per Annum.	
December Index (for the	3d.	3d.	Ss.*		
year)	20.	28.	{		

^{*} If sent by post 2s. extra per annum will be charged.

III.

ABRIDGMENTS (in Classes and Chronologically arranged) & SPECIFICATIONS of PATENTED INVENTIONS.

These books are of 12mo. sixe, and each is limited to inventions of one class only. They are so arranged as to form at once a Chrono logical, Alphabetical, and Subject-matter Index to the class to which they relate. Inventors are strongly recommended, before applying for Letters Patent, to consult the classes of Abridgments of Specifications which relate to the subjects of their inventions, and by the aid of these works to select the Specifications they may consider in necessary to examine in order to ascertain if their inventions are new. The preface of each volume explains (in most cases) the scope the series of Abridgments which it contains.

A key to the contents of these volumes will be found upon pages 20 to 3:

The classes already published are,-

- L DRAIMS AND SEWERS; INCLUDING THE MANUPACTURE OF DRAIN TILES AND PIPES.—PART I. A.D. 1619-1866, price 1s. by post 1s. 2d. — PART II., A.D. 1867-1876, entitled Drains, Sewers, Sewage, and Manues, includes inventions relating to manure, price 2s., by post 2s. 3d.
- L SEWING AND EMBROIDERING, A.D. 1755-1866 (2nd edition), price 1s. 6d., by post 1s. 9d.
- I. MABURE.—Part I., A.D. 1721-1855, price 4d.. by post 5d.—Part Is., A.D. 1856-1866, price 1s. 2d., by post 1s. 3\(\frac{1}{2}\)d.—Part II., A.D. 1867-1876, entitled DRAINS, SEWERS, SEWAGE, AND MANURE, includes inventions relating to drains, sewers, and drain tiles and pipes, price 2s., by post 2s. 3d.
- PRESERVATION OF FOOD.—Part I., A.D. 16#1-1855, price 4d., by post 5d.—Part II., A.D. 1856-1866, price 6d., by post 7d.
- i. MARINE PROPULSION (excluding sails).—Parts I., II., & III., A.D. 1618-1857, price 1s. 10d., by next 2s. 1d.—Part IV., A.D. 1857-1866, price 1s. 10d., by post 2s. 2d. Continued from A.D. 1866, in combination with Stehening and Manguvering Vessels (Series No. 75), under the fills of—Marine Propulsion (including steering and manceuvring vessels; but excluding sails). Part II., A.D., 1867-1876, price 1s. 6d., by post 1s. 8\dark d.

- MANUFACTURE OF IRON AND STEEL.—Part I., A.D. 1620-1866 (2nd edition), price 3s. 6d., by post 4s. 0\(\frac{1}{2}d\).—Part II., A.D. 1867-1876, price 4s. 6d., by post 5s. 21d.
- '. AIDS TO LOCOMOTION, A.D. 1691-1856, price 6d., by post 7d.
- 1. STRAM CULTURE A.D. 1618-1856, price 8d., by post 9td., included in AGRICULTURE Nos. 81 and 83.
- WATCHES, CLOCKS AND OTHER TIMEREPPERS.—Part I., A.D. 1661-1856, price ad., by post 94d.—Part Ia.. A.D. 1857-1866, price 8d., by post 94d.—Part II., A.D. 1867-1876, price 8d., by post 9d.
- Part I., A.D. 1588-1858, price 1s. 4d., by post 1s. 7d. Part Is. A.D. 1858-1858, price 2s. 2d., by post 2s. 6d. Continued from A.D. 1866 in two Divisions, as follow:

FIRE-ARMS, AMMUNITION, &c. :

Division I., Fire-arms and similar Weapous. — Part II., A.D. 1807-1876, price 4s. 6d., by post 5s. 4dd.
Division II., Carrendors, Projectiles, and Explosives. — Part II., A.D. 1867-1876, price 2s. 6d., by post 2s. 101d.

- . MANUFACTURE OF PAPER, PASTEBOARD, AND PAPIER-MACHE-Part I., A.D. 1865-1857, price 10d., by post 1s.-Part II., A.D. 1868-1866 (2nd adition), price 1s. 4d., by post 1s. 64d.
- . CUTTING, POLDING, AND ORNAMENTING PAPER; (including the general treatment of paper after its manufacture).—Part I. A.D. 1636–1866.—
 (2nd edition), price 2s., by post 2s. 3d.—Part II. A.D. 1867–1876, price 1s. 6d., by post 1s. 8dd.
- . LETTERPRESS AND SIMILAR PRINTING (excluding electrotelegraphic and photographic printing).—Part I., A.D. 1817-1857, price 2s. 8d., by post 3s. 3d.—Part la. A.D. 1858-1866, (2nd edition), price 2s. 6d., by post 2s. 9d.—Part II., A.D. 1867-1876, price 2s. 3d., by post 2s. 7dd.
- I. BLEACHING, DYEING, AND PRINTING CALICO AND OTHER PARRICS AND YARNS.—Part I., A.D. 1617–1887, price 3s. 4d.. by post 4s. 1d.—Part II., A.D. 1888–1886 (2nd edition), price 3s. 6d., by post 3s. 10d.—Part III. A.D. 1867–1876, price 1s. 6d., by post 1s. 9d. AND PRINTING CALICO AND OTHER FABRICS AND
- ELECTRICITY AND MAGNETISM, THEIR GENERATION AND APPLICATIONS,—Part I., A.D. 1766-1857, price 3s. 2d., by post 3s. 11d.—Part Ia., A.D. 1858-1866 (2nd edicion) price 2s. 8d. by post 3s. 2d. For continuations from A.D. 1867-1876 see series Nos. 92, 93, 94, 95, 96 and 97.
- . PREPARATION OF INDIA-RUBBER AND GUTTA-PERCHA-Part I., A.D. 1791-1866 (2nd edition), price 1s. 2d., by post 1s. 4dd.—Part II., A.D. 1867-1876, price 1s., by post 1s. 1dd.



- PRODUCTION AND APPENDATIONS OF GAS (excepting gas engines).—Part I.
 A.D. 1681-1858, price 2s. 4d., by post 2s. 11d.—Part 11., A.D. 1889-1886 (2nd edition), price 2s. 4d., by post 2s. 8\u00e9d.
- 19. METALS AND ALLOYS (excepting Iron and Steel), Part I., A.D. 1823-1839price is. 10d., by post is. 34d.—Part Id., A.D. 1860-1866, price is. 6d., by post is. 84d.
- PHOTOGRAPHY.—Part I., A.D. 1839-1859, price 8d., by peat 10d.—Part II., A.D. 1869-1868 (2nd edition), price 10d., by peat 11\(\frac{1}{2}\).—Part III., A.D. 1867-1876, price 9d., by post 10\(\frac{1}{2}\)d.—Part III.a., A.D. 1877-1883, price 14, by post 12. 1\(\frac{1}{2}\)d.
- Weaving.—Part I., A.D. 1620-1859, price 4s., by post 4s. 114d.—Part Is., A.D. 1860-1866, price 2s. 8d., by post 3s. 1d.—Part II., A.D., 1867-1876, price 3s. 6d., by post 3s. 114d.
- SHIP BUILDING, REPAIRING, SHEATHING, LAUNCHING, &c.—Part I., A.D. 1618-1800, price 2s. 4d., by post 2s. 11d.—Part II., A.D. 1861-1806, price 2s. 6d., by post 2s. 11d.
- 22. BRICKS AND TILES.—Part I., A.D. 1619-1866, price 1s., by post 1s. 34d.—Part II. A.D. 1861-1866, price 8d., by post 94d.
- PLATING OR COATING METALS WITH METALS.—Part I., A.D. 1637-1860price 10d., by post to. 0\(\text{id}\).—Part II., A.D. 1861-1866 (2nd salition), price 6d. by post 7d.
- 24. POTTRRY.—Part I., A.D. 1826-1861, price 10d., by post 1s.—Part II., A.D. 1862-1866, price 6d., by post 7d.
- MEDICINE, SURGREY, AND DESTISTEY, A.D. 1620-1866 (2nd edition), price 1s. 18d., by post 2v. 14d.
- Music and Musical Instruments, Part I., A.D. 1694-1866 (2nd edition), price 1s. 10d., by post 2s. 14d.—Part II., A.D. 1867-1876, price 1s. 6d., by post 1s. 8d.
- OILS, FATS, LUBRICANTS, CANDLES, AND SOAP, A.D. 1617-1866 (2nd edition). price 2s. 10d., by post 8s. 4d.
- 28. SPINNING: INCLUDING THE PREPARATION OF PIEROUS MATERIALS—AND THE DOUBLING OF YARNS AND THERDS.—Part I., A.D. 1624-1669 (out of print).—Part II., A.D. 1864-1865, price 2s., by post 2s. 45
- LACE-MAKING, KNITTING, NETTING, BRAIDING, AND PLAITING (including also the manufacture of fringe and chemille), A.D. 1675-1866 (2nd edition), price 7s., by post 7s. 7d.
- 30. PREPARATION AND COMBUSTION OF FUEL, A.D. 1620-1865 (out of print).
- Raising, Lowering. and Weighting, A.D. 1617-1866 (2nd edition), prices. 8d. 8d., by post 4s. 8\(\frac{1}{2}d\).
- 32. HYDRAULICE, A.D. 1617-1866 (2nd edition), price 4s. 8d., by post 5s. 5d.
- RAILWAYS.—Part I., A.D. 1808-1868 (2nd edition). price 2s. 6d., by post 2s. 11d.—Part II., A.D. 1867-1876, price 7s. 6d., by post 8s. 2d.
- SADDLERY, HARNESS, STABLE FITTINGS, &c.—Part I., A.D. 1625-1868, pricels., by post 1s. 2d.—Part II., A.D. 1867-1876, price 1s. 2d., by post 1s. 4d.
- 35. ROADS AND WAYS, A.D. 1619-1866, price 1s., by post 1s. 2d.
- 36. Bridges, Viaducts, and Aqueducts, A.D. 1750-1866, price 10d., by post 1s-
- WRITING INSTRUMENTS AND MATRIALS.—PART I., A.D. 1635-1866, price 1s. 4d., by post 1s. 7d.—Part II., A.D. 1867-1876, price 1s., by post 1s. 14d.
- 88. BAILWAY SIGNALS AND COMMUNICATING APPARATUS, A.D. 1840-1866. (out of print).
- 39. FURNITURE AND UPHOLSTERY, A.D. 1620-1866, price 2s., by post 2s. 4d.
- 40. ACIDS, ALKALIES, OXIDES, AND SALTS, A.D. 1622-1866, price 3s. 8d., by post—4s. 3d.
- 41. ABRONAUTICS, A.D. 1815-1866, price 4d., by post 5d.
- 48. PREPARATION AND USE OF TOBACCO, A.D. 1721-1866, price 10d., by post 1s.
- 48. BOOKS, PORTFOLIOS, CARD-CARRS, &c., L.D. 1768-1866, price 16d., by peet, 1s.

- 44. LAMPS, CANDLESTICES, CHANDELIERS, AND OTHER ILLUMINATING APPA-RATUS (excluding inventions for lighting by gas or electricity), A.D. 1637-1866, price 2s. 6d., by post 3s. 104d.
- 4. NEEDLES AND PINS, A.D. 1755-1866, price 6d., by post 7d.
- 44. CARRIAGES AND OTHER VEHICLES FOR RAILWAYS, A.D. 1807-1868, price 5e. 6d., by post 6s. 4d.
- Umbrellas, Parasols, and Walking Sticks.—Part I., A.D. 1780-1866, price 10d., by post 114d.—Part II., A.D. 1867-1876, price 1s., by post 1s. 14d.
- 48. SUGAR, A.D. 1663-1866, price 1s. 10d., by post 2s. 14d.
- STHAM ENGINE.—Part I. (in 2 vols.), A.D. 1618-1859, price 9s. 4d.. by post 18s. 10kd.—Part II. (in 2 vols.), A.D. 1860-1866, price 4s. 10d. by post 5s. 7d.
- 50. PAINTS, COLOURS, AND VARNISHES, A.D. 1618-1866, price 1s. 10d., by post 2s. 1 d.
- 51. Toys, Games, and Exercises, A.D. 1672-1866, price 1s., by post 1s. 2d.
- 52. VENTILATION, A.D. 1632-1866, price 1s. 10d., by post 2s. 01d. 63. FARRIERY; INCLUDING THE MEDICAL AND SUBGICAL TREATMENT OF ANIMALS.—Part I. A.D. 1719-1868, price 1s., by post 1s. 14d.—Part II. A.D. 1867-1876, price 1s., by post 1s. 14d.
- 54. ARTISTS' INSTRUMENTS AND MATERIALS, A.D. 1618-1866, price 10d., by post 1s.
- 55. SKINS, HIDES, AND LEATHER, A.D. 1627-1866, price 1s. 6d., by post 1s. 81d.
- S6. PREPARING AND CUTTING CORK; BOTTLING LIQUIDS; SECURING AND OPENING BOTTLES. &c.—Part I., A.D. 1777-1866, price 1s. 6d., by post 1s. 9d.—Part II., A.D. 1867-1876, price 2s. 6d., by post 2s. 8\float d. 57. BRUSHING AND SWREPING, A.D. 1699-1866, price 1s., by post 1s. 2d.
- 56. NAILS, RIVETS, BOLTS, SCREWS, NUTS, AND WASHERS, A.D. 1618-1866. price 1s. 8d., by post 1s. 111d. 59. HINGES, HINGE JOINTS, AND DOOR SPRINGS, A.D. 1775-1866, price 8d., by
- post 91d. 60. LOCKS, LATCHES, BOLTS, AND SIMILAR FASTKNINGS, A.D. 1774-1866, price
- 1e. 6d., by post 1s. 9d. 61. COOKING, BREAD-MAKING, AND THE PREPARATION OF CONFECTIONERY.— Part I., A.D. 1634-1866, price 1s. 10d., by post 2s. 14d.—Part II., A.D. 1857-1876, price 1s. 6d., by post 1s. 84d.
- 62. AIR, GAS, AND OTHER MOTIVE POWER ENGINES.—Part I., A.D. 1635-1866, price 1s. 11dd., by post 2s. 11d.—Part II., A.D. 1867-1876, price 3s. 6d., by
- post 4s. 01a. 63. WATER CLOSETS, EARTH CLOSETS, URINALS, &c., A.D. 1775-1866, price 10d.,
- by post 1s. 64. SAPES, STRONG ROOMS, TILLS, AND SIMILAR DEPOSITORIES, A.D. 1801-
- 1866, price 6d., by post 7d. 65. WEARING APPAREL. DIVISION I. - HEAD COVERINGS, A.D. 1637-1866,
- price 1s. 4d., by post 1s. 61d. 66. WEARING APPAREL. DIVISION II .- BODY COVERINGS, A.D. 1671-1866, price 2s. 4d., by post 2s. 8td.
- 67. WEARING APPAREL. DIVISION III .- FOOT COVERINGS, A.D. 1698-1866, price 1s. 10d., by post 2s. 11d.
- 68. Wearing Apparel. Division IV.—Dress Fastewings and Jewei-Lery, A.D. 1631-1866, price 2s. 10d., by post 3s. 14d.
- 69. ARCHORS, A.D. 1796-1866, price 6d., by post 7d.
- 70. METALLIC PIPES AND TUBES .- Part I., A.D. 1741-1866, price 1s. 8d., by post 1s. 11d.—Part II., A.D. 1867-1876, price 1s. 3d., by post 1s. 51d.
- 71. MINING, QUARRYING, TUNNELLING, AND WELL-SINKING, A.D. 1618-1866, price 1s. 4d., by post 1s. 6td.
- 72. MILKING, CHURNING, AND CHERNS-MAKING.—Part I., A.D. 1777-1866, price 6d., by post 7d.—Part II., A.D. 1867-1876, price 8d., by post 9d.
- 73. Masts, Sails, Rigging, &c.; including Apparatus for Raising and Lowering Ships' Boats, A.D. 1625-1866, price 1s., by post 1s. 2d.

- 78. GRINDING GRAIN AND DRESSING FLO 2s. 4d., by post 2s. 64d.
- 79. Puripying and Filtering Water.— by post 1s. 3\d.—Part II., A.D. 1867-18
- 80. ARTIFICIAL LEATHER, FLOORCLOTH, (
 WATERPROOF FABRICS.—Part I., A.I.
 20. 04d.—Part II., A.D. 1867-1876, price
- 81. AGRICULTURE. DIVISION I.—FIELD IN tilling and irrigating land).—Part I. A. 6s. 2\$d.—Part II. A.D. 1867-1876, price 1
- 88. AGRICULTURE. DIVISION II.-BARN AND cluding the cleansing, drying, and stori 1866, price 3s., by post 3s. 3\d.—Part II post, 1s. 5d.
- 83. AGRICULTURE. DIVISION III.—AGRICUL A.D. 1618-1866, price 1s. 6d., by post, 1s. ?
- 84. TRUNKS, PORTMANTEAUS, BOXES, AND J post 1s. 1\(\frac{1}{3}d\).
- 85. ICE-MAKING MACHINES, ICE SAFES, AN nee of freezing agents for preserving al A.D. 1819-1868, price 6d., by post 7d.—Par by post 1s. 7\frac{1}{2}d.
- 86. UNPERMENTED BEVERAGES, AERATED LI
 —Part I., A.D. 1774-1866, price 1s., by po
 1876, price 6d., by post 7d.
- 87. TEA, COPFEE, CHICORY, CHOCOLATE, Cocc price 8d., by post 9d.—Part II., A.D. 1867-1
- 88. FIRE ENGINES, EXTINGUISHERS, ESCAPE, proof dresses and fabrics), A.D. 1625-1866,
- 89. WASHING AND WRINGING MACHINE

- 95. ELECTRICITY AND MAGNETISM. DIVISION IV.—ELECTRIC LIGHTING, IGNITING, AND HEATING.—Parts I. and II. (in one vol.) A.D. 1839-1876, price 9d., by post 101d.
- 96. Electricity and Magnetism. Division V.—Blectro-deposition and Electrolysis.—Parts I, and II. (in one vol.) A.D. 1805-1876, price 1s. 6d., by post 1s. 8\dd.
- 97. ELECTRICITY AND MAGNETISM. DIVISION VI.—ELECTRIC MOTIVE POWER ENGINES AND SIMILAR APPARATUS.—Parts I. and II. (in one vol.) A.D. 1837-1876, price 7d., by post 8d.
- 96. CARRIAGES AND OTHER VEHICLES FOR COMMON ROADS, A.D. 1625-1866. price 5s., by post 5s. 8id.
- 99. Brewing, Wink-Making, and Distilling Alcoholic Liquids, A.D. 1634-1866, price 3s. 6d., by post 3s. 10d.
- 100. STARCH, GUM, SIZE, GLUE, AND OTHER STIFFENING AND ADMESIVE MATERIALS.—Parts I. and II. (in one vol.) A.D. 1717-1876, price 2s., by post 2s. 2d.

IV.

- 1. The OFFICIAL JOURNAL of the PATENT OFFICE, Price 2d. Annual Subscription, including postage, 25s.
- 2. The ILLUSTRATED JOURNAL of PATENTED Inventions. Price 1s. Annual subscription, including postage, 52s.
- 8. REPORTS of PATENT CASES. Price 6d. Annual subscription, including postage, 10s.
- 4. The TRADE MARKS JOURNAL. Price 1s. Annual subscription, including postage, 52s.
- Subscriptions to the above publications will not be received for a shorter period than three months, such period to commence on either of the following dates:-

1st January, 1st July, or 1st October. 1st April,

Annual subscriptions to date from 1st January in each year. All subscriptions must be paid in advance, and should be remitted by Postal Order or by Post Office Order made payable at the Post Office, Chancery Lane.

- The OFFICIAL JOURNAL is published on the evenings of Tuesday and Friday in each week. It contains:—
 - 1. Applications for Patents.
- 2. Acceptances of Provisional Specifications.
- 3. Acceptances of Complete Specifications.
- . Patents sealed.
- 5. Patents on which the renewal fee
- has been paid.

 6. Patents which have become void through non-payment of renewal fee.
- 7. Applications to amend Specifications.
- 8. Amendments of Specifications.
- 9. Compulsory licenses.
- 10. Extensions of Patents.
- 11. Revocations of Patents.
- 12. Designs registered.
- 13. Trade Marks advertised.
- 14. Trade Marks registered.
- 15. Official notices, advertisements, and rules.
- 16. Weekly price lists of printed Specifications, &c.

Complete sets of the Patent Office including more than 4,040 volumes and and paper upwards of £4,270) have be authorities of the most important towns condition that the works shall be rendered public, for reference or for copying, free of all list gives the names of the towns, and show of each set of the works thus presented:—

Aberdeen (Mechanics' Institution).

Aberdeen (Mechanics' Institution).

Belfast (Queen's College).

Birmingham (Central Free Library—
Reference Department. Ratcliff Pl.).

Blackburn (Free Library and Museum, Library Street).

Boldon-le-Moore (Public Library, Exchange Buildings).

Bradford, Yorkshire (Public Free Library).

Brighton (Free Library, Toeon Hall).

Brighton (Free Library, King Street).

Burnley (Uffice of the Burnley Improvement Commissioners).

Burnley (Uffice of the Burnley Ingrovement Commissioners).

Carlisle (Pub. Free Libr, Police Office).

Gork (Royal Cork Insts. Nelson Place).

Growe (Mechanics' Institution).

Dublim (National Library of Ireland, Kildare St.).

Jundalk (Free Library).

Glassow (Stirting's Library, Miller Street).

Glassow (Stirting's Library, Miller Street).

Leicester (Street). Liverpool () liam Bros London (Br. Macclesfield Manchester King Stree Newcastle-up brary. New Newport, 1 Room, Tou Northampton Nottingham (Oldham (Scho Lyceum). Plymouth (P7 Preston, Lanc Library, Cr

Rochdale (F. Town Hall).

Salford (Royal

of Office has also presented complete sets of publications to ing Public Offices, Seats of Learning, Societies, British and Foreign States :-

Public Offices, &c.

Sheerness ditto. Portsmouth ditto. Devouport ditto. Pembroke ditto.

-Chatham Dockyard.

Arthrey Institution of the Control o

India Office. Department of Science and Art, South Kensington. Department of Science and Art, Bethual Green Museum. Royal School of Mines, &c., Jermyn Street, Piccadilly. Museum of Science and Art, Edinburgh.

Seats of Learning and Societies.

Ambridge University. rinity College, Dublin.

Queen's College, Galway. Incorporated Law Society, Chancery Lane, London.

British Colonies.

ritish Guiana. mada—Library of Par-liament, Ottawa. Bureau of Agriculture, Toronto.

Board of Arts and Manufactures, Montreal. pe of Good Hope. ylon.

India-Bengal. Bombay. Madras. Malta Mauritius New South Wales. New Zealand. Queenaland. Sth. Australia--Colonial Institute, Adelaide.

Tasmania. Prinidad. Victoria-Parliamentary Library, Melbourne. Patent Office, Melbourne. Public Library Melbourne.

Poreign States. Austria-Polytechnic University, Prague.
Polytechnic University, Vienna. Belgium—Ministère de l'Intérieur, Brussels. Musée de l'Industrie, Brussels. France—Bibliothèque Nationale, Paris. Conservatoire des Arts et Métiers, Paris. Germany—Kaiserliches Patentamt, Berlin. Alsace—Société Industrielle Mulhouse. Bavaria—Königliche Bibliothek, Munich. Gotha—Ducal Friedenstein Collection. Prussia—Königliche Polytechnische Schule, Aix-la-Chapelle.
Königliche Bibliothek, Berlin.
Königliche Polytechnische Schule, Hanover.
Saxony—Königliche Polytechnische Schule, Dresden. Salony—Rongicus rolysedniscie Schule, Dresden.
Würtemberg—Bibliothek des Musterlagers, Stuttgart.
Russia—Bibliotheque Impériale, St. Petersburg.
Polytechnic School, Riga. Spain-Madrid. Spain—Madrid. Sweden—Teknologiska Institutet, Stockholm. United States—Patent Office, Washington, D.C. Agtor Library, New York, N.Y. Astor Library, New York, N.Y. State Library, Albany, N.Y. Pranklin Institute, Philadelphia, Pa.

Franklin Institute, Philadelphia, Pa.
Free Public Library, Boston, Mass.
Public Library, Cincinnati, Ohio.
Free Public Library, Chicago, Ill.
Peabody Institute, Baltimore, Md.
Cornell University, Ithaca, N.Y.
Mercantile Library, St. Louia, Mo.
Mechanics' Institute, San Francisco, Cal.
Historical Society, Madison, Wis.

GRANTS of complete series of Abridgments of Specifications have been made to the undermentioned Mechanics' Literary and Scientific Institutions:—

Bristol (Athenaum).
——— (Institution).

Aberystwith (Literary and Working Men's Reading Room) Alnwick (Scientific and Mechanical Institution). Alton (Mechanics' Institution). Altrincham (Altrincham and Bowdon Literary Institution). Ashburton (Ashburton Library, Bast Street). Ashby-de-la-Zouch (Mutual Improvement Society). Ashton-under-Lyne, (Free Library, Town Hall \. - (Mechanics' Institution). Aston, near Birmingham (Acton Manor Public Library).
Aylesbury (Kingsbury Mechanics' Institute). Bacup (Mechanica' Institution). Banbury (Mechanics' Institution). Barnstaple (Literary and Scientific Institution). Barrow-in-Furness (Barrow Working Men's Club and Institute) (Free Public Library and Museum). Basingstoke (Mechanics' . Institute and Club). Bath (Athenoum).
— (People's Club and Institute) (Royal Literary and Scientific Institution). Batley (Mechanics' Institution). Battle (Young Men's Christian Association).
Belfast (Northern Law Club).

(People's Literary Institute). Berkhampstead, Great (Mechanics' Institute). - (Working Men's College). Birkenhead (Literary and Scientific Society). Birmingham (Free Library and News Room, Gosta Green). - (Graham Street Institution). Rodmin (Literary Institution). Bolton (Mechanics' Institute). Bournemouth (Library and Reading Room). Bradford, Yorkshire (Church Institute) · (Library and Literary Society). (Mechanics' Institute). Braintree (Braintree and Bocking Literary and Mechanics Institution). Brampton, near Chesterfield (Local Museum and Literary Institute).

(Institution). (Law Library Society). Museum and Library, Queen's Road) Browsgrove (Literary and Mecha-nics' Institute). Burnley (Literary Institution).

——— (Mechanics' Institution). Burslem (Wedgwood Institute). Bury (Athenæum). Bury St. Edmund's (Athenæum).

(Mechanics' Inst.). Calne (Literary Institution). Canterbury (Westgate Towers) Carharrack (Literary Institute). Carmarthen (Literary and Scientific Institution). Cheddar (Literary Institution). Cheltenham (Permanent Library) Chertsey (Liferary and Scientific Institution). Chenter (City Library and Reading Room). Chesterfield (Mechanics' Institution). Chichester (Literary Society and Mechanics' Institute). Christchurch (Working Men's Institute). Cockermouth (Mechanics' Institution). Coggeshall (Literary and Mechanics' Institution). Colchester (Literary Institution).

(Young Mon's Christian Association) Compstall (Athenoum). Coventry (Free Library). (Institute). - (School of Art). Darlington (Public Library).
Deal (Deal and Walmer Institute).
Derby (Mechanics' Institution). Devouport (Mechanics' Institute).
Dewabury (Mechanics' Institution). Diss (Reading Room and Library). nics' Institute). - (Young Men's Christian Association) Dorchester (County Museum and Library). Dudley (Mechanics' Institute). Dukinfield (Village Library and Reading Boom).

Dumbarton (Philosophical and Lite-

rary Society).
Dumfrios (Mechanice' Institution).
Dumdee (Young Mon's Christian Association and Literary Inst.)
Dunfermline (Carnegie Free Library).

Brigg,

ciety).

Breage, Cornwall (Institution).

Lincolnshire (Reading So-

Hastings (Literary and Scientific In-Durham (Mechanics' Institute). stitute). Barley, Bolton le-Moors (Library and Institute). (Mechanics' Institution) Hebden Bridge, near Todmorden (Me-Baling (Young Men's Institute). Bast Retford (Literary and Mutual Improvement Society). Hereford (Natural History, Philoso-phical, Antiquarian, and Literary Bbbw Vale (Literary and Scientific Institute).
Bocles, near Manchester (Provident
Industrial Co-operative Society). Society). (ertford (Literary and Scientific Hertiord (Literary and Scient Institution). Heywood (Public Free Library). Hitchin (Mechanics' Institute). Holbeck (Mechanics' Institution). Hertford Edinburgh (Advocates Library).

(Association of Science and Art).
(Philosophical Institution). Holt, Norfolk (Literary Society (Royal Scottish Society of Holywell Green (Mechanics' Instit.) Horncastle (Mechanics' Institution). Arts). (Watt Institution and School of Art).

Begham (Literary Institute).

Regrement (Workmen's Institute).

Regrement (Workmen's Institute).

Regrement (Devon and Exeter Albert.

Memorial Museum, School of Science and Art, and Free Library).

(Devon and Exeter Institution). Huddersfield (Mechanics' Institution). Hull (Church Institute).
— (Literary, Scientific, and Mechanics' Institute). (Lyceum Library). (Royal Institution, Albion Street). — (Young People's Institute). Huntingdon (Literary and Scientific - (Devon and Exeter Institution). Institution). Farnham (Young Men's Association). Inverness (The Free Library).
Ipswich (Working Men's College). Paversham (Institute).

Fowey (Working Men's Reading Rooms). Kendal (Christian & Literary Instit.)

(Highgate Mechanics' Inst.)

(Working Men's Institute). Powey Frome (Literary and Scientific Institution). Kilmarnock (Library). Kingston - on - Thames (Workmon's - (Mechanics' Institution). Club and Institute, Fairfield Road) Gainsborough (Literary, Scientific and Mechanics' Institute). Lancaster (Mechanics' Institute and School of Science). Garforth, near Leeds (Working Men's school of science).
Lee, Kent (Working Hen's Instit.)
Leeds (Church Institute).
— (Holbeck Branch Library).
— (Hunslet Branch Library).
— (Leeds Library).
— (Mechanics' Institution and Club). Glasgow (Athenœum).
(Central Working Men's Club and Institute).

(City Industrial Museum, ——— (City Industrial Museum, Kelvingrove Park). ——— (Institution of Engineers in Literary Society).
—— (Philosophical and Literary Scotland). Society).

(Working Men's Institute).

(Young Men's Christian Asso-(Mechanics' Institution, Bath Street).

(Philosophical Society).

Godmanchester (Working Men's Reading Room).

Gosport (Gosport and Alverstoke Literary and Scientific Institution).

Grantham (Public Literary Institut). Leek, Staffordshire (Literary and Mechanics' Institution). Leicester (Law Society).
Leighton Buzzard (Working Men's
Mutual Improvement Society). Gravesend (Gravesend and Milton Library and Reading Rooms). Greenock (Library, Watt Monument). Guernsey (Guille Alles Library, Leith (Mechanics' Subscription Library).
Lewes (Fitsroy Memorial Library).
— (Mechanics' Institute).
— (School of Science and Art).
Lincoln (Mechanics' Institute). Guernsey (Gui Guildford (Working Men's Institution). Hadleigh (The Reading Room). Halesworth (Mechanics' Institute). Halifax (Literary and Philosophical Liverpool (Institute).

(Medical Institution) Llanelly (Chamber of Commerce and Reading Room). Luckwood (Mechanics' Institution). Society).
(Mechanice' Institute). Halstend (Literary and Mechanics' London (Bank of England Library and Literary Association). (Beaumont Institution, Mile Handsworth (Free Public Library). Haslingdon (Institute).

Bow Road). (Christchurch Working Men's Club, New Street Lark Hall Lane, Clapham). - (Free Public Library, Great Smith Street, Westminster).
——— (Hackney Working Men's Club). · (King's College). · (Literary and Scientific Institution, Walworth).
----(London Association of Foremen Engineers and Draughtsmen). (London Institution, Finsbury Circus).

(London Library, St. James'). University College) Street, Westminster).

(Royal Institute of British Architects, Conduit Street, Hanover Square). -(St. James and Scho Working Mon's Club, Rupert Street, Soho).

(Working Mon's Club, Brixton Hill).

(Working Men's Club and Institute Union, Strand).

(Working Men's College, Great Ormand Street). Longwood (Mechanics' Institution).
Lowestoft (Library and Reading Room). Lye (Institution). Madeley, Shropshire (Anstice Memo-rial, Workmen's Club and Institute). Maidstone (St. Paul's Literary Inst.). Manchester (Analytical Sanitary In-stitution, Princes Street). (Law Library). (Mechanics' Institution). (Natural History Museum, Peter Street). (Owen's College). (Portico Library Mosley Street). (Royal Exchange Library). (Scientific and Mechanical Society) Working Men's Clubs Association.) Mansfield (Co-operative Industrial Society). (Mechanics', Artisans', and Apprentices' Library).
—— (Mechanics' Institute) Marlborough (Reading and Mutual Improvement Society). — (Working Men's Hall). Melton Mowbray (Literary Institute). Mere, near Bath (Literary Associa-Middlesborough (Iron and Steel Institute).

London (Birkbeck Institution, South-

Middlewich (Literary and Belentife Institution) Mildenhall (Suffolk Literary Inst.) Newark (Mechanics Institute). Newbury (Literary and Scientific Institution). Newcastle-upon-Tyne (Mechanics' Institution). New Mills, near Stockport (Mechanics' Now Mills, none Complete (Young Men's Institute).
Newport, Isle of Wight (Young Men's Society and Reading Room).
Northampton (Mechanics' Institute).
North Shields (Free Library).
Nottingham (Mechanics' Institution).
(Subscription Library. Oldham (Mechanics' Institution, Werneth). Old Kilpatrick, near Glasgow (Public Library).
Ormskirk (Public Library). Oswestry (Institute).

Over, Cheshire (Working Men's Institute). Patricroft (Mechanics' Institution). Pembroke Dock (Mechanics' Institute). Pendleton (Free Library). Penrith (Free Public Library and Perry Barr, near Birmingham (Inst.)
Perry Barr, near Birmingham (Inst.)
Peth (Mechanics' Library, High
Street). Peterborough (Mechanics' Institution). Poole (Literary and Scientific Institution). Port Glasgow (Public Library) Portsea Island (Foung Mon's Christian Association).
Portsmouth (Public Free Library).
Preaton (Institution for the Diffusion of Knowledge). Reading (Literary, Scientific, and Mechanics' Institution, London Street). Redruth (Redruth Institution). Reigate (Mechanics' Institution). Richmond, Surrey (Free Public Library). Rothernam (Rotherham and Mastro Literary and Mechanics' Institute).
Royston (Institute). Royston (Institute).
Rusbolme (Public Hall and Library).
Ryde, Isle of Wight (Philosophical
and Scientific Society).
(Young Men's
Christian Association and Literary Institute). Saffron Walden (Literary and Scientifle institution).
St. Helens (Public Library).
St. Just (Institution).
St. Loonards (Mechanics' Institution)

Balford (Working Men's College).

Middlesborough (Mechanics' Institu-

(Literary and Scientific tion).
Literary Institute). igh (Mechanics and Literary te, Vernon Place).
echanics' Institute) s (Literary and Scientific tion). iry (Literary Institution). 8 (Literary Institute). (Branch Free Library). (Brightside Branch Library). (Literary and Philosophical School of Arts). Mallet (Reading and Mutual vement Society).
1 (Mechanics' Hall).
Vorkshire (Mechanics' Inst.)
Mechanics' Institute). Staffordshire (Library, ck, Statfordshire (Library, 19 Room, and Literary Inst.) pton (Polytechnic Institu-(Workmen's Hall) l (Mechanics' Institute).
ields (Public Free Library). (Literary Institution). (Christian Young Men's Ason) (Mechanics' Institute). (Mechanics' Institution). Mechanics' Institute). Cheshire (Mechanics' lge. tion).
[(Institution) -on-Tees (Young Men's ian Association). - (Free Library). dge (Church of England ation).

— (Iron Works Reading and Library).

— (Mechanics' Institution). - (Working Men's Inst.) 'ket (Literary Institution).
1 (Working Men's Hall).
, Suffolk (Literary and Mes's Institute). (Royal Institution of South

(South Wales Institute of

(Working Man's Institute). k (Mechanics' Institute). - (Public Library).

1. near Bradford (Mechanics'

lornwall County Library).

'ayal Institution of Cornwall'. ve (Literary and Scientific


natitution).

ute).

Tunbridge (Mechanics' Institute). Tunbridge Wells (Mechanics' Institution). - (Society of Literature and Science). Turton, near Bolton (Chapel Town Institute). Tynemouth (Free Public Library). Ulverston (Temperance Hall). Uttoxeter (Mechanics' Literary Insti-Uxbridge (Uxbridge and Hillingdon. Reading and Newsroom Institute). Wakefield (Mechanics' Institute).
Wallingford (Mechanics' Institute). Walsall (Free Library) Walsham-le-Willows, Suffolk (Inst.) Wednesbury (Free Library). Wellingborough (Working Man's Club). Wellington (Young Men's Christian Association) Wells, Somerset (Young Men's Society). Wells Somerset (Young Men's Society).
West Bromwich (Free Library).
Whaleybridge (Mechanics' Institute).
Whitby (Institute).
— (Museum).
— (Subscription Library).
Whitehaven (Mechanics' Institute).
Wilton (Literary Institute).
Winchester (Mechanics' Institution).
(Training College).
Winsford (Town Hall Reading Room).
Wirksworth (Mechanics' Institution). Wirksworth (Mechanics' Institute).
Wisheach (Mechanics' Institute).
Witham (Literary Institution). Witney (Athenaum). Wolverhampton (Law Library). - (Library). Wolverton (Institute). Woodbridge(Literary and Mechanics' Institute).
Worcester (Public Library and Hastings Museum).
(Railway Literary Inst.) Workington (Mechanics' Institute). Yarmouth, Great (Parochial Library and Museum). York (Institute of Popular Science, dc.)
(North Eastern Railway Li-

brary and Reading Room).

tific Institution). Coventry (Watchmakers Association) Dublin (Dublin Library)	
Dundee (Association W. Il Otter St.) -
Ennis (Public ra	aim
Gloucester (Working Men's Institute Southgate Street). Gueruscy (Public Record Office).	Manchest phical
Ipswich (Mechanics' Institute). Street).	David S Newcastle
Kew (Library of the Royal Gardens). Leamington (Free Public Library, Bath Street).	land In neers). Over Darw
Leominster (Literary Institute). London (House of Lords). (House of Commons).	Oxford (B. Stretford, nics' Ins
(Hon. Soc. of Gray's Inn). Inner Temple).	swindon,
Middle Middle	Tamworth Room, Ge Yarmouth,
(Aeronautical Society).	South Qu
British Columbia—Mechanics' Insti-	nd Foreign
New Westminster Public Library.	United Star tion, Sprin
Germany - Imposion Science. Paris.	Champaign
	Philadelph
Berlin. Polytechnic S. J. Strasburg. Polytechnic S. J. Strasburg.	Association
ruhe, Raden. Italy—Communal Library, Palermo. Royal Institution	sociation, P
conrement to the En-	Society, Sai
Netherlands — Library of the Poly-	Association



for legal or other purposes the Patent Office will supply, at the lermentioned rates, full-size copies of Drawings belonging to Specitions printed under the new system by the process of Photography:

No. of Copies.					Whole sheets Imperial.		Half-sheets Imperial.	
rle Copies -					s. 25	đ.	g. 15	d .
exceeding 6 copies		-	28 0	18 0				
"	12	-	-	-	30	0	20	0
,,	25	•	•	-	32	•	22	0

n cases where from the use of color or other causes a satisfactory stograph cannot be obtained from the original Drawing, an extra rge will be made to cover the expense of taking a tracing.

There will also be a small additional charge for coloring the copies olored original Drawings.

a remittance sufficient to cover the cost should be addressed to the nptroller-General.

THE PATENT MUSEUM

19

been transferred to the Department of Science and Art, South sington. A complete set of the Patent Office publications can be sulted by the public daily, at the Patent Museum, free of charge.

Abridgments of Specifications.

The following is a KEY to the classes already published. The numbers refer to the list of Abridgments on pages 5, 6, 7, 8, and 9, where the full titles, prices, &c., are given:—

A.

Accordions. See Music, &c., 26. Acetic acid. See Acids, 40.
Acids, &c., 40.
Acids, &c., 40.
Aerated liquids. See Unformented
beverages, &c., 86. Aerating water. See Purifying, &c., water, 79. Ageing fabrics. See Bleaching, &c.,14. Agricultural engines. See Steam engine, 49. Agriculture -barn and farmyard im-Agriculture—parn and farmyard im-plements (including the cleansing, drying, and storing of grain), 82. Agriculture—field implements and processes, 81. Agriculture-agricultural and traction engines, 83. Agriculture, steam. See Steam culture, 8. Air, &c., engines, 62. Air guns. See Fire-arms, 10. Air pumps of steam engines. See. Steam engine, 49.
Alarum clocks. See Watches, &c., 9.
Alarums, electric. See Electricity, 15, 94. Alarums, fire. See Fire engines, &c., Alarums, gas. See Gas Albums. See Books, 43. See Gas, 17. Albums. See Books. 45.
Alcohol distilling. See Brewing, &c., 99.
Alkalies. See Acids, &c., 40.
Alloys. See Metals, &c., 18.
Alum. See Acids, &c., 40.
Aluminium. See Acids, &c., 40.
Aluminium. See Metals, &c., 49. Aluminium. Acids, &c., 40. Amalgamating metals. See Metals, &c., 18. Ambulances. See Medicine, &c., 25; Common road carriages, 98.
Ammonia. See Acids, &c., 40 Ammonium. See Acids, &c., 40. Ammunition. See Fire-arms, 10. Anchors, 69.
Anchors for steam ploughing. See Agriculture, 81. Agriculture, 81.
Anemometers. See Optical, &c., 76.
Aniline. See Bleaching, &c., 14.
Animal charcoal. See Sugar, 48.
Animals, medical and surgical treatment of. See Farriery, &c., 55.
Annealing. See Iron, &c., 6; Fuel, &c., Anthracite furnaces. See Fuel. &c., 80. Ac., 40.
Aqueducts. See Bridges, &c., 36.
Arches. See Bridges, &c., 36.
Armour plates, rolling. See Iron and
Steel, 6.
Armour plates, shaping. See Shipbuilding, 21.
Arsenic. See Metals, &c., 18; Acids.
&c., 40.
Artificial leather, 80.
Artificial leather, 80.
Artificial leather, 80.
Artists' instruments, &c., 54.
Asphalte. See Roads, &c., 35.
Astronomical instruments. See Optical, &c., 76.
Avellers. See Agriculture, 82.
Axles, axletrees, and axleboxes, for common road carriages, 98.
Axles, axletrees, and axleboxes, for railway carriages, 48.

Antimony. See Metals, &c., 18; Acids,

В.

Bagatelle tables. See Toys, &c., 51.
Bags. See Trunks, &c., 84.
Baks, paper, See Cutting. &c., 12.
Baking-powders. See Cooking, 61.
Balancing, &c. millstones. See Grinding smit 78 ing grain, 78.
Balloons. See Aeronautics, 41. Balloons, toy. See Toys 51.
Balls. See Toys, 51.
Band boxes. See Trunks, & Band boxes. See Trunks, &c., 84. Bands and belts. See Wearing apparel, 66. Barium. See Acids, &c., 40.
Barley hummellers. See Agriculture, 32.
Barley mills. See Grinding grain, 72.
Barometers. See Optical, &c., 76. Barrels, 74. Barrows. See Common road carrisges, 98. Baryta. See Acids, &c., 40. Baskets. See Trunks, &c., 84 Bath chairs. See Common road carringes, 98. Baths for medical use. See Medicine, &c., 25. Bayonets. See Fire-arms, 10.
Beacons. See Harbours, &c., 77.
Beachs. See Wearing apparel, 68.
Beds and bedsteads. See Furniture, Beds and bedsteads for invalids. Se Medicine, &c., 25; Furniture, 39.

Beer engines. See Kydraulics, 32.

g. See Dressing, &c., 91. See Fuel, &c., 30. hurch and musical. See Music, urgical. See Medicine, &c., 25. ges, unfermented, 86. See Common road carж. is. See Toys, &c., 51. r corn, &c. See Agriculture, 82. See Cooking, 61. See Pottery, 24. h. See Acids, &c., 40. See Saddlery, 34. ng. See Skins, &c., 55; Wearing rel. 67. urnaces. See Iron and steel, 6, ig. See Fire-arms, 10; Mining, urnaces. ing, &c., fabrics, 14. ing fibrous substances. r 11; Spinning, 28. See Furniture, 39. , ventilating. SeeVentilation,52. See Raising, &c., 31. See Writing, 37. See Writing, 37.
 See Wearing apparel, 66.
 uilding. See Ship-building, 21.
 raising and lowering. See ing, &c., 31: Masts, &c., 78.
 net. See Lace-making, 29. plates. See Iron and steel, 6. See Metallic pipes, 70. tubes. of steam engines. See Steam ne, 49. 5, &c., flour. See Grinding grain. See Locks, &c., 60. See Nails, &c., 58. t boxes. See Trunks, &c., 84 ts and bonnet boxes. ring apparel, 65. &c., 43. leaning machines. See Brush-57. ooks. See Wearing apparel, 67. icks. See Wearing apparel, 67. See Wearing apparel, 67. e acid. See Acids, 40.

s, caps and capsules for. See aring and cutting cork, &c., 56 ik. See Preparing, &c., cork 56. for pens, leads, &c. See Wri-, 37. See Trunks, &c., 84. ets. See Wearing apparel, 68. See Wearing apparel, 66. See Lace-making, 29. See Carriages for railways, Steam-engine, 49; Mining, 71; tricity, 15; 94; 97. for common road carriages. Common road carriages, 98. See Metals, &c., 18.
making. See Cooking, &c., 61.
ast powders. See Tea, &c., 87.
waters. See Harbours, &c., 77.
pins. See Wearing apparel, 68.
les. See Wearing apparel, 66.
les, wine-making and distilling Bricks and tiles, 22. Bricks, ventilating. See Ventilation, 52. Bridges, &c., 38.
Bridges, &c., 38.
Bridges, &c., 38.
Broadshares. See Agriculture, 81.
Bromine. See Acids, &c., 40.
Brooches. See Wearing apparel, 68. Bruising mills for beans, grain, gorse, See Agriculture, 82. Brushes for artists. See Artists' instruments, 54; Brushing, 57 Brushing, &c., 57.
Buckles. See Wearing apparel, 68.
Buffers. See Carriages, &c., for railways, 46. Bugles. See Music, &c., 26. Bullet-making machines. See Fire arms, 10. Bungs. See Preparing and cutting cork, 56. Buoys. See Harbours, &c., 77. Bustles. See Wearing apparel, 66. Butter and artificial butter. Milking, &c., 72. Buttons. See Wearing apparel, 68.

Cable stoppers. See Raising, &c., 31. Cables, telegraphic. See Electricity. 15; 93. See Common road carriages, 98. Cabs Caddies. See Common road carriages, so. Caddies. See Trutks, &c., 40.
Cages, miners' safety. See Mining, 71.
Cake breakers. See Agriculture, 82.
Calcining furnaces. See Metals, &c., 12. Full &c., 80. Calendering. See Dressing and finishing, &c., 91. Calico, bleaching, dyeing, and printing, 14. Cameras. See Photography, 19; Optical, &c., 76. Canal navigation. See Marine propulsion, 5.
Canals. See Harbours, &c., 77.
Candles. See Oils, &c., 27.
Candlesticks. See Lamps, &c., 44. Candlesticks. See Lamps, &c., 44.
Canes, walking sticks, &c. See Umbrellas, &c., 47.
Cannon. See Fire-arms, 10.
Canvas. See Wearing, 20.
Capes. See Wearing apparel, 86.
Caps and cap fronts. See Wearing apparel, 65.
Caps and capsules for bottles. See Preparing and cutting cork, 56.
Capstans. See Baising, &c., 31. Capstans. See Raising, &c., 40. Carbon. See Acids, &c., 40. Carbonic acid. See Acids, 40. Carbonic acid. See Acids, 40. Cardboard. See Paper, 11. Card cases. See Books, &c., 43. Carding engines. See Spinning, 28. Cards. See Cutting, &c. paper, 13; Letterpress printing, &c., 13. Cards.

rolic liquids, 99.

charts. Not Control of and arranges, 98. Consections. Not Charts, 74. Consection. Not Transes, act, 84. Consection. Con Corc Casks, cleaning. See Browing, &c., 99. tra Com Castors. See Furniture, 39. Cattle food, medicated. See Farriery, PIF Ac., 53. Cattle food, preparing on the farm, not Corne !en Crife manufacturi for sale. See Agriculture, 82 Tes Confee Cattle medicines. See Parriery &c. 53. Cement, brush maker's. See Brushing, for: Coffee Centre boards. See Steering, 75. Cesspools. See Drains, 1; Water-closets, &c., 68. Chaff-cutters. See Agriculture, 82. Cotton ferrit. Coffer inur Chains, chain cailes, &c., 90. Chains, jewellery. See Wearing Apparel, 93. Chains, ac., 90. Chairs. See Purniture, 39. Chairs, invalid. See Medicine, 25; Core o Collars Collars Colouri grand Furniture, 39. Colours Chalybeate waters. See Unfer-mented beveraces, &c., &c. Chamber utensils. See Waterclosets, Colours ment Comission &c., 63. Commo &c., 63. Chandeliers. See Lamps, &c., 44. Charcoal, animal. Nee Nurar, 48. Cheese. See Milking, &c., 2. Chemises. See Wearing apparel, 66. Chemile. See Lace-making 29. Chess. See Toys, 51. closet Compas 76. Compas ar., 70 Compas Chests. See Trunks, &c., 84. &c., 70 Chicory, manufacturing and preparing for sale. See Tes. &c. 87. Chimneys and chimney tops. See Fuel, &c., 80. Conden Steam Conduc &c., 13 Confect

Chimneys sweeping. See Brushing, 57. Chinaware. See Pottery, 24.

s. See Furniture, 39.

ng number of passengers in ion road carriages. See Comoad carriages, 98. See Metallic gs for tubes. &c., 70. of vehicles. See Common road ges, 95. nches, steam. See Raising, 1; Steam engine, 49. See Raising, &c., 31 hydraulic. See Raising. &c., ydraulics, 32. steam. See Raising, &c., 31; rengine, 49. See Trunks, &c., 84. . See Wearing apparel, 66. . See Artists' instruments, and crayon holders. See ng. &c., 37; Artists' instru-, &c., 54. See Toys, &c., 51. es. See Wearing apparel, 66. needles and holders. See es, 45.
. See Toys, &c., 51.
s. See Metals, &c., 18. z bones, guano, &c. See Mag, breaking, &c., ores, &c. ; Metals, &c., 18; Roads, 35. grain, &c. See Grinding z mills for beans, gorse, grain, ee Agriculture, 82. ors. See Agriculture, 81. bars. See Common road car-. 98. mbs. See Saddlery, 34. See Furniture, 39. &c. paper, 12. metallic pipes. See Pipes, 70. roots, straw &c. See Agri-See Acids. &c.. 40.

D.

i for stamps, envelopes, copyper &c. Nee Writing, 37.
See Harbours, &c., 77.
cels. Nee Bleaching, &c., 14.
ns, unconcentrated. See United beverages, &c., 88.
ating grain and seeds. See ng grain, 78.
y. See Medicine, 25.
y. See Writing, 36.
y. See Writing, 37.
1 boxes. See Writing, 37;
1 boxes. See Writing, 37;
1 so, &c., 84.
1es, mechanism for carrying, ilways, 33.
Ing signals. See Railway sig-8.
y. See Starch, &c., 100,

Dibbles. See Agriculture, 81. Dies. See Ornamenting paper, &c., 12. Diggers and digging machines. Agriculture, 81. Distance indicators for common road carriages. See Common road carriages, 98. Distilling alcoholic liquids. See Brewing, &c., 99. Diving apparatus. See Raising, &c., 31.
Docks. See Harbours, &c., 77.
Dolls. See Toys, 51.
Door-springs. See Hinges, &c., 59. Drags. See Common road carriages. 98. Draining mines. See Mining, 71. Drain pipes, laying. See Agriculture, 81. Drain ploughs. See Agriculture, 81. Drain tiles and pipes. See Drains, &c., 1. Drains and sewers, 1. Draughts and draughtboards. See Toys, 51.

Drawers. See Wearing apparel, 66.

Drawing instruments. See Writing, &c., 37; Artists', &c., 54; Optical, mathematical, &c., 76. Dredgers, steam. See Steam engine. 40; Harbours, &c., 77.

Dredging. See Raising, &c., 31; Harbours, &c., 77.

Dress fastenings. See Wearing apparel, 68. Dressing and finishing woven fabrics, &c., 91. Dressing cases. See Trunks, &c., 84. Dressing composition. See Starch. &c., 100. Dressing flour and meal. See Grinding grain, 78. Dressing millstones. See Grinding grain, 78. Drills, seed and manure. See Agrirills, seed culture, 81. rums. See Music, &c., 26. °--- Harbours, Drums. Dry docks. See Harbours, &c., 77.
Drying grain, hops, roots, hay, &c.,
See Agriculture, 82. Dyeing. See Bleaching, &c., 14 Dynamometers. See Optical, &c., 76.

E.

Earrings. See Wearing apparel, 68 Earth closets. See Waterclosets, &c., Earthenware. See Pottery, 24. Rasels. See Artists' instruments, 54. Effervescing drinks. See Unfermented beverages, &c., 86. lastic bands. See India rubber, 16; lastic banus. Lace-making, 29.
Lace-making, 29.
See Weaving, 20; Elastic bands. Elastic fabrics. Lace-making, 29. Electric generators, 92. Electricity, &c., 15; 92; 93; 94; 95; 96; 97. Electric lighting, &c., 95. Electro-deposition, &c., 96. Electro-etching. See Electro-deposition, &c., 96. Electrolysis, 96.

Elevators or stackers. See Agriculture. ": Empankments. See Harbours, &c., 77. Emissing. See Ornamenting paper, 12: Letterpress printing, 13; Dressing, &c. fabrics, 91. Embroidering. See Sewing, 2. Emery cloth, &c. See Cutting, &c., paper, 12. Endless travelling railways. See Aids to a comotion,7; Common road car-T102***, 93. riages, vs. Engraving, embossing, and printing rollers. See Ornamenting paper, 12; Beaching, &c. fabrics, 14. Engravings. See Literpress printing, &c., 13; Artists instruments, 54. Envelope-fasteners. See Writing, &c., Envelopes. See Cutting, folding, &c. Envelopes, See Cutting, folding, &c. paper, 12.

Eputlets, See Westing apparel, 66.

Irasers, See Writing, 37.

Exercises, See Toys, &c., 51.

Exercises, See Toys, &c., 51. Explosive compounds. See Fire-arms, 10: Mining, &c., 71 Extracts of hops, &c. See Brewing, AC. 99. Extracts, unconcentrated. See Unfermented beverages, &c., 86. Eyelets. See Wearing apparel, 68.

Fan blowers. See Fuel, &c., 30. Fans, rotary. See Ventilation, 52. Fares, checking, &c. See Common road carriages, 98. Farriery, &c., 53.
Fats. See Oils, &c., 27.
Feeding bottles. See Medicine, 25.
Feeding troughs. See Agriculture, 82. Felting. See Dressing and finishing, &c., 91. Fermented beverages, &c. Sec Brewing. Ac., 99. Fertilizers. See Manure, 3. Field implements and processes for agriculture, SL Files, binders, clius, and holders for paper. See Writing, &c., 37. Filters, sugar. See Sugar, 48. Filters, water. See Purifying, &c. water, 79. Finings for malt, &c. See Brewing. &c., 99. Finishing fabrics. See Dressing, &c. 91. Fins, steering. See Steering, &c., 75. Fire-arms, 10. Fire-nrms, tov. See Toys, 51. Fire bars. See Fuel, &c., 30. Fire engines, 88. Pire escapes, 88. Fire extinguishers, 88. Fire-grates. See Fuel, &c., 80. Fire-proof depositories. See Safes, &c., Fire-proof dresses and fabrics. See Fire engines, &c., 84. Fireworks. See Toys, 51. 24

Pish joints and plates. See Rail-ways, 33. Pittings for metallic pipes. See Pipes. 70. Finecolets. See Music. &c., 26. Fiesh brushes. See Brushing, 57. Floating docks. See Harbours. &c., 71. Flooreloth, 80. Plues. See Fuel, &c., 30. Fin orine. See Acids, &c., 40. Fintes. See Music, &c., 28. For signals. See Railway signals, 38. Folding fabrics. See Dressing, &c., 91. Folding paper. See Cutting, &c., 12: Letterpress printing, &c., 13. Food for cattle, preparing on the farm. not nanufacturing for sale. Set Agriculture, \$2. Food, preservation of, 4. Footways. See Roads, &c., 35. Fountains. See Hydraulies, 32. Fraud, preventing, See Paper, II: Ornamenting, 12: Printing, 13. Freezing mixtures and processes. See Ice-making, &c., \$5.
Friils and frailings. See Wearing atparel, of. Fringe. See Lace. 29; Weaving, 20. Fruit-cleaning machines. See Brushing. 57. Fruit, machinery for paring, slicing, &c. See Cooking, &c., 61. Fuel, 30, Fulling. See Dressing and finishing. &c., 91. Funeral carriages. See Common read carriages, 98. Funnels. See Preparing and cutting cork, &c., 56. Furnaces, Sec Iron and steel, 6; Metals and alloys, 18; Fuel, &c., So; Steamengine, 49. Furn:ture, &c., 39 Furze crushers. See Agriculture, 82. Fusees and fusee cases. See Tobacco. 42. Fuses for firing. See Fire-arms, 10; Mining, 71. Gaiters. See Wearing apparel, 66. Galvanic action. See Electro-deposition, &c., 96. Galvanic batteries. See Electricity. 15; 92. Games. See Toys. 51. Garters. See Westring apparel, 66. (ian, 17. Gas engines. See Air, &c., engines, 62. Gas lighting, automatic. See Electricity, 94; 95. Gus meters. See Gas, 17 Gasometers. See Gas. 17. Gas stoves. See Gas. 17; Fuel, &c., 30. Gas tubes. See Metallic pipes. 70. Gates, lock. See Harbours, &c., 77. Gates, lock. See Harbours, &c., 77. Games, air. See Ventilation, 52.

Gauges, steam. See Steam engine, 49. Gauges, water. See Hydraulics, 32;

Gelatine. See Starch, &c., 100.

Steam engine, 49.

Þ

Gig mills. See Dressing, &c., 91. Gilding, &c. paper. See Ornamenting, 12. Girths. See Saddlery, 34. Glass paper, &c., 12. unas paper, ac., 12.
Globes. See Optical, &c., 76.
Globes for lamps. See Lamps, 44.
Glove fastenings. See Wearing apparel, 68.
Gloves. See Wearing apparel, 66.
Gloves of thread. See Lace-making, 29. Glue. See Starch, 100. Gold. See Metala. &c., 18; Acids, &c., 40. Goloshes. See Wearing apparel, 67. Gorse and grain crushers. See Agriculture, 82. Grain, preparing for brewing, &c. See Brewing, &c., 99. Grain, thrashing, cleansing, sorting, measuring, weighing, preserving, storing, &c. See Agriculture, 82. Granaries. See Agriculture, 82. Graphometers. See Optical, &c., 76. Grates. See Fuel, &c., 30. Graving docks. See Harbours, &c., 77. Gridirons for repairing ships. See Harbours, &c., 77. Gridirons. See Cooking, &c., 61. Grinding grain. 78. Grooming horses by machinery. See Brushing, 57.
Grubbers. See Agriculture, 81.
Guitars. See Music, &c., 26.
Gum. See Starch, 100. Gunboats. See Ship-building, 21. Gunpowder. See Fire-arms, 10.
Gutta-percha. See India-rubber, 16.
Gutters. See Drains, 1; Roads, 35.
Gymnastics. See Medicine, &c., 25;
Toys, 51.

H.

Habits. See Wearing apparel, 66. Hair-brushing machinery. See Brushing, 57. Hair cloth. See Weaving. 20. Hair pins. See Needles, &c., 45. Hammers, steam. See Steam engine, Hammers, tilt. See Iron, &c., 6. Hammocks. See Furniture, 39. Hand barrows. See Common road carriages, 98. Harbours, &c.,77. Harmoniums. See Music. &c., 26. Harness. See Saddlery, 34. Harps and harpsichords. See Music, &c., 26. Harrows. See Agriculture, 81 Harvesters. See Agriculture, 81. Hassocks. See Furniture, 89. Hat boxes. See Trunks, &c., 84. Hats, hat bands, and hat boxes. See Wearing apparel, 65. Haymakers. See Agriculture, 8 Hay rakes. See Agriculture, 81. See Agriculture, 81. Hay, stacking, packing, and cutting.

See Agriculture, 82. Head coverings. See Wearing apparel 65.

Hearses. See Common road carriages, 98. Heating by electricity. See Electricity, 95. tricity, 95.
Heckling machines. See Spinning, 28.
Heliography. See Photography, 19.
Helmets. See Wearing apparel, 65.
Hides. See Skins, 55.
Hinges and hinge joints, 59.
Hoes. See Agriculture, 81.
Hoists. See Raising, &c., 31.
Hoists, steam. See Raising, &c., 31;
Steam-engine, 49.
Hooks and eyes. See Wearing apparel 68. parel, 68. Hop cultivation. See Agriculture, 81. Hops, drying and pocketing. & Agriculture, 82; Brewing, &c., 99. Horns. See Music, &c., 26. Horse clippers. See Suddlery, 34; Farriery, 53.
Horse gear. See Agriculture, 82. Horse medicines. See Farriery, 53. Horse shoes and horse shoe nails. See Farriery. 53.
Hose pipes. See Fire engines, &c., 88.
Hosiery. See Wearing apparel, 66.
Hospitals. See Medicine, &c., 25. Hot pressing. See Dressing, &c., 91. House carts. See Common road carriages, 98. Hulling, &c., grain. See Grinding grain, 78. Hummellers. See Agriculture, 82. Hydrants. See Hydraulics, 3%. Hydraulics, 32. Hydrochloric acid. See Acids, 40. Hydrocyanic acid. See Acids, 40. Hydrogen. See Acids, &c., 40. Hydrometers. See Brewing, &c., 99. Hydro-propulsion. See Marine propulsion, 5. Hygrometers. See Optical, &c., 76.

I.

Ice creams. & Ice houses, 85. See Ice-making, &c., 85. Ice-making machines, 85.
Ice pails. See Ice-making, &c., 85.
Ice safes, 85. ice safes, 85.
Ice wells. See Ice-making, &c., 85.
Igniting by electricity. See Electricity, 95.
India-rubber, 16.
India-rubber horse-shoes. See Farriery, 53. Indicators for common road carriages. See Common road carriages, 98. Infusions, unconcentrated, See Unfermented beverages, &c., 86.
Ink, printers'. See Printing, &c., 18.
Ink (writing, copying, and marking) and inkstands. See Writing, &c., 37.
Insulation, electric. See Electricity, 15; 93. Invalid bedsteads. See Medicine, &c., 25; Furniture, 39.
Invalid carriages, See Common road carriages 98.

Iodine. See Acids, &c., 40.
Iron and steel, 6.
Iron oxides, &c. See Acids, &c., 40.
Ironine. See Dressing and finishing, &c., 91.
Irrigating and watering land. See
Aeroculture, 81.
Isinglass. See Starch, &c., 100.

J.

Jackets. See Wearing apparel, 66.
Jacks, hydraulic. See Hydraulics, 32.
Jacks, serve. See Raising, &c., 31.
Jacquard machines. See Weaving, 20; Lace, 20.
Jowellery, See Wearing apparel, 68.
Joints and connections. See Pipes, 70.

K.

Kaleidoscopes, See Optical, &c., 76. Kamptulicon. See Artificial leather, &c., 80. Keels, sliding. See Steering, 75. Kegs. See Casks, 74. Kettles for the table. See Unfermented oeverages, &c., 86. Kilns for drying hops, grain, malt, &c. See Agriculture, 82: Brewing, &c., 99. Kilns. See Bricks and tiles, 22; Pottery, 21: Fuel, &c., 30. Sec Aeronauties, 41; Toys, 51. Kites. Kneading machines. See Cooking, &c 411 Knife cleaners. See Brushing, 57. Knitting machines. See Lace, 29. Knobs. See Furniture, &c., 39; Locks, 69.

I.

Labels, separating, distributing, damping, and applying. See Writing. &c., 37. Lace-making, knitting, netting, &c., -20 Lampblack. See Paints, 50. Lamps, &c., 44. Lamps, cooking. Cooking. 61. See Lamps, 44; Lasts for making boots and shoes. See Wearing apparel, 67. Latches. See Locks, &c., 60. Launching vessels. See Ship-building, 21. mg, 21. Lead. See Metals, &c., 19. Lead for paints. See Paints, 50. Lead, oxides, &c. See Acids, &c., 40. Leather. See Skins, &c., 55. Leather cloth. See Artificial leather, Lee boards. See Steering &c., 75. Leggings. See Wearing apparel, 66. Lemonade. See Unfermented beverages, &c., 86. Lemon and other fruit squeezers. See Unfermented beverages, &c., 86.

Lenses. See Optical. &c., 76, Letterpress printing, 13. Levels. Sec Optical, &c., 76. Lifts. Sec Rusing, 51. Lifts, Steam. See Raising, 31; Steam engine, 49. Light, electric, &c., 95. Lighthouse lamps. See Lamps, 4. Lighthouses. See Harbours, &c. 77. Lighting mines. See Mining, 71. Lightning conductors, Sec Electricity. 15: 93. Limbs, artificial. See Medicine, &c., Lime. See Acida, &c. 40. Lime light. See Lamps, &c., 45. Links. See Chains, &c. 90, Linoleum. See Artificial leather, &c., SO. See Unformented beve-Liqueurs. rages, &c., 86. Lithography. See Printing, 13: Orms menting paper, 12. Loading hay, straw, &c. See Agriculture, 81. Lockets. See Wearing apparel, 68. Locks, &c , 60, Locks, canal, &c. See Harbours, &c.. 77-Locks for guns. See Fire-arms. 18. Locomotion, aids to, 7. Locomotive steam carriages. See Steam engine, 49. Logs. No. Optical, &c., 76, Looking-glasses. New Furniture, 39, Looms. See Weaving, 20. Looped fabrics. See Lace-making, &c., 29. Lowering apparatus. See Raising. &c., 31. Lozenges. See Medicine, 25; Cooking, 61. Lubricants. See Oils, &c., 27.

M. Machine needles, [Neg Needles, 45.

Magnesium. See Acids, &c., 40. Magnesium. See Electricity, 15; 92; 93; 94; 95; 96; 97. Malt, drylog. See Brewing, &c., 98.

Magic lanterns. See Toys, 51. Magnesia. See Acids. &c., 40.

Malt, grinding. Nee Brewing, &c., 19.
Malt mills. Nee Grinding gram, 75;
Brewing, &c., 19.
Manganese. Nee Acids. &c., 40.
Mangers. See Saddlery, &c., 34.
Manging. See Dressing and finishing. &c., 91.
Manifold writers. See Writing, 37.
Manouving ships and vessels. See
Steering. &c., 75; Marine propulsion
(Part 11.), 5.
Manuillus and mantles. See Wearing

apparel, 66.
Manure, 3.
Manure distributors. See Agriculture, 81.

N.

Marine engines. See Marine propulsion, 5; Steam engine, 49. Marine propulsion, 5. compasses. See Optical, Mariners' &c., 76. Mashing apparatus. See Brewing, &c., 99. Masts, &c., 73. Mathematical instruments. ists'instruments, 54; Optical, &c., 76. Mattresses. See Furniture, 39. Measuring lace. See Lace-making, 29. Measuring woven fabrics. See Dressing, &c., 91. Meat screens. See Cooking, 61. Meat screens. See Cooking, 61.
Medicine, &c., 25.
Medicine, and medicated food for animals. See Farriery, 53.
Memorandum books. See Books. 43,
Mercury. See Metals and alloys, 18.
Meridian instruments. See Optical, &c., 76.
Metallic pipes and tubes, 70. etallie surfaces, protecting. Electro-deposition, &c., 96. Metals. Nec Metals and alloys, 18; Iron and steel, 6. See Coating, &c., 23; Metals, plating. See Coating, &c., 23; Electro-deposition, &c., 96. Metals, separating. See Metals, &c., 18. Meteorological instruments. See Optical, &c., 76. Meters, gas. See Gas, 17.
Meters, water. See Hydraulics, 32.
Microscopes. See Optical, &c., 76.
Miking, &c., 72.
Millboard. See Paper, 11.
Mills basiloss. See Granding grain. Mills, barley. See Grinding grain, 78.
Mills, coffee. See Grinding grain, 78.
Mills, flour. See Grinding grain, 78.
Mills, malt. See Grinding grain, 78; Brewing, &c., 99.
Mills, paint. See Vrinding grain, 70;
Brewing, &c., 90.
Mills, paint. See Paints, 50.
Millstones. See Grinding grain, 78.
Millstones. See Grinding. See Grinding grain, 78. Millstones, dressing, &c. See Grinding grain, 78. Mills. water. See Hydraulics, 32; Grinding gram.

Minering machines. See Cooking. 51.

Mineral waters. See Unformented
beverages, &c., 86.

Miners' lamps. See Lamps. 44.

See Ventilation 52. Grinding grain, 78. Mines, ventilating. See Ventilation 52. Mining, &c., 71.
Mittens. See Wearing apparel, 66.
Mordants. See Bleaching, &c., 14.
Motive power. See Hydraulics, 32;
Steam engine, 49; Air and gas engines, 62. Moulds, sugar. See Sugar, 48 Mowers. See Agriculture, 31. Muffs. See Wearing apparel, 66. Mules. See Spinning, 28. Muriatic acid. See Acids, 40.
Music and musical instruments, 26.
Music stands and stools. See Music,

Nails, &c., 58.
Nails, horse-shoe. See Farriery, 53.
Nails, horse-shoe. See Farriery, 53.
Nails, 58.
Nautical instruments. See Optical, &c., 76.
Necklaces and necklets. See Wearing apparel, 68.
Necklaces See Wearing apparel, 66.
Needle cases. See Sewing, 2.
Needles and pins, 45.
Needles for knitting. See Lace-making, &c., 29.
Net, bobbin. See Lace-making, &c., 29.
Nets, fishing. See Lace-making, &c., 29.
Nickel. See Metals, &c., 18; Acids, &c., 40.
Nitric acid. See Acids, &c., 40.
Nitrogen. See Acids, &c., 40.
Nosebags. See Saddlery, 34.
Nuts. See Nails, &c., 58; Railways, 33.

O.

Oars. See Marine propulsion, 5.
Oat mills. See Agriculture, 82.
Oats, thrashing, cleaning, drying, storing, &c. See Agriculture, 82.
Octants. See Optical, &c., 76.
Oilcloth, 80.
Oils, &c., 27.
Oilskin, 80.
Optical, &c., instruments, 76.
Ordnance. See Fire-arms, 10.
Ores, dressing, disintegrating, reducing, &c. See Metals, &c., 18;
Iron, &c., 6.
Ores, getting. See Mining, &c., 71.
Organs. See Fuel, &c., 26.
Ovens. See Fuel, &c., 30.
Ovens, bakers'. See Fuel, &c., 39;
Cooking, 61.
Overalls. See Wearing apparel, 66.
Overcoats. See Wearing apparel, 66.
Overcoats. See Wearing apparel, 67.
Oxalie acid. See Acids, 40.
Oxides. See Acids, 40.
Oxygen. See Acids, &c., 40.
Oxygen. See Acids, &c., 40.

P.

Packing cases. See Trunks, &c., 84.
Packing fabrics. See Dressing and
finishing, 91.
Packing for pistons of steam engines.
See Steam engine, 49.
Paddle-wheels. See Marine propulsion, 5.
Paints, &c., 50.
Paints for artists. See Artists' instruments, &c., 54.
Pantaloons. See Wearing apparel. 66.
Paper, cutting, folding, and ornamening, 12.
Paper-fasteners, and apparatus for
classifying and arranging papers.
See Writing, 37.

&c., 26.

nee Wear ne apparen 67. Part See Fur. &c. 80 I P. w. Feat. See Fue. &c., v.
Periodiculars. See Writing, &c., v.
Periodiculars. See Writing, &c., v.
Periodiculars. See Writing, &c., v.
Periodiculars, boxes to hold feats for
See Writing, &c., v.
Pens and penholders. See Writing,
&c., v. Ac., v. Actions instruments, 54.
Pens, hoxes for holding. See Writing,
&c., v. Pro. Pr-ci app Pr->~ Pr-88 Press Pressi fini. Printil Pepper, hulling. See Grinding grain, Blea Printin Perambulators. See Common road Proje t Projell carriages, 55.
Percussion caps. See Fire arms, 10.
Perforating paper. See Cutting, Ac. Propuls Prussie Paddlin Japer, 12.
Perpetual motion. See Hydraulics,
32; Air, &c., engines, 62.
Petticosts. See Wearing apparel, 66. steel . Pur mi. Pulleys. Peturoats, oee wearing apparel, 56.
Phenakistoscopes, See Photography,
19; Optical, &c., 76.
Phenic acid. See Acids, 40.
Philosophical instruments. See Op-Pulverize Pumps. : Pumps, s Steam e Punkas. tical, &c., 78.
Phosphoric acid. See Acids, 40. Parifying Parifying Phosphorus, See Acids, &c. 40. Photography, 19. Prometer Photo-mechanical printing, &c. See Photography, 19.
Pianofortes. See Music, &c., 26. Picture frames. See Furniture, 39. Quadrants. Picture frames. See Furniture, 39.
Piers. See Harbours, &c., 77.
Pilo drivers, steam. See Steam en.
and the Harbours, &c., 77.
Pilo fabricas See Weaving, 20; Lacemaking, 29.
Pilo comen raising and outsing. See Quarrying. Quays. Se Quinine. & making, 29.

Pile or nap, raising and cutting. See
Dressing, &c., 91.

Piles. See Harbours, &c., 77.

Pins. See Needlas Rafts. See I Rails. See I Railway

Reflectors. See Lamps, 44. Refractory materials. See Metals, &c., 18; Pottery, 24; Bricks, &c., 22. Retrigerators. See Ice-making, &c., 85; Brewing, &c., 99. Registering number of passengers in common road carriages. See Common road carriages, 98.
Reservoirs. See Harbours, &c., 77.
Respirators. See Medicine, &c., 25 See Medicine, &c., 25. Reticules. See Trunks, &c., 84.
Retorts for burning animal charcoal. See Sugar, 48. Retorts, gas. See Gas, 17. Reverberatory furnaces. See Iron and steel, 6 Rice, hulling, &c. See Grinding grain, 73. Rice, milling, polishing, and otherwise preparing for the market. See Agriculture, 82. Rick covers. See Artificial leather, &c., 80. Ricks. See Agriculture, 82. Riddles for grain, &c. See Agriculture, 82. Rigging. See Masts, &c., 73. Rings, finger. See Wearing apparel, 68. Rinsing. See Washing, &c., 89. Rivets. See Nails, &c., 58. 89. Road sweepers. See Brushing, 57. Roads and ways, 35. Roasting jacks. See Cooking, 61. Rockets for pyrotechnic display. See Toys, &c., 51. Rockets, war. See Fire-arms, 10. Rocking chairs and horses. See Toys, Rollers for calico printing. See Bleaching, &c., 14. Rollers for roads. See Roads, &c., 35. Rollers, land. See Agriculture, 81. Roots, cutting, slicing, pulping, washing, drying, and sorting. See Agri-&c., 53. culture, 82. Ropes and bands for mines. Mining, 71. Roughing horses. See Farriery, 53. Rudders. See Steering, 75; Marine propulsion (Part II.), 5.
Ruffles and ruffs. See Wearing apparel, 66. Rulers. See Writing, 37.
Ruling paper. See Cutting, folding, &c., 12; Artists' instruments, 54.

S

Sacks. See Weaving, 20.
Saddlery &c., 34.
Safes, &c., 45.
Safes, &c., 46.
Safety pockets. See Lamps, 44.
Safety pockets. See Wearing apparel, 68.
Safety valves of steam boilers. See
Steam engine, 49.
Salts. See Masts, &c., 73.
Salt, common. See Acids, &c., 40.
Salts. See Acids, &c., 40.
Salts water, obtaining fresh water from.
See Purifying, &c., water, 79.

Sausage making machines. See Cooking, 61. Scales. See Raising, &c., 31. Scarifiers. See Agriculture, 81. Screening grain, &c. See Agriculture, 82. Screens. See Furniture, 39. Screw propellers for carriages and agricultural implements. See Aids to locomotion, 7. Screw propellers for ships. See Marine propeners for sings. See E rine propulsion, 5. Screws. See Nails, &c., 58. Scythes. See Agriculture, 81. Sealing wax. See Writing, &c., 37. Seams and joints. See Pipes, 70. Sea walls. See Parkey See Agriculture, 27. Sea walls. See Harbours, &c., 77.
Seed sowing. See Agriculture, 81.
Seltzer water. See Unfermented beverages, &c., 86. Semaphore signals. See Railway signals, 38. Sewage farming. See Agriculture, 81. Sewage, treatment of. See Drains, 1: Manure, 3. Sewers. See Drains, &c.. 1. Sewers, ventilating. See Ventilation, 52.
Sewing, &c., 2.
Sewing, &c., 2.
Sextants. See Optical, &c., 78.
Shackles. See Chains, &c., 99.
Shades. See Lamps, 44.
Shakos. See Wearing apparel, 65.
Shawing brushes. See Brushing, 67.
Shawl pins. See Wearing apparel, 68.
Shawls. See Wearing apparel, 68.
Shawls. See Wearing apparel, 60.
Shawls. weaving. See Weaving, 20.
Shearless. See Raising, &c., 31.
Shearing fabrics. See Dressing, &c., 91. Shearing fabrics. See Dressing, &c., 91. Shearing and clipping animals. See Saddlery, 34; Farriery, &c., 53. Sheathing metals. See Metals, &c., 18, Sheep washes, dips, &c. See Farriery, Ship-building, &c., 21. Ship lamps and lanterns. See Lamps, Ships, steering and manœuvring. See Ships, steering and manufarying.
Steering, 75.
Ships, ventilating. See Ventilation, 52.
Shirts. See Wearing apparel, 66.
Shoes. See Wearing apparel, 67.
Sickles and reaping hooks. See Agriculture, 81. Signal lamps. See Lamps, 44. Signals. See Electricity, 15; 94; Railway signals, 38. Silicic acid. See Acids, 40. Silver. See Metals, &c., 18; Acids, &c., Singsing fabrics. See Dressing, &c., 91.
Singsing horses. See Saddlery, &c.,
34; Farriery, 53.
Siphons. See Hydraulics, 32; Preparing, &c., cork, 56. Size. See Starch, 100. Sizing machines. See Weaving, 20. Skates. See Toys, 51. Skidding wheels. See Common road carriages, 28. Skins, &c., 55. Skirts. See Wearing apparel, 68.



Water, chemical treatment of, See Purifying, &c., water, 79. Waterclosets, &c., 63. Watercourses. See Harbours, &c., 77. Watering land. See Agriculture, 81. Watering roads. See Roads, 35. Water mills. See Hydraulics, 32. Water mills. See Hydraulics, 32. Watermills. See Hydraulics, 32. Water mills. See Hyd Waterproof fabrics, 80. Waterproofing leather. See Skins, &c., 55. Waterproofing paper. See Cutting, &c., paper, 12.
Water, purifying and filtering, 79.
Water-wheels. See Hydraulics, 32. Wearing apparel,-body coverings. Wearing apparel, - dress fastenings and jewellery. 68.
Wearing apparel,—foot coverings, 67.
Wearing apparel,—head coverings, 65. 65.
Woaving, 20.
Woishing. See Raising, &c., 31.
Weishing. See Mining, &c., 71.
Wet docks. See Harbours, &c., 77.
Wharves. See Harbours, &c., 77.
**Trans. See Harbours, &c., 77.
**Trans. See Harbours, &c., 77.
**Trans. See Harbours, &c., 77. Wheat, thrashing, cleaning, drying, storing, &c. See Agriculture, 82. Wheelbarrows. See Common road carriages, 98. Wheels, railway, for railways, 46. See Carriages, &c. for railways, 46.
Whips and whip sockets. See Saddlery, &c., 34.
Whistles. See Railway signals, 38.
Wicks. See Lamps, &c., 44.
Winding drums. See Raising, &c.,
31; Mining, 71; Agriculture, 31.
Winding fabrics. See Dressing, &c.,
91

Windlasses. See Raising. &c., 31.
Windlasses, steam. See Raising. &c.,
31; Steam enrine, 49.
Windmills. See Air. &c., enrines, 62.
Windmills used to propel ships. See
Marine Propulsion 5; Masts, &c.,
73.
Window fastenings. See Locks, &c.,
60.
Wine coolers. See Ice-making, &c.,
85.
Wine-making. See Brewing, &c.,
99.
Winowing machines for grain, &c.
See Agriculture, 82.
Wire brushes. See Brushing, 57.
Wire, telegraphic. See Electricity,
15; 93.
Wood paving. See Roads, 35.
Work bags and work boxes. See
Trunks, &c., 84.
Worts, cooling. See Brewing, &c., 99.
Wringing. See Washing, &c., 99.
Wringthands. See Wearing apparel,

Y.

Writing instruments, &c., 37.

Yeast, preparing. See Brewing, &c.. 99. Yeast, substitutes for. See Cooking, 61.

Z.

Zinc. See Metals, &c., 18. Zinc for paint See Paints, 50. Zinc oxides, &c. See Acids, &c., 40.

LONDON: Printed by EYRE AND SPOTTISWOODE,
Printers to the Queen's most Excellent Majesty.

For Her Majesty's Stationery Office.

[3515.-1000,-9/85.]

September, 1885.



BY A WORLD

progress, owing to the ility of fixing with any images he obtained. · had discovered a prong asphalte as a sensibasis of copper he got nd it in 1816, called it d worked at it up to leath, in 1833, without develop it into a thing value. It was uncerner too slow, requiring iours of exposure, even it. He hoped to make acing etchings, and in the Royal society, of ictures on metal plates. dvanced etchings, the had been effected by o that part of the prot had laid bare certain sin covered plate.

rly as 1826, became aciepce and made overcperimental work, but y, and it was not until relations were estabm, and not until 1829 a coalition for joint exual interest in their rees. When Niepce died, I. Isidore Niepce, took ontinued arrangement for conjoined interest heir continued experinot appear that the discovered anything, de that his researches nay have been of valu-

out the next morning

to be polished up and tried over again, it bore—to M. Daguerre's great astonishment—a distinct and perfect nicture. The

portrait of a human face produced by the process, which up to that time had only been successful in picturing statues and other things that had to keep still any desired length of time. Professor Draper's wife was their first victim. The appellation of "victim" is justly applied, for the sitter's face was covered with a white powder and she had to sit in strong sunlight, motionless, for half an hour! To modify the painful effect of the glare of light Professor Draper filtered out most of the heat rays from the sunshine poured upon the sitter by causing it to pass through a glass tank containing a clear blue liquid—but the process could hardly have been pleasurable to the victim even then. It was not long, however, before they got the time of exposure... cut down to five minutes, then to four, three, and finally one. At that point it was a practical thing for popular use in ... making portraits.

So much better was the work done by the American daguerreotypers than that produced in Europe, that over there its superiority was affirmed to be due to "the greater brilliancy of the American atmosphere," and that was insisted upon until some of the American artists went over there and beat the Europeans on their own ground. But for a long time the process continued to be a stupendous and amazing mystery to the general pub-Among the crowds always staring at the exposed sample pictures at the daguerreotyper's door, one would explain: "You look in the machine and the picture comes if you look long open that they might be H CONNELLY. J. H. CONNELLY.











-UND

JUN 15 1048

UNIV. OF MIER;

